



# Humidity and Temperature Sensors

[www.silabs.com/humidity-sensor](http://www.silabs.com/humidity-sensor)



## FEATURES

- Relative Humidity Sensor:
  - $\pm 4.5\%$  RH (maximum @ 20–80% RH)
- Temperature Sensor:
  - $\pm 0.5\text{ }^\circ\text{C}$  accuracy (typical)
  - $\pm 1\text{ }^\circ\text{C}$  accuracy (maximum @ 0 to  $70\text{ }^\circ\text{C}$ )
- 0 to 100% RH operating range
- $-40$  to  $+85\text{ }^\circ\text{C}$  (-GM)
- 0 to  $+70\text{ }^\circ\text{C}$  operating range (-FM)
- Wide operating voltage range (2.1 to 3.6 V)
- Low Power Consumption:
  - $240\text{ }\mu\text{A}$  during RH conversion
- I<sup>2</sup>C host interface
- Integrated on-chip heater
- 4 mm x 4 mm QFN package
- Excellent long term stability
- Factory calibrated
- Optional factory-installed filter/cover
  - Low-profile
  - Protection during reflow
  - Excludes liquids and particulates (hydrophobic/oleophobic)


## APPLICATIONS

- Industrial HVAC/R
- Thermostats/humidistats
- Respiratory therapy
- White goods
- Micro-environments/data centers
- Automotive climate control and de-fogging
- Asset and goods tracking

**LOWEST POWER INTEGRATED RH SENSOR**

## DIGITAL 1<sup>2</sup>C HUMIDITY AND TEMPERATURE SENSORS

The Si7005 is a digital relative humidity and temperature sensor. This monolithic CMOS IC integrates temperature and humidity sensor elements, an analog-to-digital converter, signal processing, calibration data, and an I<sup>2</sup>C host interface. The patented use of industry-standard, low-K polymeric dielectrics for sensing humidity enables the construction of a low-power, monolithic CMOS sensor IC with low drift and hysteresis and excellent long term stability. Both the temperature and humidity sensors are factory-calibrated and the calibration data is stored in the on-chip non-volatile memory. This ensures that the sensors are fully interchangeable, with no recalibration or software changes required. The Si7005 is packaged in a 4 mm x 4 mm QFN package and is reflow solderable.

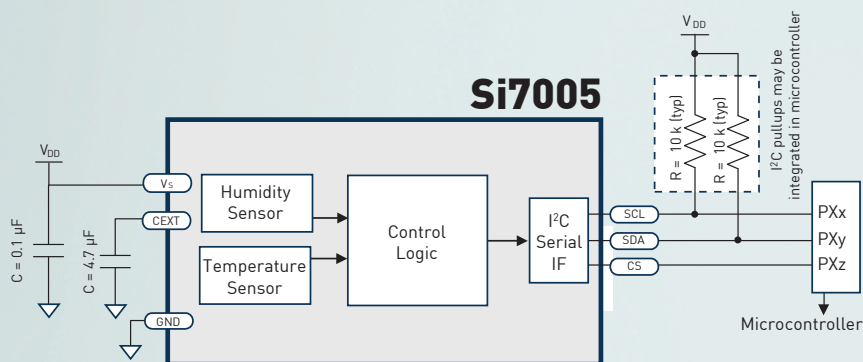



# Humidity and Temperature Sensors

[www.silabs.com/humidity-sensor](http://www.silabs.com/humidity-sensor)

## Si7005 Development Tools

The Si7005 is supported by a suite of hardware and software development tools that facilitate testing/characterization, prototyping and software development.

The **Si7005USB-DONGLE** Evaluation kit comes with everything developers need to demonstrate and evaluate the Si7005. The board plugs into a PC via a USB socket. It has a connector for adding the Si7005USB-EVB.


The optional **Si7005-EVB** is a small daughter card that permits evaluation of the Si7005 at the end of a flex cable. It is a useful add-on to the Si7005USB-DONGLE (it plugs right in) if the user wants to put a sensor in a temperature/humidity chamber or a product prototype.

The **Si7005EVB-UDP** is a small daughter card that permits evaluation of the Si7005 in conjunction with certain Unified Development Platform (UDP) components such as the C8051F960 Ultra-Low Power Microcontroller Development Kit. It plugs directly into UDP MCU cards for fast prototyping and software development. In addition to an on-board Si7005, there is a connector for adding an Si7005-EVB via its flex cable, allowing the user to place the Si7005 in a temperature/humidity chamber or a product prototype.

The **Si7005EVB-UDP-F960** Development Kit combines the C8051F960 Ultra-Low Power Microcontroller Development Kit and the Si7005EVB-UDP daughter card with data logger demonstration code. It is a complete package designed to support hardware and software development using the Si7005 and Silicon Lab's ultra-low power MCUs. It ships with example software that implements a portable, battery-powered data logger/asset tracker.




Si7005  
USB DONGLE

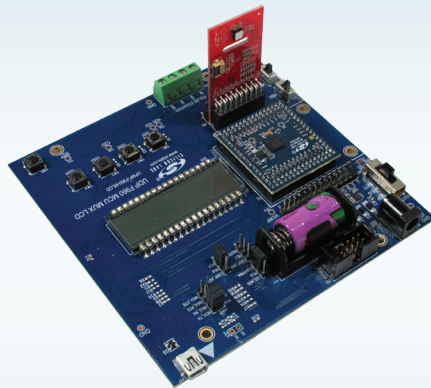

Si7005/C8051F960  
UDP EVALUATION KIT



Si7005 UDP  
DAUGHTER CARD



Si7005 EVB  
DAUGHTER CARD

## Digital I<sup>2</sup>C Humidity and Temperature Sensors

PART NUMBER	DESCRIPTION	TYP ACCURACY		TEMPERATURE RANGE	FILTER COVER	PACKAGE FORMAT	PACKAGE
		TEMP.	RH				
Si7005-B-FM	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade	±0.5 °C	±3%	0 to 70 °C		Tube	QFN24
Si7005-B-FM1	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade with pre-installed protective cover	±0.5 °C	±3%	0 to 70 °C	•	Tray	QFN24
Si7005-B-FM1R	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade with pre-installed protective cover on tape and reel	±0.5 °C	±3%	0 to 70 °C	•	Tape-and-Reel	QFN24
Si7005-FMR	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade on tape and reel	±0.5 °C	±3%	0 to 70 °C		Tape-and-Reel	QFN24
Si7005-B-GM	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade	±0.5 °C	±3%	-40 to 85 °C		Tube	QFN24
Si7005-B-GM1	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade with pre-installed protective cover	±0.5 °C	±3%	-40 to 85 °C	•	Tray	QFN24
Si7005-B-GM1R	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade with pre-installed protective cover on tape and reel	±0.5 °C	±3%	-40 to 85 °C	•	Tape-and-Reel	QFN24
Si7005-GMR	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade on tape and reel	±0.5 °C	±3%	-40 to 85 °C		Tape-and-Reel	QFN24



**Mixed Sources**  
Product group from well-managed forests, controlled sources and recycled wood or fiber  
[www.fsc.org](http://www.fsc.org) Cert no. SW-COC-001730  
© 1996 Forest Stewardship Council



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9