


100 V field-effect rectifier diode

Datasheet - production data

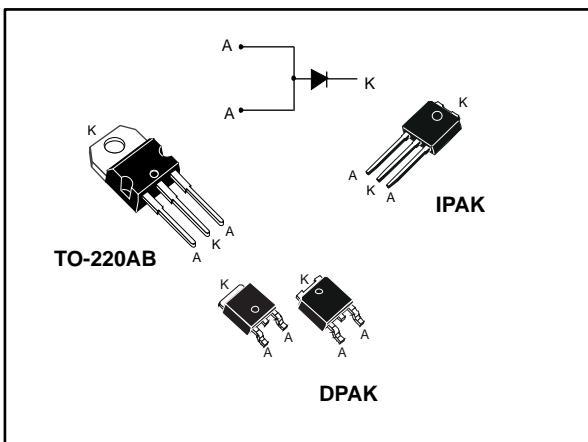

Features

- ST advanced rectifier process
- Stable leakage current over reverse voltage
- Reduced leakage current
- Low forward voltage drop
- High frequency operation
- ECOPACK®2 compliant component

Description

The device is based on a proprietary technology that achieves the best in class V_F/I_R trade-off for a given silicon surface. This 100 V rectifier has been optimized for use in confined casing applications where both efficiency and thermal performance matter. With a lower dependency of leakage current (I_R) and forward voltage (V_F) in function of temperature, the thermal runaway risk is reduced. Therefore, it can advantageously replace 100 V Schottky diodes.

Table 1: Device summary

| Symbol | Value |
|--------------|-------------|
| $I_{F(AV)}$ | 30 A |
| V_{RRM} | 100 V |
| V_F (max.) | 0.405 V |
| I_R (max.) | 130 μ A |
| T_j (max.) | 175 °C |

1 Characteristics

Table 2: Absolute ratings (limiting values at 25 °C, unless otherwise specified, with anode terminals short circuited)

| Symbol | Parameter | | Value | Unit |
|---------------------|---|--|-------------|------|
| V _{RRM} | Repetitive peak reverse voltage | | 100 | V |
| I _{F(RMS)} | Forward rms current | | 45 | A |
| I _{F(AV)} | Average forward current $\delta = 0.5$, square wave | T _C = 145 °C | 30 | A |
| I _{FSM} | Surge non repetitive forward current | t _p = 10 ms sinusoidal, DPAK/IPAK | 150 | A |
| | | t _p = 10 ms sinusoidal, TO-220AB | 250 | |
| T _{stg} | Storage temperature range | | -65 to +175 | °C |
| T _j | Maximum operating junction temperature ⁽¹⁾ | | +175 | °C |

Notes:

⁽¹⁾(dP_{tot}/dT_j) < (1/R_{th(j-a)}) condition to avoid thermal runaway for a diode on its own heatsink.

Table 3: Thermal resistance parameters

| Symbol | Parameter | Value | Unit |
|----------------------|------------------|-------|------|
| R _{th(j-c)} | Junction to case | 0.9 | °C/W |

Table 4: Static electrical characteristics with anode terminals short circuited

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------|-------------------------|-------------------------|-----------------------------------|------|-------|-------|------|
| I _R ⁽¹⁾ | Reverse leakage current | T _j = 25 °C | V _R = V _{RRM} | - | | 130 | µA |
| | | T _j = 125 °C | | - | 8 | 16 | mA |
| | | T _j = 125 °C | V _R = 70 V | - | 4 | 7 | |
| V _F ⁽²⁾ | Forward voltage drop | T _j = 25 °C | I _F = 3 A | - | 0.390 | 0.440 | V |
| | | T _j = 125 °C | | - | 0.350 | 0.405 | |
| | | T _j = 25 °C | I _F = 5 A | - | 0.440 | 0.495 | |
| | | T _j = 125 °C | | - | 0.415 | 0.470 | |
| | | T _j = 25 °C | I _F = 10 A | - | 0.550 | 0.620 | |
| | | T _j = 125 °C | | - | 0.530 | 0.585 | |
| | | T _j = 125 °C | I _F = 30 A | - | 0.680 | 0.745 | |

Notes:

⁽¹⁾Pulse test: t_p = 5 ms, δ < 2%

⁽²⁾Pulse test: t_p = 380 µs, δ < 2%

To evaluate the conduction losses use the following equation:

$$P = 0.424 \times I_{F(AV)} + 0.0133 I_F^2(\text{RMS})$$

1.1 Characteristics (curves)

Figure 1: Average forward current versus ambient temperature ($\delta = 0.5$)

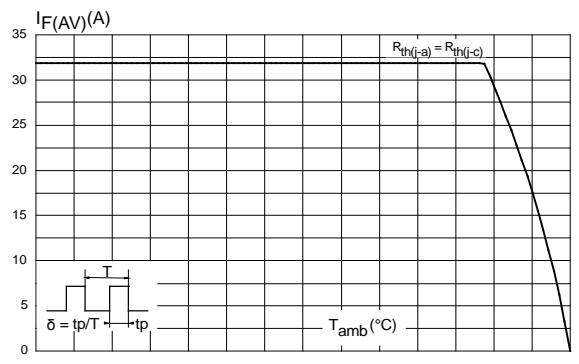


Figure 2: Relative variation of thermal impedance junction to case versus pulse duration

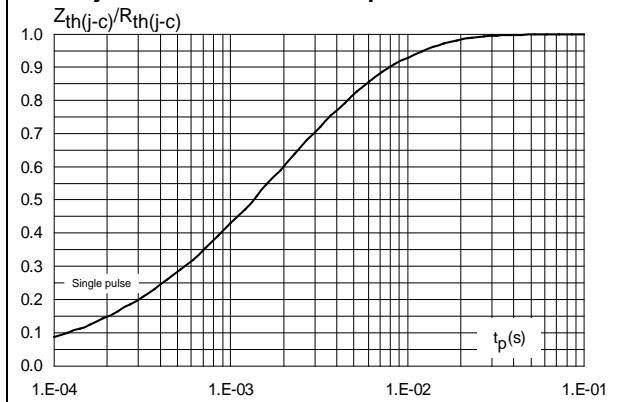


Figure 3: Reverse leakage current versus reverse voltage applied (typical values)

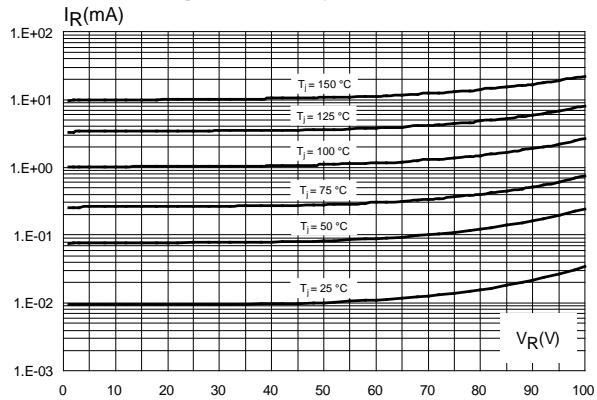


Figure 4: Junction capacitance versus reverse voltage applied (typical values)

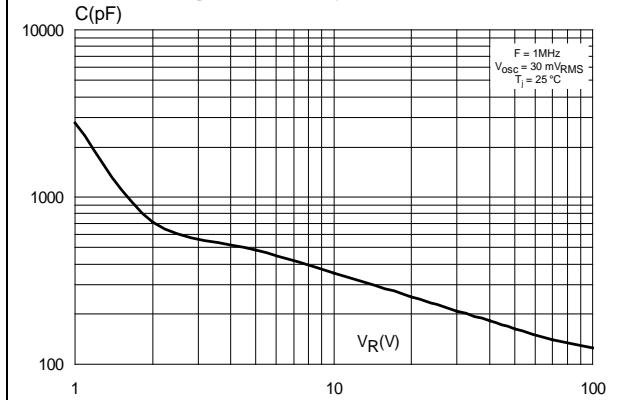


Figure 5: Forward voltage drop versus forward current (typical values)


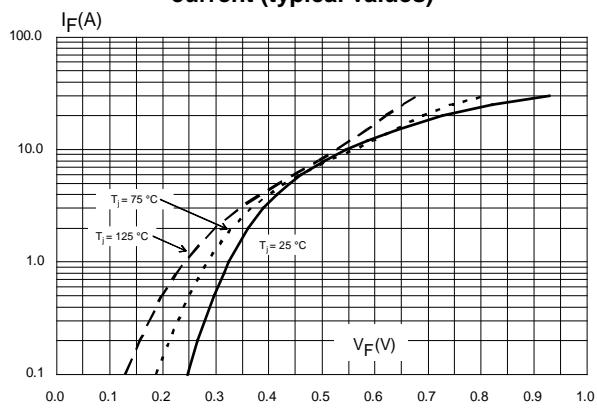



Figure 6: Forward voltage drop versus forward current (typical values)

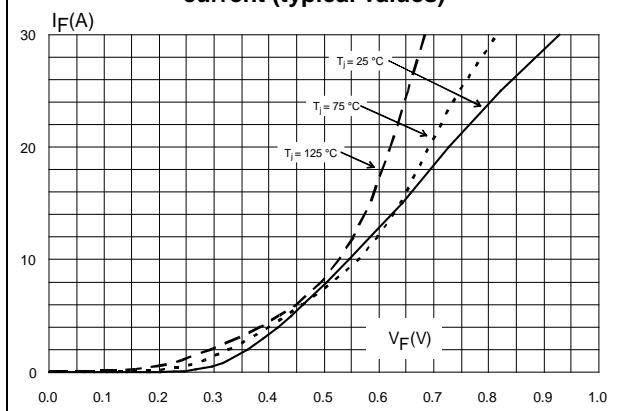

Characteristics

FERD30H100S

Figure 7: Thermal resistance junction to ambient versus copper surface under tab for DPAK (typical values)

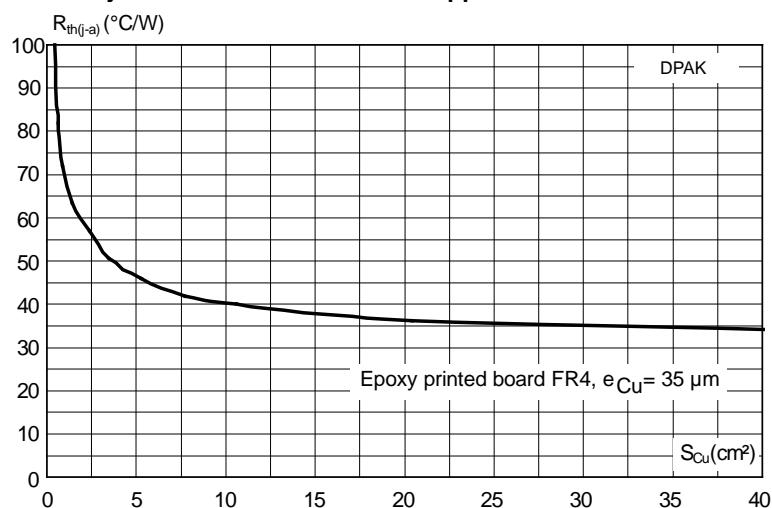

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.
ECOPACK® is an ST trademark.

- Cooling method: by conduction (C)
- Epoxy meets UL94,V0
- Recommended torque value: 0.55 N·m (for TO-220AB)
- Maximum torque value: 0.6 N·m (for TO-220AB)

2.1 TO-220AB package information

Figure 8: TO-220AB package outline


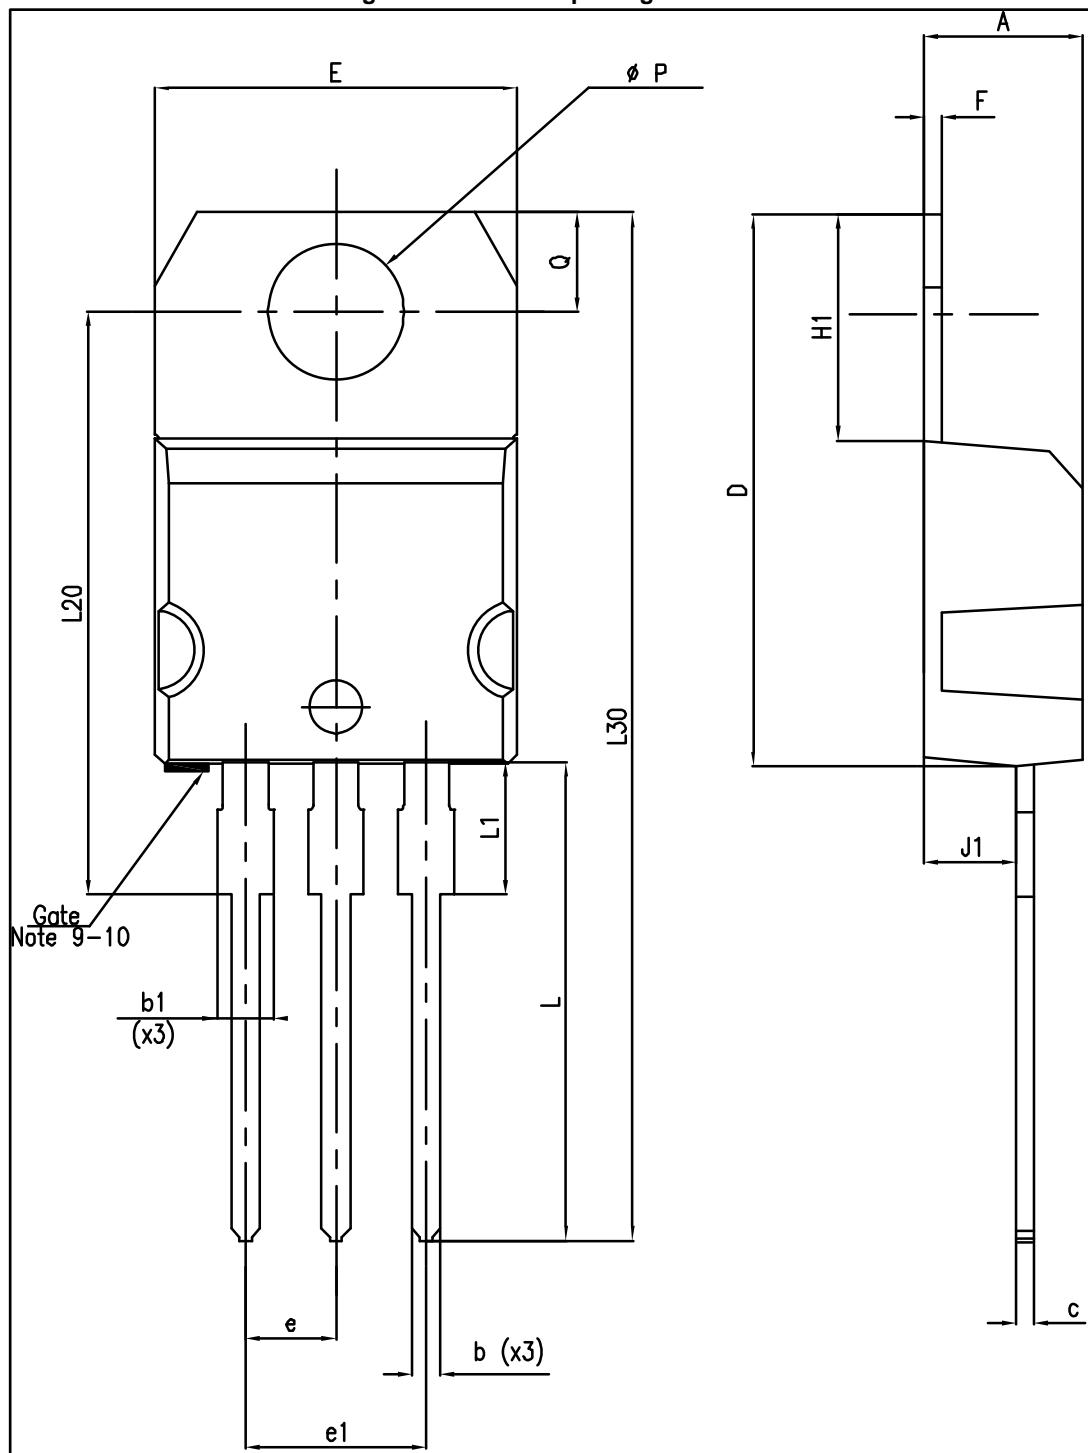


Table 5: TO-220AB package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.40 | 4.60 | 0.173 | 0.181 |
| b | 0.61 | 0.88 | 0.024 | 0.035 |
| b1 | 1.14 | 1.70 | 0.045 | 0.067 |
| c | 0.48 | 0.70 | 0.019 | 0.028 |
| D | 15.25 | 15.75 | 0.600 | 0.620 |
| E | 10.00 | 10.40 | 0.394 | 0.409 |
| e | 2.40 | 2.70 | 0.094 | 0.106 |
| e1 | 4.95 | 5.15 | 0.195 | 0.203 |
| F | 0.51 | 0.60 | 0.020 | 0.024 |
| J1 | 2.40 | 2.72 | 0.094 | 0.107 |
| H1 | 6.20 | 6.60 | 0.244 | 0.256 |
| L | 13.00 | 14.00 | 0.512 | 0.551 |
| L1 | 3.50 | 3.93 | 0.138 | 0.155 |
| L20 | 16.40 typ. | | 0.646 typ. | |
| L30 | 28.90 typ. | | 1.138 | |
| Ø P | 3.75 | 3.85 | 0.148 | 0.156 |
| Q | 2.65 | 2.95 | 0.104 | 0.116 |

2.2 DPAK package information

Figure 9: DPAK package outline

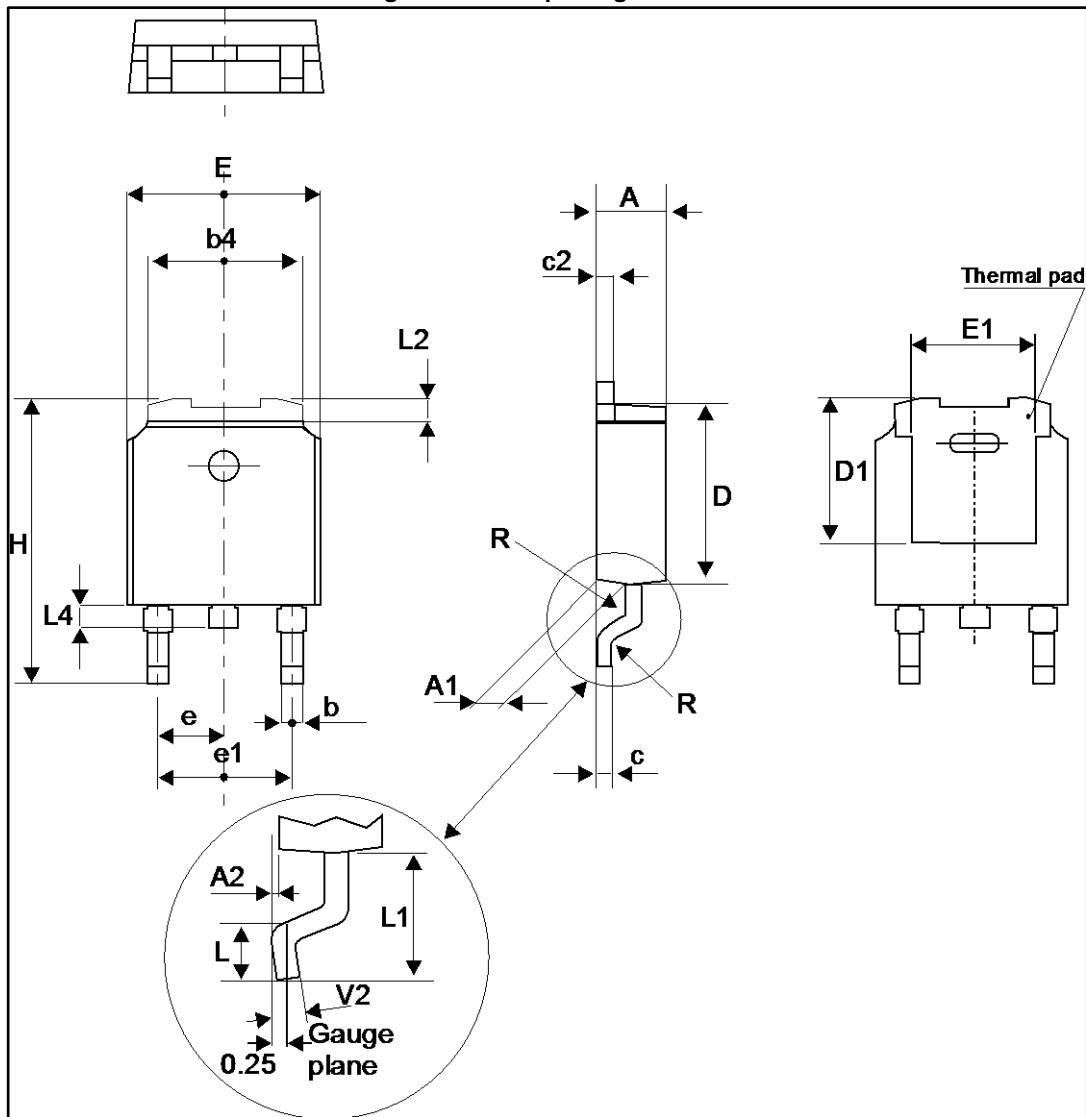


This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 6: DPAK package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 2.18 | 2.40 | 0.085 | 0.094 |
| A1 | 0.90 | 1.10 | 0.035 | 0.043 |
| A2 | 0.03 | 0.23 | 0.001 | 0.009 |
| b | 0.64 | 0.90 | 0.025 | 0.035 |
| b4 | 4.95 | 5.46 | 0.194 | 0.215 |
| c | 0.46 | 0.61 | 0.018 | 0.024 |
| c2 | 0.46 | 0.60 | 0.018 | 0.023 |
| D | 5.97 | 6.22 | 0.235 | 0.244 |
| D1 | 4.95 | 5.60 | 0.194 | 0.220 |
| E | 6.35 | 6.73 | 0.250 | 0.265 |
| E1 | 4.32 | 5.50 | 0.170 | 0.216 |
| e | 2.286 typ. | | 0.090 typ. | |
| e1 | 4.40 | 4.70 | 0.173 | 0.185 |
| H | 9.35 | 10.40 | 0.368 | 0.409 |
| L | 1.0 | 1.78 | 0.039 | 0.070 |
| L2 | | 1.27 | | 0.050 |
| L4 | 0.60 | 1.02 | 0.023 | 0.040 |
| V2 | -8° | +8° | -8° | +8° |

Figure 10: DPAK recommended footprint (dimensions in mm)

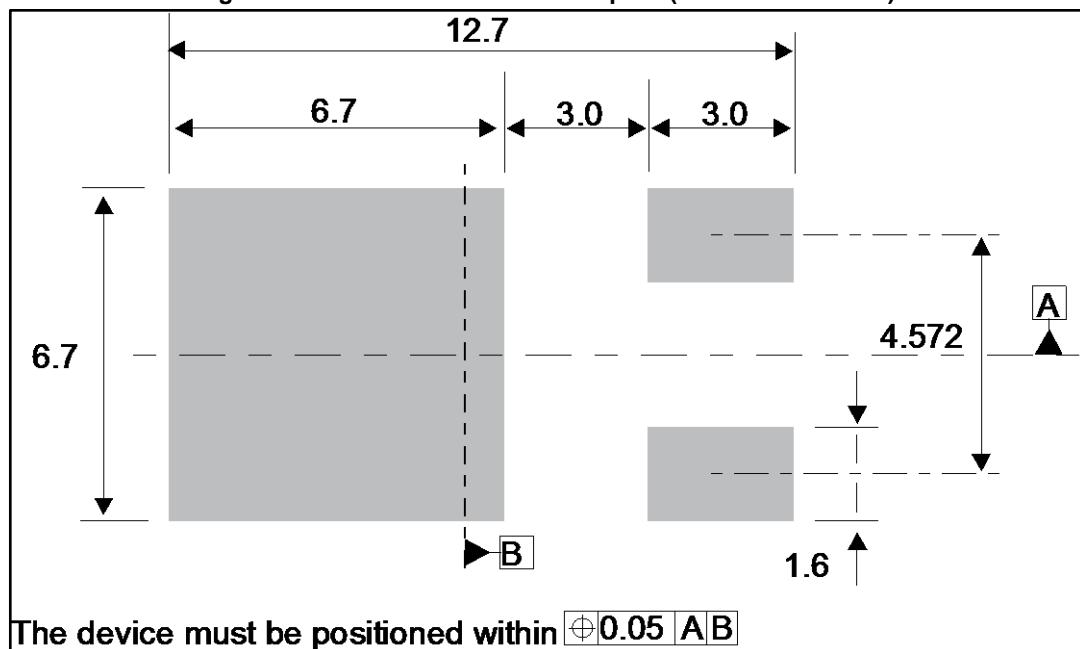

2.3 IPAK package information

Figure 11: IPAK package outline

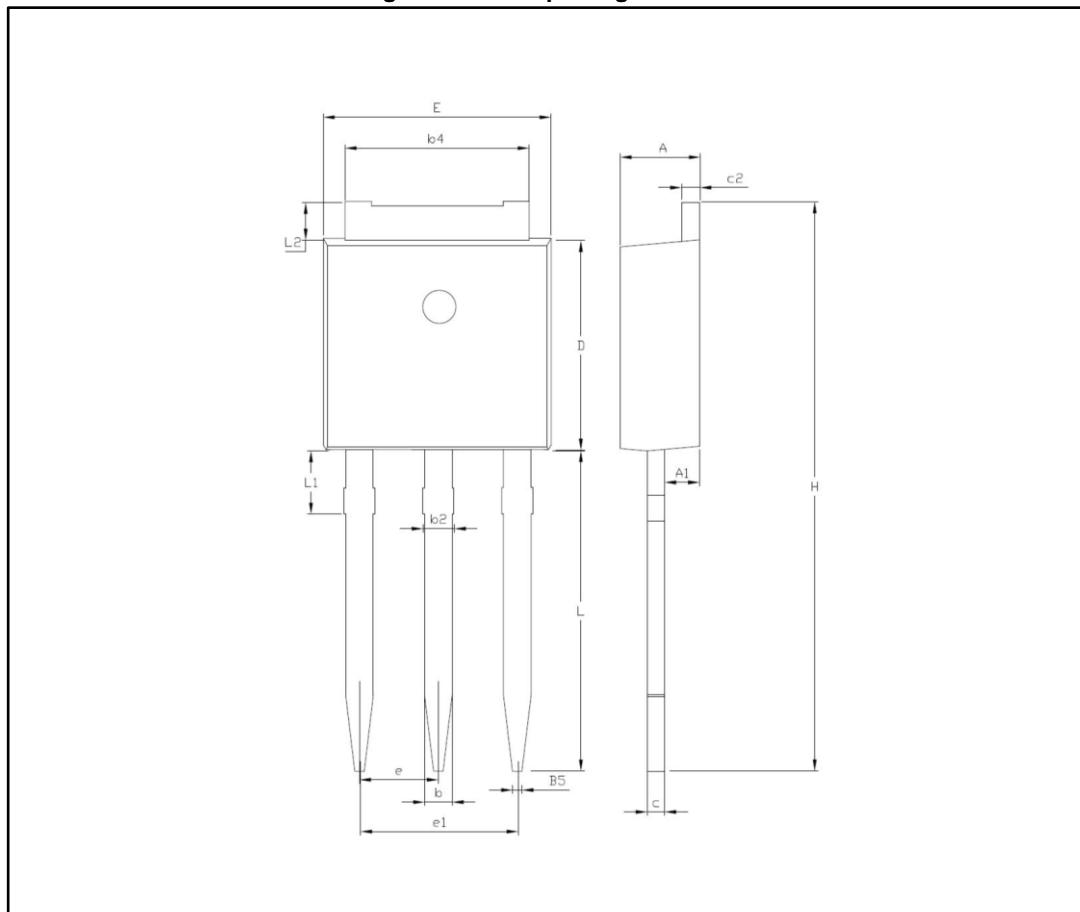


Table 7: IPAK package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 2.20 | 2.40 | 0.087 | 0.094 |
| A1 | 0.90 | 1.10 | 0.035 | 0.043 |
| b | 0.64 | 0.90 | 0.025 | 0.035 |
| b2 | | 0.95 | | 0.037 |
| b4 | 5.20 | 5.43 | 0.205 | 0.214 |
| B5 | 0.30 typ. | | 0.012 typ. | |
| c | 0.45 | 0.60 | 0.018 | 0.024 |
| c2 | 0.46 | 0.60 | 0.018 | 0.024 |
| D | 6.00 | 6.20 | 0.236 | 0.244 |
| E | 6.40 | 6.65 | 0.252 | 0.261 |
| e | 2.28 typ. | | typ.0.090 | |
| e1 | 4.40 | 4.60 | 0.173 | 0.181 |
| H | 16.10 typ. | | 0.634 typ. | |
| L | 9.0 | 9.60 | 0.354 | 0.378 |
| L1 | 0.80 | 1.20 | 0.031 | 0.047 |
| L2 | 0.80 typ. | 1.25 | 0.031 typ. | 0.049 |
| V1 | +10° | | +10 | |

3 Ordering information

Table 8: Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|-----------------|-------------|----------|--------|-----------|---------------|
| FERD30H100STS | FD30H100STS | TO-220AB | 1.38 g | 50 | Tube |
| FERD30H100SH | FD30 H100S | IPAK | 0.32 g | 75 | Tube |
| FERD30H100SB-TR | FD30 H100S | DPAK | 0.35 g | 2500 | Tape and reel |

4 Revision history

Table 9: Document revision history

| Date | Revision | Changes |
|-------------|----------|---------------------|
| 07-Apr-2016 | 1 | Initial release. |
| 14-Nov-2017 | 2 | Updated cover page. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9