

## 79-153W Single Output Power Supplies

### Features

- ◆ Convection or Conduction Cooled
- ◆ Up to 206W Peak Power Capability
- ◆ Low 31mm Height
- ◆ -40°C Ambient temperature Start Up



### Key Market Segments & Applications



### Specifications

Model		CUS200LD
AC Input Voltage	VAC	85 - 265VAC <sup>(1)</sup>
Input Frequency	Hz	47 - 63Hz
Inrush Current (cold start)	A	20A at 115VAC, 40A at 230VAC
Power Factor	-	Meets EN61000-3-2 (Typical PF 0.95/0.9) <sup>(2)</sup>
Input Current	A	Varies by model, please see detailed specification on website
Temperature Coefficient	%/°C	<0.02%/°C
Overcurrent Protection	-	> 101% of peak current rating
Overvoltage Protection <sup>(3)</sup>	V	See model selector
Hold Up Time (115 / 230V input)	ms	20ms typical
Leakage Current	mA	<0.75mA at 265VAC, 60Hz
Ripple and Noise	%	3.3-7.5V: 120mV, 12-24V: 150mV, 28-48V: 200mV
Line and Load Regulation	%	See model selector
Remote Sense	-	No
Operating Temperature	°C	-25 to +70°C. Start up at -40°C Convection cooled: Derate linearly to 40% load from +40 to +70°C Conduction cooled: Derate linearly to 40% load from +45 to +70°C
Storage Temperature	°C	-40 to +85°C
Humidity (non condensing)	%RH	10 - 95%RH (Operating & Storage)
Cooling	-	Convection or Conduction Cooled (Mounted on a 2mm thick aluminium plate 400x400mm)
Withstand Voltage	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC
Isolation Resistance	MΩ	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	10 - 55Hz: 19.6m/s <sup>2</sup> constant sweep 1 min X, Y, Z for 1 hour
Shock	-	< 196.1 m/s <sup>2</sup> (20G)
Immunity	-	IEC61000-4-2 (lv 2, 3), -3 (lv3), -4 (lv 3), -5 (lv3, 4), -6 (lv 3), -8 (lv 4), -11
Safety Agency Certifications	-	IEC/UL/CSA/EN 60950-1, CE Mark
Conducted & Radiated EMI	-	EN55011-B, EN55032-B, FCC Class B
Weight (Typ)	g	430
Size (LxWxH)	mm (in)	160 x 62 x 31mm (6.3 x 2.44 x 1.22")
Warranty	yrs	Three Years

#### Notes:

See specification for conditions and test methods

(1) 4.2V model: Derate linearly to 90% load from 115 to 85VAC input. 5-48V models: Derate linearly to 80% load from 115 to 85VAC input

(2) 115 / 230VAC input

(3) Cycle AC to reset

## Model Selector

Model	Output Voltage	Adjust Range (V)	Max Current Convection (A)	Max Power Convection (W)	Max Current Conduction (A)	Max Power Conduction (W)	Peak Current <sup>(4)</sup> (A)	Load Reg (mV)	Line Reg (mV)	Overvoltage	Efficiency (typ) % <sup>(5)</sup>
CUS200LD-3	3.3V	2.97 - 3.63V	24A	79.2W	30A	99W	40A	26mV	13mV	3.8 - 5.44V	82 / 83%
CUS200LD-4	4.2V	3.78 - 4.62V	24A	100.8W	30A	126W	40A	33mV	16mV	4.83 - 6.51V	85 / 87%
CUS200LD-5	5V	4.5 - 5.5V	24A	120W	30A	150W	40A	40mV	20mV	5.75 - 7.5V	87 / 89%
CUS200LD-7R5	7.5V	6.375 - 8.25V	16A	120W	20A	150W	26.6A	60mV	30mV	8.63 - 10.87V	88 / 90%
CUS200LD-12	12V	10.8 - 13.2V	10A	120W	12.5A	150W	16.7A	96mV	48mV	13.8 - 17.4V	87 / 89%
CUS200LD-15	15V	13.5 - 16.5V	8A	120W	10A	150W	13.4A	120mV	60mV	17.25 - 21.75V	87 / 89%
CUS200LD-24	24V	21.6 - 26.4V	5A	120W	6.3A	151.2W	8.4A	192mV	96mV	27.6 - 34.8V	87 / 89%
CUS200LD-28	28V	25.2 - 30.8V	4.3A	120.4W	5.4A	151.2W	7.2A	224mV	112mV	32.2 - 40.6V	87 / 90%
CUS200LD-48	48V	43.2 - 52.8V	2.5A	120W	3.15A	151.2W	4.2A	384mV	192mV	55.2 - 69.6V	88 / 90%

Notes:


See specification for conditions and test methods

(4) Convection cooling: Peak current for less than 10 seconds, with a duty cycle of <35%

Conduction cooling: Peak current for less than 5 seconds, with a duty cycle of <35%

(5) 115 / 230VAC input. Conduction cooled ratings

## Outline Drawing

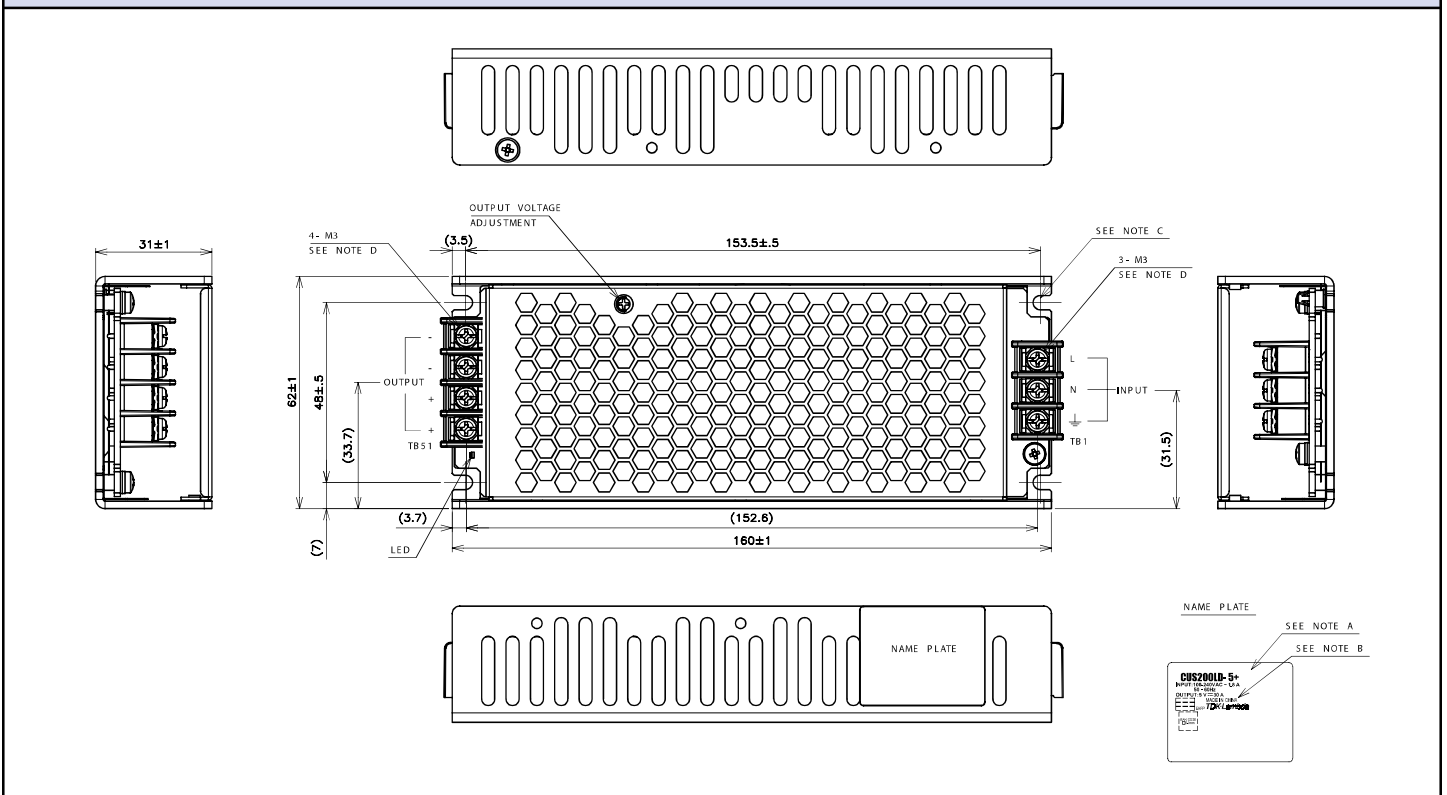

For Additional Information, please visit  
<https://product.tdk.com/info/en/products/power/index.html>



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9