



# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches

## General Description

Maxim's MAX312/MAX313/MAX314 analog switches feature low on-resistance (10 $\Omega$  max) and 1.5 $\Omega$  on-resistance matching between channels. These switches conduct equally well in either direction. They offer low leakage over temperature (2.5nA at +85°C). Low power consumption and ESD tolerance greater than 2000V per Method 3015.7 are guaranteed.

The MAX312/MAX313/MAX314 are quad, single-pole/single-throw (SPST) analog switches. The MAX312 is normally closed (NC), and the MAX313 is normally open (NO). The MAX314 has two NC switches and two NO switches. All three devices operate from a single supply of +4.5V to +30V or from dual supplies of  $\pm$ 4.5V to  $\pm$ 20V.

## Applications

Test Equipment  
Communication Systems  
PBX, PABX Systems  
Audio Signal Routing  
Avionics  
Sample-and-Hold Circuits  
Data Acquisition Systems

Rail-to-Rail is a registered trademark of Nippon Motorola Ltd.

## Features

- ◆ Pin Compatible with DG411/DG412/DG413
- ◆ Low On-Resistance (6.5 $\Omega$  typical)
- ◆ Guaranteed  $R_{ON}$  Match Between Channels (1.5 $\Omega$  max)
- ◆ Guaranteed  $R_{ON}$  Flatness over Specified Signal Range (2 $\Omega$  max)
- ◆ Guaranteed ESD Protection > 2000V per Method 3015.7
- ◆ Crosstalk > 96dB at 20kHz
- ◆ Single-Supply Operation: +4.5V to +30V  
Dual-Supply Operation:  $\pm$ 4.5V to  $\pm$ 20V
- ◆ Rail-to-Rail® Signal Handling

## Ordering Information


| PART      | TEMP RANGE      | PIN-PACKAGE    |
|-----------|-----------------|----------------|
| MAX312CPE | 0°C to +70°C    | 16 Plastic DIP |
| MAX312CSE | 0°C to +70°C    | 16 Narrow SO   |
| MAX312CUE | 0°C to +70°C    | 16 TSSOP       |
| MAX312C/D | 0°C to +70°C    | Dice*          |
| MAX312EPE | -40°C to +85°C  | 16 Plastic DIP |
| MAX312ESE | -40°C to +85°C  | 16 Narrow SO   |
| MAX312EUE | -40°C to +85°C  | 16 TSSOP       |
| MAX312MJE | -55°C to +125°C | 16 CERDIP**    |

Ordering Information continued at end of data sheet.

\* Contact factory for dice specifications.

\*\*Contact factory for availability.

## Pin Configurations/Functional Diagrams/Truth Tables

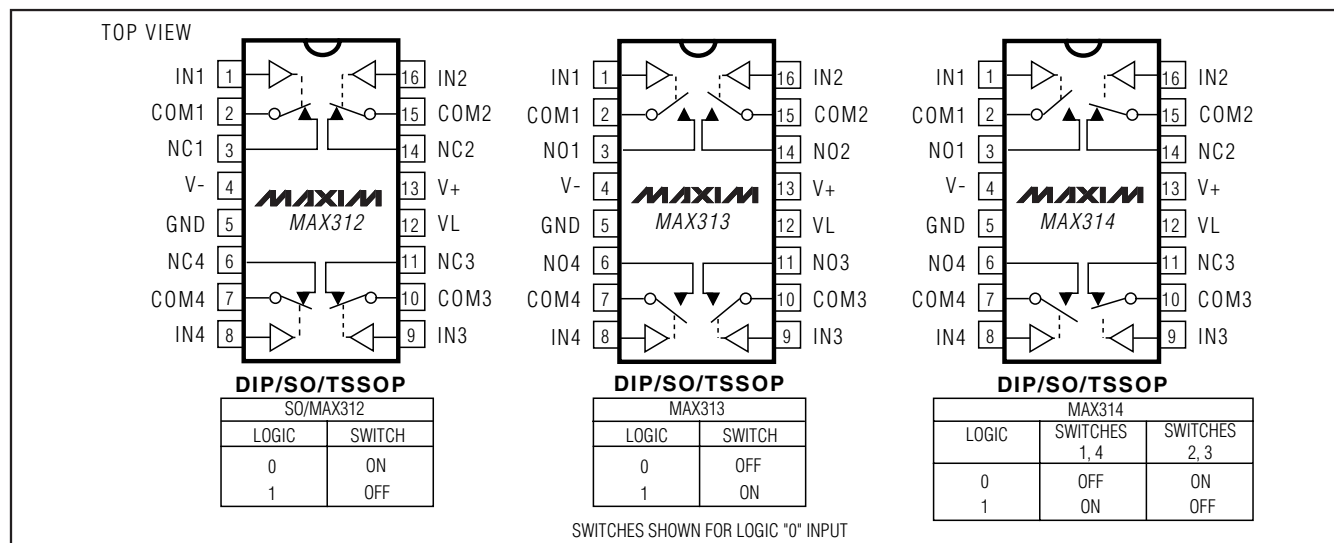

# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches

## ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to GND

V+ .....-0.3V to +44V

V- .....+0.3V to -44V

V+ to V-.....-0.3V to +44V

VL .....(GND - 0.3V) to (V+ + 0.3V)

All Other Pins (Note 1) .....(V- - 2V) to (V+ + 2V)

or 30mA (whichever occurs first)

Continuous Current (COM<sub>-</sub>, NO<sub>-</sub>, NC<sub>-</sub>)..... $\pm 100$ mA

Peak Current (COM<sub>-</sub>, NO<sub>-</sub>, NC<sub>-</sub>)..... $\pm 300$ mA

Continuous Power Dissipation (T<sub>A</sub> = +70°C)

Plastic DIP (derate 10.53mW/°C above +70°C) .....842mW

Narrow SO (derate 8.70mW/°C above +70°C) .....696mW

CERDIP (derate 10.00mW/°C above +70°C) .....800mW

TSSOP (derate 6.7mW/°C above +70°C) .....457mW

Operating Temperature Ranges

MAX31\_C\_ .....0°C to +70°C

MAX31\_E\_ .....-40°C to +85°C

MAX31\_M\_ .....-55°C to +125°C

Storage Temperature Range .....-65°C to +150°C

Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Note 1:** Signals on NC<sub>-</sub>, NO<sub>-</sub>, COM<sub>-</sub>, or IN<sub>-</sub> exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current rating.

## ELECTRICAL CHARACTERISTICS—Dual Supplies

(V+ = 15V, V- = -15V, VL = 5V, GND = 0V, V<sub>INH</sub> = 2.4V, V<sub>INL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

| PARAMETER                                                          | SYMBOL                                                        | CONDITIONS                                                                        |                                                          |      | MIN  | TYP<br>(Note 2) | MAX | UNITS |
|--------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------|------|------|-----------------|-----|-------|
| ANALOG SWITCH                                                      |                                                               |                                                                                   |                                                          |      |      |                 |     |       |
| Analog Signal Range                                                | V <sub>COM-</sub> ,<br>V <sub>NO-</sub> ,<br>V <sub>NC-</sub> | (Note 3)                                                                          |                                                          |      | V-   |                 | V+  | V     |
| On-Resistance                                                      | R <sub>ON</sub>                                               | I <sub>COM</sub> = 10mA,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = ±10V           | T <sub>A</sub> =<br>+25°C                                | C, E | 6.5  |                 | 10  | Ω     |
|                                                                    |                                                               |                                                                                   |                                                          | M    |      |                 | 9   |       |
|                                                                    |                                                               |                                                                                   | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>    |      |      |                 | 15  |       |
| On-Resistance Match Between Channels (Note 4)                      | ΔR <sub>ON</sub>                                              | I <sub>COM</sub> = 10mA,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = ±10V           | T <sub>A</sub> = +25°C                                   |      | 0.3  |                 | 1.5 | Ω     |
|                                                                    |                                                               |                                                                                   | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>    |      |      |                 | 3   |       |
| On-Resistance Flatness (Note 5)                                    | R <sub>FLAT(ON)</sub>                                         | I <sub>COM</sub> = 10mA,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = -5V,<br>0V, 5V | T <sub>A</sub> = +25°C                                   |      | 0.2  |                 | 2   | Ω     |
|                                                                    |                                                               |                                                                                   | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>    |      |      |                 | 4   |       |
| Off Leakage Current (NO <sub>-</sub> or NC <sub>-</sub> ) (Note 6) | I <sub>NO</sub><br>I <sub>NC</sub>                            | V <sub>COM</sub> = ±10V,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = ±10V           | T <sub>A</sub> = +25°C                                   |      | -0.5 | -0.02           | 0.5 | nA    |
|                                                                    |                                                               |                                                                                   | T <sub>A</sub> = T <sub>MIN</sub><br>to T <sub>MAX</sub> | C, E | -2.5 |                 | 2.5 |       |
|                                                                    |                                                               |                                                                                   |                                                          | M    | -40  |                 | 40  |       |
| COM Off Leakage Current (Note 6)                                   | I <sub>NC(OFF)</sub>                                          | V <sub>COM</sub> = ±10V,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = ±10V           | T <sub>A</sub> = +25°C                                   |      | -0.5 | -0.02           | 0.5 | nA    |
|                                                                    |                                                               |                                                                                   | T <sub>A</sub> = T <sub>MIN</sub><br>to T <sub>MAX</sub> | C, E | -2.5 |                 | 2.5 |       |
|                                                                    |                                                               |                                                                                   |                                                          | M    | -40  |                 | 40  |       |
| COM On Leakage Current (Note 6)                                    | I <sub>COM(ON)</sub>                                          | V <sub>COM</sub> = ±10V,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = ±10V           | T <sub>A</sub> = +25°C                                   |      | -1   | -0.04           | 1   | nA    |
|                                                                    |                                                               |                                                                                   | T <sub>A</sub> = T <sub>MIN</sub><br>to T <sub>MAX</sub> | C, E | -5   |                 | 5   |       |
|                                                                    |                                                               |                                                                                   |                                                          | M    | -100 |                 | 100 |       |

# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS—Dual Supplies (continued)

(V+ = 15V, V- = -15V, VL = 5V, GND = 0V, VINH = 2.4V, VINL = 0.8V, TA = TMIN to TMAX, unless otherwise noted.)

| PARAMETER                             | SYMBOL             | CONDITIONS                                                                                         |                                                       | MIN    | TYP<br>(Note 2) | MAX   | UNITS |
|---------------------------------------|--------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------|--------|-----------------|-------|-------|
| LOGIC INPUT                           |                    |                                                                                                    |                                                       |        |                 |       |       |
| Input Current with Input Voltage High | I <sub>INH</sub>   | I <sub>N</sub> = 2.4V, all others = 0.8V                                                           |                                                       | -0.500 | 0.005           | 0.500 | μA    |
| Input Current with Input Voltage Low  | I <sub>INL</sub>   | I <sub>N</sub> = 0.8V, all others = 2.4V                                                           |                                                       | -0.500 | 0.005           | 0.500 | μA    |
| POWER SUPPLY                          |                    |                                                                                                    |                                                       |        |                 |       |       |
| Power-Supply Range                    |                    |                                                                                                    |                                                       | ±4.5   |                 | ±20.0 | V     |
| Positive Supply Current               | I <sub>+</sub>     | All channels on or off, V <sub>IN</sub> = 0V or 5V, V <sub>+</sub> = 16.5V V <sub>-</sub> = -16.5V | T <sub>A</sub> = +25°C                                | -1     | 0.0001          | 1     | μA    |
|                                       |                    |                                                                                                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -5     |                 | 5     |       |
| Negative Supply Current               | I <sub>-</sub>     | All channels on or off, V <sub>IN</sub> = 0V or 5V, V <sub>+</sub> = 16.5V V <sub>-</sub> = -16.5V | T <sub>A</sub> = +25°C                                | -1     | 0.0001          | 1     | μA    |
|                                       |                    |                                                                                                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -5     |                 | 5     |       |
| Logic Supply Current                  | I <sub>L</sub>     | All channels on or off, V <sub>IN</sub> = 0V or 5V, V <sub>+</sub> = 16.5V V <sub>-</sub> = -16.5V | T <sub>A</sub> = +25°C                                | -1     | 0.0001          | 1     | μA    |
|                                       |                    |                                                                                                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -5     |                 | 5     |       |
| Ground Current                        | I <sub>IGND</sub>  | All channels on or off, V <sub>IN</sub> = 0V or 5V, V <sub>+</sub> = 16.5V V <sub>-</sub> = -16.5V | T <sub>A</sub> = +25°C                                | -1     | -0.0001         | 1     | μA    |
|                                       |                    |                                                                                                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -5     |                 | 5     |       |
| DYNAMIC                               |                    |                                                                                                    |                                                       |        |                 |       |       |
| Turn-On Time                          | t <sub>ON</sub>    | Figure 2, V <sub>COM</sub> = ±10V                                                                  | T <sub>A</sub> = +25°C                                | 70     | 225             | ns    |       |
|                                       |                    |                                                                                                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |        | 275             |       |       |
| Turn-Off Time                         | t <sub>OFF</sub>   | Figure 2, V <sub>COM</sub> = ±10V                                                                  | T <sub>A</sub> = +25°C                                | 65     | 185             | ns    |       |
|                                       |                    |                                                                                                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |        | 235             |       |       |
| Break-Before-Make Time Delay          | t <sub>D</sub>     | MAX314 only, Figure 3, R <sub>L</sub> = 300Ω, C <sub>L</sub> = 35pF                                | T <sub>A</sub> = +25°C                                | 1      | 5               | ns    |       |
| Charge Injection (Note 3)             | V <sub>CTE</sub>   | C <sub>L</sub> = 1.0nF V <sub>GEN</sub> = 0V, R <sub>GEN</sub> = 0Ω, Figure 4                      | T <sub>A</sub> = +25°C                                | -30    | 20              | 30    | pC    |
| Off Isolation (Note 7)                | V <sub>ISO</sub>   | R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF, f = 1MHz, Figure 5                                     | T <sub>A</sub> = +25°C                                |        | -65             |       | dB    |
| Crosstalk (Note 8)                    | V <sub>CT</sub>    | R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF, f = 1MHz, Figure 6                                     | T <sub>A</sub> = +25°C                                |        | -85             |       | dB    |
| NC or NO Capacitance                  | C <sub>(OFF)</sub> | f = 1MHz, Figure 7                                                                                 | T <sub>A</sub> = +25°C                                |        | 15              |       | pF    |
| COM Off Capacitance                   | C <sub>(COM)</sub> | f = 1MHz, Figure 7                                                                                 | T <sub>A</sub> = +25°C                                |        | 15              |       | pF    |
| On Capacitance                        | C <sub>(COM)</sub> | f = 1MHz, Figure 7                                                                                 | T <sub>A</sub> = +25°C                                |        | 47              |       | pF    |

# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS—Single Supply

(V+ = 12V, V- = 0V, VL = 5V, GND = 0V, VINH = 2.4V, VINL = 0.8V, TA = TMIN to TMAX, unless otherwise noted.)

| PARAMETER                                | SYMBOL                                                        | CONDITIONS                                                                              |                                                       | MIN  | TYP<br>(Note 2) | MAX | UNITS |
|------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------------------------------------------|------|-----------------|-----|-------|
| ANALOG SWITCH                            |                                                               |                                                                                         |                                                       |      |                 |     |       |
| Analog Signal Range                      | V <sub>COM-</sub> ,<br>V <sub>NO-</sub> ,<br>V <sub>NC-</sub> | (Note 3)                                                                                |                                                       | 0    |                 | V+  | V     |
| Channel On-Resistance                    | R <sub>ON</sub>                                               | I <sub>COM</sub> = 10mA,<br>V <sub>NC-</sub> or V <sub>NO-</sub> +10V                   | T <sub>A</sub> = +25°C                                | 12.5 | 25              |     | Ω     |
|                                          |                                                               |                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      | 35              |     |       |
| POWER SUPPLY                             |                                                               |                                                                                         |                                                       |      |                 |     |       |
| Positive Supply Current                  | I <sub>+</sub>                                                | V <sub>+</sub> = 13.2V<br>all channels on or off,<br>V <sub>IN</sub> = 0V or 5V         | T <sub>A</sub> = +25°C                                | -1   | 0.0001          | 1   | μA    |
|                                          |                                                               |                                                                                         | T <sub>A</sub> = T <sub>MAX</sub>                     | -5   |                 | 5   |       |
| Logic Supply Current                     | I <sub>L</sub>                                                | V <sub>L</sub> = 5.5V<br>all channels on or off,<br>V <sub>IN</sub> = 0V or 5V          | T <sub>A</sub> = +25°C                                | -1   | 0.0001          | 1   | μA    |
|                                          |                                                               |                                                                                         | T <sub>A</sub> = T <sub>MAX</sub>                     | -5   |                 | 5   |       |
| Ground Current                           | I <sub>GND</sub>                                              | V <sub>L</sub> = 5.5V<br>all channels on or off,<br>V <sub>IN</sub> = 0V or 5V          | T <sub>A</sub> = +25°C                                | -1   | -0.0001         | 1   | μA    |
|                                          |                                                               |                                                                                         | T <sub>A</sub> = T <sub>MAX</sub>                     | -5   |                 | 5   |       |
| DYNAMIC                                  |                                                               |                                                                                         |                                                       |      |                 |     |       |
| Turn-On Time<br>(Note 3)                 | t <sub>ON</sub>                                               | Figure 2,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = 8V                                  | T <sub>A</sub> = +25°C                                | 100  | 325             |     | ns    |
|                                          |                                                               |                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      | 425             |     |       |
| Turn-Off Time<br>(Note 3)                | t <sub>OFF</sub>                                              | Figure 2,<br>V <sub>NO-</sub> or V <sub>NC-</sub> = 8V                                  | T <sub>A</sub> = +25°C                                | 95   | 175             |     | ns    |
|                                          |                                                               |                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      | 225             |     |       |
| Break-Before-Make Time Delay<br>(Note 3) | t <sub>D</sub>                                                | MAX314 only, Figure 3<br>R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF                | T <sub>A</sub> = +25°C                                | 5    |                 |     | ns    |
| Charge Injection<br>(Note 3)             | V <sub>CTE</sub>                                              | Figure 4,<br>C <sub>L</sub> = 1.0nF,<br>V <sub>GEN</sub> = 0V,<br>R <sub>GEN</sub> = 0V | T <sub>A</sub> = +25°C                                | -5   |                 |     | pC    |

**Note 2:** The algebraic convention, where the most negative value is a minimum and the most positive value a maximum, is used in this data sheet.

**Note 3:** Guaranteed by design.

**Note 4:**  $\Delta R_{ON} = \Delta R_{ON\ max} - \Delta R_{ON\ min}$ .

**Note 5:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.

**Note 6:** Leakage parameters are 100% tested at maximum-rated hot temperature and guaranteed by correlation at +25°C.

**Note 7:** Off isolation =  $20\log_{10} [V_{COM} / (V_{NC} \text{ or } V_{NO})]$ , VCOM = output, VNC or VNO = input to off switch.

**Note 8:** Between any two switches.


**Note 9:** Leakage testing at single supply is guaranteed by testing with dual supplies.

# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches


## Typical Operating Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)


**ON-RESISTANCE vs.  $V_{\text{COM}}$   
(BIPOLAR SUPPLIES)**

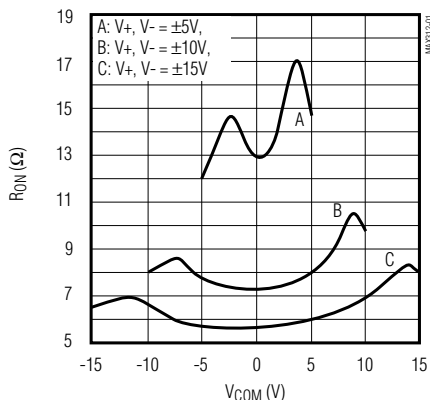


**ON-RESISTANCE vs.  $V_{\text{COM}}$  AND  
TEMPERATURE**

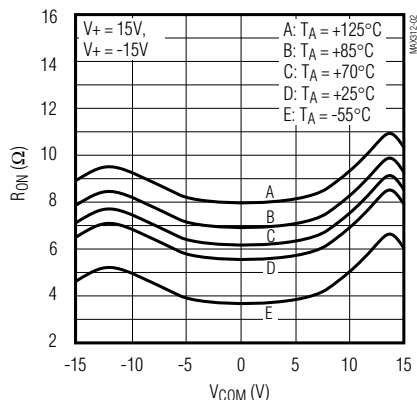


**ON-RESISTANCE vs.  $V_{\text{COM}}$   
(SINGLE SUPPLY,  $V_- = 0\text{V}$ )**

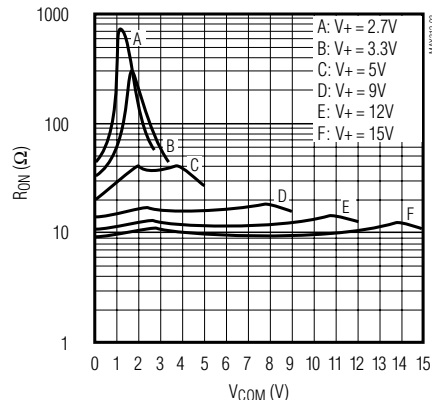


**ON-RESISTANCE vs.  $V_{\text{COM}}$  AND  
TEMPERATURE**

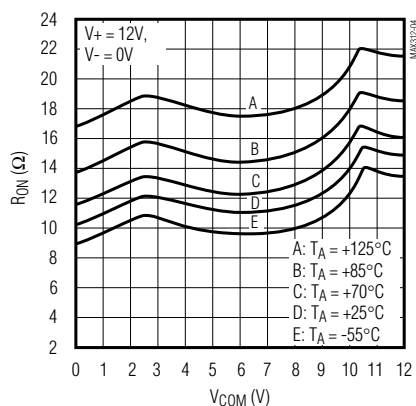


**OFF LEAKAGE CURRENT  
vs. TEMPERATURE**

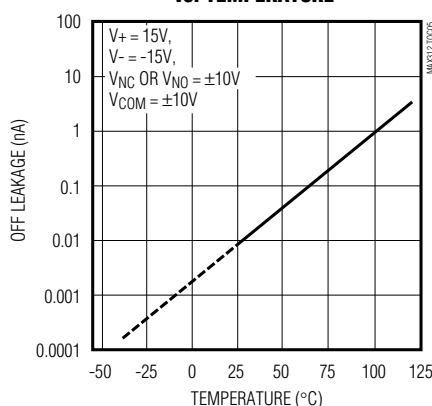


**ON LEAKAGE CURRENT  
vs. TEMPERATURE**

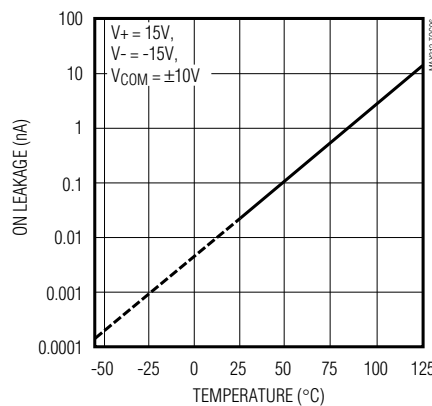

**CHARGE INJECTION  
vs.  $V_{\text{COM}}$**

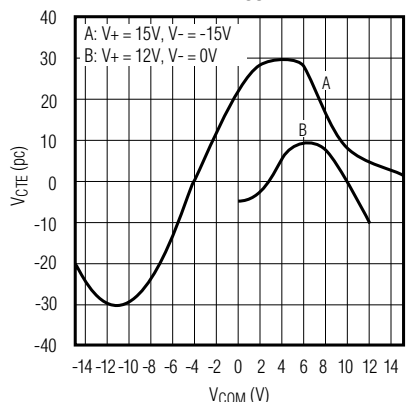



**SUPPLY CURRENT  
vs. TEMPERATURE**

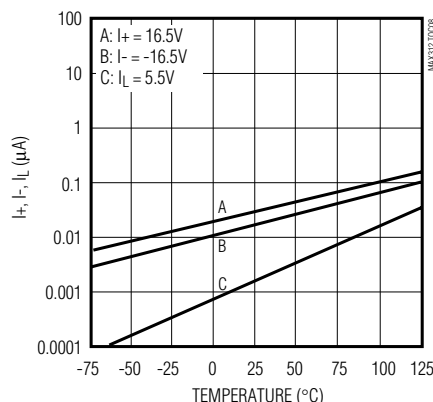

# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches

## Typical Operating Characteristics (continued)

(T<sub>A</sub> = +25°C, unless otherwise noted.)

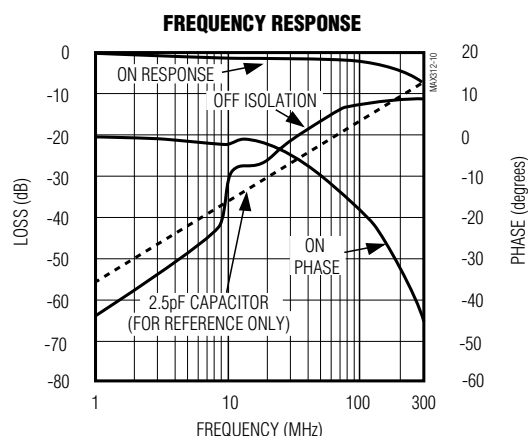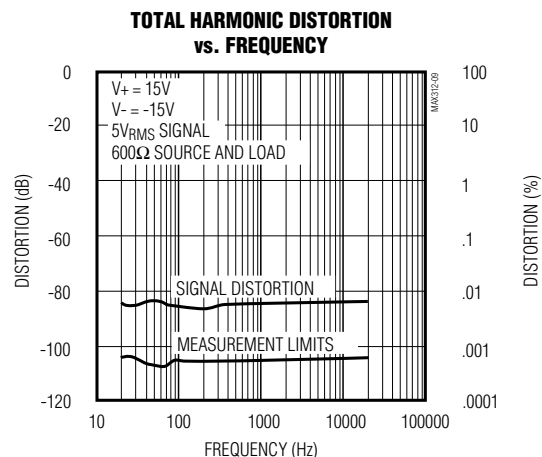

## Pin Description

| PIN             |                 |                 | NAME                      | FUNCTION                                                                  |
|-----------------|-----------------|-----------------|---------------------------|---------------------------------------------------------------------------|
| MAX312          | MAX313          | MAX314          |                           |                                                                           |
| 1, 8,<br>9, 16  | 1, 8,<br>9, 16  | 1, 8,<br>9, 16  | IN2, IN4,<br>IN3, IN2     | Logic Level Inputs                                                        |
| 2, 7,<br>10, 15 | 2, 7,<br>10, 15 | 2, 7,<br>10, 15 | COM1, COM4,<br>COM3, COM2 | Analog Signal Common Terminals                                            |
| 3, 6,<br>11, 14 | —               | —               | NC1, NC4,<br>NC3, NC2     | Analog Signal Normally Closed Terminals                                   |
| —               | 3, 6,<br>11, 14 | —               | NO1, NO4,<br>NO3, NO2     | Analog Signal Normally Open Terminals                                     |
| —               | —               | 3, 6            | NO1, NO4                  | Analog Signal Normally Open Terminals                                     |
| —               | —               | 11, 14          | NC3, NC2                  | Analog Signal Normally Closed Terminals                                   |
| 4               | 4               | 4               | V-                        | Negative Analog Supply Input (connect to GND for single-supply operation) |
| 5               | 5               | 5               | GND                       | Logic Level Ground                                                        |
| 12              | 12              | 12              | VL                        | Logic Supply Voltage                                                      |
| 13              | 13              | 13              | V+                        | Positive Analog Supply Input                                              |

# 10Ω, Quad, SPST, CMOS Analog Switches

## Applications Information

### Low-Distortion Audio

The MAX312/MAX313/MAX314, having very low  $R_{ON}$  and very low  $R_{ON}$  variation with signal amplitude, are well suited for low-distortion audio applications. The *Typical Operating Characteristics* show Total Harmonic Distortion (THD) vs. Frequency graphs for several signal amplitudes and impedances. Higher source and load impedances improve THD, but reduce off isolation.

### Off Isolation at High Frequencies

In 50Ω systems, the high-frequency on-response of these parts extends from DC to above 100MHz with a typical loss of -2dB. When the switch is turned off, however, it behaves like a capacitor, and off isolation decreases with increasing frequency. (Above 300MHz, the switch actually passes more signal turned off than turned on.) This effect is more pronounced with higher source and load impedances.

Above 5MHz, circuit board layout becomes critical, and it becomes difficult to characterize the response of the switch independent of the circuit. The graphs shown in the *Typical Operating Characteristics* were taken using a 50Ω source and load connected with BNC connec-

tors to a circuit board deemed “average”; that is, designed with isolation in mind, but not using strip-line or other special RF circuit techniques. For critical applications above 5MHz, use the MAX440, MAX441, and MAX442, which are fully characterized up to 160MHz.

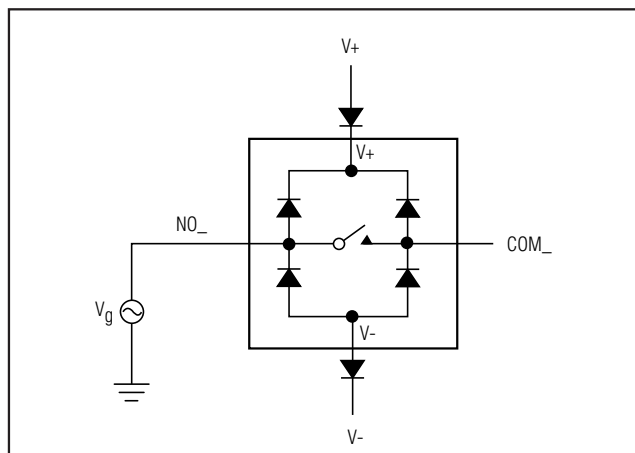


Figure 1. Overvoltage Protection Using External Blocking Diodes

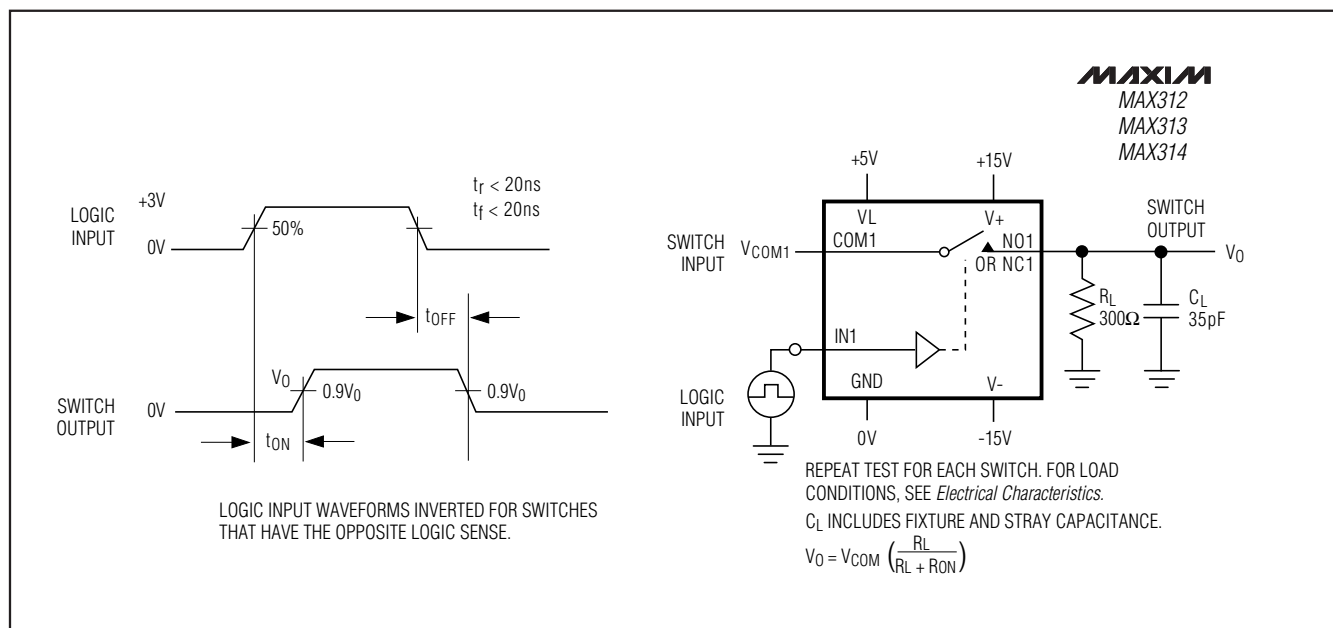


Figure 2. Switching-Time Test Circuit

# 10Ω, Quad, SPST, CMOS Analog Switches

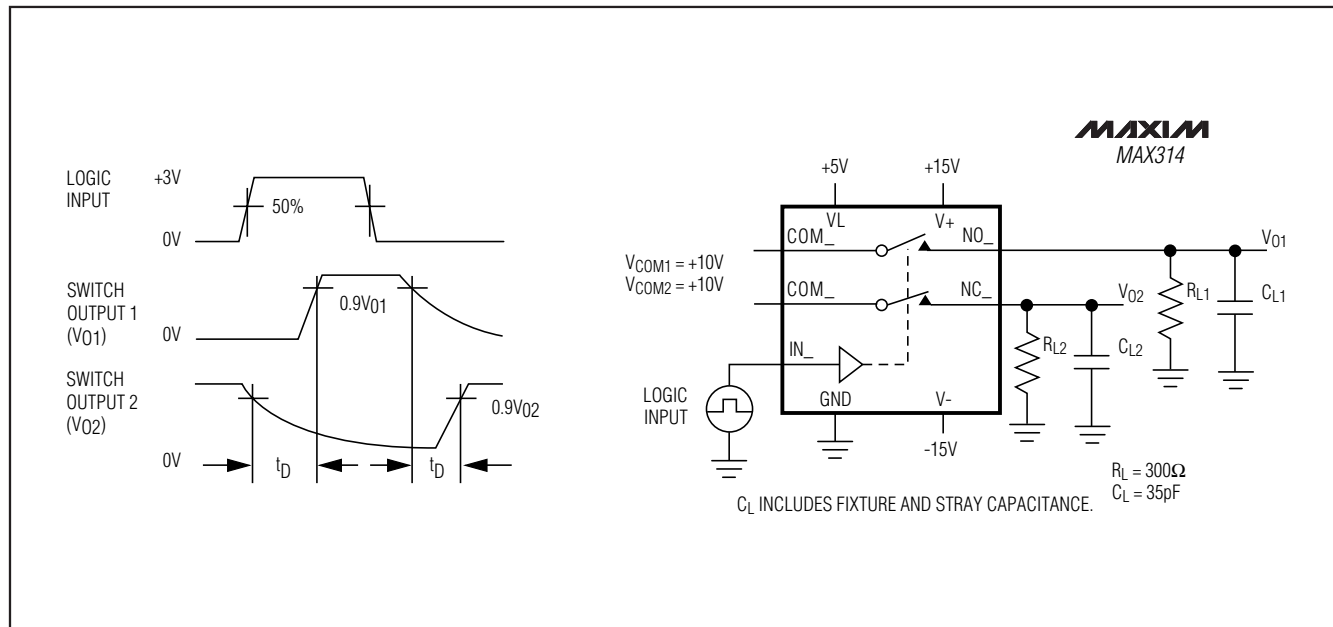


Figure 3. Break-Before-Make Test Circuit (MAX314 only)

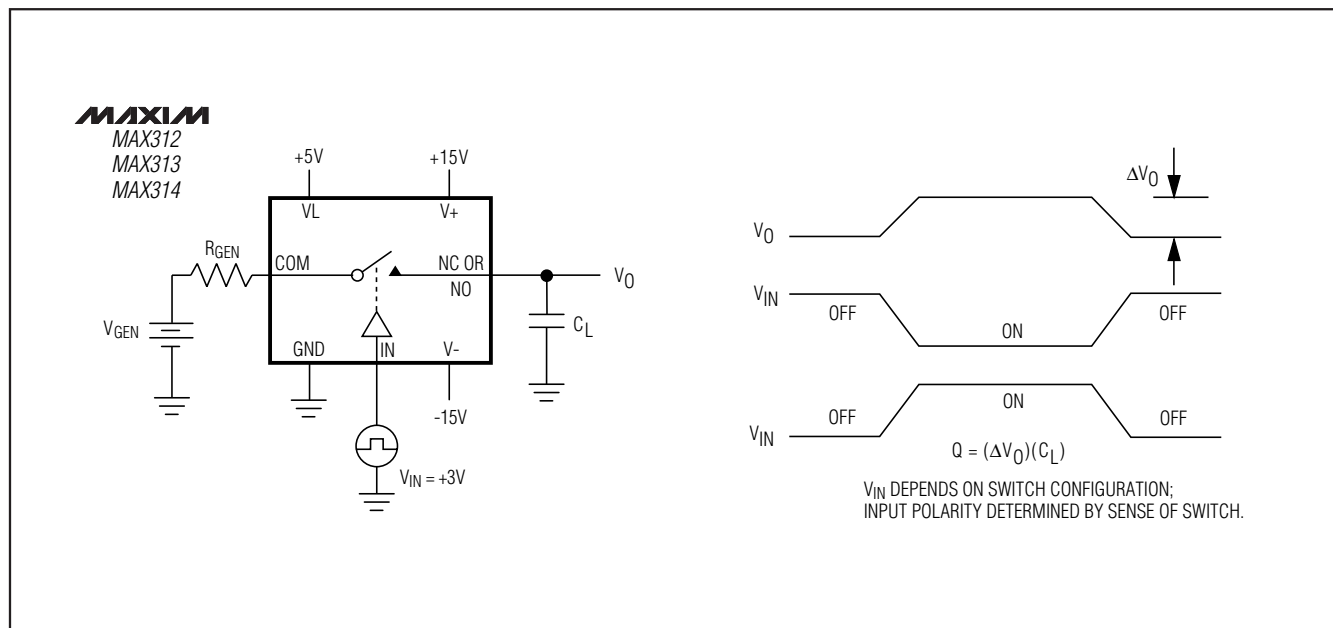


Figure 4. Charge Injection Test Circuit



# 10 $\Omega$ , Quad, SPST, CMOS Analog Switches

MAX312/MAX313/MAX314

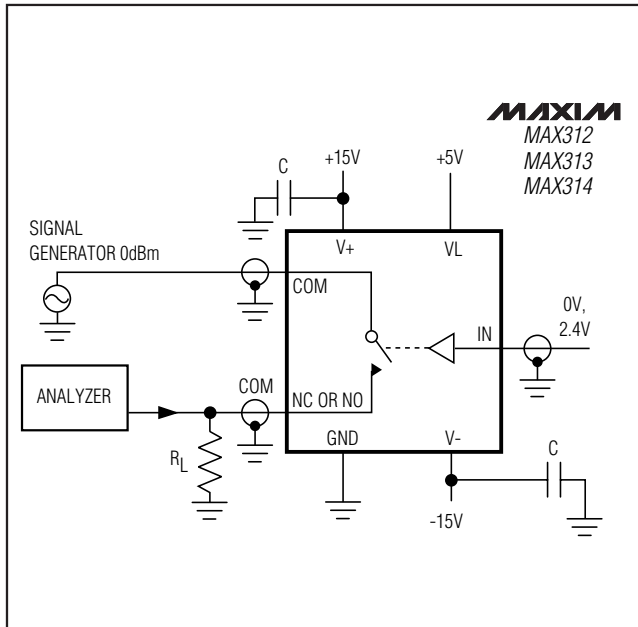


Figure 5. Off-Isolation Test Circuit

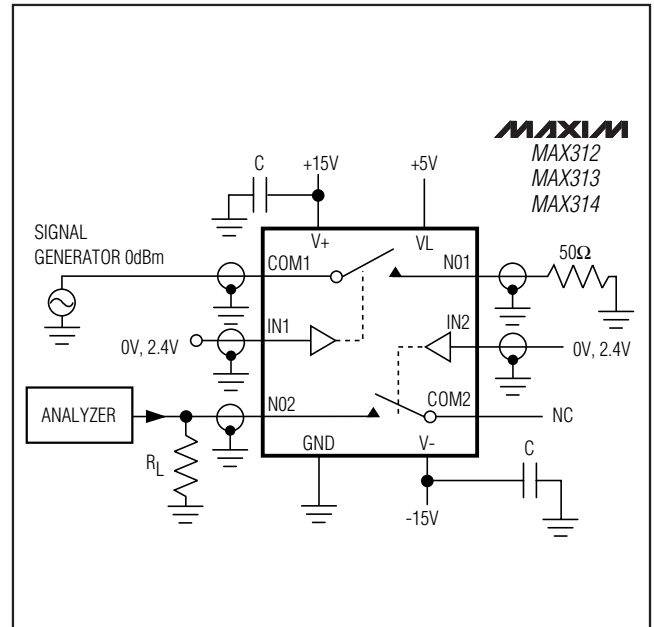


Figure 6. Crosstalk Test Circuit

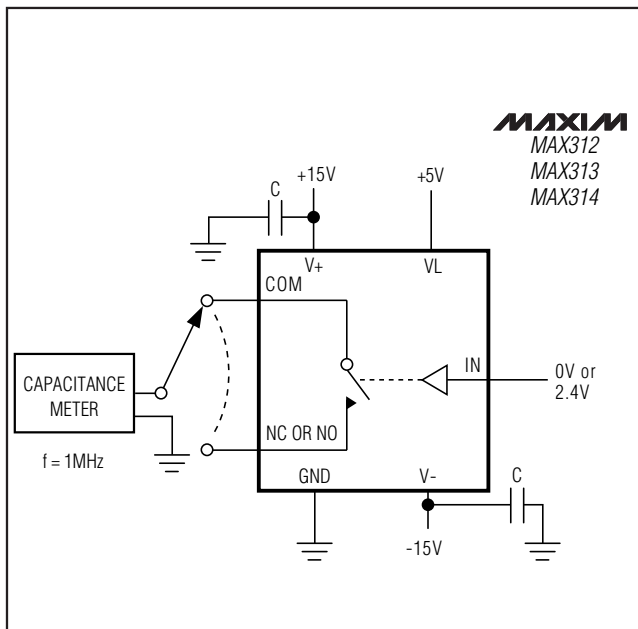


Figure 7. Channel-Off Capacitance Test Circuit

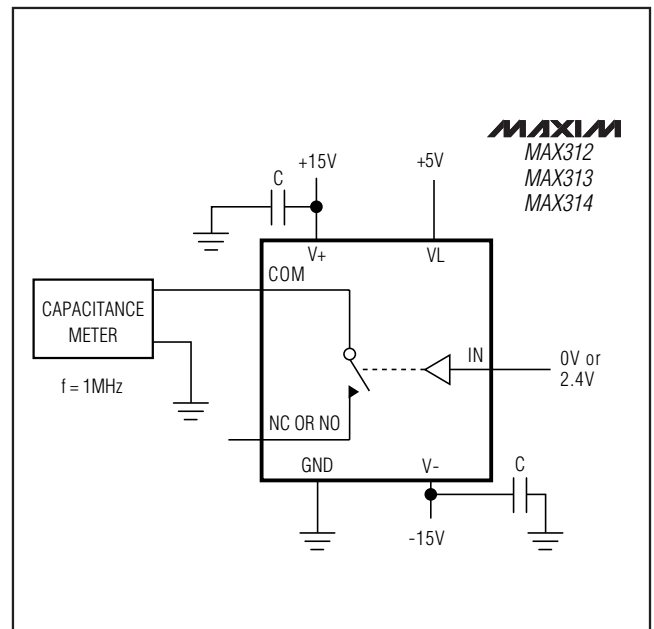


Figure 8. Channel-On Capacitance Test Circuit

# 10Ω, Quad, SPST, CMOS Analog Switches


## Ordering Information (continued)

| PART      | TEMP. RANGE     | PIN-PACKAGE    |
|-----------|-----------------|----------------|
| MAX313CPE | 0°C to +70°C    | 16 Plastic DIP |
| MAX313CSE | 0°C to +70°C    | 16 Narrow SO   |
| MAX313CUE | 0°C to +70°C    | 16 TSSOP       |
| MAX313C/D | 0°C to +70°C    | Dice*          |
| MAX313EPE | -40°C to +85°C  | 16 Plastic DIP |
| MAX313ESE | -40°C to +85°C  | 16 Narrow SO   |
| MAX313EUE | -40°C to +85°C  | 16 TSSOP       |
| MAX313MJE | -55°C to +125°C | 16 CERDIP**    |
| MAX314CPE | 0°C to +70°C    | 16 Plastic DIP |
| MAX314CSE | 0°C to +70°C    | 16 Narrow SO   |
| MAX314CUE | 0°C to +70°C    | 16 TSSOP       |
| MAX314C/D | 0°C to +70°C    | Dice*          |
| MAX314EPE | -40°C to +85°C  | 16 Plastic DIP |
| MAX314ESE | -40°C to +85°C  | 16 Narrow SO   |
| MAX314EUE | -40°C to +85°C  | 16 TSSOP       |
| MAX314MJE | -55°C to +125°C | 16 CERDIP**    |

\* Contact factory for dice specifications.

\*\*Contact factory for availability.

## Chip Topography

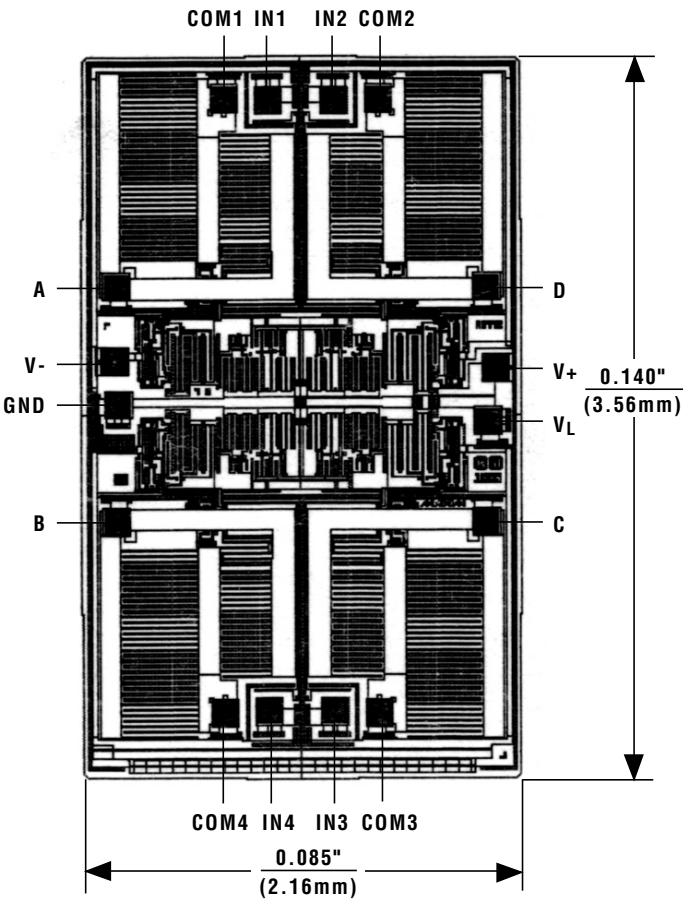

| MAX312 |      | MAX313 |      | MAX314 |      |
|--------|------|--------|------|--------|------|
| PIN    | NAME | PIN    | NAME | PIN    | NAME |
| A      | NC1  | A      | NO1  | A      | NO1  |
| B      | NC4  | B      | NO4  | B      | NO4  |
| C      | NC3  | C      | NO3  | C      | NC3  |
| D      | NC2  | D      | NO2  | D      | NC2  |



TRANSISTOR COUNT: 100

SUBSTRATE CONNECTED TO V+

# 10Ω, Quad, SPST, CMOS Analog Switches

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

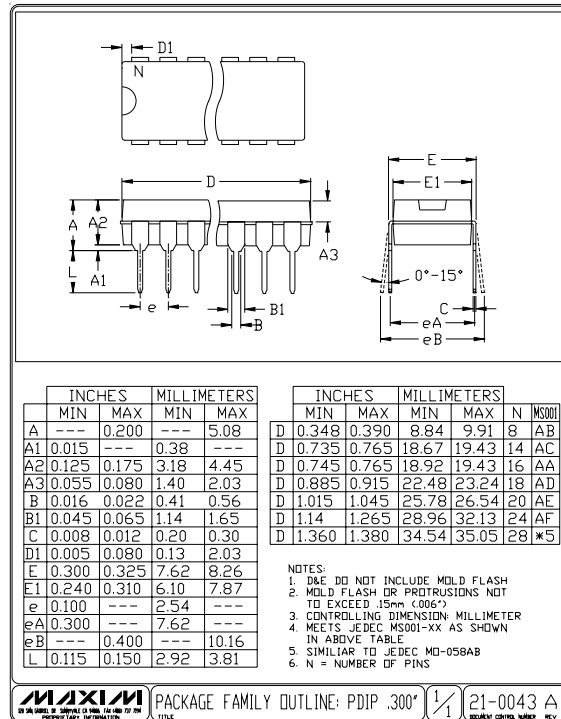
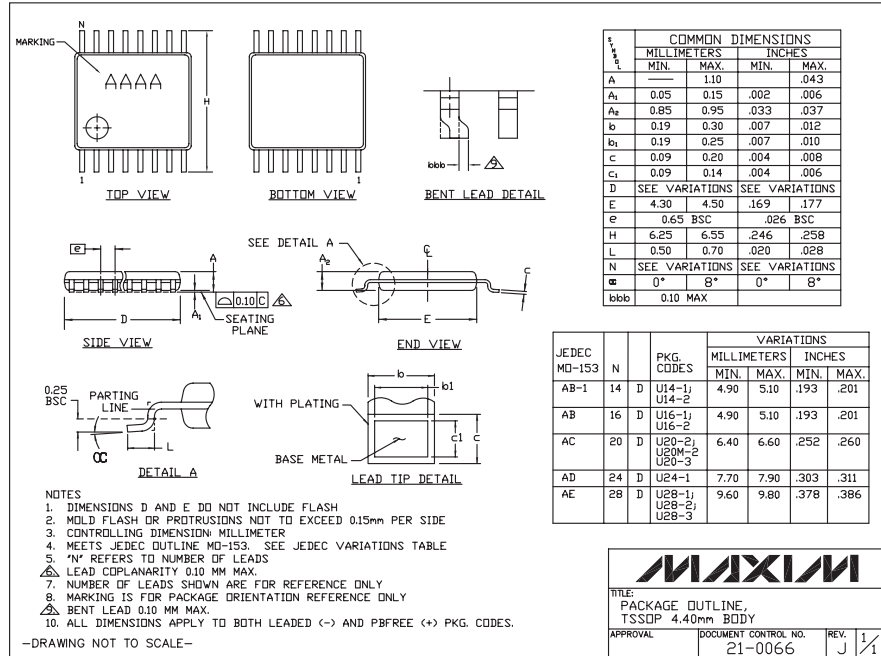


MAX312/MAX313/MAX314

10Ω, Quad, SPST, CMOS Analog Switches

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

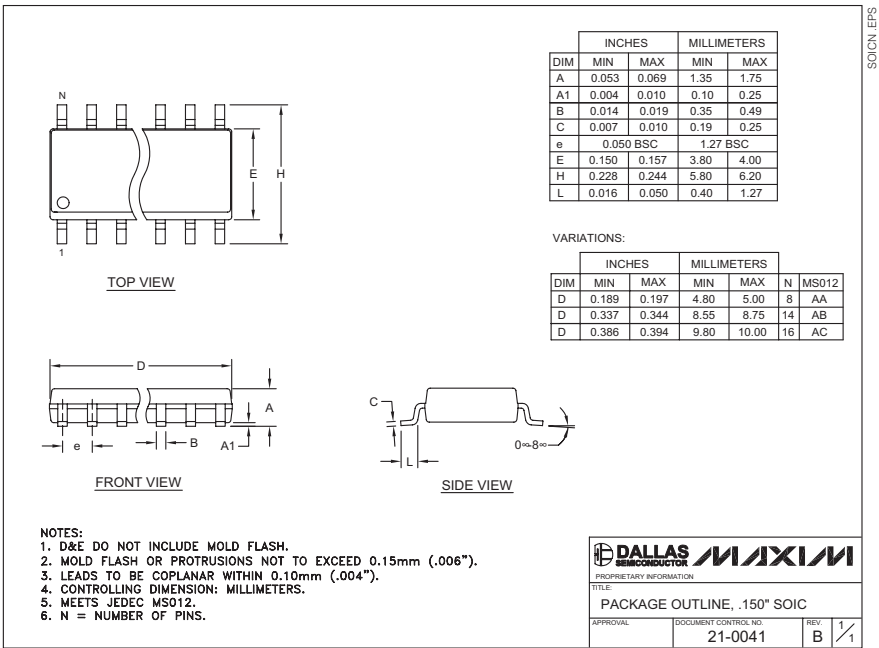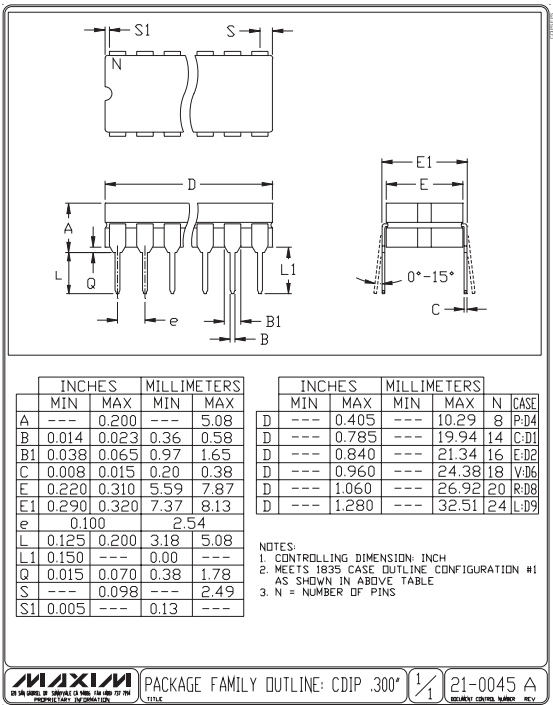

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9