Is Now Part of

ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at
www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

May 2017

FODM8801A, FODM8801B, FODM8801C OptoHiT™ Series, High-Temperature Phototransistor Optocoupler in Half-Pitch Mini-Flat 4-Pin Package

Features

- Utilizing Proprietary Process Technology to Achieve High Operating Temperature: up to 125°C
- Guaranteed Current Transfer Ratio (CTR) Specifications Across Full Temperature Range
  - Excellent CTR Linearity at High-Temperature
  - CTR at Very Low Input Current, I_F
- High Isolation Voltage Regulated by Safety Agency: C-UL / UL1577, 3750 VAC_{RMS} for 1 minute and DIN EN/IEC60747-5-5
- Compact Half-Pitch, Mini-Flat, 4-Pin Package (1.27 mm Lead Pitch, 2.4 mm Maximum Standoff Height)
- > 5 mm Creepage and Clearance Distance
- Applicable to Infrared Ray Reflow, 245°C

Applications

- Primarily Suited for DC-DC Converters
- Ground-Loop Isolation, Signal-Noise Isolation
- Communications – Adapters, Chargers
- Consumer – Appliances, Set-Top Boxes
- Industrial – Power Supplies, Motor Control, Programmable Logic Control

Description

In the OptoHiT™ series, the FODM8801 is a first-of-kind phototransistor, utilizing Fairchild's leading-edge proprietary process technology to achieve high operating temperature characteristics, up to 125°C. The opto-coupler consists of an aluminum gallium arsenide (AlGaAs) infrared light-emitting diode (LED) optically coupled to a phototransistor, available in a compact half-pitch, mini-flat, 4-pin package. It delivers high current transfer ratio at very low input current. The input-output isolation voltage, V_{ISO}, is rated at 3750 VAC_{RMS}.

Schematic

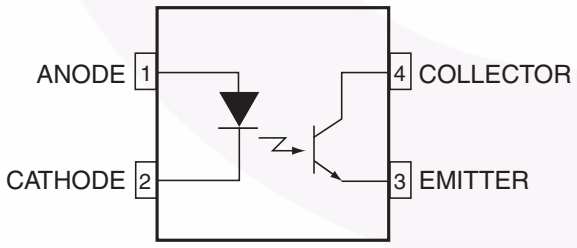

Figure 1. Schematic

Package



Figure 2. Half-Pitch Mini-Flat

©2010 Fairchild Semiconductor Corporation

Safety and Insulation Ratings

As per DIN EN/IEC 60747-5-5, this optocoupler is suitable for “safe electrical insulation” only within the safety limit data. Compliance with the safety ratings shall be ensured by means of protective circuits.

Parameter		Characteristics
Installation Classifications per DIN VDE 0110/1.89 Table 1, For Rated Mains Voltage	< 150 V_{RMS}	I–IV
	< 300 V_{RMS}	I–III
Climatic Classification		40/125/21
Pollution Degree (DIN VDE 0110/1.89)		2
Comparative Tracking Index		175

Symbol	Parameter	Value	Unit
V_{PR}	Input-to-Output Test Voltage, Method A, V_{IORM} x 1.6 = V_{PR}, Type and Sample Test with t_m = 10 s, Partial Discharge < 5 pC	848	V_{peak}
	Input-to-Output Test Voltage, Method B, V_{IORM} x 1.875 = V_{PR}, 100% Production Test with t_m = 1 s, Partial Discharge < 5 pC	1060	V_{peak}
V_{IORM}	Maximum Working Insulation Voltage	565	V_{peak}
V_{IOTM}	Highest Allowable Over-Voltage	6000	V_{peak}
	External Creepage	≥ 5	mm
	External Clearance	≥ 5	mm
DTI	Distance Through Insulation (Insulation Thickness)	≥ 0.5	mm
T_S	Case Temperature(1)	150	°C
$I_{S,INPUT}$	Input Current(1)	200	mA
$P_{S,OUTPUT}$	Output Power(1)	300	mW
R_{IO}	Insulation Resistance at T_S, V_{IO} = 500 V(1)	> 10^9	Ω

Note:

1. Safety limit values – maximum values allowed in the event of a failure.

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. T_A = 25°C unless otherwise specified.

Symbol	Parameter	Value	Unit
Total Package			
T_{STG}	Storage Temperature	-40 to +150	°C
T_{OPR}	Operating Temperature	-40 to +125	°C
T_J	Junction Temperature	-40 to +140	°C
T_{SOL}	Lead Solder Temperature	245 for 10 s	°C
Emitter			
$I_{F(average)}$	Continuous Forward Current	20	mA
V_R	Reverse Input Voltage	6	V
PD_{LED}	Power Dissipation(2)(4)	40	mW
Detector			
$I_{C(average)}$	Continuous Collector Current	30	mA
V_{CEO}	Collector-Emitter Voltage	75	V
V_{ECO}	Emitter-Collector Voltage	7	V
PD_C	Collector Power Dissipation(3)(4)	150	mW

Notes:

2. Derate linearly from 73°C at a rate of 0.24 mW/°C
3. Derate linearly from 73°C at a rate of 2.23 mW/°C.
4. Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Value	Unit
T_A	Operating Temperature	-40 to +125	°C
$V_{FL(OFF)}$	Input Low Voltage	-5.0 to +0.8	V
I_{FH}	Input High Forward Current	1 to 10	mA

Isolation Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{ISO}	Input-Output Isolation Voltage	f = 60 Hz, t = 1 min., $I_{I-O} \le 10$ μA(5)(6)	3,750			VAC_{RMS}
R_{ISO}	Isolation Resistance	V_{I-O} = 500 V(5)	10^{12}			Ω
C_{ISO}	Isolation Capacitance	f = 1 MHz		0.3	0.5	pF

Notes:

5. Device is considered a two-terminal device: pins 1 and 2 are shorted together and pins 3 and 4 are shorted together.
6. 3,750 VAC_{RMS} for 1 minute is equivalent to 4,500 VAC_{RMS} for 1 second.

©2010 Fairchild Semiconductor Corporation

Electrical Characteristics

Apply over all recommended conditions (T_A = -40°C to +125°C unless otherwise specified).
All typical values are measured at T_A = 25°C.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Emitter						
V_F	Forward Voltage	I_F = 1 mA	1.00	1.35	1.80	V
$\Delta V_F / \Delta T_A$	Forward-Voltage Coefficient	I_F = 1 mA		-1.6		mV / °C
I_R	Reverse Current	V_R = 6 V			10	µA
C_T	Terminal Capacitance	V = 0 V, f = 1 MHz		30		pF
Detector						
BV_{CEO}	Collector-Emitter Breakdown Voltage	I_C = 0.5 mA, I_F = 0 mA	75	130		V
BV_{ECO}	Emitter-Collector Breakdown Voltage	I_E = 100 µA, I_F = 0 mA	7	12		V
I_{CEO}	Collector Dark Current	V_{CE} = 75 V, I_F = 0 mA, T_A = 25°C			100	nA
		V_{CE} = 50 V, I_F = 0 mA			50	µA
		V_{CE} = 5 V, I_F = 0 mA			30	µA
C_{CE}	Capacitance	V_{CE} = 0 V, f = 1 MHz		8		pF

©2010 Fairchild Semiconductor Corporation

Transfer Characteristics

Apply over all recommended conditions (T_A = -40°C to +125°C unless otherwise specified).
All typical values are measured at T_A = 25°C.

Symbol	Parameter	Device	Conditions	Min.	Typ.	Max.	Unit
CTR_{CE}	Current Transfer Ratio (Collector-Emitter)	FODM8801A	I_F = 1.0 mA, V_{CE} = 5 V @ T_A = 25°C	80	120	160	%
			I_F = 1.0 mA, V_{CE} = 5 V	35	120	230	
			I_F = 1.6 mA, V_{CE} = 5 V	40	125		
			I_F = 3.0 mA, V_{CE} = 5 V	45	138		
		FODM8801B	I_F = 1.0 mA, V_{CE} = 5 V @ T_A = 25°C	130	195	260	
			I_F = 1.0 mA, V_{CE} = 5 V	65	195	360	
			I_F = 1.6 mA, V_{CE} = 5 V	70	202		
			I_F = 3.0 mA, V_{CE} = 5 V	75	215		
		FODM8801C	I_F = 1.0 mA, V_{CE} = 5 V @ T_A = 25°C	200	300	400	
			I_F = 1.0 mA, V_{CE} = 5 V	100	300	560	
			I_F = 1.6 mA, V_{CE} = 5 V	110	312		
			I_F = 3.0 mA, V_{CE} = 5 V	115	330		
$CTR_{CE(SAT)}$	Saturated Current Transfer Ratio (Collector-Emitter)	FODM8801A	I_F = 1.0 mA, V_{CE} = 0.4 V @ T_A = 25°C	65	108	150	%
			I_F = 1.0 mA, V_{CE} = 0.4 V	30	108		
			I_F = 1.6 mA, V_{CE} = 0.4 V	25	104		
			I_F = 3.0 mA, V_{CE} = 0.4 V	20	92		
		FODM8801B	I_F = 1.0 mA, V_{CE} = 0.4 V @ T_A = 25°C	90	168	245	
			I_F = 1.0 mA, V_{CE} = 0.4 V	45	168		
			I_F = 1.6 mA, V_{CE} = 0.4 V	40	155		
			I_F = 3.0 mA, V_{CE} = 0.4 V	35	132		
		FODM8801C	I_F = 1.0 mA, V_{CE} = 0.4 V @ T_A = 25°C	140	238	380	
			I_F = 1.0 mA, V_{CE} = 0.4 V	75	238		
			I_F = 1.6 mA, V_{CE} = 0.4 V	65	215		
			I_F = 3.0 mA, V_{CE} = 0.4 V	55	177		
$V_{CE(SAT)}$	Saturation Voltage	FODM8801A	I_F = 1.0 mA, I_C = 0.3 mA		0.17	0.40	V
			I_F = 1.6 mA, I_C = 0.4 mA		0.16	0.40	
			I_F = 3.0 mA, I_C = 0.6 mA		0.15	0.40	
		FODM8801B	I_F = 1.0 mA, I_C = 0.45 mA		0.17	0.40	
			I_F = 1.6 mA, I_C = 0.6 mA		0.16	0.40	
			I_F = 3.0 mA, I_C = 1.0 mA		0.16	0.40	
		FODM8801C	I_F = 1.0 mA, I_C = 0.75 mA		0.18	0.40	
			I_F = 1.6 mA, I_C = 1.0 mA		0.17	0.40	
			I_F = 3.0 mA, I_C = 1.6 mA		0.17	0.40	

©2010 Fairchild Semiconductor Corporation

Switching Characteristics

Apply over all recommended conditions (T_A = -40°C to +125°C unless otherwise specified).
All typical values are measured at T_A = 25°C.

Symbol	Parameter	Device	Conditions	Min.	Typ.	Max.	Unit
t_{ON}	Turn-On Time	All Devices	I_F = 1.6 mA, V_{CC} = 5 V, R_L = 0.75 kΩ	1	6	20	µs
			I_F = 1.6 mA, V_{CC} = 5 V, R_L = 4.7 kΩ		6		
t_{OFF}	Turn-Off Time	All Devices	I_F = 1.6 mA, V_{CC} = 5 V, R_L = 0.75 kΩ	1	6	20	µs
			I_F = 1.6 mA, V_{CC} = 5 V, R_L = 4.7 kΩ		40		
t_R	Output Rise Time (10% to 90%)	All Devices	I_F = 1.6 mA, V_{CC} = 5 V, R_L = 0.75 kΩ		5		µs
t_F	Output Fall Time (90% to 10%)	All Devices	I_F = 1.6 mA, V_{CC} = 5 V, R_L = 0.75 kΩ		5.5		µs
CM_H	Common-Mode Rejection Voltage (Transient Immunity) – Output High	All Devices	T_A = 25°C, I_F = 0 mA, V_O > 2.0 V, R_L = 4.7 kΩ, V_{CM} = 1000 V[7], Figure 16		20		kV / µs
CM_L	Common-Mode Rejection Voltage (Transient Immunity) – Output Low	All Devices	T_A = 25°C, I_F = 1.6 mA, V_O < 0.8 V, R_L = 4.7 kΩ, V_{CM} = 1000 V[7], Figure 16		20		kV / µs

Note:

7. Common-mode transient immunity at output high is the maximum tolerable positive dVcm/dt on the leading edge of the common-mode impulse signal, V_{CM}, to assure that the output remains high.

Typical Performance Curves

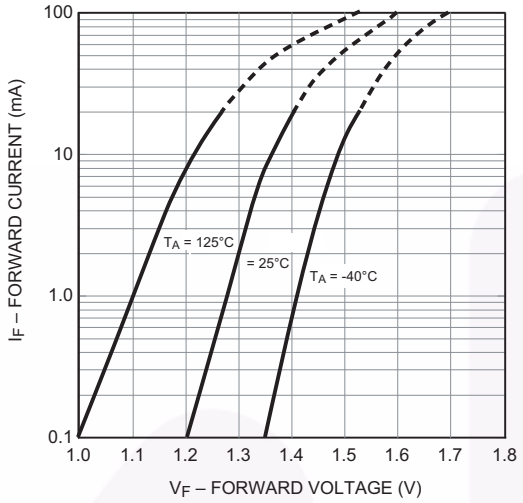

Figure 3. Forward Current vs. Forward Voltage

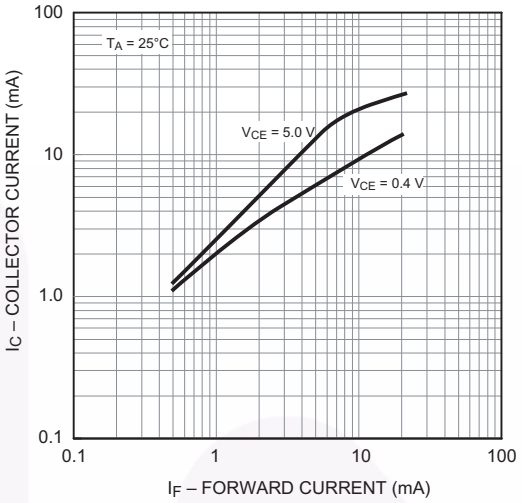

Figure 4. Collector Current vs. Forward Current

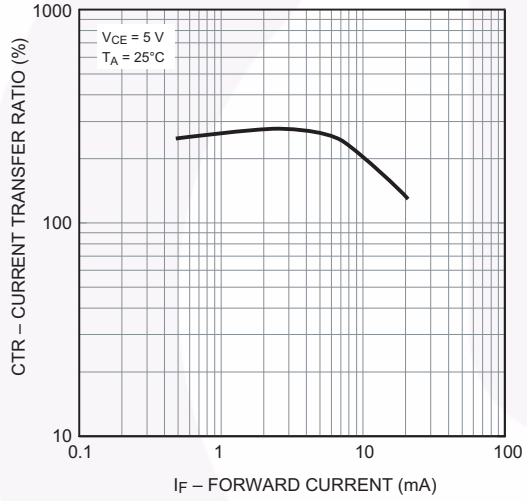

Figure 5. Current Transfer Ratio vs. Forward Current

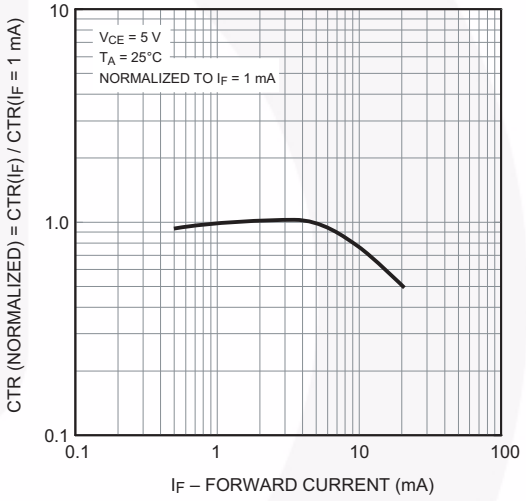

Figure 6. Normalized CTR vs. Forward Current

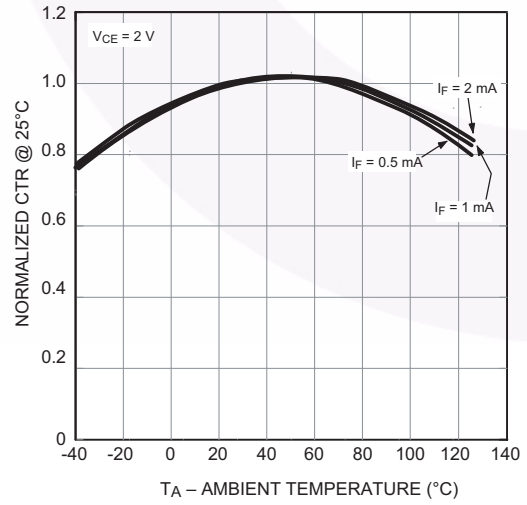

Figure 7. Normalized CTR vs. Ambient Temperature

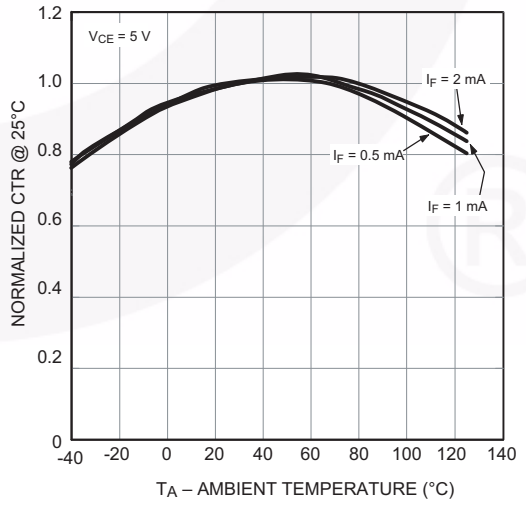

Figure 8. Normalized CTR vs. Ambient Temperature

Typical Performance Curves (Continued)

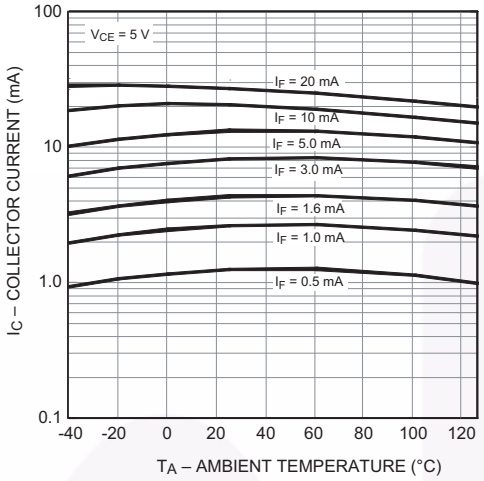

Figure 9. Collector Current vs. Ambient Temperature

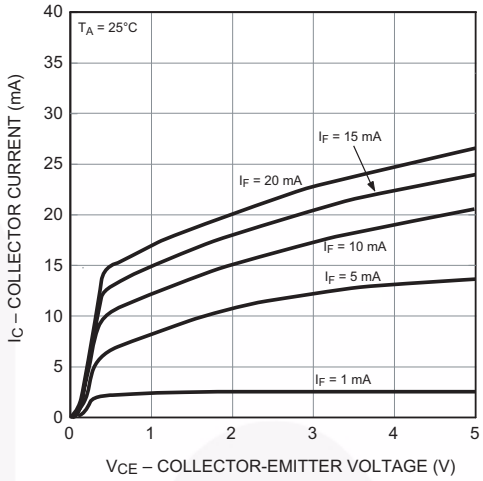

Figure 10 Collector Current vs. Collector-Emitter Voltage

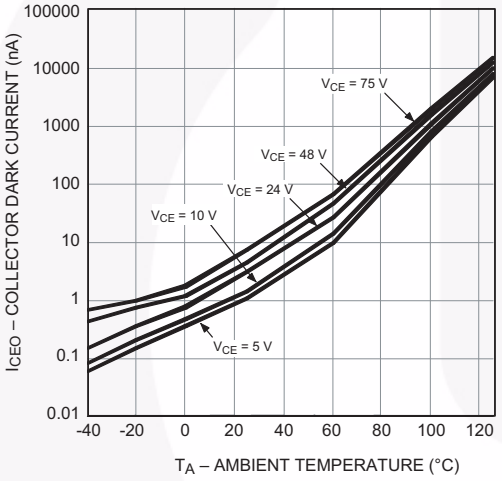

Figure 11. Collector Dark Current vs. Ambient Temperature

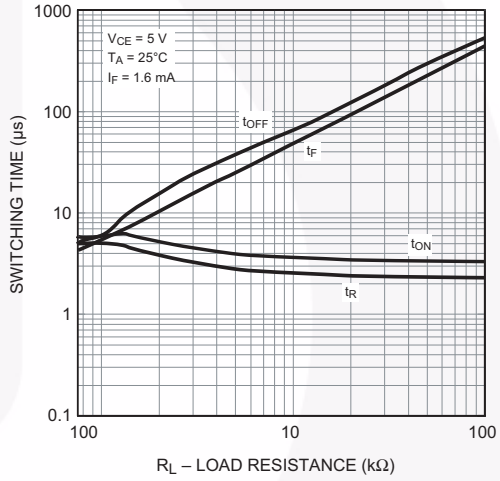

Figure 12. Switching Time vs. Load Resistance

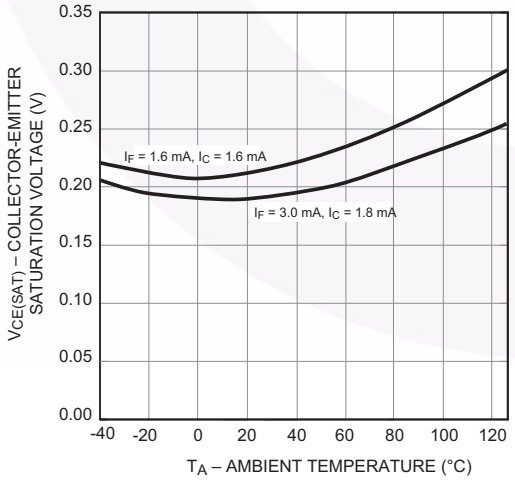

Figure 13. Collector-Emitter Saturation Voltage vs. Ambient Temperature

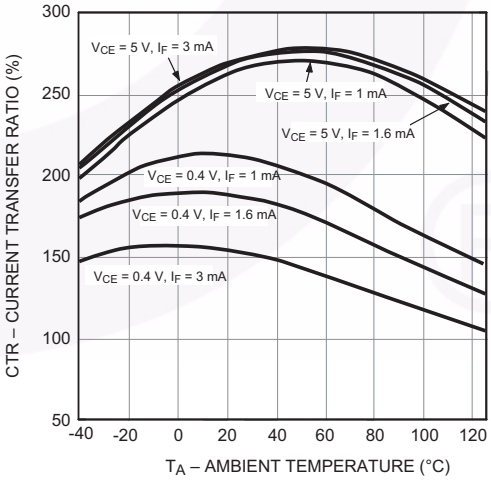

Figure 14. Current Transfer Ration vs. Ambient Temperature

Test Circuits

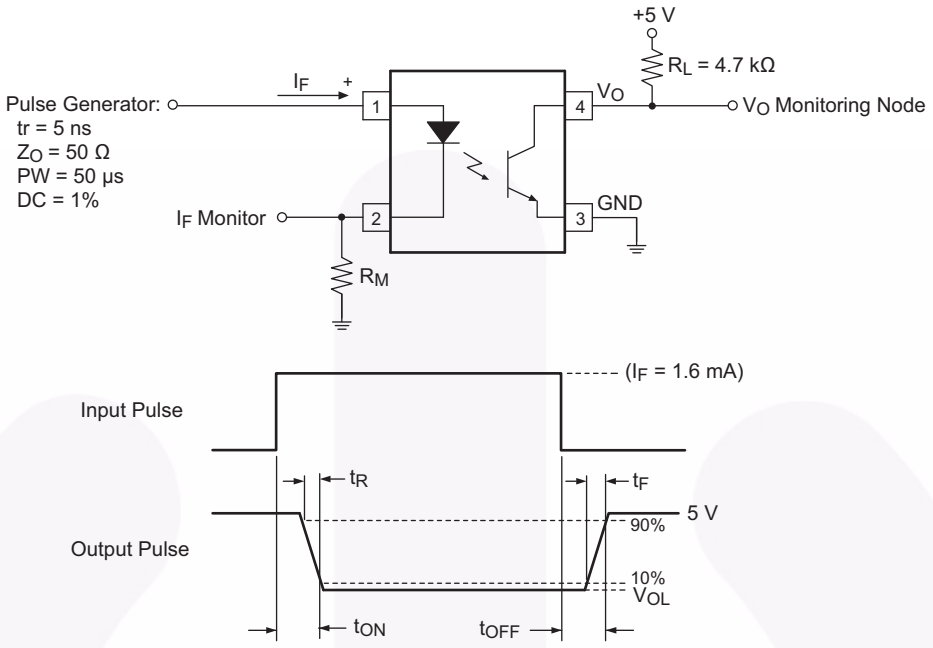

Figure 15. Test Circuit for Propagation Delay, Rise Time, and Fall Time

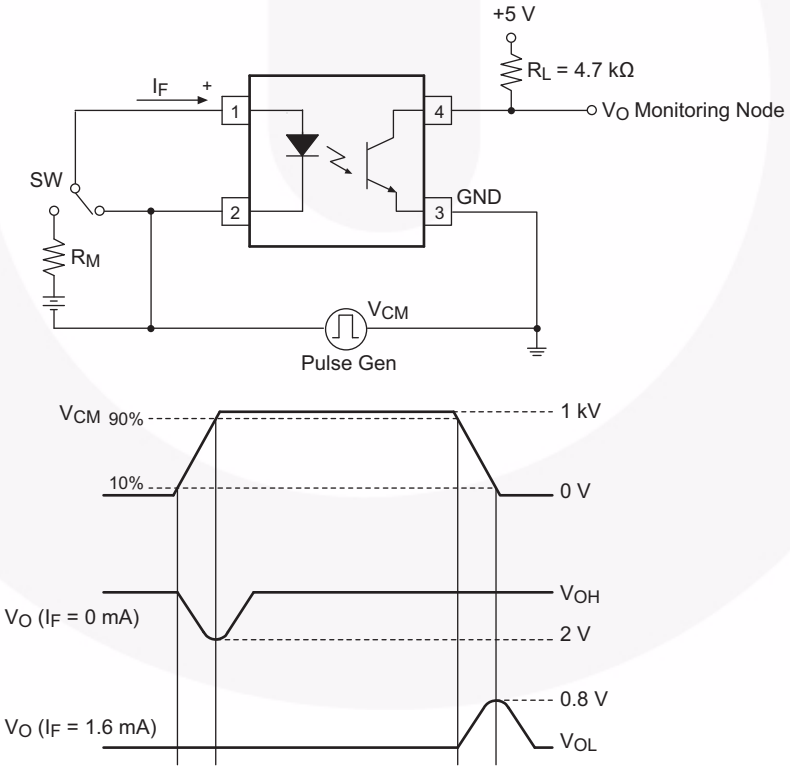

Figure 16. Test Circuit for Instantaneous Common-Mode Rejection Voltage

Reflow Profile

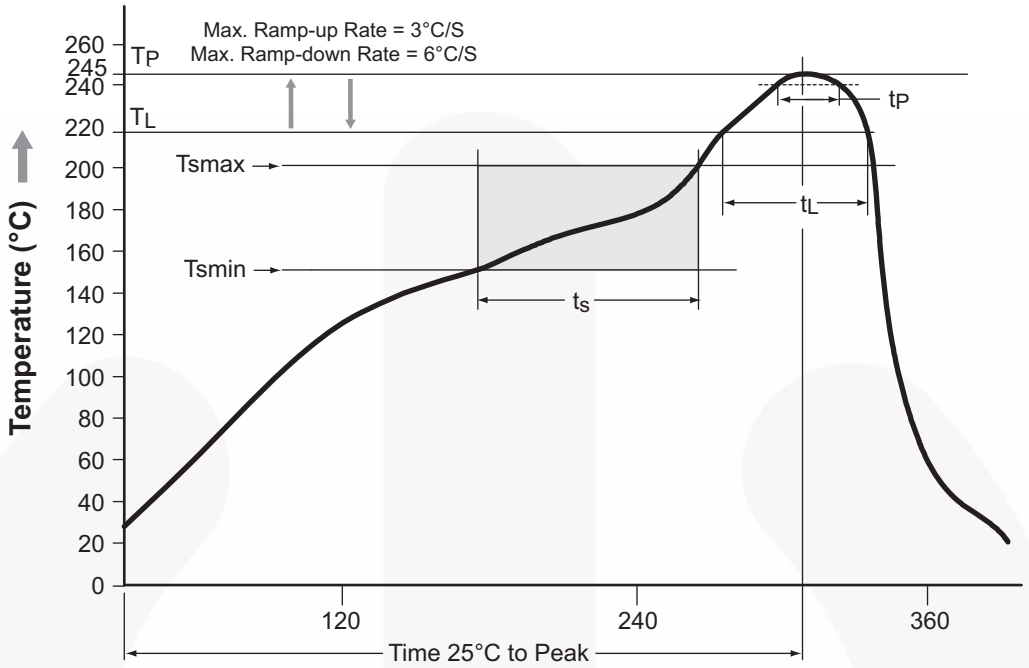

Figure 13. Reflow Profile

Profile Freature	Pb-Free Assembly Profile
Temperature Minimum (Tsmin)	150°C
Temperature Maximum (Tsmax)	200°C
Time (t_S) from (Tsmin to Tsmax)	60–120 seconds
Ramp-up Rate (t_L to t_P)	3°C/second maximum
Liquidous Temperature (T_L)	217°C
Time (t_L) Maintained Above (T_L)	60–150 seconds
Peak Body Package Temperature	245°C +0°C / –5°C
Time (t_P) within 5°C of 245°C	30 seconds
Ramp-down Rate (T_P to T_L)	6°C/second maximum
Time 25°C to Peak Temperature	8 minutes maximum

Figure 17. Reflow Profile

Ordering Information

Part Number	Package	Packing Method
FODM8801A	Half Pitch Mini-Flat 4-Pin	Tube (100 units)
FODM8801AR2	Half Pitch Mini-Flat 4-Pin	Tape and Reel (2500 Units)
FODM8801AV	Half Pitch Mini-Flat 4-Pin, DIN EN/IEC60747-5-5 Option	Tube (100 Units)
FODM8801AR2V	Half Pitch Mini-Flat 4-Pin, DIN EN/IEC60747-5-5 Option	Tape and Reel (2500 Units)

Note:

8. The product orderable part number system listed in this table also applies to the FODM8801B, FODM8801C products.

Marking Information

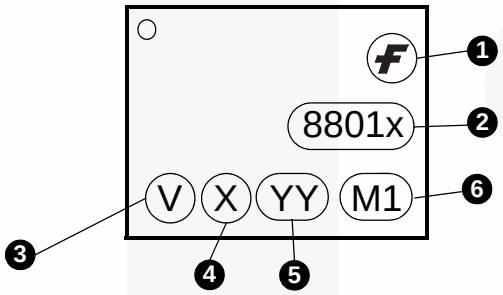

Figure 18. Top Mark

Table 1. Top Mark Definitions

1	Fairchild Logo
2	Device Number
3	DIN EN/IEC60747-5-5 Option (only appears on component ordered with this option)
4	One-Digit Year Code, e.g., “6”
5	Digit Work Week, Ranging from “01” to “53”
6	Assembly Package Code

Tape and Reel Dimensions

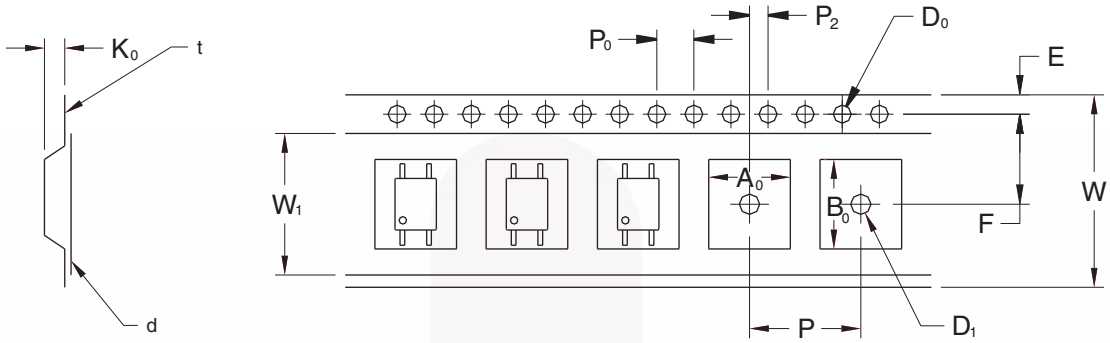

		1.27 Pitch
Description	**Symbol**	**Dimensions (mm)**
Tape Width	W	12.00 +0.30/-0.10
Tape Thickness	t	0.30 ±0.05
Sprocket Hole Pitch	P_0	4.00 ±0.10
Sprocket Hole Diameter	D_0	1.50 +0.10/-0.0
Sprocket Hole Location	E	1.75 ±0.10
Pocket Location	F	5.50 ±0.10
	P_2	2.00 ±0.10
Pocket Pitch	P	8.00 ±0.10
Pocket Dimension	A_0	2.80 ±0.10
	B_0	7.30 ±0.10
	K_0	2.30 ±0.10
Pocket Hole Diameter	D_1	1.50 Min.
Cover Tape Width	W_1	9.20
Cover Tape Thickness	d	0.065 ±0.010
Max. Component Rotation or Tilt		10° Max.
Devices Per Reel		2500
Reel Diameter		330 mm (13")

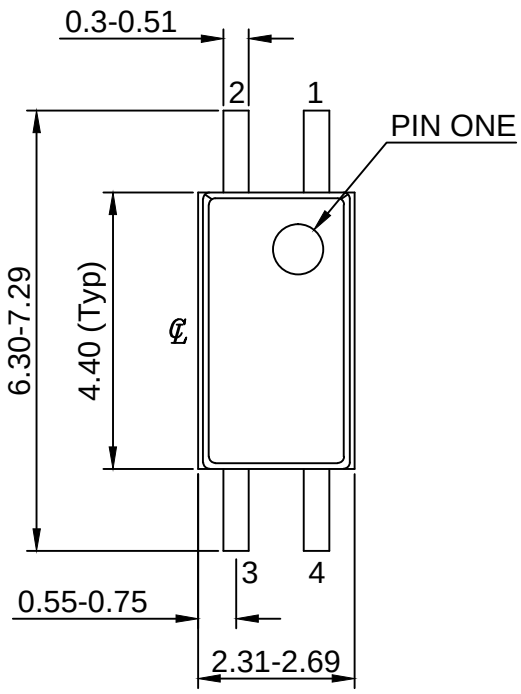

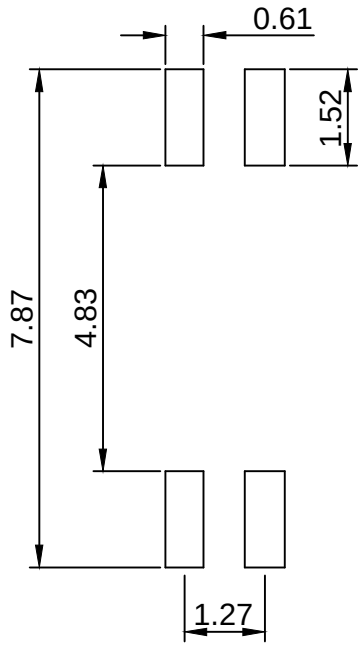

LAND PATTERN RECOMMENDATION

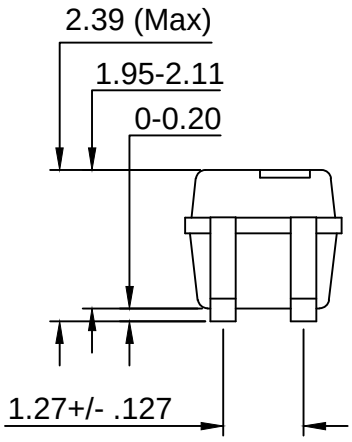

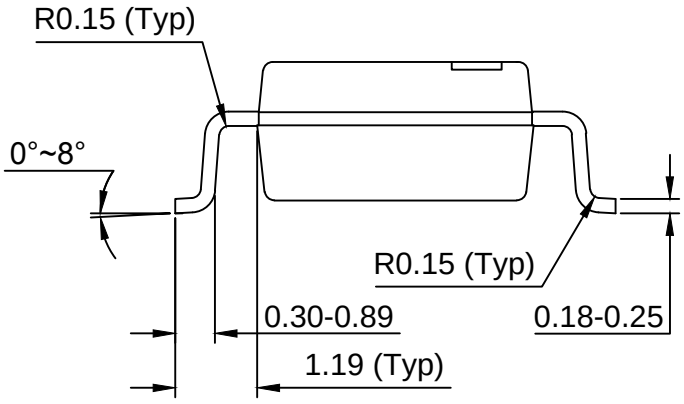

NOTES:

A) NO STANDARD APPLIES TO THIS PACKAGE

B) ALL DIMENSIONS ARE IN MILLIMETERS.

C) DIMENSIONS ARE EXCLUSIVE OF BURRS,
MOLD FLASH, AND TIE BAR EXTRUSION

D) DRAWING FILENAME AND REVSION : MKT-MFP04AREV4.

FAIRCHILD

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor:

FODM8801C FODM8801CR2 FODM8801CR2V FODM8801CV

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9