



HEAVYCON complete heavy-duty connectors

Compatible insertion – flexible combination



PHOENIX CONTACT – in dialog with customers and partners worldwide

Phoenix Contact is a global market leader in the fields of electrical engineering, electronics, and automation. Founded in 1923, the family-owned company now employs around 14,000 people worldwide. A sales network with over 50 sales subsidiaries and more than 30 additional global sales partners guarantees customer proximity directly on site, anywhere in the world.

Our range of services consists of all kinds of products with a wide range of electrotechnical applications. This includes numerous connection technologies for device manufacturers and machine building, components for modern control cabinets, and tailor-made solutions for many applications and industries such as the automotive industry, wind energy, solar energy, the process industry or applications in the fields of water supply, power transmission/distribution, and traffic infrastructure.



Global player with personal customer contact

Company independence is an integral part of our company philosophy. Phoenix Contact therefore relies on in-house knowledge and expertise in countless respects. The design and development departments constantly implement innovative product ideas, developing special solutions to meet customer requirements. Numerous patents emphasize the fact that many of Phoenix Contact's products have been developed in-house.



HEAVYCON complete – The right connector for every application



Find out more with the web code

In this brochure, you will find our web codes: a number sign followed by a four-digit number combination.



Web code: #1234 (example)

This allows you to reach information on our website quickly.

It couldn't be simpler:

1. Go to the Phoenix Contact website
2. Enter # and the number combination in the search field
3. Receive more information and product versions

#1234

Search



Or use the direct link:

phoenixcontact.net/webcode/#1234

Contents

HEAVYCON complete The right connector for every application	4/5
HEAVYCON complete Free combination is your competitive advantage	6/7
HEAVYCON STANDARD Proven versatility	8/9
HEAVYCON EVO Ingenious flexibility	10/11
HEAVYCON ADVANCE Robust without compromise	12/13
HEAVYCON complete Quality in every application	14/15
Inserts with a fixed number of positions and modular inserts The right connection technology for every application	16/17
Product overview	
System cross-reference list Housing and contact inserts	18/19
Contact inserts with a fixed number of positions	20/21
Modular contact inserts and hinged retaining frames	22–25
Crimp contacts and tools	26/27
STANDARD housing	28/29
EVO housing	30–33
ADVANCE housing	34/35
HPR housing for railway applications	36/37
Accessories	38/39

HEAVYCON complete – The right connector for every application

Heavy-duty connectors from the HEAVYCON complete series protect your interfaces and ensure safe power, data, and signal transmission even under the harshest conditions. They resist dirt, water, vibrations, and high mechanical load and remain sealed up to IP69K degree of protection. You can always create the right plug-in connection for your requirements with housings from our three series and matching contact inserts which can be combined.

Metal housings are EMC-ready

Due to conductive surfaces and seals, all HEAVYCON metal housings are "EMC-ready".

Combined with shielded cable glands, they offer you reliable protection in electromagnetic surroundings.



Wind turbine generators

In wind turbine generators, cables and lines are connected several times using connectors. This is the only way that large plants can be installed quickly and cost-effectively. The interfaces must be resistant to corrosion, robust, and as light as possible. This is where the HEAVYCON EVO series comes into its own.



Automotive industry

Robust, hard-wearing connectors are used on assembly lines in the automotive industry. As such, you save costs during transport, startup, and maintenance. The HEAVYCON STANDARD metal connectors are ideal here, in order to ensure fast assembly and a high degree of availability.



Control cabinet manufacturing, machine building and systems manufacturing

Reliable interfaces are an absolute must in state-of-the-art systems. As the system's complexity increases, there is less and less installation space available. Combine virtually every plug-in connection with the HEAVYCON complete product range – optimally tailored to your space requirements and assembly effort.



HEAVYCON provides the right connector with matching connection technology for every application: with plug-in compatibility and flexible combinations.

HEAVYCON complete



HEAVYCON STANDARD – Proven versatility

STANDARD housings are distinguished by a wide range of robust metal housings with various different cable outlet directions and locks.

- High corrosion resistance
- Flexible single or double locking latches
- Mounting- and plug-in-compatible
- EMC-ready



HEAVYCON EVO – Ingenious flexibility

The flexible, swiveling bayonet locking of the EVO series allows the cable outlet direction to be freely selected.

- On-site selection of cable outlet direction
- Lower logistics costs
- Flexible single or double locking latches
- Mounting- and plug-in-compatible
- Metal housings: EMC-ready



HEAVYCON ADVANCE – Robust without compromise

ADVANCE housings are particularly durable and robust, thanks to the direct screw locking without panel mounting base.

- Ideal for increased environmental requirements thanks to high degree of protection
- Cost advantage with direct mounting
- Mounting-compatible
- Metal housings: EMC-ready

HEAVYCON complete – Free combination is your competitive advantage

The entire HEAVYCON complete product range consists of metal and plastic housings, contact inserts, cable glands, and accessories.

All housing series fit standard panel cutouts. STANDARD and EVO housings require a panel mounting base for the panel feed-through.

ADVANCE housings can be mounted directly onto the wall using the panel mounting flange.

The sleeve housing, panel mounting base, box mounting base, and coupling housings can be freely combined with each other within the STANDARD and EVO series.

They are mounting- and plug-in-compatible with aluminum housing units from well-known manufacturers. This allows all components to be individually combined and flexibly modified, extended or replaced.

Our contact inserts with a fixed number of positions and modular contact inserts naturally fit into all housing series.


HEAVYCON complete

HEAVYCON STANDARD

Sleeve housing



Contact inserts

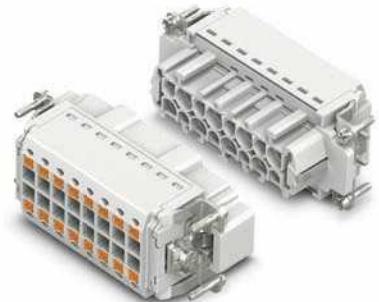

Fixed number
of positions


Panel mounting base



HEAVYCON EVO



HEAVYCON ADVANCE

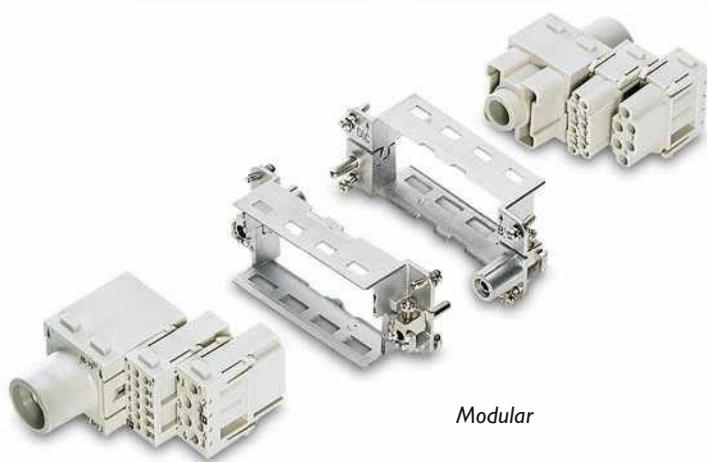

Modular



Panel mounting flange



HEAVYCON STANDARD – Proven versatility

HEAVYCON STANDARD housings with fast and reliable locking latch are suitable for many applications.

The robust metal housings resist dirt, water, vibrations, and high mechanical loads.

HEAVYCON STANDARD and EVO housings are equipped with single locking latches and double locking latches. Various supporting base elements such as panel mounting bases, box mounting bases or coupling housings are available depending on the application.



EMC protection

The housing surfaces and seals are electrically conductive.

Combined with shielded cable glands, they offer you reliable EMC protection.



Proven product range

The STANDARD housings are available in market-standard sizes and are fully compatible with the industry standard.



Convenient locking latch

The locking latch can be manually pressed quickly and easily.

Housing with a single locking latch is ideal for alignment lengthways. Double locking latches can be installed sideways and save space.

The locking latches comprise special, glass-reinforced polyamide.



Various different outlet directions

Select from our wide housing range according to your requirements. We offer you sleeve housings with straight or lateral outlet for all common metric and Pg thread sizes.



For the harshest conditions

The robust metal housings are made from particularly corrosion-resistant die-cast aluminum, which is resistant to aggressive industrial conditions and high mechanical loads.

They are sealed up to IP69K degree of protection

HEAVYCON EVO – Ingenious flexibility

Switch to HEAVYCON EVO now and save on material and storage costs. You can use the angled EVO cable entry to save up to 70% the number of versions. The use of high-quality materials and full compatibility with the industry standard enable failsafe use in a wide range of applications.

Depending on the application, select a cost-effective plastic housing or an EMC-compatible metal housing.



HEAVYCON EVO housing units reduce the variety of versions required, thereby cutting your storage costs by up to 70%. Using just one housing type and four cable glands, you can implement solutions for every possible application – whether with straight or lateral entry.



EMC protection

The housing surfaces and seals of the metal series are electrically conductive. Combined with shielded cable glands, they offer you reliable EMC protection.



Flexible connection in no time at all

The cable gland, which is separate from the housing, is securely locked with just a twist of the wrist thanks to the bayonet locking, without the need for special tools.



Convenient locking latch

The locking latch can be manually pressed quickly and easily.

Housing with a single locking latch is ideal for alignment lengthways. Double locking latches can be installed sideways and save space.

The locking latches comprise special, glass-reinforced polyamide.



Two outlet directions with one housing

Thanks to the flexible bayonet locking, you can determine the cable outlet direction on site and subsequently change it, if required. The straight outlet enables closer cable routing along the panel; the lateral entry can be assembled without bending the cable.



For harsh conditions

EVO connectors are tested for use in various industrial applications. The plastic housing, made from special, glass-reinforced polyamide, meets IP66 and NEMA 4X degree of protection; the metal housing meets IP66/IP67/IP69K and NEMA 4X/6P.

HEAVYCON ADVANCE – Robust without compromise

HEAVYCON ADVANCE heavy-duty connectors with screw locking are ideally suited for particularly aggressive surroundings, e.g., in offshore areas, the chemical or railway industry. Sensitive interfaces are reliably protected, even against EMC influences.

For the panel feed-through, the panel mounting base typically used has been replaced by two single panel mounting flanges, thereby reducing assembly and material costs. As such, the sleeve housing forms a seal directly on the control cabinet panel.



EMC protection

The housing surfaces and seals of the metal series are electrically conductive. Combined with shielded cable glands, they offer you reliable EMC protection.



Save space and costs

ADVANCE housings do not need a panel mounting base on the device side.



Robust screw locking

ADVANCE housings do not need a panel mounting base on the device side. Mount the sleeve housing with two panel mounting flanges and robust stainless steel locking screws directly onto the wall. This not only saves time and costs, but also offers a high degree of leak-tightness and makes it more difficult for unauthorized persons to access.



Cost-efficient designs

You save assembly and material costs, as the typical panel mounting base is no longer needed.

Additional savings potential is offered by the low design of the metal housings and molded cable glands of the plastic design.



For the harshest conditions

The resistant plastic housings meet IP68 protection.

The two metal housing versions made from corrosion-resistant die-cast aluminum are reliably protected up to IP68/69K protection.

Usage ranges for ADVANCE housing include, for example, wind turbine generators, drilling platforms or the rail and chemical industry.

HEAVYCON complete – Quality in every application

The quality of our products is our top priority. This is not tested subsequently on finished products, but is ensured responsibly during every step of production.

A process-oriented, integrated management system ensures that not only legislation and standards, but also customer requirements are taken into account in the manufacturing of our products.



IP and NEMA degrees of protection DIN EN 60529, NEMA 250

Protection of contact inserts within the housing against ingress of dust or heavy jet water is examined here.

For HEAVYCON connectors, no visible dust or water ingress could be detected within the housing.

Vibration IEC 60068-2-6

Harmonic, sinusoidal vibrations are applied to the test object to simulate rotating, pulsating or oscillating forces during the vibration test.

HEAVYCON connectors meet these requirements and are therefore suitable for applications on construction vehicles and machinery, for example.

Temperature shock IEC 60512-11-4, test 11d

To simulate significant temperature differences, the test objects are switched between the lower and upper limiting temperature of the product within a few seconds in a two-chamber procedure.

HEAVYCON connectors are suitable for applications at an ambient temperature of -40°C to +125°C with constant temperature response.

HEAVYCON connectors are tested according to numerous national and international standards and are suitable for many applications.



Impact resistance IK09 DIN EN 50102

The impact resistance is tested with a free-fall hammer with a weight of 1.7 kg from a height of 0.3 m.

HEAVYCON plastic connectors with IK09 are impact-resistant to the same degree as aluminum connectors or control boxes. They therefore meet the mechanical requirements of heavy-duty industrial connectors.



Roll-over according to DIN IEC 62196-1

A special test is carried out on the plastic housing whereby a forklift truck weighing several tons is rolled over the housing.

HEAVYCON plastic housings withstand high stresses from heavy, moving loads without any adverse effects on function and are therefore ideal for use in industrial environments.



Dynamic loading HEAVYCON EVO special test

In this test, a force of 200 N is applied to the cable in 50 cycles at an angle of 90°.

This test verifies that the HEAVYCON EVO bayonet locking and the double locking latch between the housing and panel mounting frame do not open independently or malfunction even in the case of extremely static loads.

Inserts with a fixed number of positions and modular inserts – The right connection technology for every application

Our contact inserts offer you consistently compatible interfaces, which can be flexibly combined, for all conventional sizes.

In addition to versions with a fixed number of positions – even for mixed assembly – modular contact inserts are available in various performance classes and with a variety of connection technologies.

Fast connection technology such as push-in or QUICKON displacement connection enables cable connection within seconds.


Flexible combination

Transmit current, data, and compressed air flexibly with modular contact inserts via a single plug-in connection. Simply snap the modules into the hinged retaining frame, and your individual contact insert is done!

Your advantages:

- Save space and installation work
- Reduce interfaces

Modular contact inserts

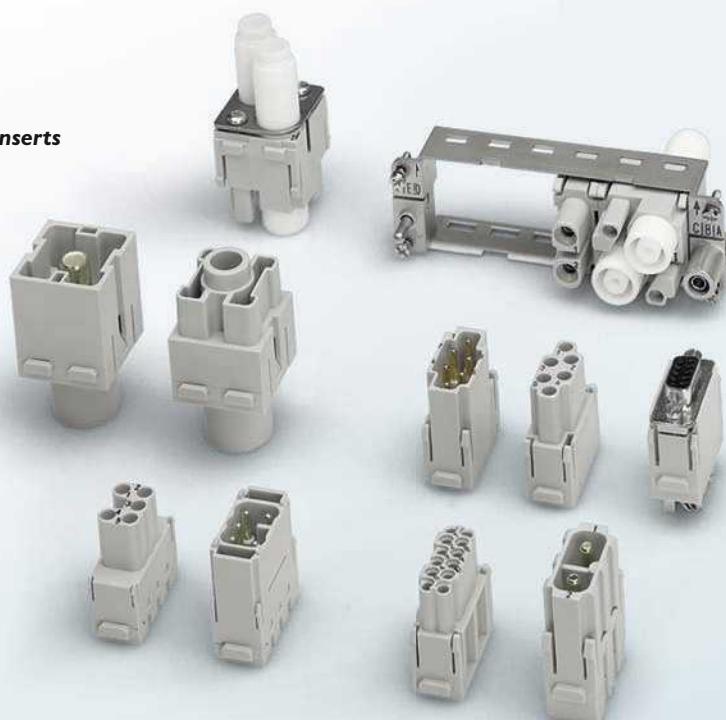

User-friendly push-in connection

Contact inserts with push-in connection provide easy handling, extremely short connection time, and an air-tight, vibration-proof, and shock-proof connection. Stranded conductors with splicing protection or solid conductors can be inserted directly into the connection without any tools. The orange colored button can be used to remove the conductor without any special tools.


Push-in connection



Screw connection




Contact inserts with various connection technologies – for safe and convenient wiring.



Crimp connection




QUICKON connection

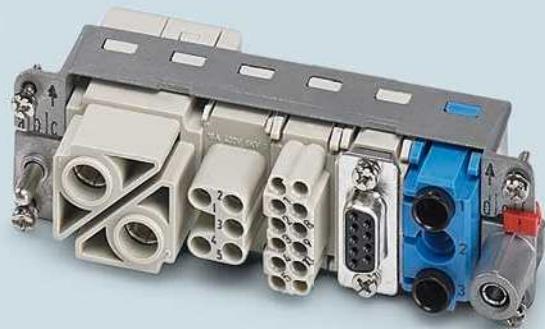

Fast QUICKON connection

Save up to 60% of wiring time: with contact inserts with QUICKON displacement connection, connect solid and stranded conductors in a flash without any prior processing. Simply route the unstripped cores through the connection and wire the slider with a screwdriver. The wire insulation is severed and large-surface, gas-tight contact is made.

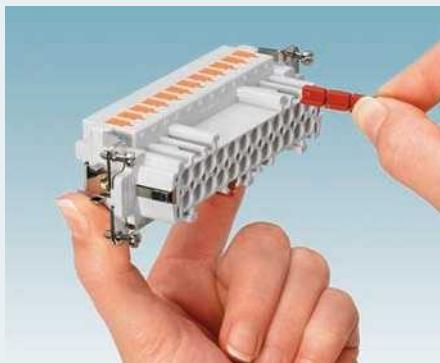

Fast, cost-effective coding

It is often necessary to protect identical connectors which are located next to each other from being interchanged. In contrast to previous coding methods, such as coding bolts, pins or sockets, HEAVYCON contact inserts are quickly coded by snapping in plastic coding profiles.



Space-saving terminal adapters

Terminal adapters connect the marshalling and marking options for terminal blocks with fast startup of connectors. You therefore save space and installation work.

System cross-reference list: HEAVYCON housings and contact inserts

The system cross-reference list illustrates which contact insert matches which housing type.

Configure complete HEAVYCON connectors easily and quickly with our configurator:

 Web code: #0003

HEAVYCON contact inserts



Series		A					B					BB					BBB												
Number of positions		3	4	10	16	2x16	6	10	16	24	2x16	2x24	10	18	32	46	2x32	2x46	40	64									
Size		D7	D7	D15	D25	D50	B6	B10	B16	B24	B32	B48	B6	B10	B16	B24	B32	B48	B16	B24									
Rated voltage		230/400		250		500		500		500		500		500		500		500											
Rated current		24		20		16		16		16		16		16		16		16											
Connection methods	UT = Screw	UT				UT				UT				UT				UT											
	CT = Crimp	CT				CT				CT				CT				CT											
	PT = Push-in	PT				PT				PT				PT				PT											
	Z = Spring-cage	Z				Z				Z				Z				Z											
	Q = IDC/QUICKON	Q				Q				Q				Q				Q											
	L = Fiber optics	L				L				L				L				L											
	A = Axial screw	A				A				A				A				A											
	P = Pneumatic	P				P				P				P				P											
Series		A					B					BB					BBB												
Number of positions		3	4	10	16	2x16	6	10	16	24	2x16	2x24	10	18	32	46	2x32	2x46	40	64									
Size		Page		21				20				20				20				20									
HEAVYCON housing	Size	 																											
	D7																												
	D15																												
	D25																												
	D50																												
	B6	 																											
	B10																												
	B16																												
	B24																												
	B32	 																											
	B48																												

																													
D				DD				HV				HS				Q													
7	8	15	25	40	2x25	64	2x40	2x64	24	42	72	108	2x72	2x108	3+2	6+2	10+2	6	12	2	5	7	12	Variable	Variable				
D7	D7	D15	D25	B16	D50	B24	B32	B48	B6	B10	B16	B24	B32	B48	B10	B16	B24	B16	B32	D7	D7	D7	D7	B10 – B24	B6 – B48				
250	50	250				250				830				400/690				400	230/ 400	400	160 – 830		50 – 5000						
		10				10				16				41				40	24	10	10 – 80		5 – 200						
CT				CT				CT				UT				CT				CT		CT							
								PT												Z									
L				L												L				L		L							
																A				A		A							
																				P									
D				DD				HV				HS				Q				K		M							
7	8	15	25	40	2x25	64	2x40	2x64	24	42	72	108	2x72	2x108	3+2	6+2	10+2	6	12	2	5	7	12	Variable	Variable				
20/21				20				20				20				21				*		22/23							
•	•															•	•	•	•										
		•																											
			•																										
				•																									
					•																								
						•																							
							•																						
								•																					
									•																				
										•																			
											•																		
												•																	
													•																
														•															
															•														
																•													
																	•												
																		•											
																			•										
																				•									
																					•								
																						•							
																							•						

Contact inserts with a fixed number of positions

						Housing size	B06	B10	B16	B24	B32	B48	
	Series	Connection	Connection cross section	Rated current	Rated voltage	Number of positions	6	10	16	24	2 x 16	2 x 24	
	B	Screw CK 2,5	UT CT	0.5–2.5 mm ² 0.5–4.0 mm ²	16 A 16 A	500 V 500 V	Socket	1648128	1648186	1648241	1648306	1648241	1648306
							—	—	—	—	1584884	1584949	
							Pin	1648115	1648173	1648238	1648296	1648238	1648296
							—	—	—	—	1584871	1584936	
		Crimp CK 2,5	PT Q	0.14–2.5 mm ² 0.34–2.5 mm ²	16 A 16 A	500 V 400 V	Socket	1648160	1648225	1648283	1648348	1648283	1648348
							—	—	—	—	1584923	1584981	
							Pin	1648157	1648212	1648270	1648335	1648270	1648335
							—	—	—	—	1584910	1584978	
		Push-in IDC	PT Q	0.14–2.5 mm ² 0.34–2.5 mm ²	16 A 16 A	500 V 400 V	Socket	1407727	1407729	1407731	1407735	1407731	1407735
							—	—	—	—	1407733	1407737	
							Pin	1407728	1407730	1407732	1407736	1407732	1407736
							—	—	—	—	1407734	1407738	
		IDC	Q	0.34–2.5 mm ²	16 A	400 V	Socket	1605556	1605569	1605572	1605585	1605572	1605585
							—	—	—	—	1605598	1605608	
							Pin	1605611	1605624	1605637	1605640	1605637	1605640
							—	—	—	—	1605653	1605666	
	BB	Crimp CK 2,5	CT	0.5–4.0 mm ²	16 A	500 V	Socket	1584703	1584729	1584745	1584758	1584745	1584758
							—	—	—	—	1406543	1406545	
							Pin	1584774	1584716	1584732	1584761	1584732	1584761
							—	—	—	—	1406544	1406546	
	BBB	Crimp CK 2,5	CT	0.5–4.0 mm ²	16 A	500 V	Socket	—	—	1409930	1409914	1409930	1409914
							—	—	—	—	1409930	1409914	
							Pin	—	—	1409921	1409901	1409921	1409901
							—	—	—	—	1409921	1409901	
	D	Crimp CK 1,6	CT	0.14–2.5 mm ²	10 A	250 V	Socket	—	—	1584428	1584444	1584428	1584444
							—	—	—	—	1584428	1584444	
							Pin	—	—	1584415	1584431	1584415	1584431
							—	—	—	—	1584415	1584431	
	DD	Crimp CK 1,6	CT	0.14–2.5 mm ²	10 A	250 V	Socket	1584046	1584062	1584091	1584130	1584091	1584130
							—	—	—	—	1584101	1584143	
							Pin	1584033	1584059	1584075	1584114	1584075	1584114
							—	—	—	—	1584088	1584127	
	HV	Push-in CK 2,5	PT	0.14–2.5 mm ²	16 A	830 V	Socket	—	1407743	1407744	1407745	—	—
							—	—	—	—	—	—	
							Pin	—	1407739	1407740	1407741	—	—
							—	—	—	—	—	—	
	HS	Screw	UT	0.5–6.0 mm ²	35 A	400/690 V	Socket	—	—	1406530	—	1406530	—
							—	—	—	—	1406533	—	
							Pin	—	—	1406531	—	1406531	—
							—	—	—	—	1406534	—	

						Housing size	B06	B10	B16	B24	B32	B48
	Series	Connection	Connection cross section	Rated current	Rated voltage	Number of positions	6	10	16	24	2 x 16	2 x 24
	B-A	Screw	UT 0.5–2.5 mm ²	16 A	500 V	Socket, PE left	1648018	1648030	1648042	1648054	–	–
						Socket, PE right	1648066	1648078	1648090	1648102	–	–
						Pin, PE left	1648024	1648036	1648048	1648060	–	–
						Pin, PE right	1648072	1648084	1648096	1648108	–	–
	B-A	Push-in	DT 0.5–2.5 mm ²	16 A	500 V	Socket, PE left	1648377	1648416	1648458	1648490	–	–
						Socket, PE right	1648351	1648393	1648432	1648474	–	–
						Pin, PE left	1648380	1648429	1648461	1648500	–	–
						Pin, PE right	1648364	1648403	1648445	1648487	–	–

										40	64	
	D-A	Screw	UT 0.5–2.5 mm ²	10 A	250 V	Socket, PE left	–	–	1584253	1584295	–	–
						Socket, PE right	–	–	1584279	1584321	–	–
						Pin, PE left	–	–	1584240	1584282	–	–
						Pin, PE right	–	–	1584266	1584318	–	–
	D-A	Push-in	DT 0.5–2.5 mm ²	10 A	250 V	Socket, PE left	–	–	1580147	1774869	–	–
						Socket, PE right	–	–	1580163	1774526	–	–
						Pin, PE left	–	–	1580150	1774872	–	–
						Pin, PE right	–	–	1580176	1774513	–	–

						Housing size	D7	D7	D15	D25	D50
						No. of positions	3	4	10	16	2 x 16
	A	Screw	UT 0.5–2.5 mm ²	16 A	250 V	Socket	1585223	1585249	1585304	1585320	1585320
							–	–	–	–	1585346
						Pin	1585210	1585236	1585294	1585317	1585317
							–	–	–	–	1585333
	A	Crimp CK 2,5	CT 0.5–4.0 mm ²	16 A	250 V	Socket	–	–	1676983	1677018	1677018
							–	–	–	–	1677050
						Pin	–	–	1676996	1677034	1677034
							–	–	–	–	1677076
							7	8	15	25	2 x 25
	D	Crimp CK 1,6	CT 0.14–2.5 mm ²	10 A	250 V	Socket	1584347	1584363 *	1584389	1584402	1584402
							–	–	–	–	1584402
						Pin	1584334	1584350 *	1584376	1584392	1584392
							–	–	–	–	1584392

* 250 V only in conjunction with plastic housing

							2				
	Q	Axial screw	A 4.0–10.0 mm ²	40 A	400 V	Socket	1586264	–	–	–	–
							–	–	–	–	–
						Pin	1586277	–	–	–	–
							–	–	–	–	–
	Q	Crimp CK 2,5	CT 0.14–2.5 mm ²	16 A	230/400 V	Socket	1406537	–	–	–	–
							–	–	–	–	–
						Pin	1406538	–	–	–	–
							–	–	–	–	–
							7				
	Q	Crimp CK 2,5	CT 0.14–2.5 mm ²	10 A	400 V	Socket	1408588	–	–	–	–
							–	–	–	–	–
						Pin	1408575	–	–	–	–
							–	–	–	–	–
							12				
	Q	Crimp CK 2,5	CT 0.14–2.5 mm ²	10 A	400 V	Socket	1409419	–	–	–	–
							–	–	–	–	–
						Pin	1409422	–	–	–	–
							–	–	–	–	–

Modular contact inserts, B series


Number of positions	1	1	2	2
Connection	Axial screw	Axial screw	Axial screw	Axial screw
Current	200 A	200 A	100 A	70 A
Voltage	1000 V	1000 V	1000 V	1000 V
Cable diameter	40–70 mm ²	25–40 mm ²	16–35 mm ²	14–22 mm ²
Module slots	2	2	2	1
Socket	1636897	1637171	1605001	1585731
Pin	1636884	1637168	1605000	1585728
Number of positions	2	2	2	3
Connection	Axial screw	Axial screw	Crimp (CK 4.0)	Crimp (CK 4.0)
Current	70 A	40 A	40 A	40 A
Voltage	1000 V	1000 V	1000 V	500 V
Cable diameter	6–16 mm ²	2.5–8 mm ²	1.5–10 mm ²	1.5–10 mm ²
Module slots	1	1	1	1
Socket	1585715	1679359	1587519	1645972
Pin	1585702	1679346	1587506	1645969
Number of positions	3/4	4	2	6
Connection	Crimp (CK 4.0/CK 1.6)	Crimp (CK 4.0)	Crimp (CK 2.5)	Crimp (CK 2.5)
Current	40/10 A	40 A	16 A	16 A
Voltage	830 V	830 V	2900 V/5000 V	830 V
Cable diameter	1.5–6 mm ² / 0.14–2.5 mm ²	1.5–6 mm ²	0.5–4 mm ²	0.5–4 mm ²
Module slots	1	1	2	1
Socket	1585786	1585605	1604999	1636460
Pin	1585799	1585618	1604998	1636457
Number of positions	6	20	5	8
Connection	Crimp (CK 2.5)	Crimp (CK 2.5)	Spring-cage	Crimp (CK 2.5)
Current	16 A	16 A	16 A	16 A
Voltage	500 V	500 V	400 V	400 V
Cable diameter	0.5–4 mm ²	0.5–4 mm ²	0.14–2.5 mm ²	0.5–4 mm ²
Module slots	1	2	1	1
Socket	1663462	1636936	1647721	1605003
Pin	1663459	1636923	1647718	1605002

Number of positions	12	17	25	
Connection	Crimp (CK 1.6)	Crimp (CK 1.6)	Crimp (VS-CD 1.0)	
				
Current	10 A	10 A	5 A	
Voltage	250 V	160 V	50 V	
Cable diameter	0.14–2.5 mm ²	0.14–2.5 mm ²	0.08–0.5 mm ²	
Module slots	1	1	1	
Socket	1663323	1636486	1605005	
Pin	1663310	1636473	1605004	
Number of positions	2	8	9	2
Connection	EMC (CK 1.6)	Ethernet CAT5 (VS-CD 1.0)	Crimp (VS-CD 1.0)	Profibus RS-485
				
Current	10 A	5 A	1 A	5 A
Voltage	50 V	50 V	50 V	50 V
Cable diameter	0.14–2.5 mm ²	0.08–0.5 mm ²	0.08–0.5 mm ²	0.08–0.5 mm ²
Module slots	2	1	1	1
Socket	1678570	1636091	1587726	1587700
Pin	1678567	1636088	1587713	1587690
Socket	1647543	1647530		–
Number of positions	4	4		
Connection	Coax	Coax		
				
Current	1.5 A	1.5 A		
Voltage	50 V	50 V		
Cable diameter	50 ohms	75 ohms		
Module slots	1	1		
Socket	1676789	1676815	1676789	1686245
Pin	1676792	1676802	1676792	1686258
Number of positions	2	3		
Connection	Pneumatic	Pneumatic		
				
Internal hose diameter	6 mm	1.6 mm; 3 mm; 4 mm		
Module slots	1	1		
Socket	1674998	1663475		
Pin				

Hinged retaining frames and accessories for modular contact inserts, B series

Hinged retaining frames


Module slots	Housing size	Dimensions	Type	For sleeve housing	For panel and box mounting bases and coupling housing
				a (mm)	b (mm)
2	B06	44.0	51.0	HC-M-MHR-...2-N	1679249
3	B10	57.0	64.0	HC-M-MHR-...3-N	1679252
4	B16	77.5	84.5	HC-M-MHR-...4-N	1679265
6	B24	104.0	111.0	HC-M-MHR-...6-N	1679278




Plastic housing for a contact insert module

	With PE marking	Without PE marking
Sleeve housing	1408520	1408546
Panel mounting base	1408533	1408559
Coding pin	1408562	












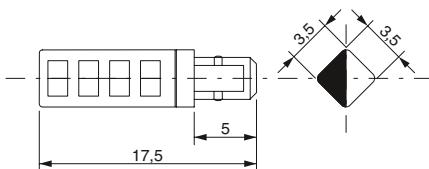


Dummy module and module retainer

Dummy module for filling free module slots in the retaining frame




1676828



Module retainer without strain relief




1676844



Module retainer with strain relief



1676831




Docking frames

Floating

for 4 module slots




1587454



for 6 module slots



1587470




Fixed assembly

for 4 module slots




1587467



for 6 module slots




1587483



Special washer for mounting the floating docking frame with a standard M4 screw



1587496



Crimp contacts and tools

Series	For cross section [mm ²]	AWG	Silver			Gold	
			Socket	Pin	Pin lagging	Socket	Pin
	0.14–0.37	26–22	1663394	1663336		1674969	1674901
	0.5	20	1663404	1663349		1674480	1672453
	0.75	18	1663417	1663352		1672440	1674914
	0.75–1.0	18	1663420	1663365		1674943	1674888
	1.5	16	1663433	1663378		1674930	1674875
	2.5	14	1663446	1663381		1674985	1674927
	0.14–0.37	26–22	1585634	1585650		1585647	1585663
	0.5	20	1663640	1663572		1674859	1674804
	0.75	18	1663653	1663585			
	0.75–1.0	18	1663666	1663598	1663857	1674833	1674781
	1.5	16	1663679	1663608	1663860	1674820	1674778
	2.5	14	1663682	1663611	1663873	1674862	1674817
	4	12	1663705	1663637		1674846	1674794
	1.5	16	1663271	1663239			
	2.5	14	1663284	1663242			
	4	12	1663297	1663255			
	6	10	1663307	1663268			
	10	8	1586198	1586183			
	0.08–0.2	28–24				1688997	1688971
	0.2–0.5	24–20				1688984	1688968
	FO POF	for 1 mm Ø					
	for 1.6 mm Ø						
	for 3.0 mm Ø						
	for 4.0 mm Ø						
	for 6.0 mm Ø						

Thermo contacts				Fiber optics		Pneumatic			Professional crimping tool with positioning tool	Basic crimping tool		Removal tool
Constantan (CuNi)		Iron (Fe)				Without valve		With valve		Crimping tool without positioning tool	Dies	
Socket	Pin	Socket	Pin	Socket	Pin	Socket	Pin	Socket				
									1212113	1212072	1212075	1884869
1585757	1585744	1585773	1585760						1212113	1212072	1212075	1662722
									1212113	1212072	1212075	1662735
									1212114	1212076		
									1205448			1658794
				1885004	1884995				1584839			1884869
						1663514	1663488	1663543				
						1663527	1663491	1663556				
						1663530	1663501	1663569				
						1676763	1676750	1676776				

STANDARD housings, B series, with double locking latch

 Web code: #0517

	Height	Thread	Metric thread			Thread	Pg thread		
			B10	B16	B24		B10	B16	B24
Sleeve housing for double locking latch									
	low	1 x M20	1412620			1 x Pg16	1412622	1412723	1412780
		1 x M25	1412621	1412721	1412778	1 x Pg21	1412623	1412724	1412781
		1 x M32		1412722	1412779	1 x Pg29			1412782
	high	1 x M25	1412596			1 x Pg21	1412598	1412669	1412755
		1 x M32	1412597	1412653	1412754	1 x Pg29	1412599	1412678	1412756
		1 x M40		1412654	1412099				
	low	1 x M20	1412616			1 x Pg16	1412618	1412719	1412775
		1 x M25	1412617	1412717	1412773	1 x Pg21	1412619	1412720	1412776
		1 x M32		1412718	1412774	1 x Pg29			1412777
	high	1 x M25	1412592			1 x Pg21	1412594	1412651	1412752
		1 x M32	1412593	1412649	1412750	1 x Pg29	1412595	1412652	1412753
		1 x M40		1412650	1412751				
Panel mounting base with double locking latch									
		Without cover	1411322	1411327	1411331	Without cover	1411322	1411327	1411331
Box mounting base with double locking latch									
	low	1 x/2 x M20	1412835			1 x/2 x Pg16	1412837		
		1 x/2 x M25	1412836	1412855	1412873	1 x/2 x Pg21	1412838	1412857	1412875
		1 x/2 x M32		1412856	1412874	1 x/2 x Pg29		1412860	1412876
Coupling housing									
	high	1 x M20	1412578			1 x Pg16	1412581		
		1 x M25	1412579	1412641		1 x Pg21	1412582	1412643	1412744
		1 x M32	1412580	1412642	1412742	1 x Pg29	1412583	1412644	1412745
		1 x M40			1412743				
Sleeve housing with double locking latch									
	low	1 x M20	1412637			1 x Pg16	1412639	1412740	1412801
		1 x M25	1412638	1412738	1412799	1 x Pg21	1412640	1412741	1412802
		1 x M32		1412739	1412800	1 x Pg29			1412803
	high	1 x M25	1412612			1 x Pg21	1412614	1412715	1412771
		1 x M32	1412613	1412708	1412769	1 x Pg29	1412615	1412716	1412772
		1 x M40		1412709	1412770				
	low	1 x M20	1412633			1 x Pg16	1412635	1412735	1412796
		1 x M25	1412634	1412733	1412793	1 x Pg21	1412636	1412737	1412797
		1 x M32		1412734	1412795				
	high	1 x M25	1412608			1 x Pg21	1412610	1412705	1412767
		1 x M32	1412609	1412703	1412764	1 x Pg29	1412611	1412706	1412768
		1 x M40		1412704	1412766				
Panel mounting base for double locking latch									
		with cover	1411323	1411328	1411332		1411323	1411328	1411332
Box mounting base for double locking latch									
		1/2 x M20	1412830			1/2 x Pg16	1412832	1412852	
		1/2 x M25	1412831	1412849	1412869	1/2 x Pg21		1412853	1412871
		1/2 x M32		1412850	1412870				

STANDARD housings, B series, with single locking latch

 Web code: #0517

	Height	Thread	Metric thread				Thread	Pg thread			
			B6	B10	B16	B24		B6	B10	B16	B24
Sleeve housing for single locking latch											
	low						1x Pg13.5	1412576			
		1 x M20	1412574	1412629			1 x Pg16	1412577	1412631	1412731	1412790
		1 x M25	1412575	1412630	1412729	1412788	1 x Pg21		1412632	1412732	1412791
	high	1 x M32			1412730	1412789	1 x Pg29				1412792
		1 x M25	1412566	1412604			1 x Pg21	1412568	1412606	1412701	1412762
		1 x M32	1412567	1412605	1412689	1412761	1 x Pg29	1412569	1412607	1412702	1412763
	low						1 x Pg13.5	1412572			
		1 x M20	1412570	1412624			1 x Pg16	1412573	1412627	1412727	1412785
		1 x M25	1412571	1412625	1412725	1412783	1 x Pg21		1412628	1412728	1412786
	high	1 x M32			1412726	1412784	1 x Pg29				1412787
		1 x M25	1412562	1412600			1 x Pg21	1412564	1412602	1412683	1412759
		1 x M32	1412563	1412601	1412679	1412757	1 x Pg29	1412565	1412603	1412684	1412760

Panel mounting base											
		Without cover	1411318	1411320	1411324	1411329	Without cover	1411318	1411320	1411324	1411329
		With cover	1411319	1411321	1411325	1411330	With cover	1411319	1411321	1411325	1411330

Box mounting base											
		1 x/2 x M20	1412821	1412839			1 x/2 x Pg16	1412823	1412842		
		1 x/2 x M25	1412822	1412840	1412861	1412877	1 x/2 x Pg21	1412824	1412843	1412863	1412879
		1 x/2 x M32			1412862	1412878	1 x/2 x Pg29			1412864	1412880

Coupling housing											
	high	1 x M20	1412555	1412584			1 x Pg13.5	1412558			
		1 x M25	1412556	1412585	1412645		1 x Pg16		1412587		
		1 x M32	1412557	1412586	1412646	1412746	1 x Pg21	1412559	1412588	1412647	1412748
		1 x M40				1412747	1 x Pg29	1412560	1412589	1412648	1412749

Technical data

Housing material	Cast aluminum, corrosion resistant
Surface material	Uncoated
Lock material	Polyamide
Sealing material	NBR, conductive
Ambient temperature (operation)	-40°C ... +125°C
Degree of protection (when plugged in)	IP66/IP67/69K NEMA 4X/6P

EVO housings with double locking latch

Height/ thread	Metric thread							
	Plastic			Metal				
	B10	B16	B24	B06	B10	B16	B24	
Sleeve housing for double locking latch								
	low	1407628				1411455		
	high	1407629	1407643	1407657		1411451	1411460	1411472
Panel mounting base with double locking latch								
		1407634	1407648	1407661		1411322	1411327	1411331
Box mounting base with double locking latch								
	1 x M20					1412835		
	1 x M25					1412836	1412855	1412873
	1 x M32	1407638					1412856	1412874
	1 x M40		1407652	1407665				
Coupling housing with double locking latch								
		1407641	1407655	1407668		1411458	1411463	1411475
Sleeve housing with double locking latch								
	low	1407630				1411457		
	high	1407631	1407644	1407658		1411454	1411462	1411474
Panel mounting base for double locking latch with cover								
		1407635	1407649	1407662		1411323	1411328	1411332
Box mounting base for double locking latch with cover								
	1 x M20					1412830		
	1 x M25					1412831	1412849	1412869
	1 x M32	1407639					1412850	1412870
	1 x M40		1407653	1407666				
Sleeve housing with two cable outlets								
	high	1411495	1411496	1411497				

Height/ thread	Pg thread		
	Metal		
	B10	B16	B24
low	1411455		
high	1411451	1411460	1411472
	1411322	1411327	1411331
1 x Pg16	1412837		
1 x Pg21	1412838	1412857	1412875
1 x Pg29		1412860	1412876
	1411458	1411463	1411475
	1411457		
	1411454	1411462	1411474
	1411323	1411328	1411332
1 x Pg16	1412832	1412852	
1 x Pg21	1412833	1412853	1412871
1 x Pg29		1412854	1412872

	Cable Ø	Thread	Plastic		EMC	Metal
			D	B	B	B
Cable gland with bayonet locking						
		9 mm ... 12 mm 11 mm ... 16 mm 14 mm ... 21 mm 19 mm ... 27 mm	1 x M20 1 x M25 1 x M32 1 x M40	1411350 1411351 1407671 1407672	1407669 1407670 1411446 1411447	1411439 1411440 1411444 1411445
Thread adapter						
		1 x M20 1 x M25 1 x M32 1 x M40 1 x Pg13.5 1 x Pg16 1 x Pg21 1 x Pg29 1 x NPT 1/2 1 x NPT 3/4 1 x NPT 1		1411352 1411353 1411354	1414243 1414244 1414245 1414246 1414247 1414248 1414249 1414250 1414251 1414252 1414253	1414256 1414257 1414258 1414259 1414260 1414261 1414262 1414263 1414264 1414265 1414266
Standard cable glands						
		9 mm ... 12 mm 11 mm ... 16 mm 15 mm ... 21 mm 19 mm ... 27 mm 6 mm ... 12 mm 10 mm ... 14 mm 13 mm ... 18 mm 18 mm ... 25 mm 10 mm ... 14 mm 13 mm ... 18 mm 18 mm ... 25 mm	1 x M20 1 x M25 1 x M32 1 x M40 1 x Pg13.5 1 x Pg16 1 x Pg21 1 x Pg29 1 x NPT 1/2 1 x NPT 3/4 1 x NPT 1	1411133 1411134 1411136 1411137 1411198 1411199 1411200 1411201 1411157 1411158 1411159	1411133 1411134 1411190 1411191 1411165 1411166 1411192 1411167 1411198 1411174 1411175 1411176 1411183 1411184 1411185	1411189 1411190 1411191 1411165 1411166 1411192 1411167 1411198 1411174 1411175 1411176 1411183 1411184 1411185

EVO housings with single locking latch

Height/ thread	Metric thread										
	Plastic						Metal				
	D15	D25	B06	B10	B16	B24	B06	B10	B16	B24	
Sleeve housing for single locking latch											
 low				1407619	1407626			1411448	1411456		
	high	1411340	1411347	1407620	1407627	1407642	1407656	1411447	1411453	1411461	1411473
Panel mounting base with single locking latch, without cover											
		1411336	1411344	1407621	1407632	1407646	1407659	1411318	1411320	1411324	1411329
Panel mounting base with single locking latch, with cover											
		1411337	1411345	1407622	1407633	1407647	1407660	1411319	1411321	1411325	1411330
Box mounting base with single locking latch, without cover											
	1 x M20							1412821	1412839		
	1 x M25	1411341	1411348					1412822	1412840	1412861	1412877
	1 x M32			1407623	1407636					1412862	1412878
	1 x M40					1407650	1407663				
Box mounting base with single locking latch, with cover											
	1 x M20							1412825	1412844		
	1 x M25	1411343	1411349					1412826	1412845	1412865	1412881
	1 x M32			1407624	1407637					1412866	1412882
	1 x M40					1407651	1407664				
Coupling housing with single locking latch											
		1411338	1411346	1407625	1407640	1407654	1407667	1411450	1411459	1411464	1411476

Height/ thread	Pg thread			
	Metal			
	B06	B10	B16	B24
 				
low	1411448	1411456		
high	1411447	1411453	1411461	1411473
 				
	1411318	1411320	1411324	1411329
 				
	1411319	1411321	1411325	1411330
 				
1 x Pg16	1412823	1412842		
1 x Pg21			1412863	1412879
1 x Pg29				1412880
 				
1 x Pg16	1412827	1412846		
1 x Pg21	1412828	1412847	1412867	1412883
1 x Pg29			1412868	1412884
 				
	1411450	1411459	1411464	1411476

Technical data, plastic

Housing material	Polyamide
Surface material	–
Lock material	Polyamide
Sealing material	NBR
Ambient temperature (operation)	Cable gland: -40°C ... +100°C Housing: -40°C ... +125°C
Degree of protection (when plugged in)	IP66 NEMA 4/4X/12

Technical data, metal

Housing material	Cast aluminum, corrosion resistant
Surface material	Uncoated
Lock material	Polyamide
Sealing material	NBR, conductive
Ambient temperature (operation)	-40°C ... +125°C
Degree of protection (when plugged in)	IP66/67/69K NEMA 4X/6P

ADVANCE housing, B series, with screw locking

ADVANCE connectors are characterized by the fact that the supporting base element is not required when using an ADVANCE housing with panel mounting flange.

Additional savings potential is offered by the low design of the metal housings and molded cable glands of the plastic design.



The ADVANCE housing with screw locking is suitable for the harshest requirements. Sensitive interfaces are reliably protected, even against EMC influences.

Thread	B6	B10	B16	B24
--------	----	-----	-----	-----

Plastic housing (PL)

	1 x M20	1404222			
	1 x M25	1404225	1404227		
	1 x M32		1404229	1404231	1404235
	1 x M40			1404233	1404238
	1 x M20	1404224			
	1 x M25	1404226	1404228		
	1 x M32		1404230	1404232	1404237
	1 x M40			1404234	1404239

Metal housing (AL)

	low	1 x M20	1413362	1413388		
	low	1 x M25	1413364	1413390	1414975	1414982
	low	1 x M32				
	low	1 x M40				
	high	1 x M20				
	high	1 x M25	1413374	1413400	1414977	1414980
	high	1 x M32	1413376	1413402	1413416	1413430
	high	1 x M40			1413418	1413432
	low	1 x M20	1413363	1413389		
	low	1 x M25	1413365	1413391	1414976	1414983
	low	1 x M32				
	low	1 x M40				
	high	1 x M20				
	high	1 x M25	1413375	1413401	1414978	1414981
	high	1 x M32	1413377	1413403	1413417	1413431
	high	1 x M40			1413419	1413433

Thread	B6	B10	B16	B24
ADVANCE metal housing for increased environmental requirements (EUA)				
	1 x M20	1604049		
	1 x M25	1604104	1690037	
	1 x M32		1690118	1690192
	1 x M40			1690354
	1 x M20	1604078		
	1 x M25	1604133	1690079	
	1 x M32		1690150	1690231
	1 x M40			1690396
	1 x M20			1690435
	1 x M25			1690477
	1 x M32			
	1 x M40			

Panel mounting flanges for ADVANCE housing

	For screw locking, 2 connectors necessary for every connector	1686533
	For screw locking, set (2 flanges, 4 self-tapping M4 Torx20 screws)	1604638

Box mounting bases and coupling housings	B6	B10	B16	B24
	2 x M20	1408630	1408737	
	2 x M25	1408656	1408753	1408834
	2 x M32			1408850
	2 x M40			1408957
	1 x M20	1408685	1408782	
	1 x M25	1408698	1408795	1408889
	1 x M32			1408892
	1 x M40			1409008

Plastic protective cover	B6	B10	B16	B24	
	HEAVYCON ADVANCE IP66 protective cover for panel mounting side, with screw locking, with retaining cord	1411494	1411504	1411517	1411520
	HEAVYCON ADVANCE IP50 protective cover for panel mounting side, with clip locking, with retaining cord	1690736	1690749	1690752	1690765

The box mounting bases, coupling housings, and panel mounting flanges can be combined with all ADVANCE sleeve housings.

PL	AL	EUA
Technical data		
Housing material	Polyamide	Cast aluminum, corrosion resistant
Surface material	–	–
Lock material	Stainless steel	Stainless steel
Sealing material	NBR	NBR, conductive
Ambient temperature (operation)	-40°C ... +100°C	-40°C ... +125°C
Degree of protection (when plugged in)	IP66/68 (0.2 bar, 24 h) NEMA 4X/6P	IP66/68 (0.2 bar, 24 h)/IP69K NEMA 4X/6P

HPR housing, B series, with screw locking for railway applications

The new HPR series of heavy-duty connectors consists of aluminum housings with screw locking. The B series housing features a high degree of vibration resistance and protection up to 69K. This makes it extremely well suited for special fields of application such as railway technology.



The HPR housings are certified to the highest degree of protection (IP69K), which allows them to remain reliably sealed even in extreme applications.



Thread	B6	B10	B16	B24
--------	----	-----	-----	-----

Sleeve housing

	M20	1411879			
	M25	1411106	1411882		
	M32		1411067	1411059	1411888
	M40			1411885	1411062
	M20	1411878			
	M25	1411119	1411881		
	M32		1411070	1411058	1411887
	M40			1411884	1411061

Panel mounting base without cover

	1411122	1411083	1411060	1411055
---	---------	---------	---------	---------

Box mounting base without cover

	2 x M20	1411880			
	2 x M25	1411135	1411883		
	2 x M32		1411096	1411054	1411889
	2 x M40			1411886	1411063

Technical data

Housing material	Cast aluminum
Surface material	Powder-coated, black
Locking screw material	Stainless steel
Sealing material	NBR, conductive
Ambient temperature (operation)	-40°C ... +125°C
Degree of protection (when plugged in)	IP68 (0.5 bar, 24 h)/IP69K

Accessories

	Thread	Order No.	B6	B10	B16	B24
Plastic filler plug						
	For metric screw openings					
	M20	1415206				
	M25	1415207				
	M32	1415208				
	M40	1410767				
Plastic reducing adapter						
	Reduction	Order No.				
	For metric screw openings					
	M32 to M25	1410712				
	M32 to M20	1410725				
	M40 to M32	1410738				
	M40 to M25	1410741				
Corrugated pipe adapters for plastic protective hoses						
	Outside Ø	Order No.				
	For HEAVYCON EVO plastic housing, B series, for protective hose outside diameter					
	21.2 mm	M20	1412021			
	28.5 mm	M25	1411973			
	34.5 mm	M32	1412022			
	42.5 mm	M40	1412023			
Plastic protective hose						
	Outside/inside Ø	Bending radius Static/dynamic	Order No.			
	Black, plastic, PA 6.6 HB					
	21.2 mm/16.5 mm	45 mm/75 mm	3240683			
	28.5 mm/23 mm	55 mm/100 mm	3240684			
	34.5 mm/29 mm	65 mm/120 mm	3241088			
	42.5 mm/36 mm	90 mm/150 mm	3241089			
Cover plate						
	For HEAVYCON panel cutouts, height: 3.5 mm					
	1660368	1660371	1660384	1660397		
Replacement latch						
	Single locking latch, plastic, for HEAVYCON EVO plastic housing					
	1407697	1407698	1407700	1407701		
	Double locking latch, plastic, for HEAVYCON EVO plastic housing					
	1407696	1407696	1407696	1407696		
Replacement seals						
	Replacement flat gasket for HEAVYCON EVO plastic panel mounting base					
	1407702	1407703	1407704	1407705		
	Replacement profile gasket for HEAVYCON EVO plastic supporting base element					
	1407706	1407707	1407708	1407709		
	Replacement profile gasket for HEAVYCON ADVANCE sleeve housing for extremely uneven mounting panels					
	1409794	1409804	1409817	1409820		
Marking label						
	Unmarked, UniSheet, 0.5 mm thick, 70-section, lettering field size: 20 x 9 mm, white					
	0829439					

B6 B10 B16 B24

Plastic protective cover



Protective cover for panel mounting base, box mounting base, and coupling housing with single locking latch, with retaining cord, without seal

1414623 1414625 1414626 1414627

Protective cover for panel and box mounting base and coupling housing with double locking latch and retaining cord, without seal

1414628 1414629 1414630

Protective cover for sleeve housing without single locking latch, with retaining cord, with seal

1414634 1414635 1414636 1414637

Protective cover for sleeve housing without double locking latch, with retaining cord, with seal

1414638 1414639 1414640

Protective cover for sleeve housing with double locking latch, with retaining cord, with seal

1414631 1414632 1414633



Online product configurator

Use our online configurator to quickly and easily assemble your connectors, consisting of suitable housings, contact inserts, and cable glands. The product list can be exported, e-mailed or directly ordered.

i Web code: #0003



Cable assembling

In order to meet your special requirements, you need solutions that are just as special. Benefit from our wide selection of cable types and connectors.

The service center for industrial connectors at Phoenix Contact will transform your requirements into a custom product within just a few days. To take advantage of this option, please get in touch with your local contact person.



Connector sets

Sets, consisting of heavy-duty connectors with push-in contact inserts and cable glands, are available in all sizes in our online shop.

i Web code: #0523

Save time when ordering and installing heavy-duty connectors. Our service center would be happy to create a custom connector set for you. To take advantage of this option, please get in touch with your local contact person.



Always up-to-date, always available to you. Here you'll find everything on our products, solutions and service:

phoenixcontact.com

Product range

- Cables and wires
- Connectors
- Controllers
- Electronics housings
- Electronic switchgear and motor control
- Fieldbus components and systems
- Functional safety
- HMIs and industrial PCs
- I/O systems
- Industrial communication technology
- Industrial Ethernet
- Installation and mounting material
- Lighting and signaling
- Marking and labeling
- Measurement and control technology
- Modular terminal blocks
- Monitoring
- PCB terminal blocks and PCB connectors
- Power supply units and UPS
- Protective devices
- Relay modules
- Sensor/actuator cabling
- Software
- Surge protection and interference filters
- System cabling for controllers
- Tools
- Wireless data communication

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
32825 Blomberg, Germany
Phone: + 49 5235 3-00
Fax: + 49 5235 3-41200
E-mail: info@phoenixcontact.com
phoenixcontact.com

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9