



Photocoupler  
Product Data Sheet  
LTV-817/ 827/ 847  
(M, S, S-TA, S-TA1, S-TP)  
Series

Spec No. :DS-70-96-0016

Effective Date: 08/09/2017

Revision: 0

**LITE-ON DCC**

**RELEASE**

BNS-OD-FC001/A4

**LITE-ON Technology Corp. / Optoelectronics**

No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.

Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>

## Photocoupler LTV-8x7 Series

### 1. DESCRIPTION

#### 1.1 Features

- Current transfer ratio ( CTR : MIN. 50% at  $I_F = 5\text{mA}$ ,  $V_{CE} = 5\text{V}$  )
- High input-output isolation voltage (  $V_{iso} = 5,000\text{Vrms}$  )
- Response time (  $t_r$  : TYP.  $4\mu\text{s}$  at  $V_{CE} = 2\text{V}$ ,  $I_C = 2\text{mA}$ ,  $R_L = 100\Omega$  )
- Dual-in-line package :
  - LTV-817 : 1-channel type
  - LTV-827 : 2-channel type
  - LTV-847 : 4-channel type
- Wide lead spacing package :
  - LTV-817M : 1-channel type
  - LTV-827M : 2-channel type
  - LTV-847M : 4-channel type
- Surface mounting package :
  - LTV-817S : 1-channel type
  - LTV-827S : 2-channel type
  - LTV-847S : 4-channel type
- Tape and reel packaging :
  - LTV-817S-TA : 1-channel type
  - LTV-817S-TA1 : 1-channel type
  - LTV-817S-TP : 1-channel type
  - LTV-827S-TA : 2-channel type
  - LTV-827S-TA1 : 2-channel type
- Safety approval
  - UL 1577
  - VDE DIN EN60747-5-5 (VDE 0884-5)
  - CSA CA5A
  - CQC GB4943.1-2011/ GB8898-2011 (meet Altitude up to 5000m)
  - Nordic Safety ( FIMKO/NEMKO/SEMKO/DEMKO)
  - BSI
- RoHS Compliance
  - All materials be used in device are followed EU RoHS directive (No. 2011/65/EU).
- ESD pass HBM 8000V/MM2000V
- MSL class1


#### 1.2 Applications

- Hybrid substrates that require high density mounting.
- Programmable controllers


## Photocoupler LTV-8x7 Series

### 2. PACKAGE DIMENSIONS


#### 2.1 LTV-817

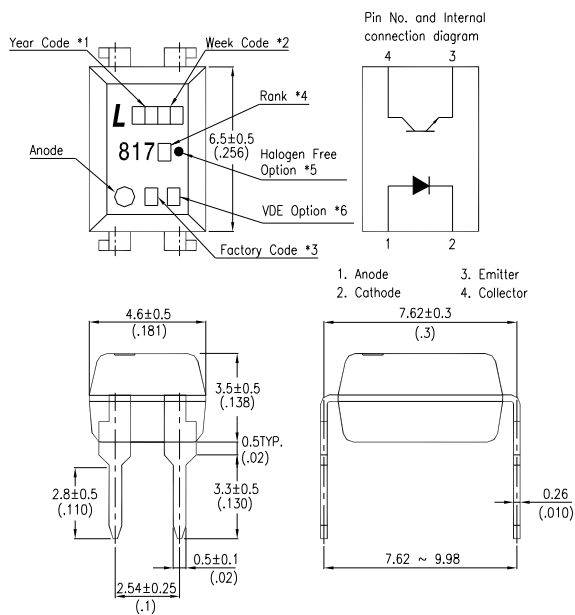

#### 2.2 LTV-817M

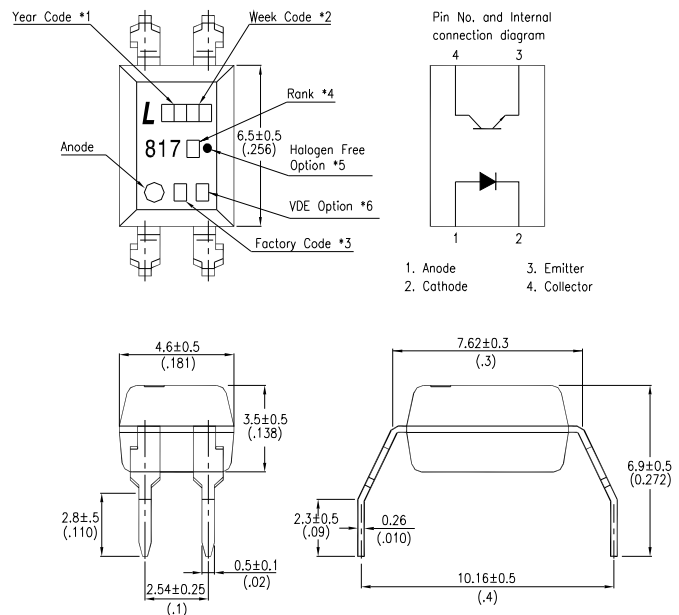

#### 2.3 LTV-817S

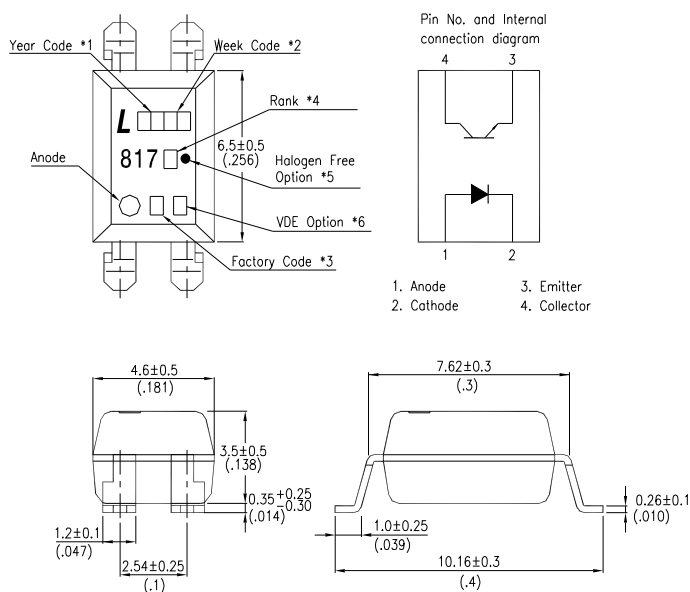


#### Notes :

1. 2-digit year code, example : 2016 = 16
2. 2-digit work week ranging from '01' to '53'
3. Factory identification mark shall be marked (W: China-CZ, Y: Thailand)
4. Rank shall be or shall not be marked.
5. "●" for halogen free option.
6. "4" or "V" for VDE option.


Dimensions in millimeters(inches).

## Photocoupler LTV-8x7 Series


### 2.4 LTV-827

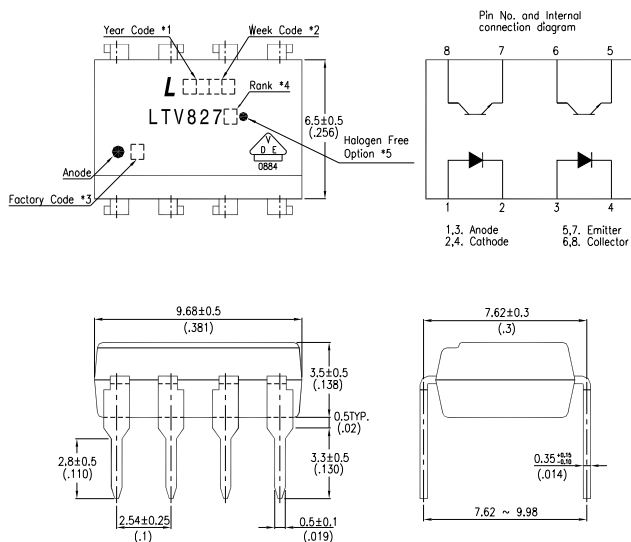

### 2.5 LTV-827M

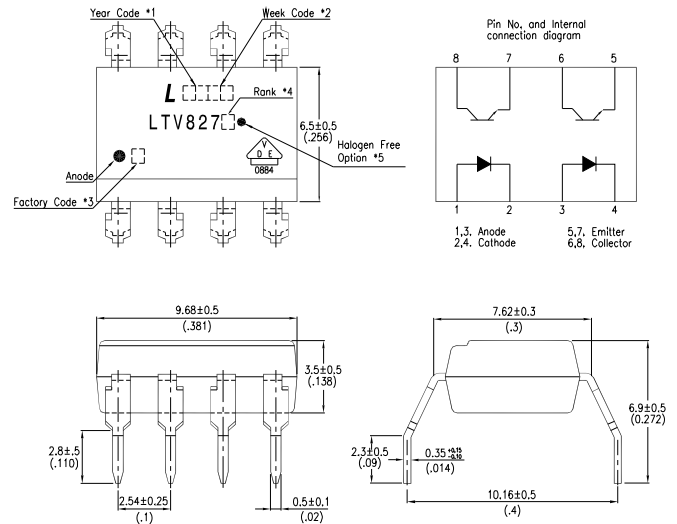

### 2.6 LTV-827S

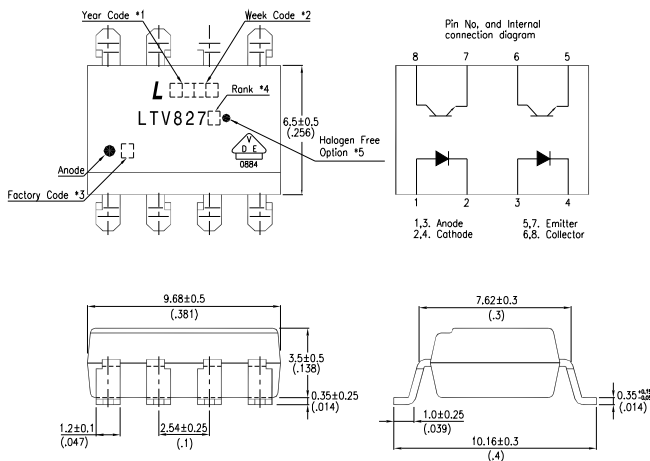




#### Notes :

1. 2-digit year code, example : 2016 = 16
2. 2-digit work week ranging from '01' to '53'
3. Factory identification mark shall be marked (W: China-CZ, Y: Thailand)
4. Rank shall be or shall not be marked.
5. "●" for halogen free option.




Dimensions in millimeters(inches).

# Photocoupler LTV-8x7 Series




## 2.7 LTV-847

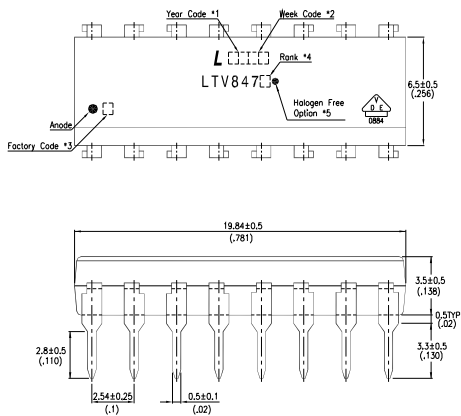

## 2.8 LTV-847M

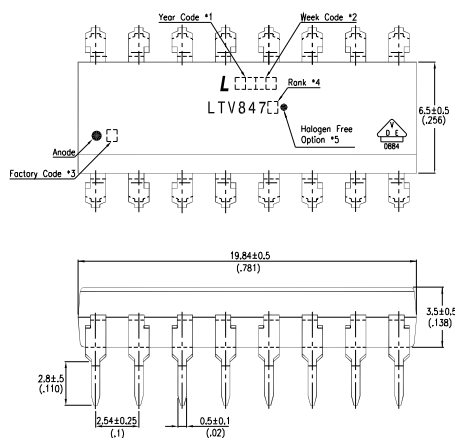

## 2.9 LTV-847S

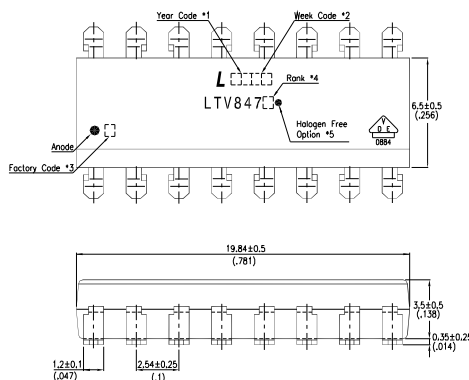

**Notes :**


1. 2-digit year code, example : 2016 = 16
2. 2-digit work week ranging from '01' to '53'
3. Factory identification mark shall be marked  
(W: China-CZ, Y: Thailand)
4. Rank shall be or shall not be marked.
5. "●" for halogen free option.

Dimensions in millimeters(inches).


## Photocoupler LTV-8x7 Series

### 3. TAPING DIMENSIONS

#### 3.1 LTV-817S-TA

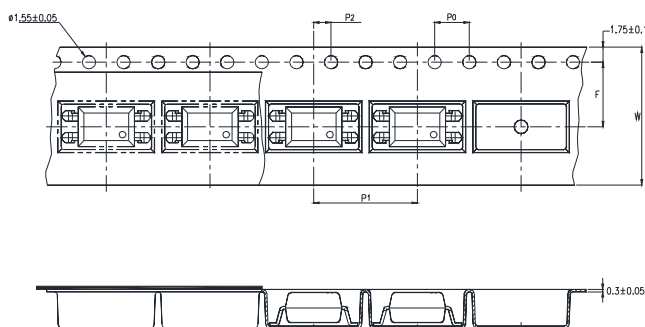

#### 3.2 LTV-817S-TA1

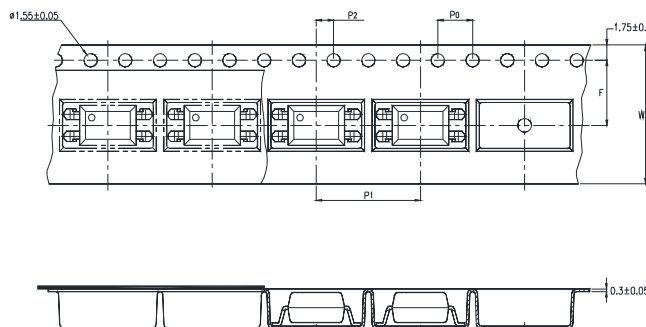


| Description                            | Symbol         | Dimension in mm (inch) |
|----------------------------------------|----------------|------------------------|
| Tape wide                              | W              | 16±0.3 (0.63)          |
| Pitch of sprocket holes                | P <sub>0</sub> | 4±0.1 (0.15)           |
| Distance of compartment                | F              | 7.5±0.1 (0.295)        |
|                                        | P <sub>2</sub> | 2±0.1 (0.079)          |
| Distance of compartment to compartment | P <sub>1</sub> | 12±0.1 (0.472)         |

#### 3.3 Quantities Per Reel

| Package Type     | TA/TA1 |
|------------------|--------|
| Quantities (pcs) | 1000   |

## Photocoupler LTV-8x7 Series

### 3.4 LTV-817S-TP

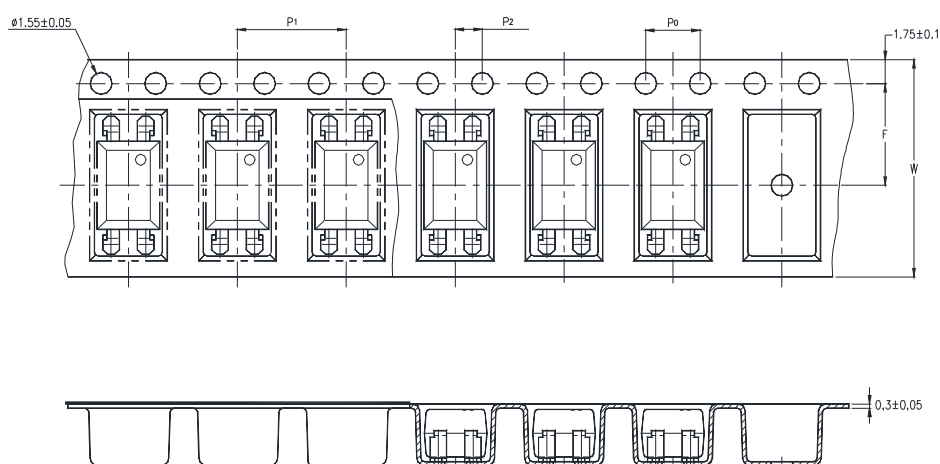


| Description                            | Symbol         | Dimension in mm (inch) |
|----------------------------------------|----------------|------------------------|
| Tape wide                              | W              | 16±0.3 (0.63)          |
| Pitch of sprocket holes                | P <sub>0</sub> | 4±0.1 (0.15)           |
| Distance of compartment                | F              | 7.5±0.1 (0.295)        |
|                                        | P <sub>2</sub> | 2±0.1 (0.079)          |
| Distance of compartment to compartment | P <sub>1</sub> | 8±0.1 (0.472)          |

### 3.5 Quantities Per Reel


| Package Type     | TP   |
|------------------|------|
| Quantities (pcs) | 2000 |

## Photocoupler LTV-8x7 Series

### 3.6 LTV-827S-TA

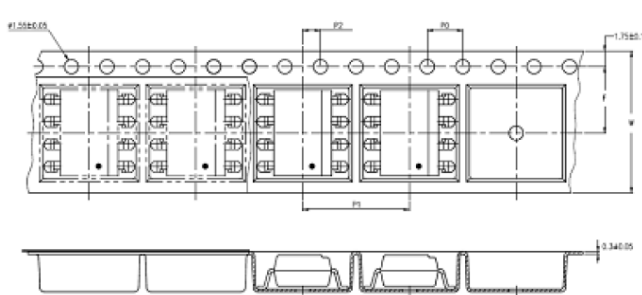

### 3.7 LTV-827S-TA1

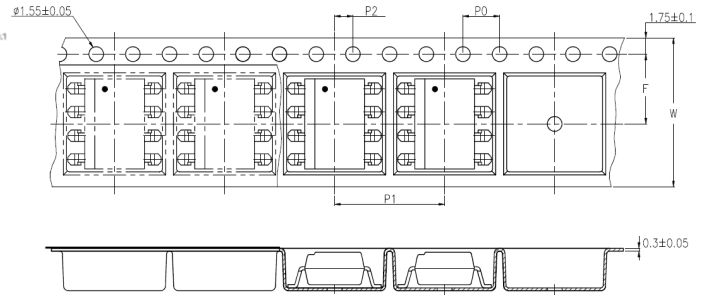

| Description                            | Symbol         | Dimension in mm (inch) |
|----------------------------------------|----------------|------------------------|
| Tape wide                              | W              | 16 $\pm$ 0.3 (0.63)    |
| Pitch of sprocket holes                | P <sub>0</sub> | 4 $\pm$ 0.1 (0.15)     |
| Distance of compartment                | F              | 7.5 $\pm$ 0.1 (0.295)  |
|                                        | P <sub>2</sub> | 2 $\pm$ 0.1 (0.079)    |
| Distance of compartment to compartment | P <sub>1</sub> | 12 $\pm$ 0.1 (0.472)   |

### 3.8 Quantities Per Reel

| Package Type     | TA/TA1 |
|------------------|--------|
| Quantities (pcs) | 1000   |

## Photocoupler LTV-8x7 Series

### 4. RATING AND CHARACTERISTICS

#### 4.1 Absolute Maximum Ratings at Ta=25°C

|        | Parameter                                              | Symbol      | Rating     | Unit      |
|--------|--------------------------------------------------------|-------------|------------|-----------|
| Input  | Forward Current                                        | $I_F$       | 50         | mA        |
|        | Reverse Voltage                                        | $V_R$       | 6          | V         |
|        | Power Dissipation                                      | P           | 70         | mW        |
|        | Peak Forward Current<br>(100μs pulse, 100Hz frequency) | IFP         | 1          | A         |
|        | Thermal Resistance Junction-Ambient                    | $R_{thJ-A}$ | 325        | °C/W      |
|        | Thermal Resistance Junction-Case                       | $R_{thJ-C}$ | 200        | °C/W      |
| Output | Collector - Emitter Voltage                            | $V_{CEO}$   | 35         | V         |
|        | Emitter - Collector Voltage                            | $V_{ECO}$   | 6          | V         |
|        | Collector Current                                      | $I_C$       | 50         | mA        |
|        | Collector Power Dissipation                            | $P_C$       | 150        | mW        |
|        | Total Power Dissipation                                | $P_{tot}$   | 200        | mW        |
| 1.     | Isolation Voltage                                      | $V_{iso}$   | 5000       | $V_{rms}$ |
|        | Operating Temperature (LTV-827/847)                    | $T_{opr}$   | -30 ~ +100 | °C        |
|        | Operating Temperature (LTV-817)                        | $T_{opr}$   | -55 ~ +110 | °C        |
|        | Storage Temperature                                    | $T_{stg}$   | -55 ~ +125 | °C        |
|        | Soldering Temperature                                  | $T_{sol}$   | 260        | °C        |

1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.

## Photocoupler LTV-8x7 Series

### 4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

| Parameter                |                                      | Symbol        | Min.               | Typ.               | Max. | Unit          | Test Condition                                                     |
|--------------------------|--------------------------------------|---------------|--------------------|--------------------|------|---------------|--------------------------------------------------------------------|
| Input                    | Forward Voltage                      | $V_F$         | —                  | 1.2                | 1.4  | V             | $I_F=20\text{mA}$                                                  |
|                          | Reverse Current                      | $I_R$         | —                  | —                  | 10   | $\mu\text{A}$ | $V_R=4\text{V}$                                                    |
|                          | Terminal Capacitance                 | $C_t$         | —                  | 30                 | 250  | pF            | $V=0, f=1\text{KHz}$                                               |
| Output                   | Collector Dark Current               | $I_{CEO}$     | —                  | —                  | 100  | nA            | $V_{CE}=20\text{V}, I_F=0$                                         |
|                          | Collector-Emitter Breakdown Voltage  | $BV_{CEO}$    | 35                 | —                  | —    | V             | $I_C=0.1\text{mA}, I_F=0$                                          |
|                          | Emitter-Collector Breakdown Voltage  | $BV_{ECO}$    | 6                  | —                  | —    | V             | $I_E=10\mu\text{A}, I_F=0$                                         |
| TRANSFER CHARACTERISTICS | Collector Current                    | $I_C$         | 2.5                | —                  | 30   | mA            | $I_F=5\text{mA}, V_{CE}=5\text{V}$                                 |
|                          | 1. Current Transfer Ratio            | CTR           | 50                 | —                  | 600  | %             |                                                                    |
|                          | Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | —                  | 0.1                | 0.2  | V             | $I_F=20\text{mA}, I_C=1\text{mA}$                                  |
|                          | Isolation Resistance                 | $R_{iso}$     | $5 \times 10^{10}$ | $1 \times 10^{11}$ | —    | $\Omega$      | DC500V,<br>40 ~ 60% R.H.                                           |
|                          | Floating Capacitance                 | $C_f$         | —                  | 0.6                | 1    | pF            | $V=0, f=1\text{MHz}$                                               |
|                          | Cut-off Frequency                    | $f_c$         | —                  | 80                 | —    | kHz           | $V_{CE}=5\text{V}, I_C=2\text{mA}$<br>$R_L=100\Omega, -3\text{dB}$ |
|                          | Response Time (Rise)                 | $t_r$         | —                  | 4                  | 18   | $\mu\text{s}$ | $V_{CE}=2\text{V}, I_C=2\text{mA}$<br>$R_L=100\Omega,$             |
|                          | Response Time (Fall)                 | $t_f$         | —                  | 3                  | 18   | $\mu\text{s}$ |                                                                    |

$$1. \text{ CTR} = \frac{I_C}{I_F} \times 100\%$$

## Photocoupler LTV-8x7 Series

### 5. RANK TABLE OF CURRENT TRANSFER RATIO

|         | CTR Rank              | Min | Max | Condition                             |
|---------|-----------------------|-----|-----|---------------------------------------|
| LTV-817 | L                     | 50  | 100 | $I_F=5mA, V_{CE}=5V, T_a=25^{\circ}C$ |
|         | A                     | 80  | 160 |                                       |
|         | B                     | 130 | 260 |                                       |
|         | C                     | 200 | 400 |                                       |
|         | D                     | 300 | 600 |                                       |
|         | L or A or B or C or D | 50  | 600 |                                       |
| LTV-827 | No Bin                | 50  | 600 |                                       |
|         | B                     | 130 | 260 |                                       |
|         | C                     | 200 | 400 |                                       |
|         | D                     | 300 | 600 |                                       |
|         | BC                    | 130 | 400 |                                       |
|         | CD                    | 200 | 600 |                                       |
| LTV-847 | No Bin                | 50  | 600 |                                       |
|         | BC                    | 130 | 400 |                                       |
|         | CD                    | 200 | 600 |                                       |

## Photocoupler LTV-8x7 Series

### 6. CHARACTERISTICS CURVES

Fig.1 Forward Current  
vs. Ambient Temperature

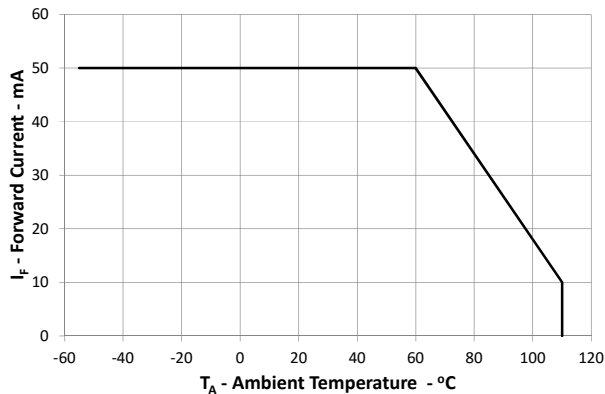


Fig.2 Collector Power Dissipation  
vs. Ambient Temperature

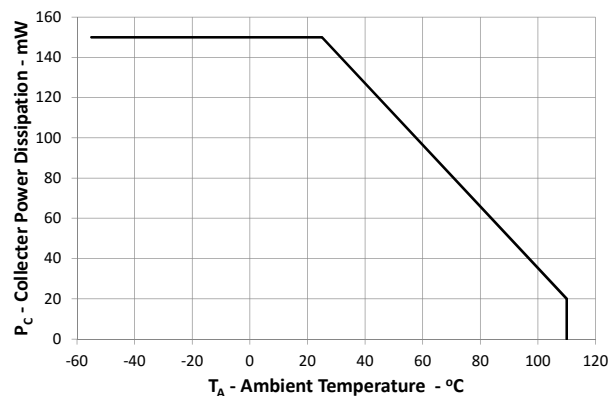


Fig.3 Collector-emitter Saturation  
Voltage vs. Forward Current

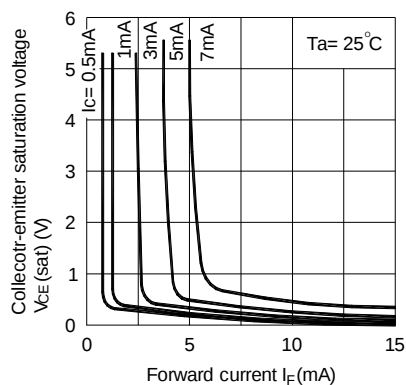


Fig.4 Forward Current vs. Forward  
Voltage

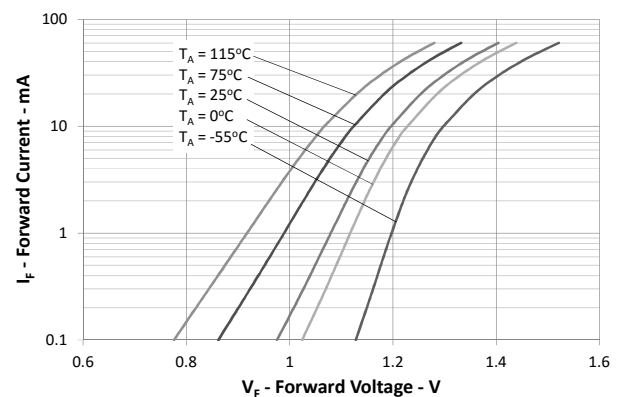


Fig.5 Current Transfer Ratio vs.  
Forward Current


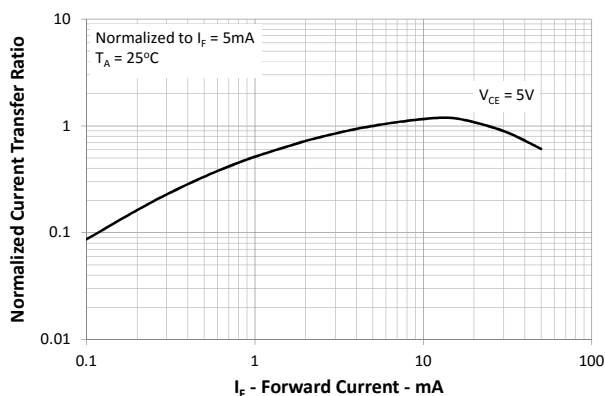


Fig.6 Collector Current vs.  
Collector-emitter Voltage

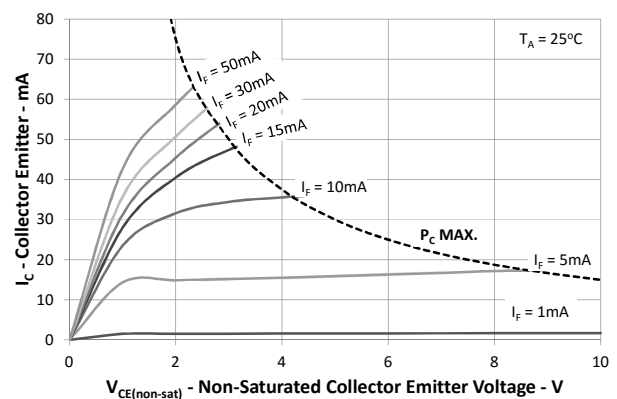

## Photocoupler LTV-8x7 Series

Fig.7 Relative Current Transfer Ratio  
vs. Ambient Temperature

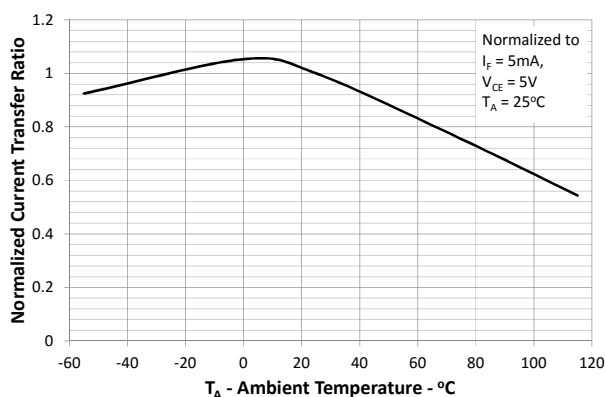


Fig.8 Collector-emitter Saturation Voltage  
vs. Ambient Temperature

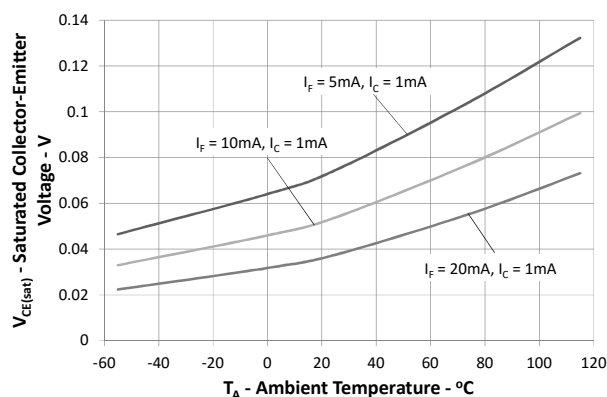


Fig.9 Collector Dark Current vs.  
Ambient Temperature

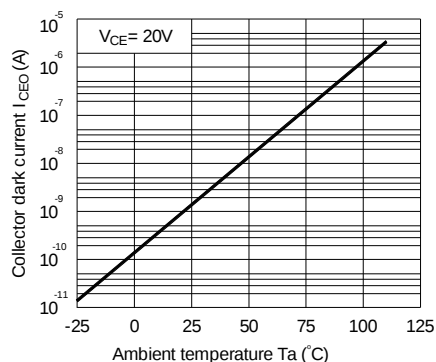


Fig.10 Response Time vs. Load  
Resistance



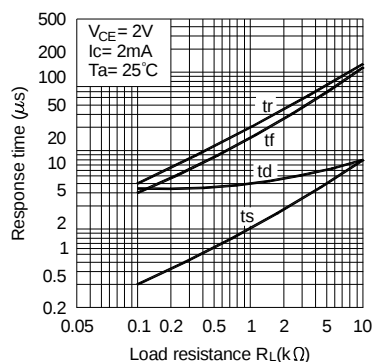



Fig.11 Frequency Response

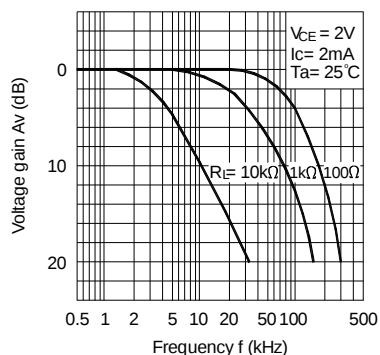

Test Circuit for Response Time

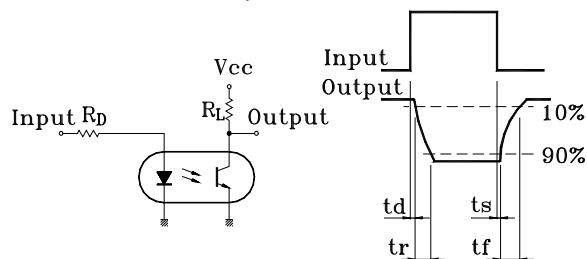

Test Circuit for Frequency Response

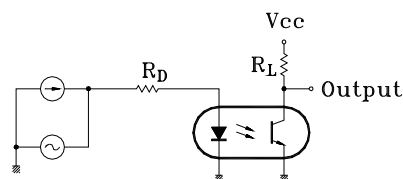


## Photocoupler LTV-8x7 Series

### 7. TEMPERATURE PROFILE OF SOLDERING

#### 7.1 IR Reflow soldering (JEDEC-STD-020C compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

| Profile item                     | Conditions     |
|----------------------------------|----------------|
| Preheat                          |                |
| - Temperature Min ( $T_{Smin}$ ) | 150°C          |
| - Temperature Max ( $T_{Smax}$ ) | 200°C          |
| - Time (min to max) ( $t_s$ )    | 90±30 sec      |
| Soldering zone                   |                |
| - Temperature ( $T_L$ )          | 217°C          |
| - Time ( $t_L$ )                 | 60 sec         |
| Peak Temperature ( $T_P$ )       | 260°C          |
| Ramp-up rate                     | 3°C / sec max. |
| Ramp-down rate                   | 3~6°C / sec    |

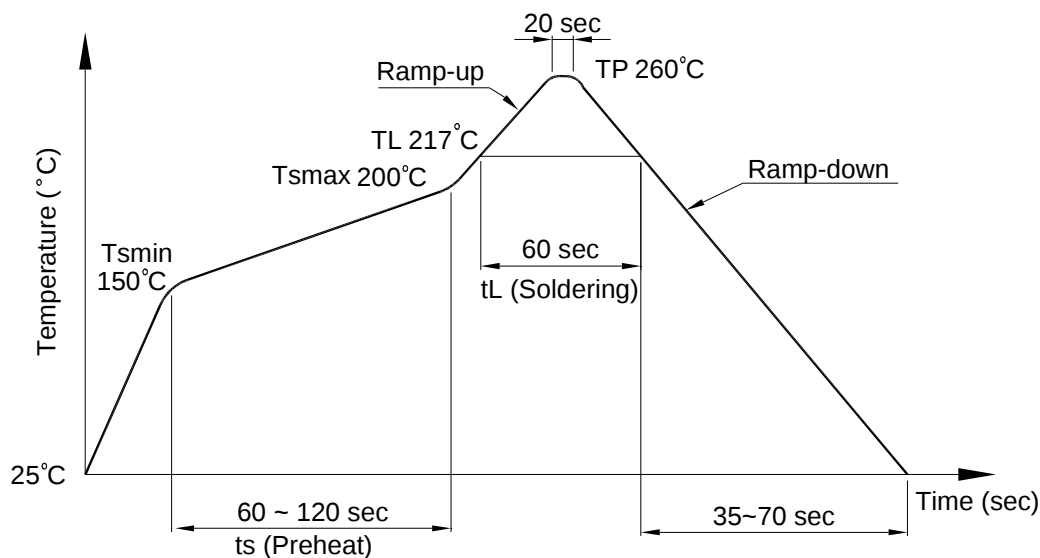

## Photocoupler LTV-8x7 Series

### 7.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature:  $260 \pm 0/-5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to  $140^{\circ}\text{C}$

Preheat time: 30 to 80 sec.

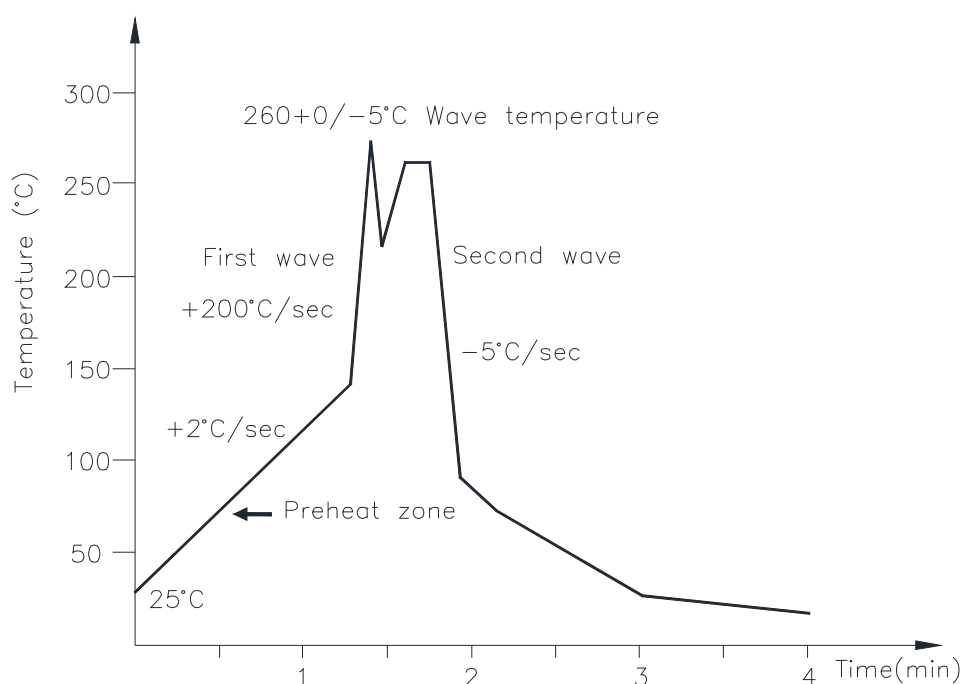

### 7.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature:  $380 \pm 0/-5^{\circ}\text{C}$

Time: 3 sec max.


## Photocoupler LTV-8x7 Series

### 8. RRECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)


8.1 4 PIN

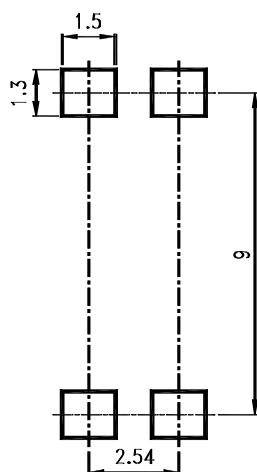

8.2 8 PIN

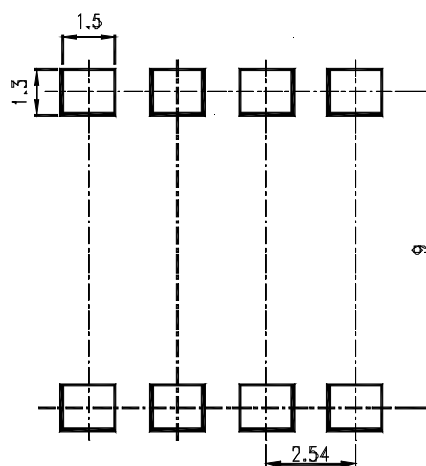

8.3 16PIN

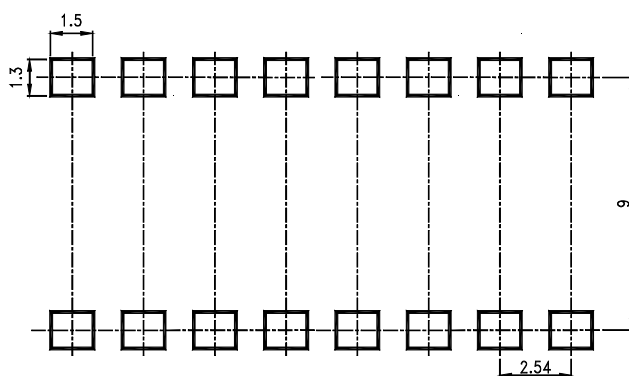

**Note :**

Dimensions in millimeters.

## Photocoupler LTV-8x7 Series

### 9. Naming rule

# LTV-8X7(1)-(2)-(3)-G

DEVICE PART NUMBER

- (1) No suffix = Dual-in-Line package  
M = Wide lead spacing package  
S = Surface mounting package
- (2) TAPING TYPE(TA,TA1,TP or none)  
LTV-817 and LTV-827 have tape and reel solution.  
Please refer to orientation of taping on Page P5-P7
- (3) CTR RANK (A,B or none)  
Please refer to the CTR table on Page P10
- (4) Halogen free option

Example : LTV-817S-TA1-A-G

# LTV8X7(1)(2)(3)-V-G

DEVICE PART NUMBER

- (1) No suffix = Dual-in-Line package  
M = Wide lead spacing package  
S = Surface mounting package
- (2) TAPING TYPE(TA,TA1,TP or none)  
LTV-817 and LTV-827 have tape and reel solution  
Please refer to orientation of taping on Page P5-P7
- (3) CTR RANK (A,B or none)  
Please refer to the CTR table on Page P10
- (4) VDE order option
- (5) Halogen free option

Example : LTV817STA1A-V-G

### Photocoupler LTV-8x7 Series

#### 10. Notes:

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Lite-On:

[LTV-817A](#) [LTV-817S](#) [LTV-817](#) [LTV-817M](#) [LTV-817S-TA](#) [LTV-817S-TA1](#) [LTV-827M](#) [LTV-847M](#) [LTV-847S](#) [LTV-847](#) [LTV-827](#) [LTV-827S](#) [LTV-827S-TA](#) [LTV-827S-TA1](#) [LTV-817S-TA1-B](#) [LTV-817S-TA1-A](#) [LTV-817D](#) [LTV-817S-TA1-D](#) [LTV-817S-D](#) [LTV-817S-B](#) [LTV-817S-C](#) [LTV-817S-A](#) [LTV-817S-TA1-C](#) [LTV-827M-V](#) [LTV-817B](#) [LTV-817C](#) [LTV-817-A](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9