


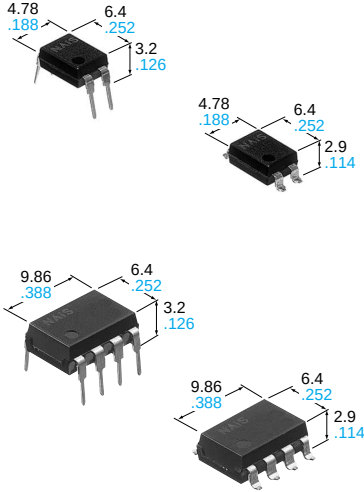

mm inch

FEATURES

- 1. Low cost type.**
- 2. Reinforced insulation 5,000V type (DIP type)**
More than 0.4mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation)
- 3. Various package design (DIP4, SOP4, DIP8, SOP8 packages are available)**
- 4. High sensitivity, Low ON resistance**
Can control a maximum 0.5A (AQY282EH, AQW282EH) load current with a 5mA input current. Low ON resistance of 2.5Ω (AQY282EH, AQW282EH). Stable operation because there are no metallic contact parts.
- 5. Low-level off state leakage current**
The SSR has an off state leakage current of several milliamperes, where as the PhotoMOS relay has only 100pA even with the rated load voltage of 350V (AQY280EH).

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensors
- Amusement

DIP TYPES

DIP 4pin

Type	I/O isolation voltage	Output rating*		Part No.				Packing quantity
				Through hole terminal	Surface-mount terminal			
		Load voltage	Load current	Tube packing style		Tape and reel packing style		
						Picked from the 1/2-pin side	Picked from the 3/4-pin side	
AC/DC type	Reinforced 5,000 V	60 V	500 mA	AQY282EH	AQY282EHA	AQY282EHAX	AQY282EHAZ	Tube: 1 tube contains 100 pcs. Tube: 1 batch contains 1,000 pcs. Tape and reel: 1,000 pcs.
		350 V	130 mA	AQY280EH	AQY280EHA	AQY280EHAX	AQY280EHAZ	
		400 V	120 mA	AQY284EH	AQY284EHA	AQY284EHAX	AQY284EHAZ	

*Indicate the peak AC and DC values.

Note: For space reasons, the initial letters of the product number "AQY", the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

DIP 8pin

Type	I/O isolation voltage	Output rating*		Part No.				Packing quantity
				Through hole terminal	Surface-mount terminal			
		Load voltage	Load current	Tube packing style	Tape and reel packing style			
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC type	Reinforced 5,000 V	60 V	400 mA	AQW282EH	AQW282EHA	AQW282EHAX	AQW282EHAZ	Tube: 1 tube contains 40 pcs. Tube: 1 batch contains 400 pcs. Tape and reel: 1,000 pcs.
		350 V	120 mA	AQW280EH	AQW280EHA	AQW280EHAX	AQW280EHAZ	
		400 V	100 mA	AQW284EH	AQW284EHA	AQW284EHAX	AQW284EHAZ	

*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

DIP 4pin

Item		Symbol	AQY282EH	AQY280EH	AQY284EH	Remarks
Input	LED forward current	I _F	50 mA			
	LED reverse voltage	V _R	5 V			
	Peak forward current	I _{FP}	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW			
Output	Load voltage (peak AC)	V _L	60 V	350 V	400 V	
	Continuous load current (peak AC)	I _L	0.5 A	0.13 A	0.12 A	
	Peak load current	I _{peak}	1.5 A	0.4 A	0.3 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	500 mW			
Total power dissipation		P _T	550 mW			
I/O isolation voltage		V _{iso}	5,000 V AC			
Operating temperature		T _{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperature
Storage temperature		T _{stg}	-40°C to +100°C -40°F to +212°F			

DIP 8pin

Item		Symbol	AQW282EH	AQW280EH	AQW284EH	Remarks
Input	LED forward current	I _F	50 mA			
	LED reverse voltage	V _R	5 V			
	Peak forward current	I _{FP}	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW			
Output	Load voltage (peak AC)	V _L	60 V	350 V	400 V	
	Continuous load current (peak AC)	I _L	0.4 (0.5) A	0.12 (0.14) A	0.1 (0.13) A	(): in case of using only 1 channel
	Peak load current	I _{peak}	1.2 A	0.36 A	0.3 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	800 mW			
Total power dissipation		P _T	850 mW			
I/O isolation voltage		V _{iso}	5,000 V AC			
Operating temperature		T _{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperature
Storage temperature		T _{stg}	-40°C to +100°C -40°F to +212°F			

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

DIP4pin


Item			Symbol	AQY282EH	AQY280EH	AQY284EH	Condition
Input	LED operate current	Typical	I _{Fon}	1.8 mA			I _L = Max.
		Maximum		3.0 mA			
	LED turn off current	Minimum	I _{Foff}	0.2 mA			I _L = Max.
		Typical		1.6 mA			
	LED dropout voltage	Typical	V _F	1.14 V (1.25 V at I _F = 50mA)			I _F = 5 mA
		Maximum		1.5 V			
Output	On resistance	Typical	R _{on}	0.85Ω	20Ω	28Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum		2.5Ω	25Ω	35Ω	
	Off state leakage current	Maximum	I _{Leak}	1μA			I _F = 0 mA V _L = Max.
Transfer characteristics	Turn on time*	Typical	T _{on}	1.8 ms	1.5 ms		I _F = 5 mA I _L = Max.
		Maximum		5 ms			
	Turn off time*	Typical	T _{off}	0.5 ms		I _F = 5 mA I _L = Max.	
		Maximum		2 ms			
	I/O capacitance	Typical	C _{iso}	0.8 pF		f = 1 MHz V _B = 0V	
		Maximum		1.5 pF			
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ		500 V DC	

AQ○28○EH

DIP8pin

Item			Symbol	AQW282EH	AQW280EH	AQW284EH	Condition
Input	LED operate current	Typical	I _{Fon}	1.8 mA			I _L = Max.
		Maximum		3.0 mA			
	LED turn off current	Minimum	I _{Foff}	0.2 mA			I _L = Max.
		Typical		1.6 mA			
	LED dropout voltage	Typical	V _F	1.14 V (1.25 V at I _F = 50mA)			I _F = 5 mA
		Maximum		1.5 V			
Output	On resistance	Typical	R _{on}	0.85Ω	20Ω	28Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum		2.5Ω	25Ω	35Ω	
	Off state leakage current	Maximum	I _{Leak}	1μA			I _F = 0 mA V _L = Max.
Transfer char- acteristics	Turn on time*	Typical	T _{on}	1.8 ms	1.5 ms		I _F = 5 mA I _L = Max.
		Maximum		5 ms			
	Turn off time*	Typical	T _{off}	0.5 ms		I _F = 5 mA I _L = Max.	
		Maximum		2 ms			
	I/O capacitance	Typical	C _{iso}	0.8 pF		f = 1 MHz V _B = 0V	
		Maximum		1.5 pF			
	Initial I/O isolation resistance	Minimum	R _{Iso}	1,000 MΩ			500 V DC

*Turn on/Turn off time

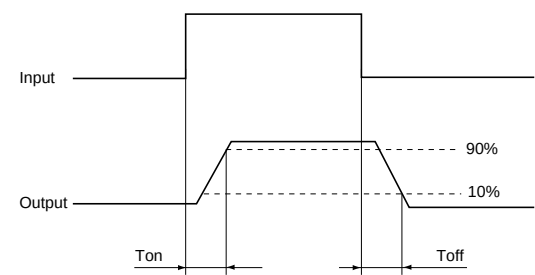

3-4 the terminal leads receive solder plating or solder dip plating.

REFERENCE DATA


[DIP type]

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A


(1) AQY282EH

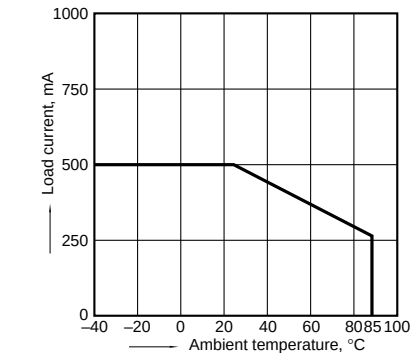

(2) AQY280EH, AQY284EH

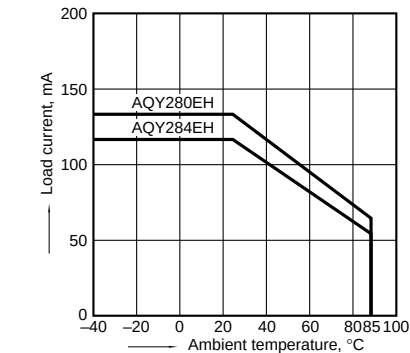


(3) AQW282EH

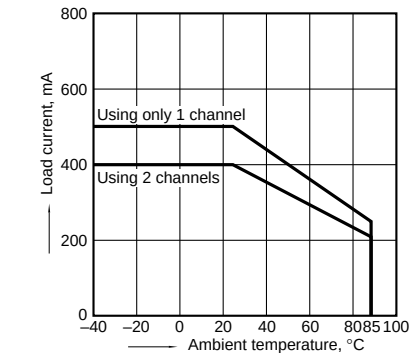


DIMENSIONS

AQY28○S




Recommended mounting pad (Top view)




Terminal thickness = 0.15 .006
General tolerance: ±0.1 ±.004

Tolerance: ±0.1 ±.004

AQW28○S

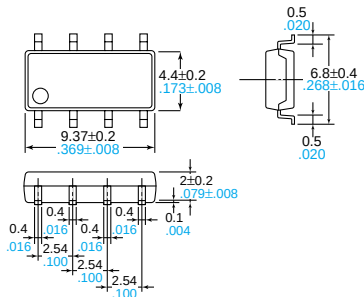

Recommended mounting pad (Top view)




Terminal thickness = 0.15 .006
General tolerance: ±0.1 ±.004

Tolerance: ±0.1 ±.004


AQY28○EH(A)

Through hole terminal type

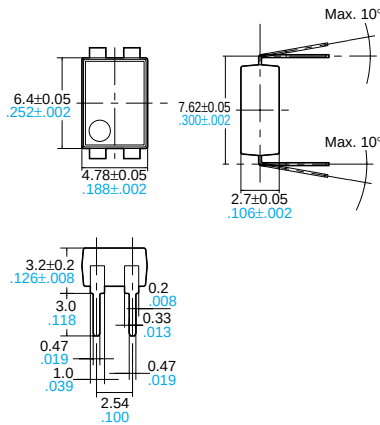


Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

Surface mount terminal type

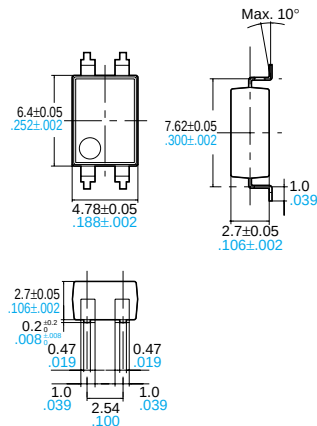


Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

PC board pattern (Bottom view)



Tolerance: ±0.1 ±.004


Mounting pad (Top view)



Tolerance: ±0.1 ±.004


AQW28○EH(A)

Through hole terminal type

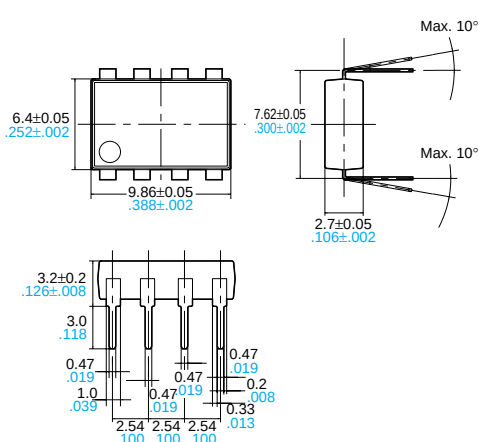


Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

Surface mount terminal type

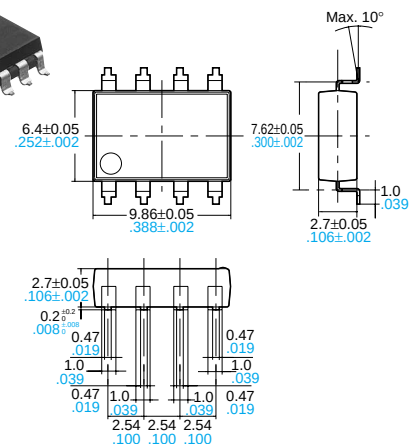


Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

PC board pattern (Bottom view)



Tolerance: ±0.1 ±.004

Mounting pad (Top view)



Tolerance: ±0.1 ±.004

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQW282EH](#) [AQW282EHA](#) [AQW282EHAX](#) [AQW282EHAZ](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9