

THREE PHASE BRIDGE



Power Module

Features

- Low V_F
- Low profile package
- Direct Mounting to heatsink
- Flat-Pin/ Round-Pin versions with PCB solderable terminals
- Low junction-to-case Thermal Resistance
- 3500 V_{RMS} insulation voltage
- UL approval pending

Applications: Power conversion machines

- Welding
- UPS
- SMPS
- Motor Drives
- General Purpose & Heavy Duty Applications





Description

A range of extremely compact three-phase rectifier bridges offering efficient and reliable operation. The low profile package has been specifically conceived to maximize space saving and optimize the electrical layout of the application specific Power Supplies.

Major Ratings and Characteristics

| Parameters | 40MT | 70MT | 100MT | Units |
|-----------------|-------------|------|-------|---------------|
| I_O | 45 | 75 | 100 | A |
| @ T_C | 100 | 80 | 80 | °C |
| I_{FSM} | 270 | 380 | 450 | A |
| @ 50Hz | 280 | 398 | 470 | |
| @ 60Hz | 365 | 724 | 1013 | A^2s |
| I^2t | 325 | 660 | 920 | |
| @ 50Hz | 3650 | 7240 | 10130 | $A^2\sqrt{s}$ |
| @ 60Hz | | | | |
| V_{RRM} | 1400 & 1600 | | | V |
| T_{STG} range | -40 to 125 | | | °C |
| T_J range | -40 to 150 | | | |

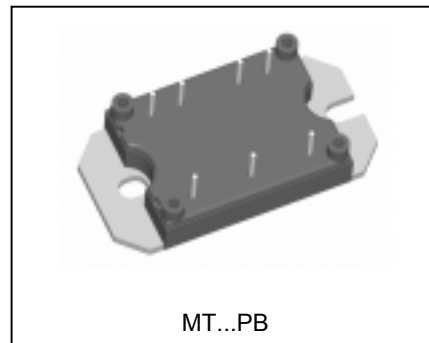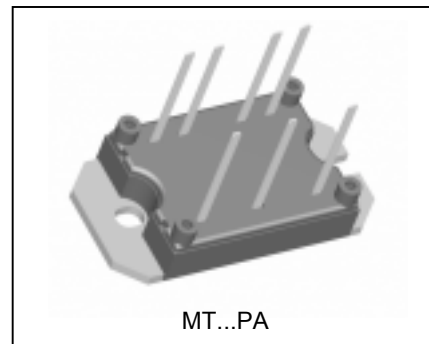

ELECTRICAL SPECIFICATIONS

Voltage Ratings

| Type number | Voltage Code reverse voltage V | V_{RRM} , maximum repetitive peak reverse voltage V | V_{RSM} , maximum non-repetitive peak V | I_{RRM} max. @ $T_J = 150^\circ\text{C}$ mA |
|-----------------|-----------------------------------|--|--|---|
| 40-70-100MT140P | 140 | 1400 | 1500 | 5 |
| 40-70-100MT160P | 160 | 1600 | 1700 | |

Forward Conduction

| Parameter | 40MT | 70MT | 100MT | Units | Conditions |
|--|------------------------|------------------------|-------------------------|-------------------|--|
| I_O Maximum DC output current @ Case temperature | 45 | 75 | 100 | A | 120° Rect conduction angle |
| | 100 | 80 | 80 | °C | |
| I_{FSM} Maximum peak, one-cycle forward, non-repetitive on state surge current | 270 | 380 | 450 | A | t = 10ms No voltage reappplied |
| | 280 | 398 | 470 | | t = 8.3ms |
| | 225 | 320 | 380 | | t = 10ms 100% V_{RRM} reappplied |
| | 240 | 335 | 400 | | t = 8.3ms |
| I^2t Maximum I^2t for fusing | 365 | 724 | 1013 | A ² s | t = 10ms No voltage reappplied |
| | 325 | 660 | 920 | | t = 8.3ms |
| | 253 | 512 | 600 | | t = 10ms 100% V_{RRM} reappplied |
| | 240 | 467 | 665 | | t = 8.3ms |
| $I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing | 3650 | 7240 | 10130 | A ² √s | t = 0.1 to 10ms, no voltage reappplied |
| $V_{F(TO)}$ Value of threshold voltage | 0.78 | 0.82 | 0.75 | V | @ T_J max. |
| r_t Slope resistance | 14.8 | 9.5 | 8.1 | mΩ | |
| V_{FM} Maximum forward voltage drop | 1.45 $I_{pk} = 40A$ | 1.45 $I_{pk} = 70A$ | 1.51 $I_{pk} = 100A$ | V | $T_J = 25^\circ\text{C}$ $t_p = 400\mu\text{s}$ single junction |

Insulation Table

| Parameter | 40MT | 70MT | 100MT | Units | Conditions |
|----------------------------------|------|------|-------|-------|---|
| V_{INS} RMS insulation voltage | 3500 | | | V | $T_J = 25^\circ\text{C}$ all terminal shorted f = 50Hz, t = 1s |

Thermal and Mechanical Specifications

| Parameter | 40MT | 70MT | 100MT | Units | Conditions |
|--|-------------|------|-------|-------|--|
| T _J Maximum junction operating temperature range | - 40 to 150 | | | °C | |
| T _{stg} Maximum storage temperature range | -40 to 125 | | | °C | |
| R _{thJC} Maximum thermal resistance, junction to case | 0.27 | 0.23 | 0.19 | K/W | DC operation per module |
| | 1.6 | 1.38 | 1.14 | | DC operation per junction |
| | 0.38 | 0.29 | 0.22 | | 120° Rect conduction angle per module |
| | 2.25 | 1.76 | 1.29 | | 120° Rect conduction angle per junction |
| R _{thCS} Maximum thermal resistance, case to heatsink | 0.1 | | | K/W | Per module. Mounting surface smooth, flat and greased. Heatsink compound thermal conductivity = 0.42W/mK |
| T Mounting torque ± 10% to heatsink | 4 | | | Nm | A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. |
| wt Approximate weight | 65 | | | g | Lubricated threads. |

Clearance and Creepage Distances

| Parameter | MT...PA | MT...PB | Units |
|---|---------|---------|-------|
| Clearance (external shortest distance in air between terminals which are not internally short circuited together) | 10.9 | 12.3 | mm |
| Creepage distance (shortest distance along external surface of the insulating material between terminals which are not internally short circuited together) | 10.9 | 12.3 | mm |

Ordering Information Table

Device Code

| | | | | | |
|----|---|----|-----|---|---|
| 10 | 0 | MT | 160 | P | B |
| ① | ② | ③ | ④ | ⑤ | |

| | |
|----|--------|
| 4 | = 45A |
| 7 | = 75A |
| 10 | = 100A |

- 1** - Current rating code
- 2** - Circuit configuration code: 0 = 3-Phase Rectifier Bridge
- 3** - Essential part number
- 4** - Voltage code: code x 10 = V_{RRM} (See Voltage Ratings table)
- 5** - Pinout code:



A = Flat pins
 B = Round pins

MTP 3-Phase Rectifier Series

Bulletin I27145 rev. B 06/02

International
IR Rectifier

Outline Table

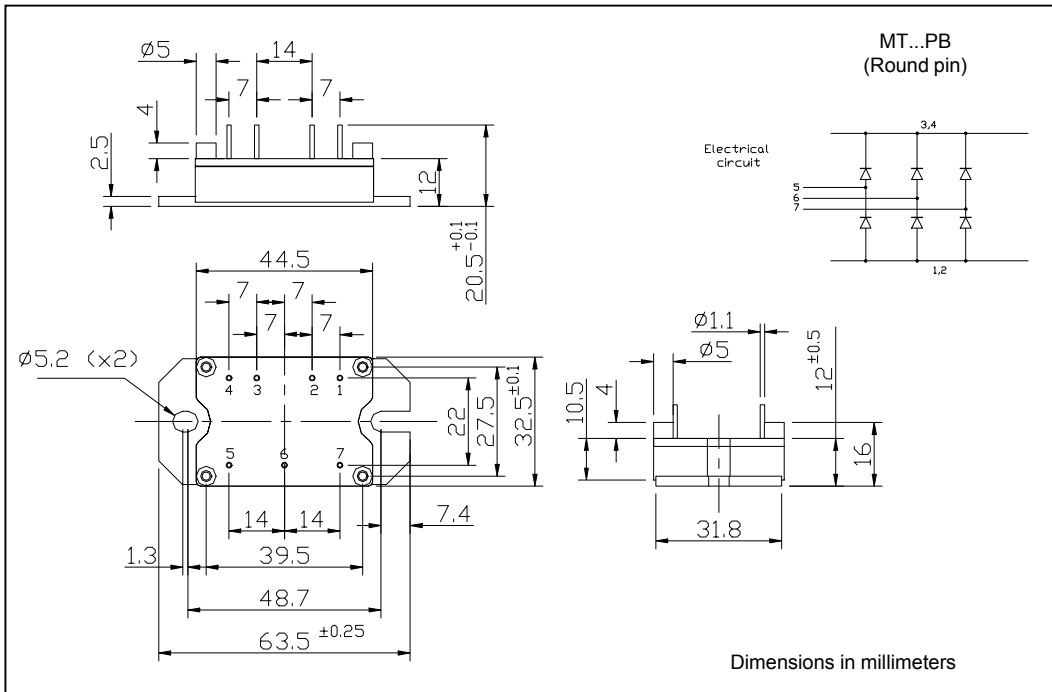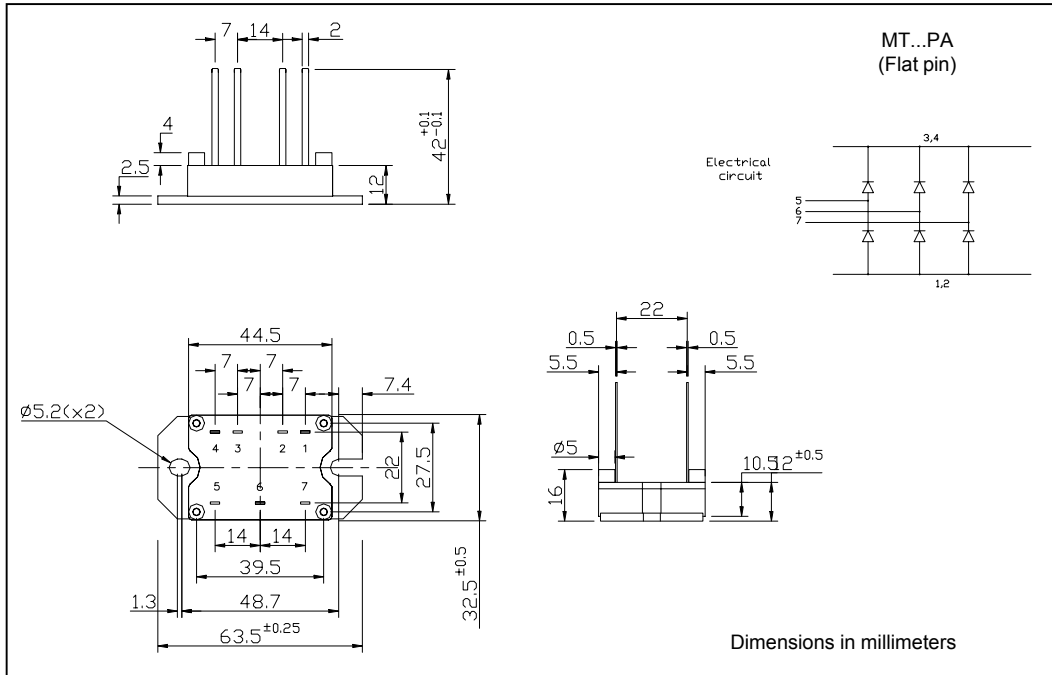

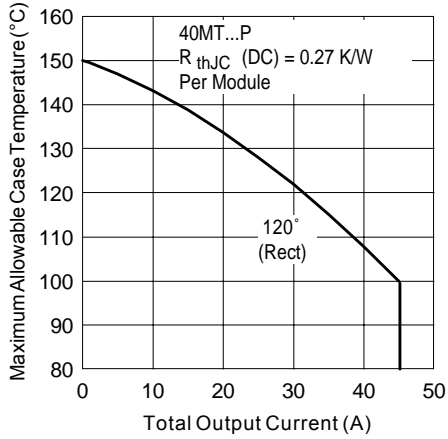


Fig. 1 - Current Rating Characteristics

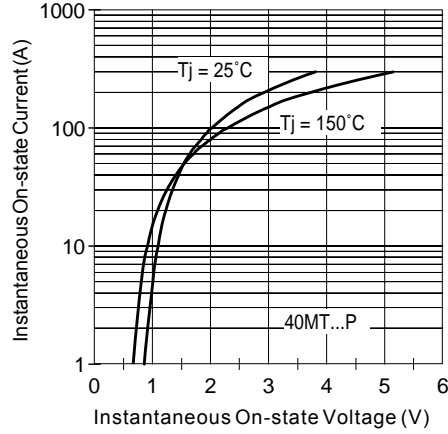


Fig. 2 - On-state Voltage Drop Characteristics

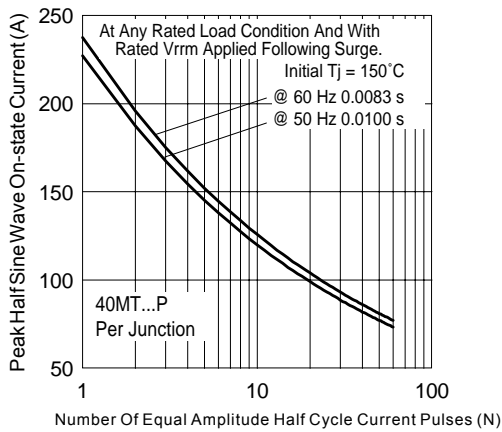


Fig. 3 - Maximum Non-Repetitive Surge Current

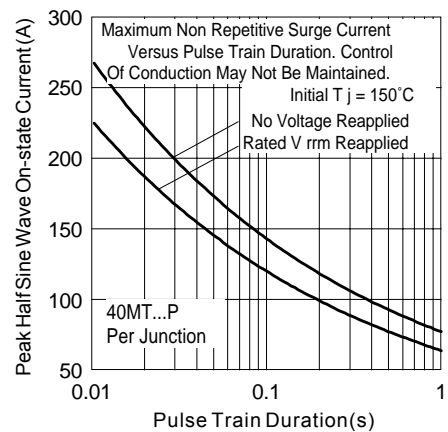


Fig. 4 - Maximum Non-Repetitive Surge Current

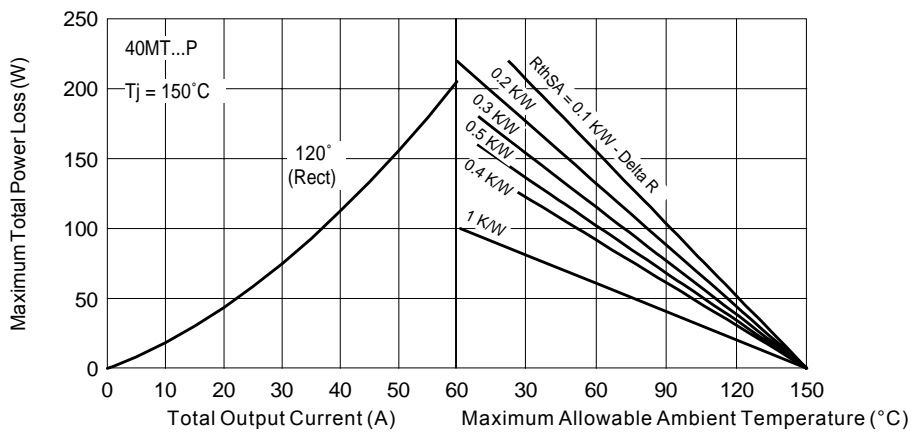


Fig. 5 - Current Rating Nomogram (1 Module Per Heatsink)

MTP 3-Phase Rectifier Series

Bulletin I27145 rev. B 06/02

International
IRF Rectifier

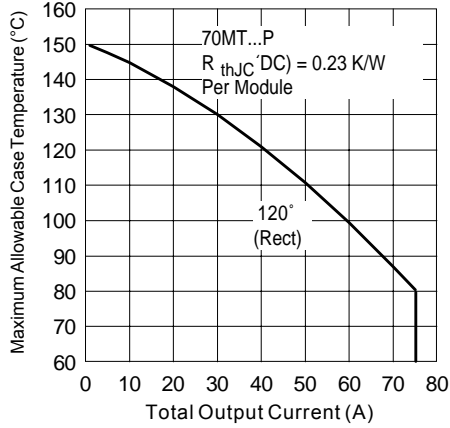


Fig. 6 - Current Rating Characteristics

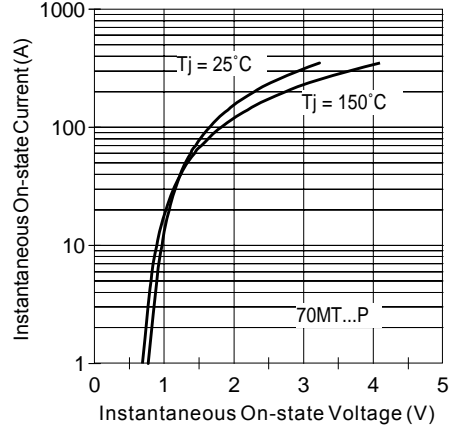


Fig. 7 - On-state Voltage Drop Characteristics

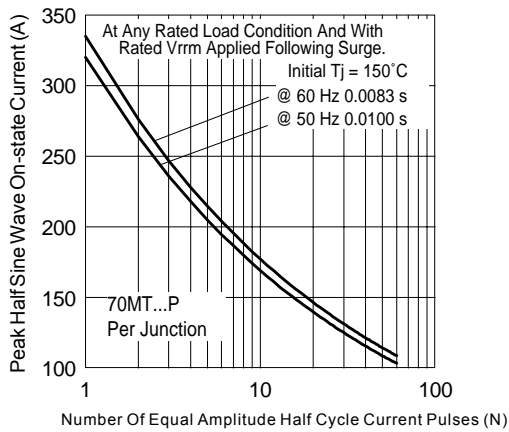


Fig. 8 - Maximum Non-Repetitive Surge Current

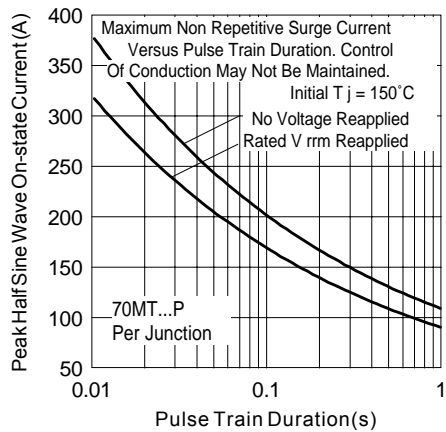


Fig. 9 - Maximum Non-Repetitive Surge Current

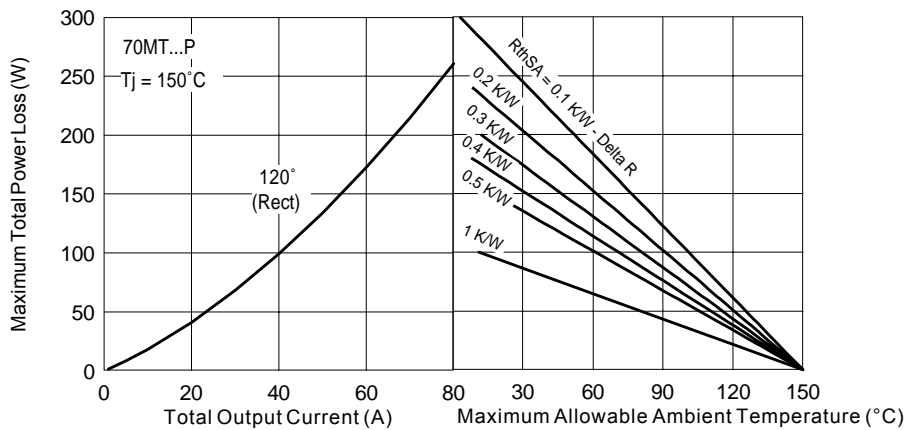


Fig. 10 - Current Rating Nomogram (1 Module Per Heatsink)

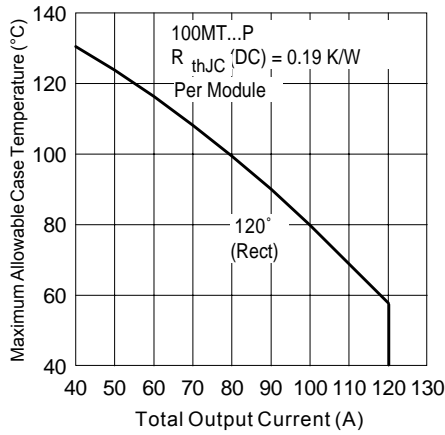


Fig. 11 - Current Rating Characteristics

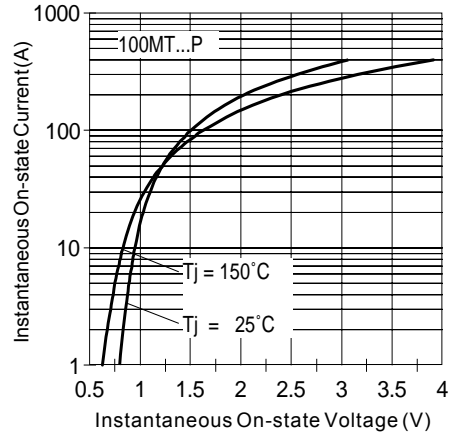


Fig. 12 - On-state Voltage Drop Characteristics

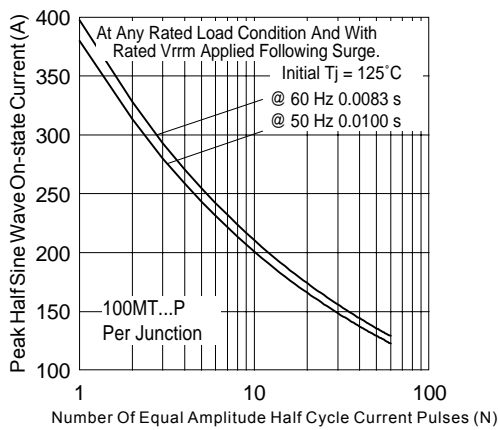


Fig. 13 - Maximum Non-Repetitive Surge Current

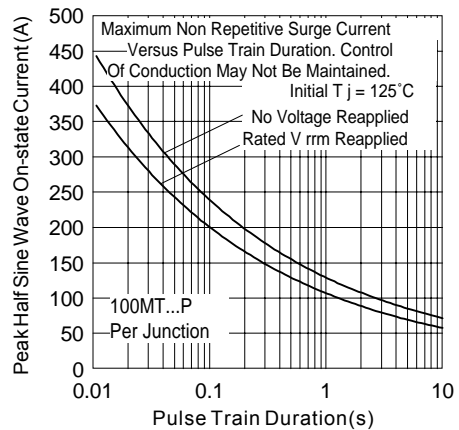


Fig. 14 - Maximum Non-Repetitive Surge Current

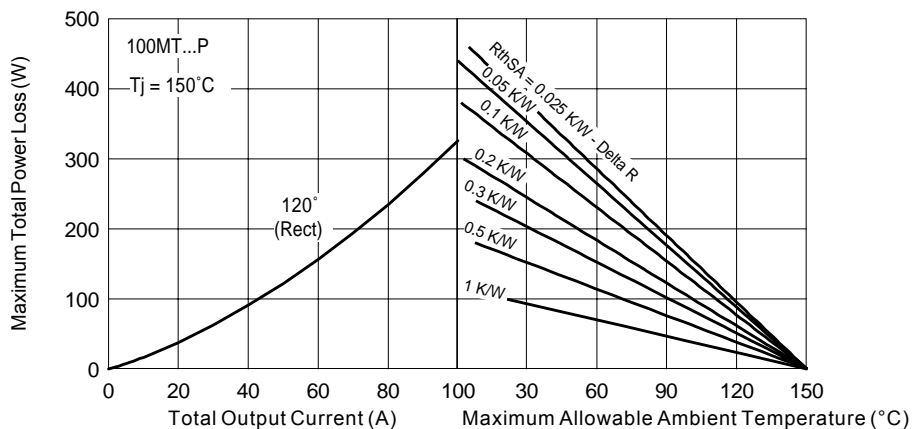


Fig. 15 - Current Rating Nomogram (1 Module Per Heatsink)

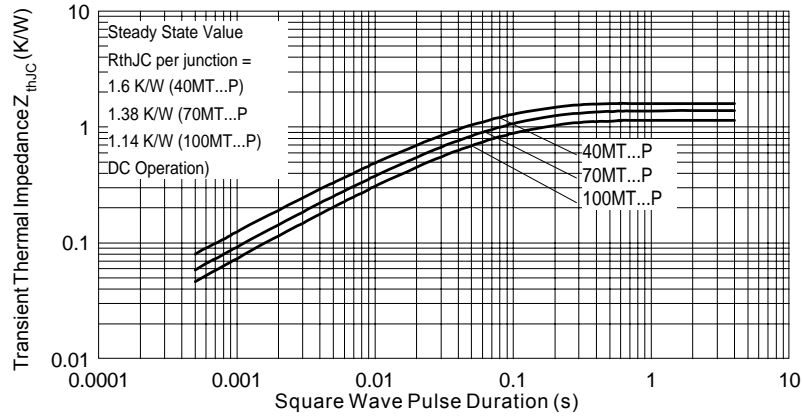


Fig. 16 - Thermal Impedance Z_{thJC} Characteristics

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9