

## LPS250 Series

250 Watts

**Total Power:** 250 Watts  
**Input Voltage:** 85-264 Vac  
120 - 300 Vdc  
**# of Outputs:** Single



### Special Features

- Active power factor correction
- IEC EN6100-3-2 compliance
- Remote sense & remote inhibit
- Power fail
- Single wire current sharing
- Built-in EMI filter
- 2:1 Wide range output voltage adjust
- 2 Supervisory outputs 5 V and 12 V
- Overvoltage protection
- Overload protection
- Thermal overload protection
- DC power good
- 120 kHz switching frequency
- Cover -C
- Optional top with fan cover -CF
- Optional end fan cover -CEF

### Safety

- **VDE** 0805/EN60950 (IEC950)  
11774-3336-1262
- **UL** UL1950 EI32002
- **CSA** CSA 22.2-234 Level 5  
LR53982C
- **NEMKO** EN 60950/EMKO-TUE  
P95102999 (74-sec) 203
- **CB** Certificate and report  
2186
- **CE** Mark (LVD)

## Electrical Specifications

### Input

|                                |                                                                                                                                                                        |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input range:                   | 85-264 Vac; 120 - 300 Vdc                                                                                                                                              |
| Frequency:                     | 47-440 Hz                                                                                                                                                              |
| Inrush current:                | 20 A max, cold start @ 25 °C                                                                                                                                           |
| Efficiency:                    | 75% typical at full load                                                                                                                                               |
| EMI filter:                    | FCC Class B conducted and radiated<br>CISPR 22 Class B conducted and radiated<br>EN55022 Class B conducted and radiated<br>VDE 0878 PT3 Class B conducted and radiated |
| Safety ground leakage current: | < 0.5 mA @ 50/60 Hz, 264 VAC input                                                                                                                                     |

### Output

|                         |                                                                                                 |
|-------------------------|-------------------------------------------------------------------------------------------------|
| Maximum power:          | With cover: 250 W with 30 CFM forced air.<br>(-C) (-CF) (CEF)                                   |
| Supervisory output:     | 5 V @ 100 mA regulated; 12 V @ 500 mA                                                           |
| Adjustment range:       | 2:1 wide ratio                                                                                  |
| Hold-up time:           | 20 ms @ 250 W load, 115 VAC nominal line                                                        |
| Overload protection:    | Short circuit protection on all outputs. Case overload protected @<br>10-145% above peak rating |
| Overvoltage protection: | 5 V output: 5.7 to 6.7 VDC.<br>Other models 10% to 25% above nominal output                     |



## Logic Control

|                |                                                                                                                    |
|----------------|--------------------------------------------------------------------------------------------------------------------|
| Power failure: | TTL Logic signal goes high 50-150 msec after 5 V output. It goes low at least 4 ms before loss of regulation       |
| Remote on/off: | Requires an external contact (N.O or N.C) to inhibit outputs                                                       |
| DC - OK:       | TTL logic goes high 50-150 msec after the output. It goes low when there is loss of regulation.                    |
| Remote sense:  | Compensates for 0.5 V lead drop minimum, will operate without remote sense connected. Reverse connection protected |

## Environmental Specifications

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Operating temperature:          | 0° to 50 °C ambient;<br>derate each output at 2.5% per degree from 50° to 70 °C                                         |
| Storage temperature:            | -40 °C to +85 °C                                                                                                        |
| Temperature coefficient:        | ± 0.4% per °C                                                                                                           |
| Electromagnetic susceptibility: | Designed to meet IEC 801, -2, -3, -4, -5, -6, Level 3                                                                   |
| Humidity:                       | Operating; non-condensing 5% to 95%                                                                                     |
| Vibration:                      | Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances 0.7 G peak 5 Hz to 500 Hz, operational |
| MTBF demonstrated:              | > 550,000 hours at full load and 25 °C ambient conditions                                                               |


## Ordering Information

| Model Number | Output Voltage  | Minimum Load | Maximum Load with 30CFM Forced Air | Peak Load <sup>1</sup> | Regulation <sup>2</sup> | Ripple P/P (PARD) <sup>3</sup> |
|--------------|-----------------|--------------|------------------------------------|------------------------|-------------------------|--------------------------------|
| LPS252-C     | 5 V (3 - 6 V)   | 1.50 A       | 50 A                               | 60 A                   | ±2%                     | 50 mV                          |
| LPS253-C     | 12 V (6 - 12) V | 0.63 A       | 21 A                               | 25 A                   | ±2%                     | 120 mV                         |
| LPS254-C     | 15 (12 - 24 V)  | 0.50 A       | 16.7 A                             | 20 A                   | ±2%                     | 150 mV                         |
| LPS255-C     | 24 V (24 -48 V) | 0.32 A       | 10.4 A                             | 12.5 A                 | ±2%                     | 240 mV                         |

1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
4. If optional CF or CEF fans are not used, 30CFM forced air cooling needs to be provided and is required through the length of the power supply. Not convection rated.
5. Output voltage adjustment requires a minimum load.
6. Remote inhibit resets OVP latch

Note: -CF suffix added to the model number indicates cover with top fan. -CEF suffix added to the model number indicates cover with dual end mounted fan cover and AC inlet.

## Mechanical Drawing

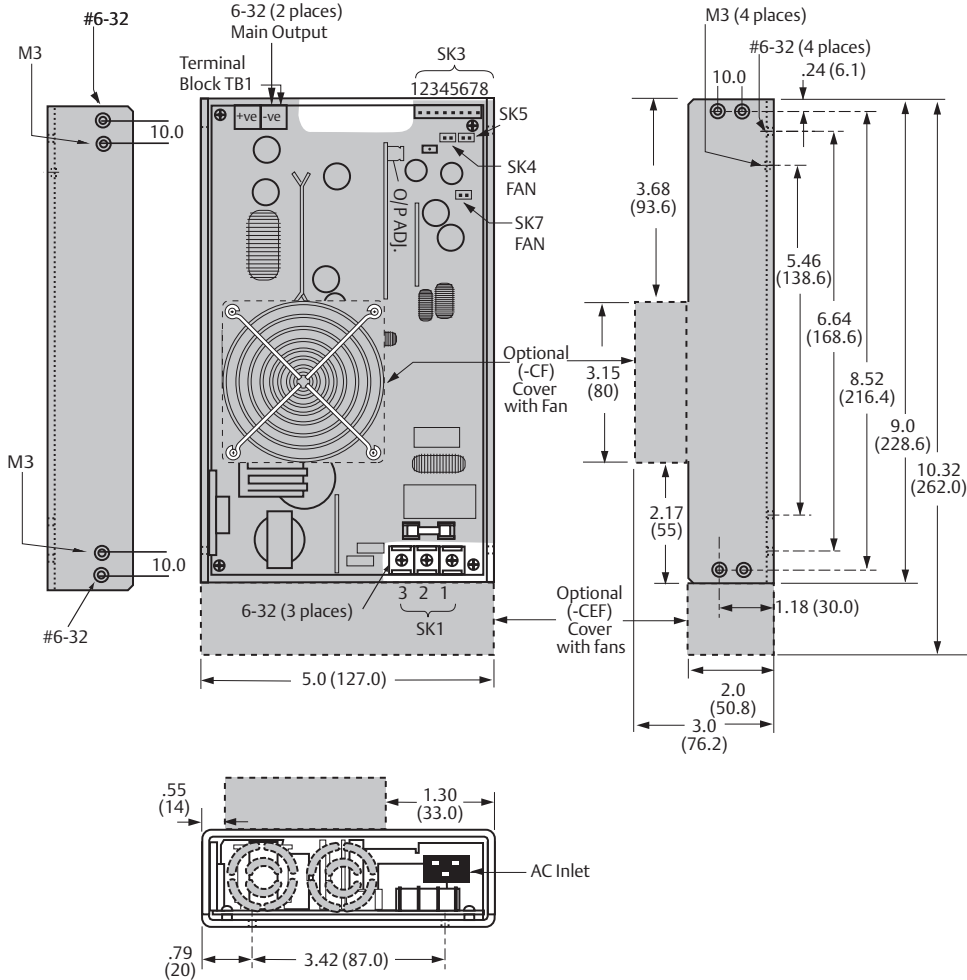

### Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.Emerson.com/EmbeddedPower](http://www.Emerson.com/EmbeddedPower)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

## Pin Assignments

| Connector | PIN   | Assignment                                 |
|-----------|-------|--------------------------------------------|
| SK1       | PIN 1 | Neutral                                    |
|           | PIN 2 | Line                                       |
|           | PIN 3 | Ground                                     |
| SK3       | PIN 1 | + Remote sense                             |
|           | PIN 2 | - Remote sense                             |
|           | PIN 3 | Remote inhibit (N.O.)                      |
|           | PIN 4 | Remote inhibit (N.C.)                      |
|           | PIN 5 | Common                                     |
|           | PIN 6 | Current sharing                            |
|           | PIN 7 | Power fail                                 |
|           | PIN 8 | DC Power Good                              |
| SK4       | PIN 1 | + Fan's power source (12 V @ 500 mA)       |
|           | PIN 2 | - Fan's power source (12 V @ 500 mA)       |
| SK5       | PIN 1 | + Supervisory output supply (5 V @ 100 mA) |
|           | PIN 2 | - Supervisory output supply (5 V @ 100 mA) |
| SK7       | PIN 1 | + Fan's power source (12 V @ 500 mA)       |
|           | PIN 2 | - Fan's power source (12 V @ 500 mA)       |

## Mating Connectors

|     |                                      |
|-----|--------------------------------------|
| SK3 | Molex 22-01-1084<br>PINS:08-70-0057  |
| SK4 | Molex 22-01-3027<br>PINS: 08-50-0114 |
| SK5 | Molex 22-01-3027<br>PINS: 08-50-0114 |
| SK7 | Molex 22-01-3027<br>PINS: 08-50-0114 |

Emerson Network Power Connector Kit #70-841-005, includes all of the above

- Specifications subject to change without notice.
- All dimensions in inches (mm), tolerance is  $\pm 0.02"$  ( $\pm 0.5\text{mm}$ )
- Specifications are at factory settings.
- To enable normally closed remote inhibit, cut jumper J1.
- Mounting maximum insertion depth is 0.12".
- Warranty: 2 year
- Weight: 2.6 lb / 1.19 kg

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

## EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2011 Emerson Electric Co.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9