

AZ2110/AZ2120

40A MINIATURE POWER RELAY

FEATURES

- 40 Amp switching capability
- 1 Form A, B and C contacts available
- DC coils to 120 VDC
- Low cost
- Life expectancy to 10 million operations
- High dielectric strength version available
- Class B insulation standard
- Class F (155°C) version available
- Versatility of both PC and "Trace Saver" quick-connect terminals on contacts offered on the AZ2120 version
- Proof Tracking Index (PTI/CTI) 175
- UL, CUR file E44211 including versions meeting UL 508 and UL 873 spacing and contact rating requirements; VDE 132710 ÜG (some models)



CONTACTS

Arrangement	SPDT (1 Form C) SPST (1 Form A and 1 Form B)
Ratings	Resistive load: Max. switched power: 900 W or 10000 VA Max. switched current: 40 A (Form A) 30 A (Form B) Max. switched voltage: 30 VDC or 300 VAC UL Rating: See chart for UL contact ratings. AZ2150 Series meets UL 508 Group A spacing and UL 873 refrigeration and safety control requirements. AZ2151 Series meets UL 508 Group B spacing requirements. VDE Rating: AZ2110-1A - 25 A at 250 VAC, 10k cycles, tive AZ2110-1C - 20 A at 250 VAC, 10k cycles, tive
resis	
resis	
Material	Silver cadmium oxide
Resistance	20 milliohms initially (at rated current, voltage drop method)

COIL

Power	
At Pickup Voltage (typical)	500 mW
Max. Continuous Dissipation	2.2 W at 20°C (68°F) ambient 1.8 W at 40°C (104°F) ambient
Temperature Rise	38°C (68°F) at nominal coil voltage - AZ2110 33°C (59°F) at nominal coil voltage - AZ2120
Temperature	Max. 130°C (266°F) Class B Max. 155°C (311°F) Class F

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at 30 A 120 VAC Res. (N.O.)
Operate Time (max.)	Max. 12 ms Typical: 8 ms
Release Time (max.)	Max. 5 ms Typical: 3.5 ms
Dielectric Strength (at sea level for 1min)	2500 Vrms contact to coil 1500 Vrms between open contacts
Insulation Resistance	1000 megohms min. at 500 VDC, 20°C, 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -55°C (-67°F) to 100°C (212°F) Class B -55°C (-67°F) to 125°C (257°F) Class F -55°C (-67°F) to 130°C (266°F) Class B -55°C (-67°F) to 155°C (311°F) Class F
Vibration	0.062" DA at 10-55 Hz
Shock	20 g
Enclosure (optional)	P.B.T. polyester
Terminals	Tinned copper alloy, P.C. & quick connects, .250" wide, on top Note: Allow suitable slack on leads when wiring, and do not subject the terminals to excessive force.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Weight	40 grams

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Other coil resistances and sensitivities available upon request. Please contact the factory.
4. Specifications subject to change without notice.



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/30/05W

AZ2110/AZ2120

STANDARD RELAYS: UL 508: 1/8" Clearance, 1/4" Creepage					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	Form A (SPST)	Form C (SPDT)
5	7.3	27	3.75	AZ2110-1A-5D	AZ2110-1C-5D
6	8.9	40	4.5	AZ2110-1A-6D	AZ2110-1C-6D
9	13.9	97	6.75	AZ2110-1A-9D	AZ2110-1C-9D
12	17.5	155	9.0	AZ2110-1A-12D	AZ2110-1C-12D
15	22.5	256	11.25	AZ2110-1A-15D	AZ2110-1C-15D
18	27.4	380	13.5	AZ2110-1A-18D	AZ2110-1C-18D
24	36.1	660	18.0	AZ2110-1A-24D	AZ2110-1C-24D
48	68.4	2,560	36.0	AZ2110-1A-48D	AZ2110-1C-48D
70	104.4	5,500	52.5	AZ2110-1A-70D	AZ2110-1C-70D
110	163.2	13,450	82.5	AZ2110-1A-110D	AZ2110-1C-110D

STANDARD RELAYS: 1/16" Clearance, 1/8" Creepage					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	Form A (SPST)	Form C (SPDT)
5	7.3	27	3.75	AZ2111-1A-5D	AZ2111-1C-5D
6	8.9	40	4.5	AZ2111-1A-6D	AZ2111-1C-6D
9	13.9	97	6.75	AZ2111-1A-9D	AZ2111-1C-9D
12	17.5	155	9.0	AZ2111-1A-12D	AZ2111-1C-12D
15	22.5	256	11.25	AZ2111-1A-15D	AZ2111-1C-15D
18	27.4	380	13.5	AZ2111-1A-18D	AZ2111-1C-18D
24	36.1	660	18.0	AZ2111-1A-24D	AZ2111-1C-24D
48	68.4	2,560	36.0	AZ2111-1A-48D	AZ2111-1C-48D
70	104.4	5,500	52.5	AZ2111-1A-70D	AZ2111-1C-70D
110	163.2	13,450	82.5	AZ2111-1A-110D	AZ2111-1C-110D

* Substitute "1B" in place of the "1A" to indicate 1 Form B contact. To indicate Class F version, add suffix "F". For quick connect terminals on contacts substitute "2120" or "2121" in place of "2110" or "2111".

UL/CUR File E44211 Approved Contact Ratings

Load Type	Cycles	Volts	Form A (NO)	Form B (NC)	Form C	
					NO	NC
General Purpose (Inductive)	100,000	125 or 240 VAC	30 A	15 A	30 A	15 A
	30,000	277 VAC	30 A	30 A	30 A	30 A
Resistive	100,000	125 or 240 VAC	30 A	15 A	30 A	15 A
	100,000	30 VDC	20 A	10 A	20 A	10 A
	100,000	277 VAC	20 A	—	—	—
	100,000	240 VAC	15 A	—	—	—
	6,000	250 VAC	40 A	—	40 A	—
Ballast	6,000	277 VAC	6 A	3 A	6 A	3 A
Pilot Duty	6,000	125 VAC	800 VA	290 VA	800 VA	290 VA
	30,000	125 VAC	800 VA	—	690 VA	—
	100,000	125 VAC	690 VA	—	470 VA	275 VA
	6,000	240 VAC	1152 VA	768 VA	1152 VA	768 VA
	100,000	277 VAC	764 VA	—	764 VA	—
Motor Load	6,000	125 VAC	1 HP	1/4 HP	1 HP	1/4 HP
	6,000	240 VAC	3 HP	1 HP	2 HP	1 HP
	30,000	125 VAC	1 HP	—	1 HP	—
	100,000	125 or 277 VAC	3/4 HP	—	3/4 HP	—
Definite Purpose (LRA-Locked Rotor)	30,000	125 VAC	96 LRA 30 FLA	33 LRA 10 FLA	60 LRA 20 FLA	33 LRA 10 FLA
	100,000	125 VAC	82.8 LRA 27 FLA	—	82.8 LRA 27 FLA	—
	30,000	240 VAC	80 LRA 30 FLA	33 LRA 10 FLA	60 LRA 20 FLA	33 LRA 10 FLA
	100,000	277 VAC	60 LRA 20 FLA	—	60 LRA 20 FLA	—
Tungsten	6,000	125 VAC	15 A	—	15 A	3 A
	6,000	240 VAC	5 A	—	5 A	3 A
	6,000	120 VAC	—	3 A	—	—
	6,000	240 VAC	—	3 A	—	—
TV-5	25,000	120 VAC	TV-5	—	TV-5	TV-3
TV-3	25,000	120 VAC	—	TV-3	—	TV-3

Note: See AZ2100 Data Sheet for more complete UL and CUR approved contact ratings.



AMERICAN ZETTLER, INC.


www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM


11/30/05W

AZ2110/AZ2120


Maximum Switching Capacity

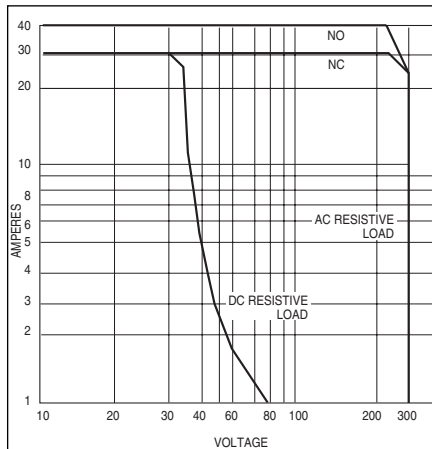


Coil Temperature Rise - AZ2110

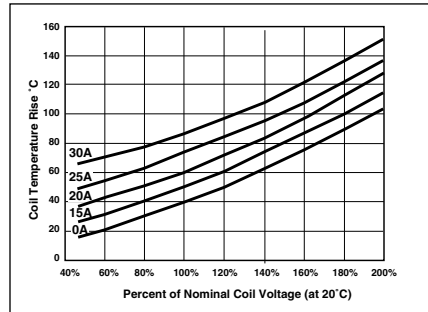

Coil Temperature Rise - AZ2120

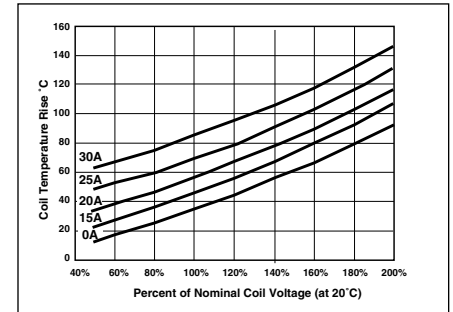

MECHANICAL DATA

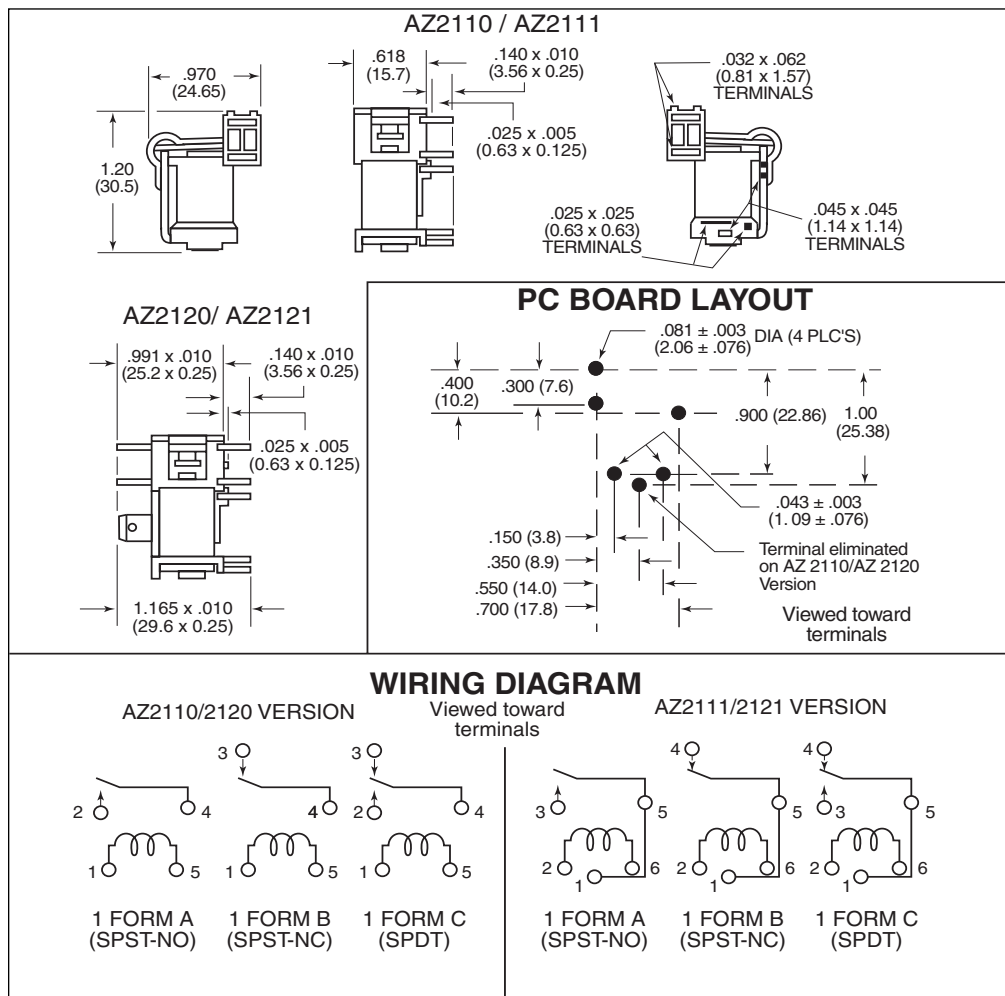

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/30/05W

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9