

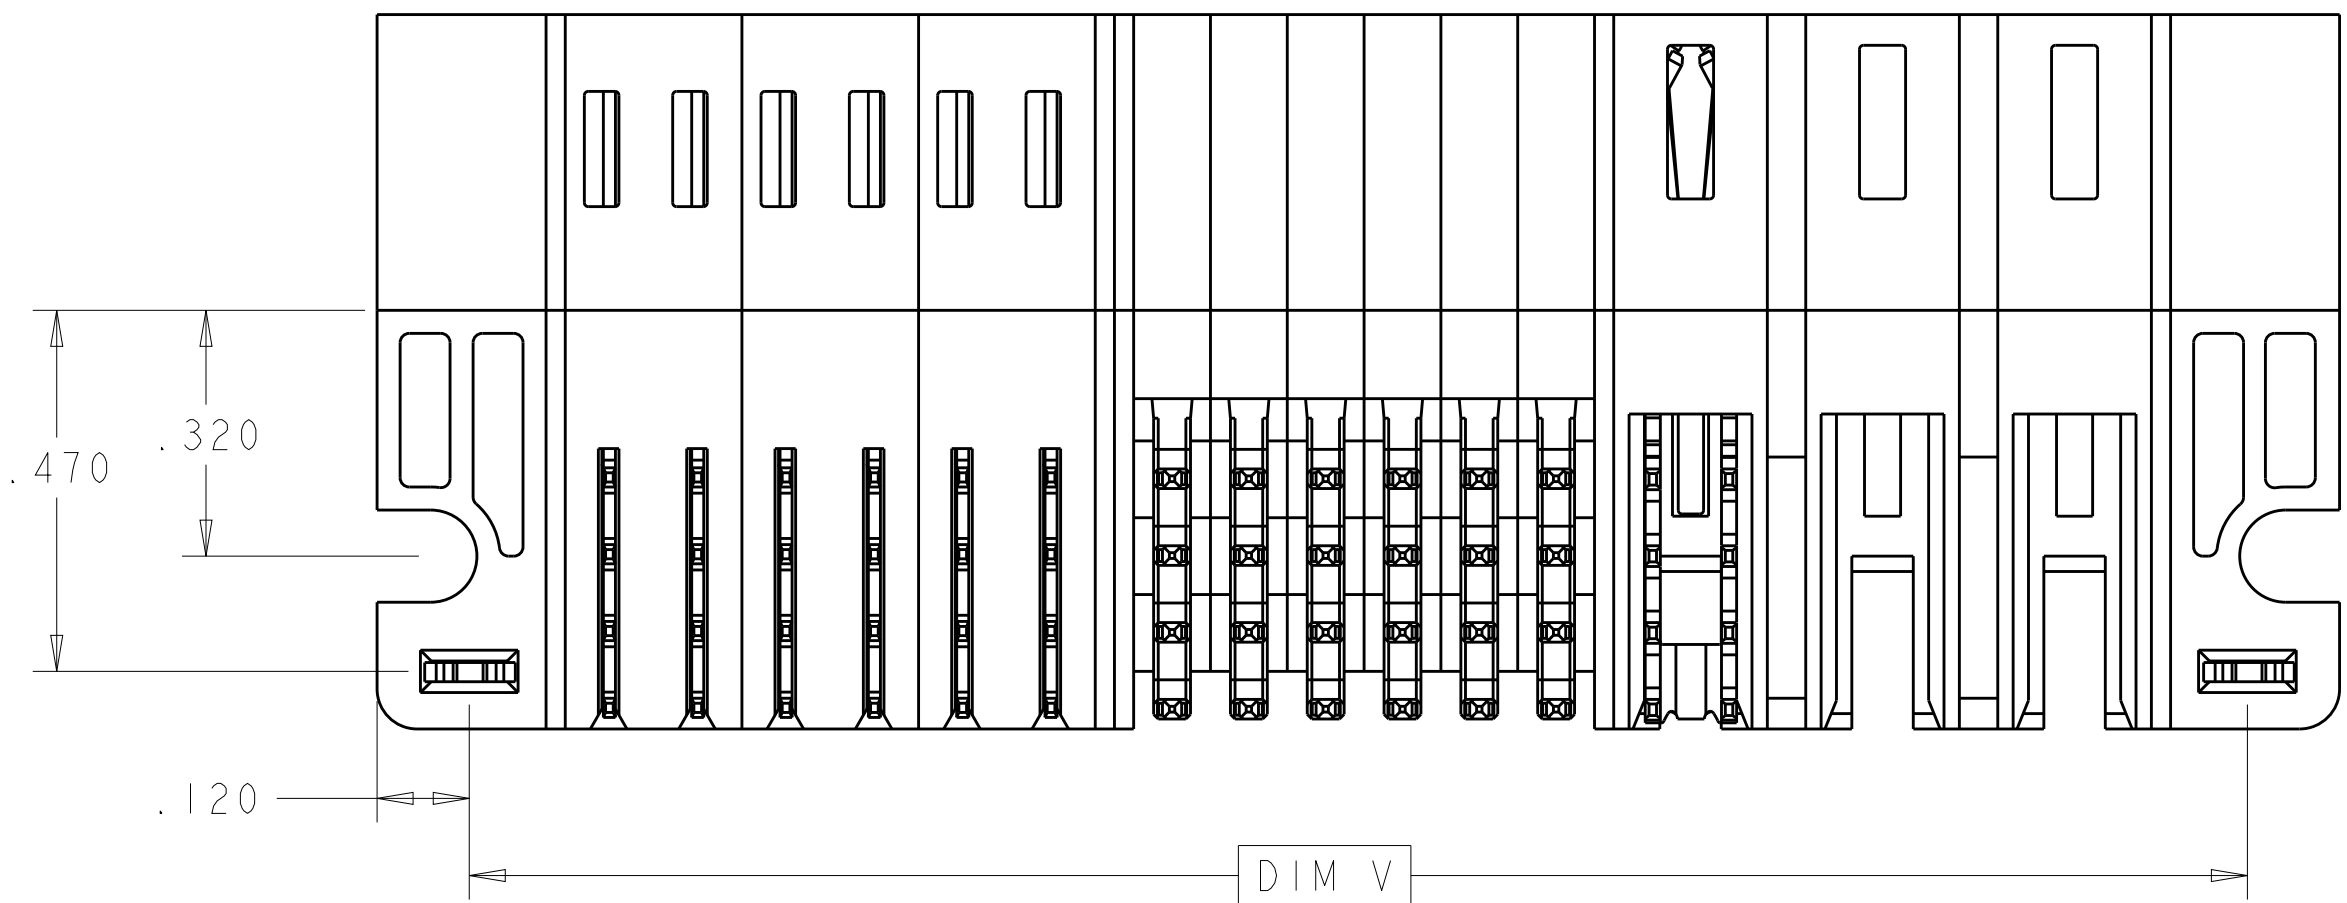
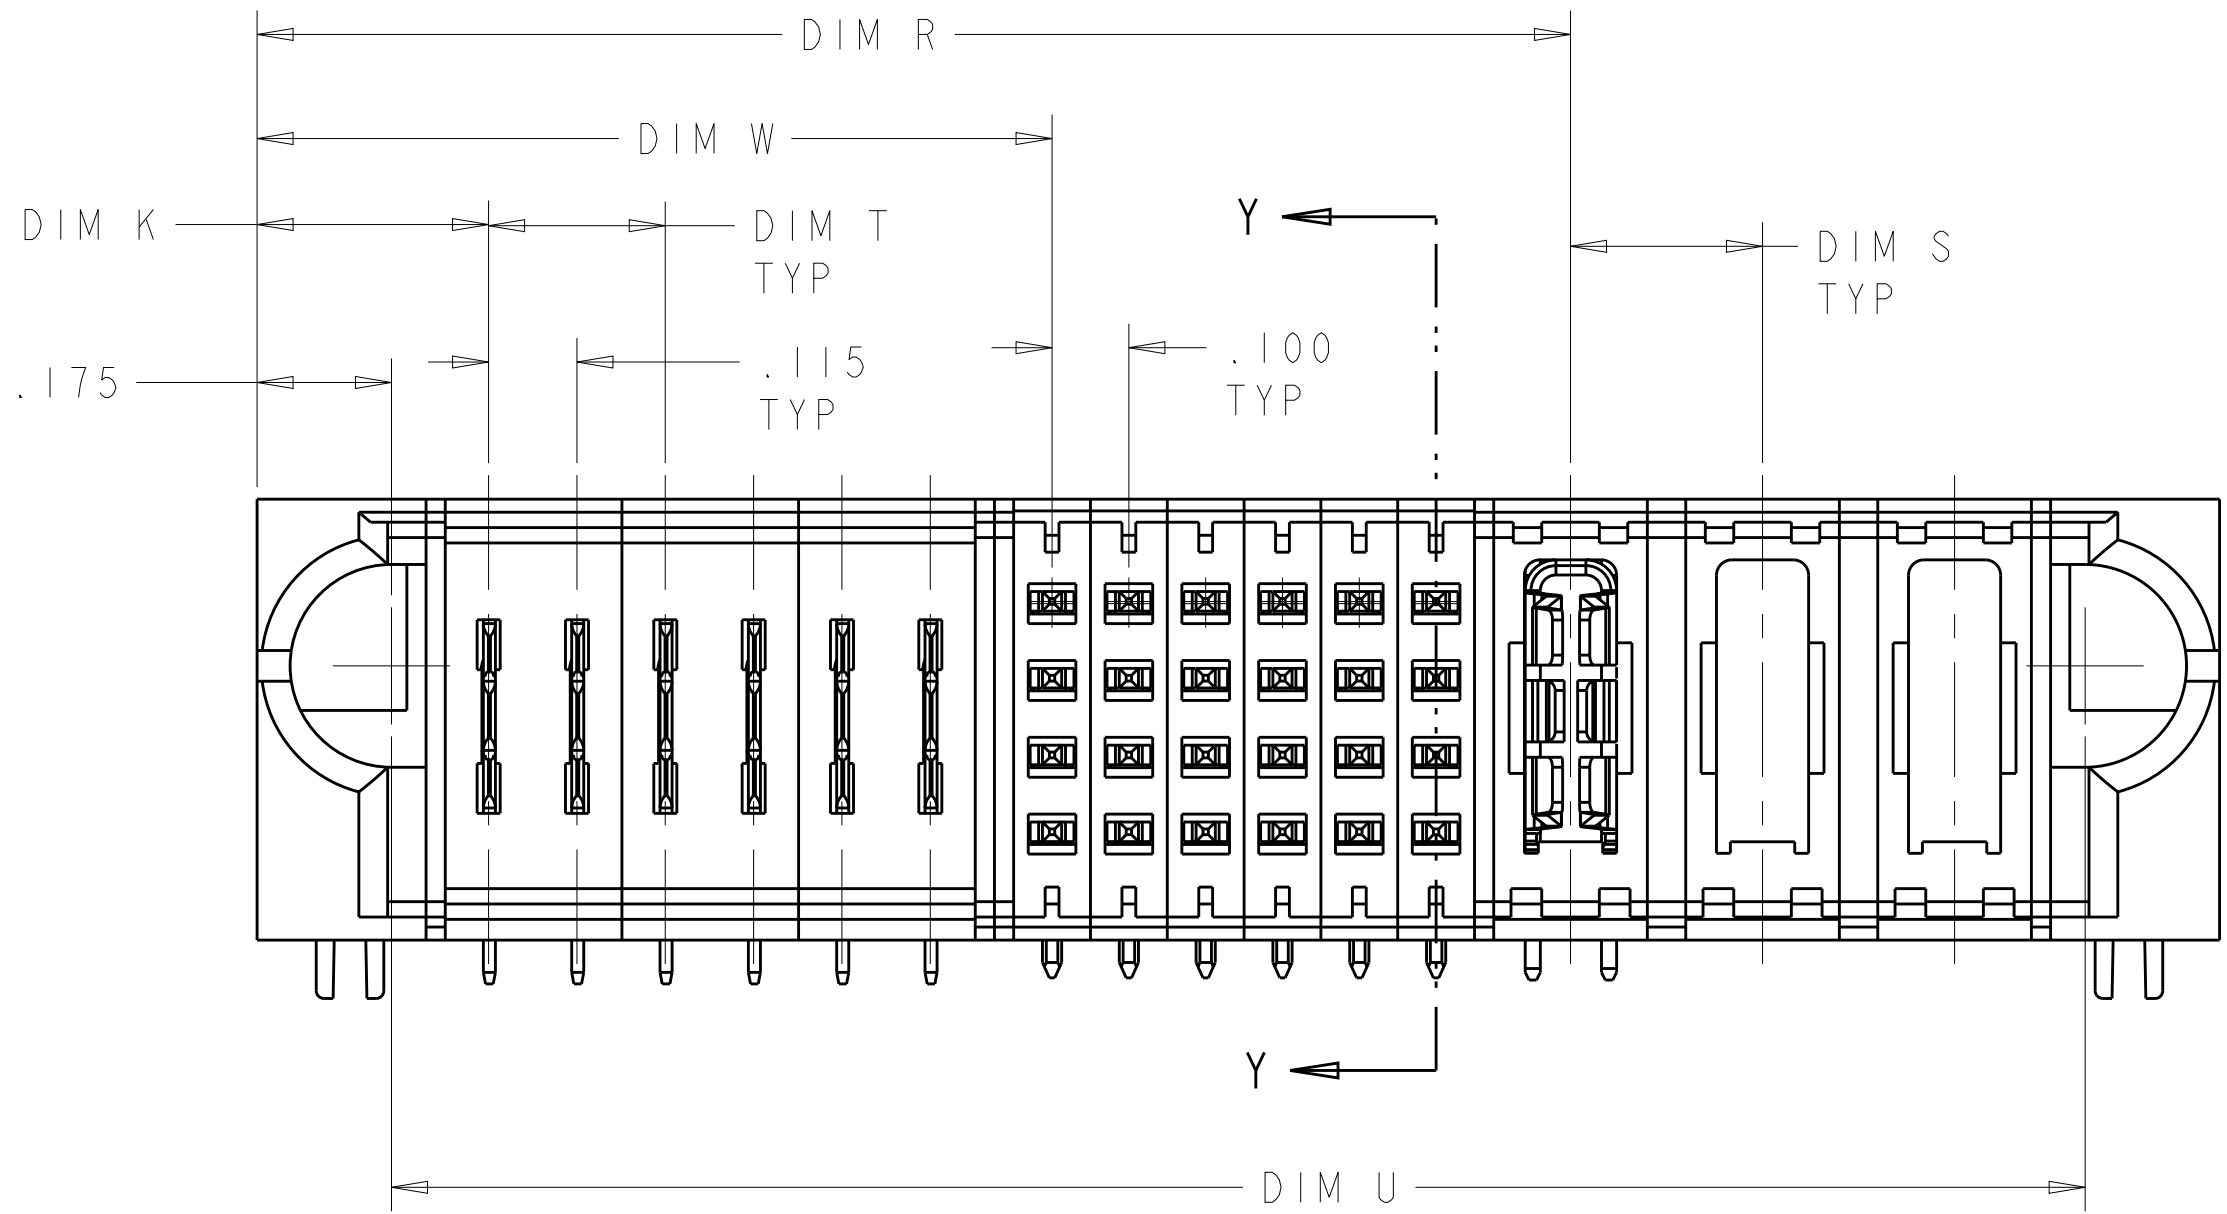
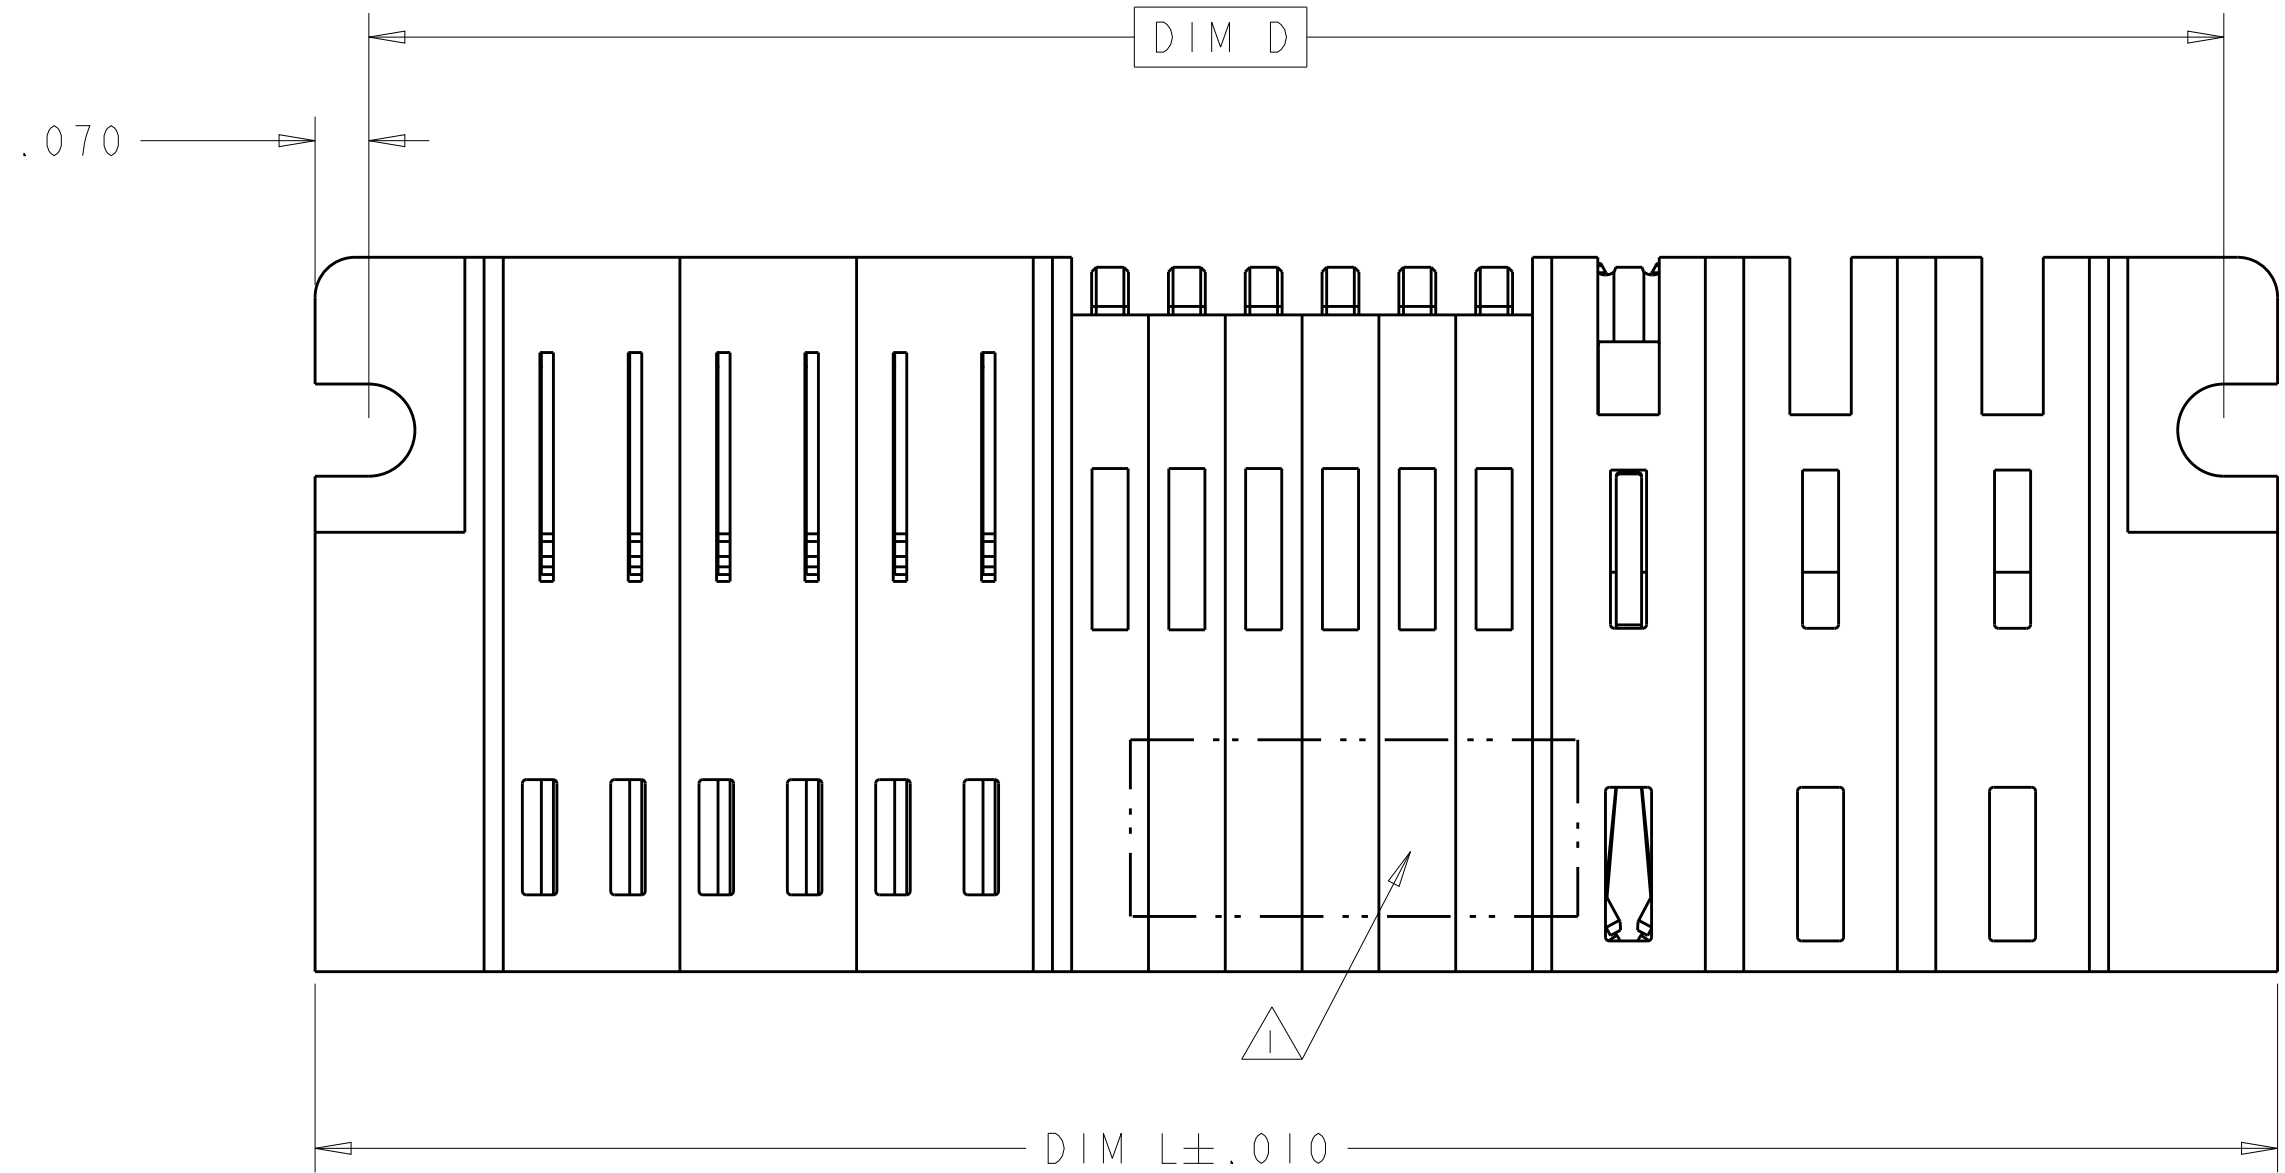


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R9	REVISED 8-1	05NOV2014	CZ	SZ
			S	ADD NEW DASH NUMBER 8-2	07FEB2015	CZ	SZ
			S2	REVISED 8-2 CUSTOMER	09MAR2015	CZ	SZ

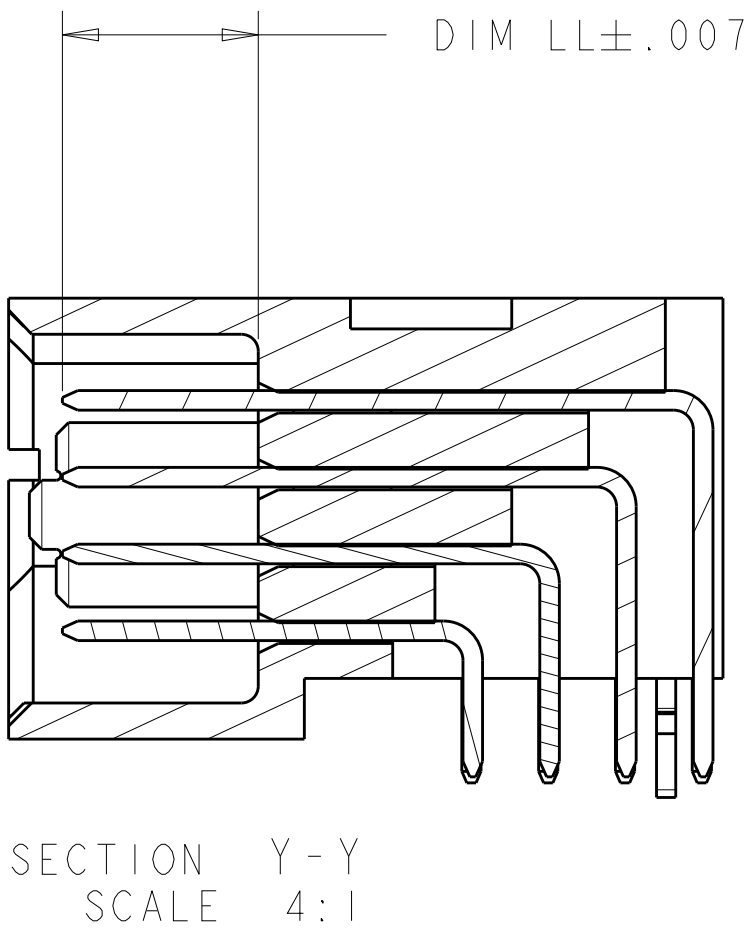


- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 VARIABLE DIMENSIONS SHOW ON TABLE OR PART VIEW
- 9 REFER TO PAGE 10 FOR DETAIL DIMENTIONS.

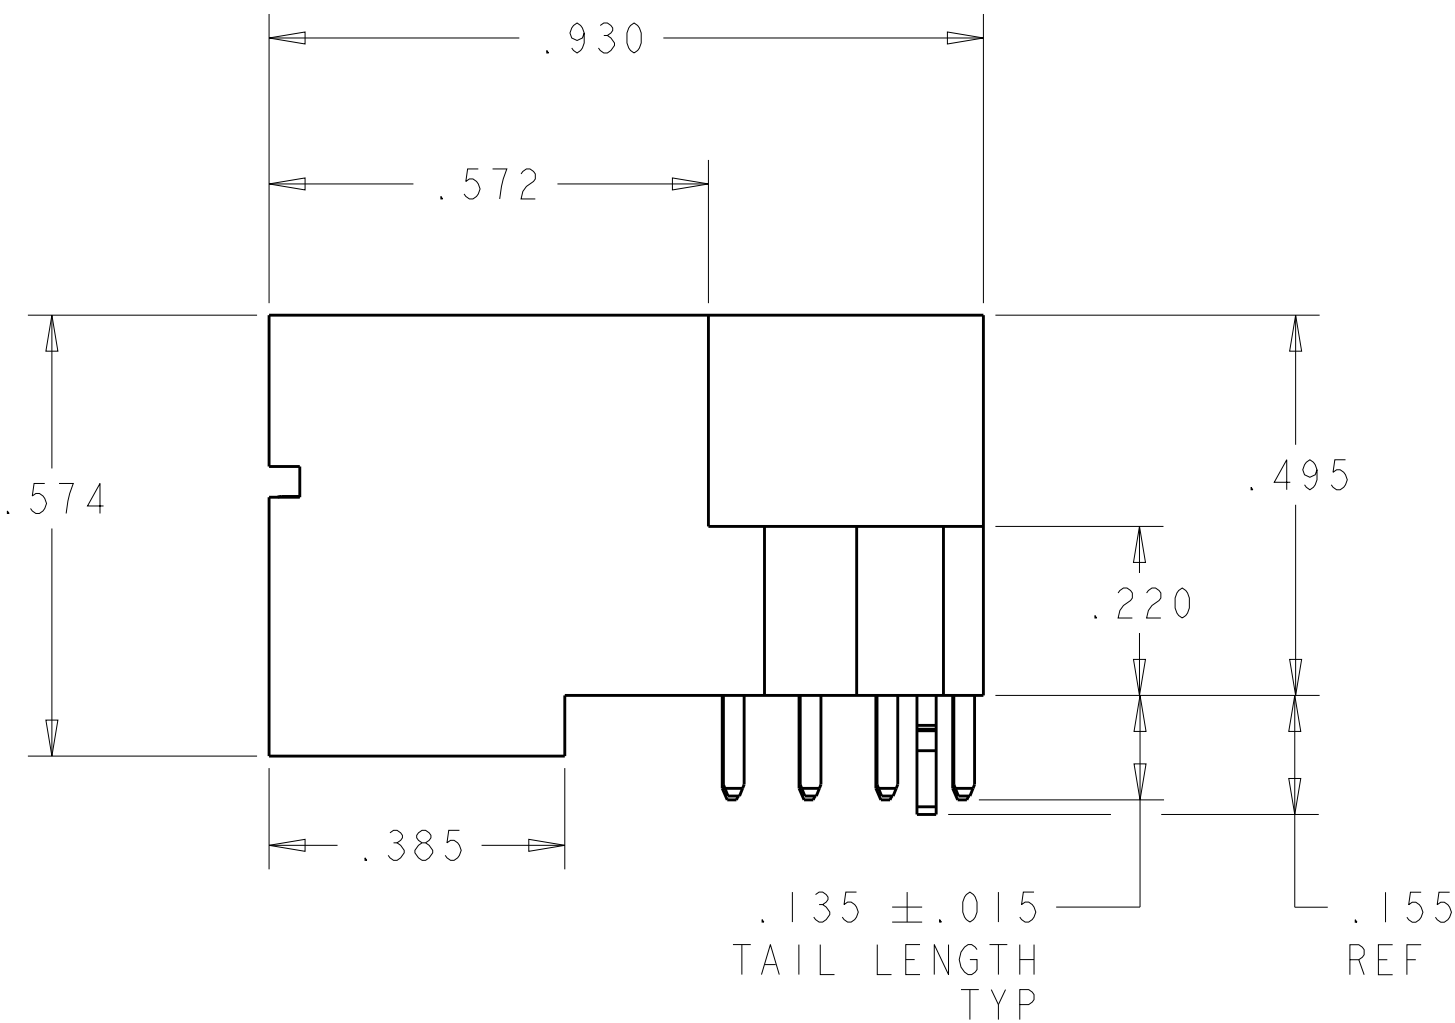


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±"		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		CUSTOMER DRAWING	
MATERIAL : 2		FINISH : 3		SIZE A1	
				CAGE CODE 00779	
				DRAWING NO 6450830	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 1	
				OF 42	
				REV S2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

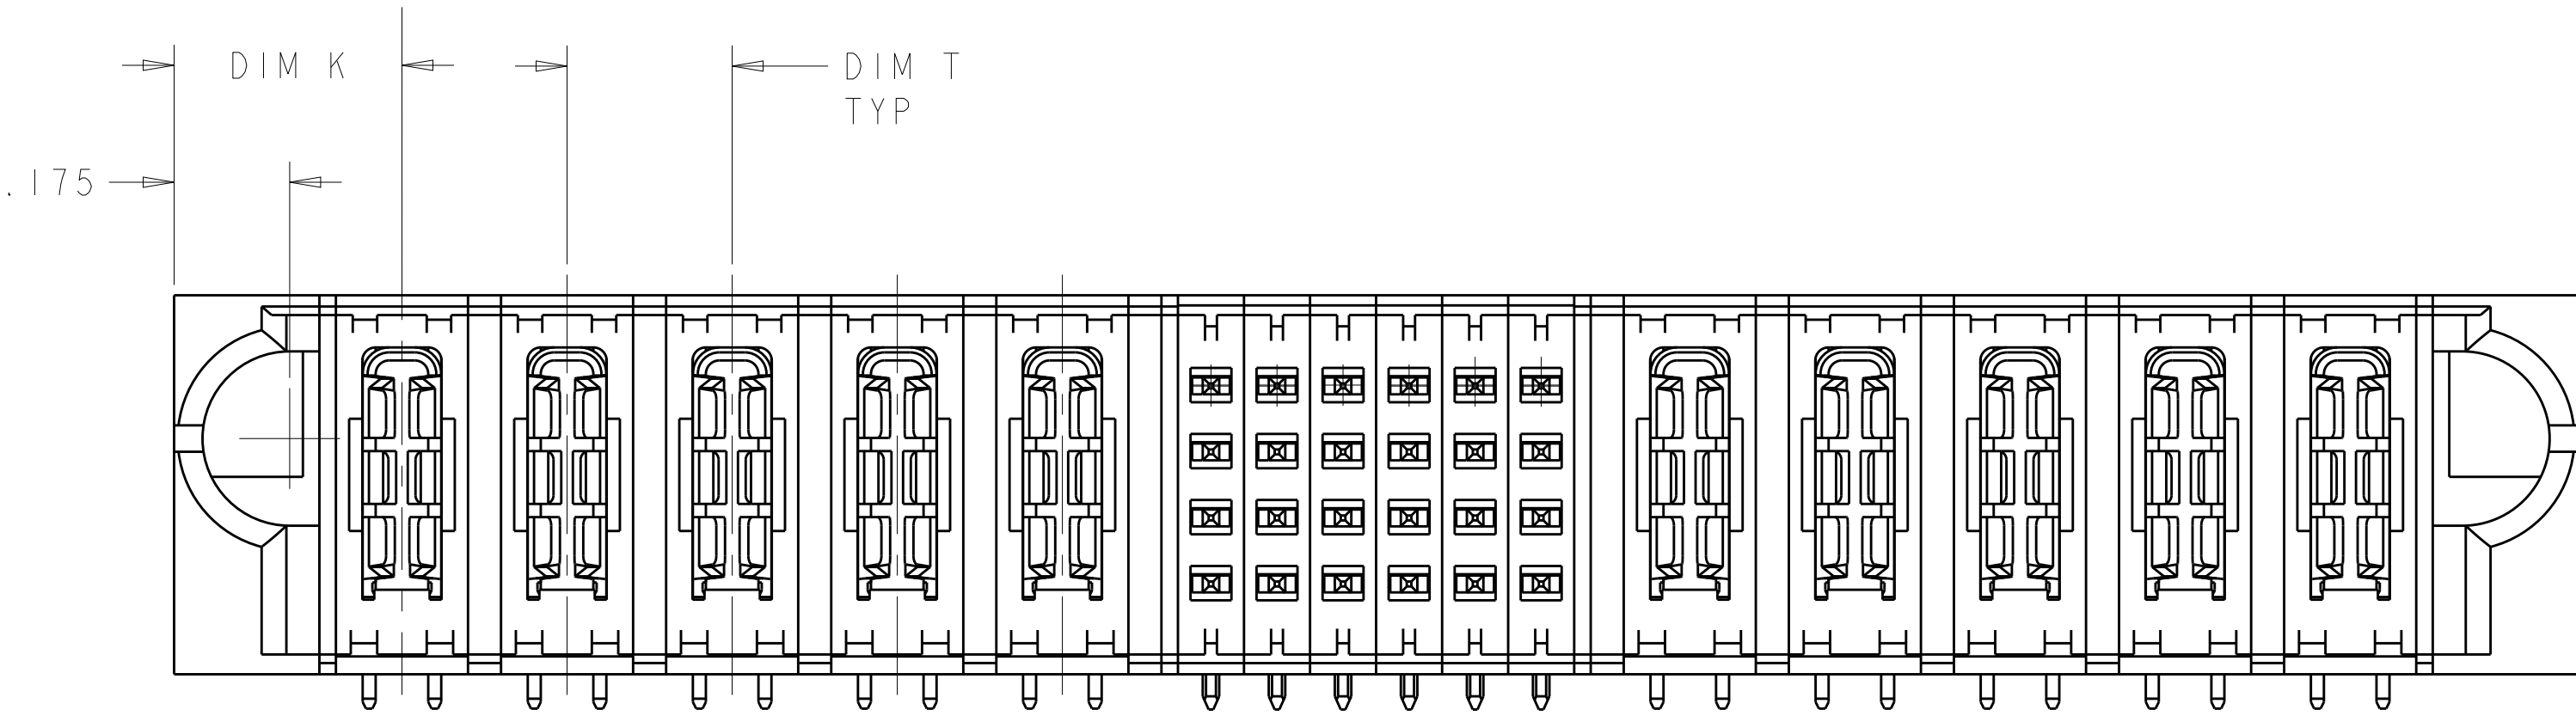

FOR "P+S+P"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

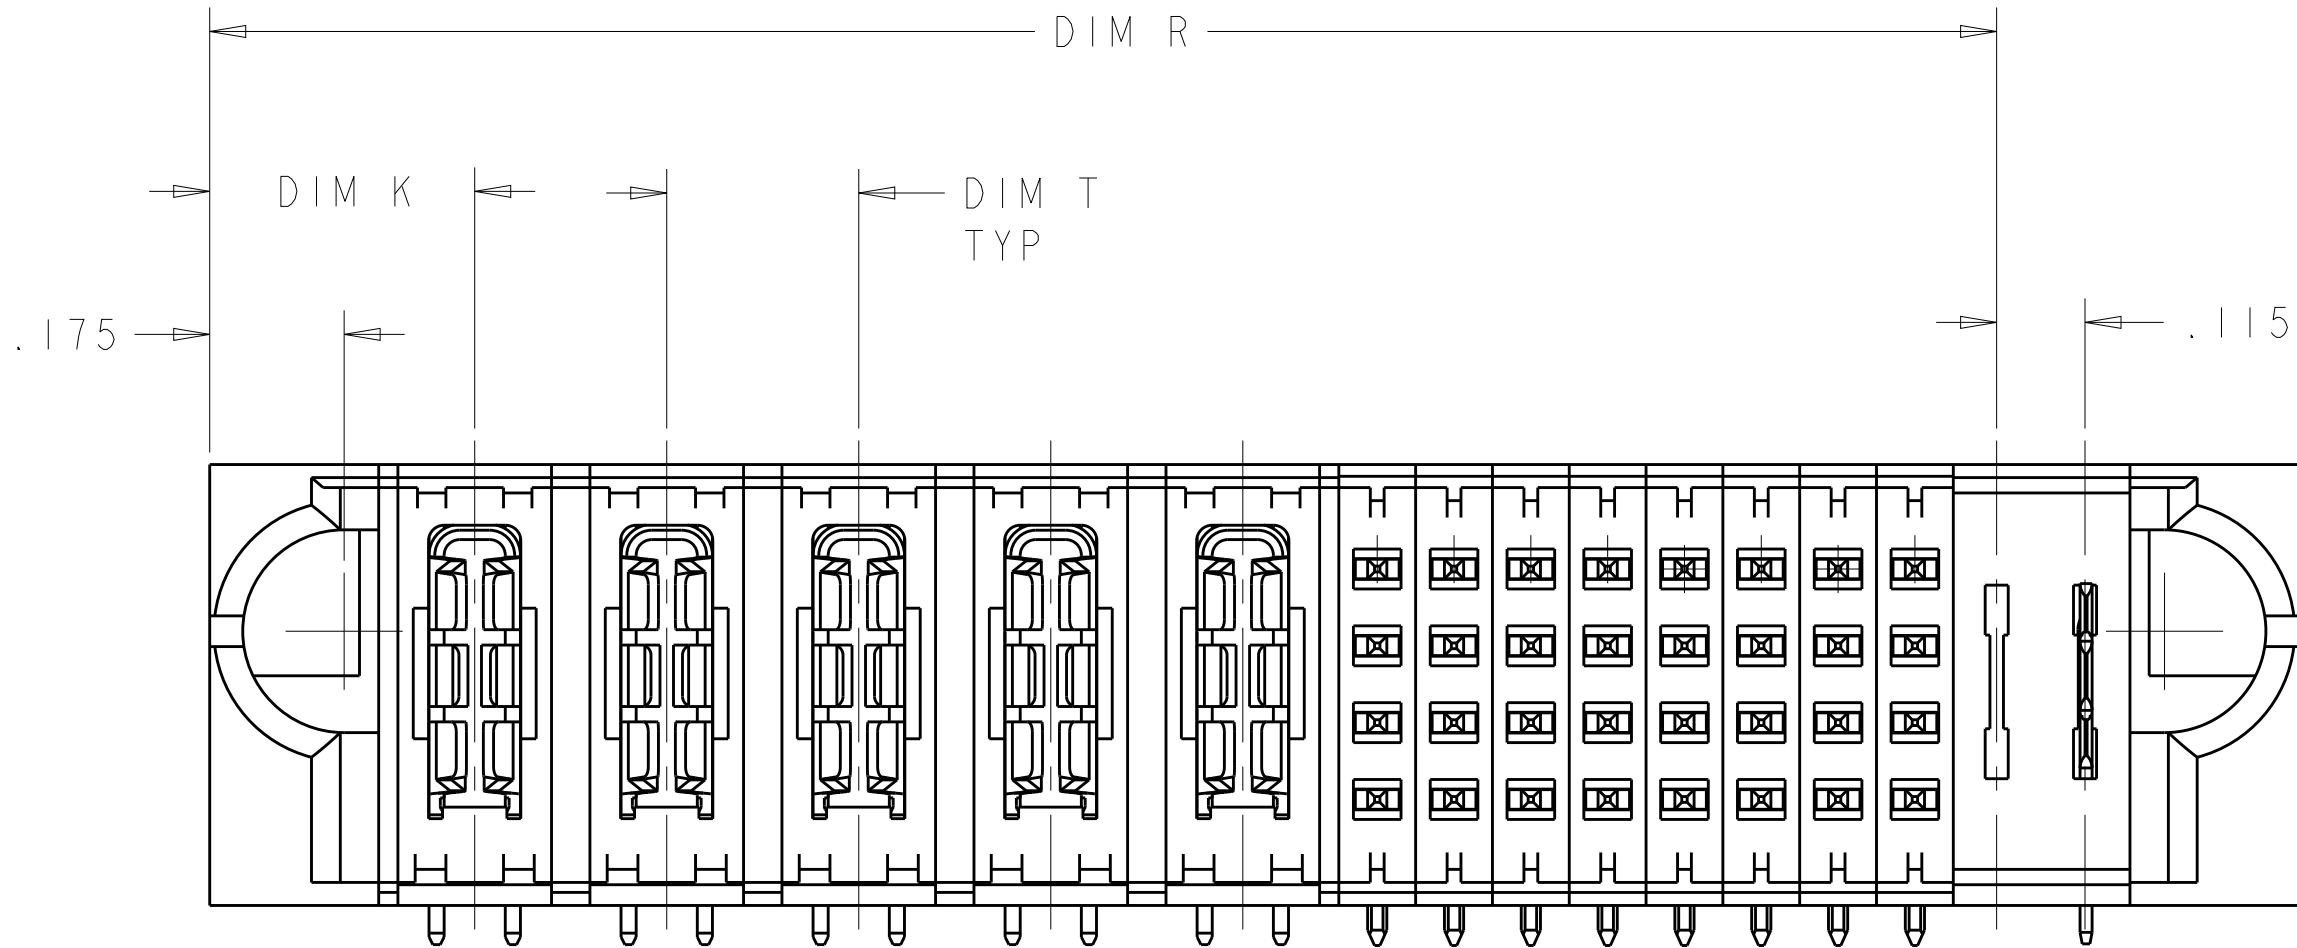

FOR "P+S+LP"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

HOLD DOWN	HD
.135 SIGNAL CON, ROW D,MFBL LL=.304	FJ
.135 SIGNAL CON, ROW C,MFBL LL=.304	FK
.135 SIGNAL CON, ROW B,MFBL LL=.304	FN
.135 SIGNAL CON, ROW A,MFBL LL=.304	FS
.135 SIGNAL CON, ROW D,MLBF LL=.204	E
.135 SIGNAL CON, ROW C,MLBF LL=.204	F
.135 SIGNAL CON, ROW B,MLBF LL=.204	G
.135 SIGNAL CON, ROW A,MLBF LL=.204	H
.135 SIGNAL CON, ROW D,STANDARD LL=.254	J
.135 SIGNAL CON, ROW C,STANDARD LL=.254	K
.135 SIGNAL CON, ROW B,STANDARD LL=.254	N
.135 SIGNAL CON, ROW A,STANDARD LL=.254	S
.135 STANDARD POWER CON,3 BEAMS	TM
.135 SOLDER LOWER POWER,MFBL	LMF
.135 SOLDER LOWER POWER,STD	LM
.135 SOLDER LOWER POWER,MLBF	LML
DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

0 PLC

±"

1 PLC

±.01

2 PLC

±.01

3 PLC

±.005

4 PLC

±.0020

ANGLES

±2°

FINISH

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

MATERIAL

-

CUSTOMER DRAWING

TE

TE Connectivity

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1

00779

6450830

-

SCALE

4:1

SHEET

3


OF



42


REV


S2

PART NUMBER	ROWS		POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
6450830-2	D C B A		LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	TM	TM	TM	
									K	K	K	K	K	K				
									N	N	G	N	N	N				
									S	S	S	S	S	S				
6LP + 24S + 3P																		

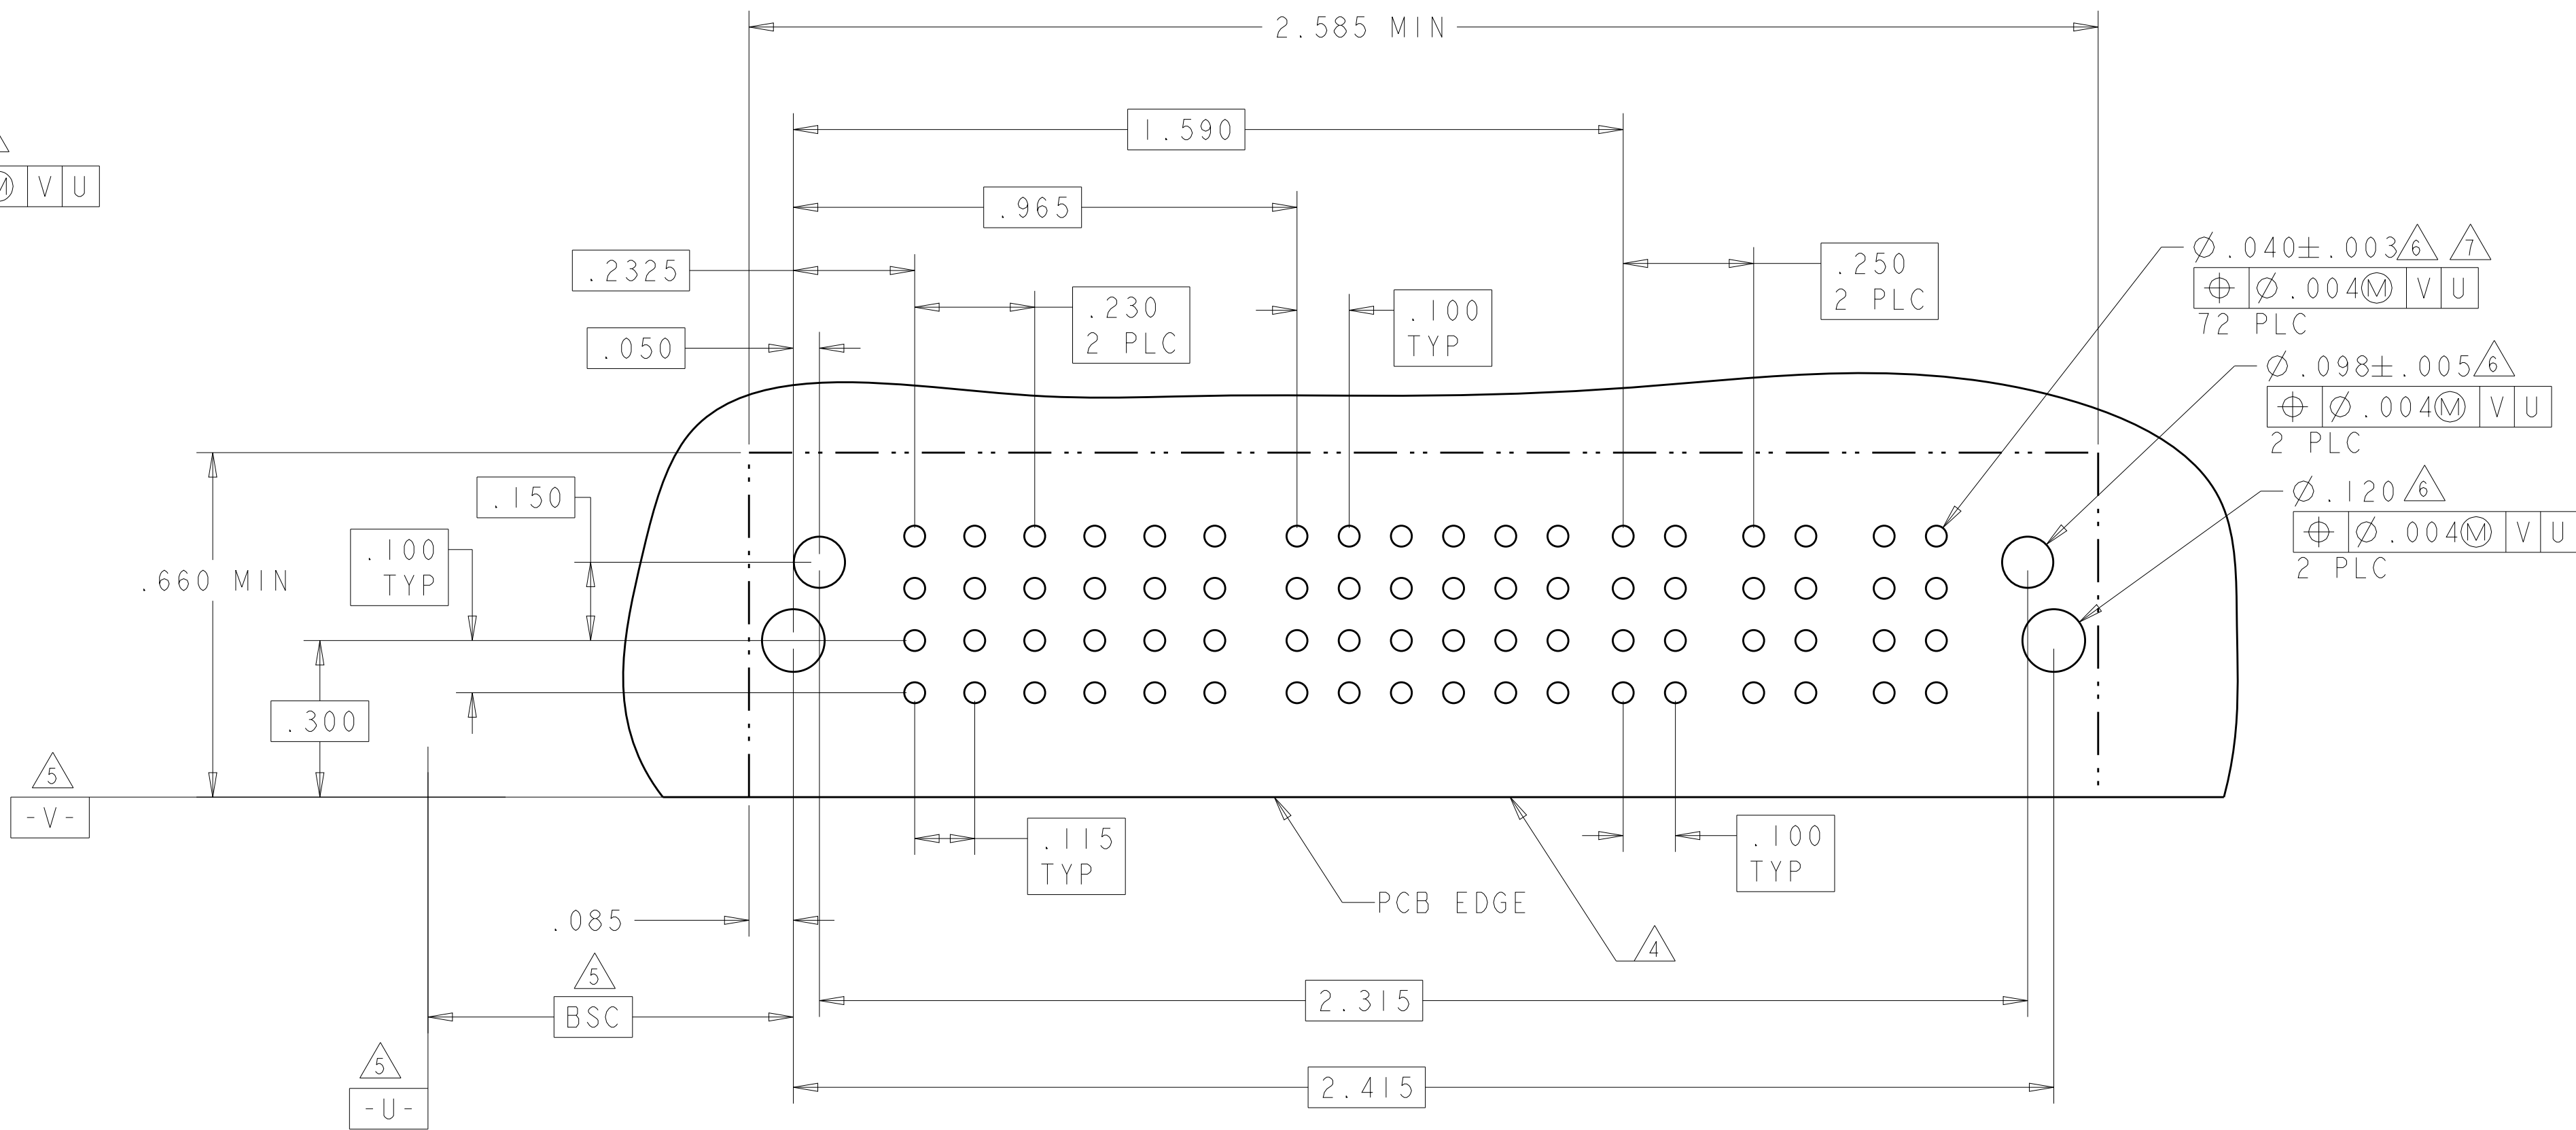4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL								POWER			
			P1	P2	1	2	3	4	5	6	7	8	LP1	LP2		
6450830-4	D		TM	TM	J	J	J	J	J	J	J	J	LM	LM		
	K				K	K	K	K	K	K	K					
	N				N	N	N	N	N	N	N					
	S				S	S	S	S	S	S	S					
		HD														HD
2P + 32S + 2LP																

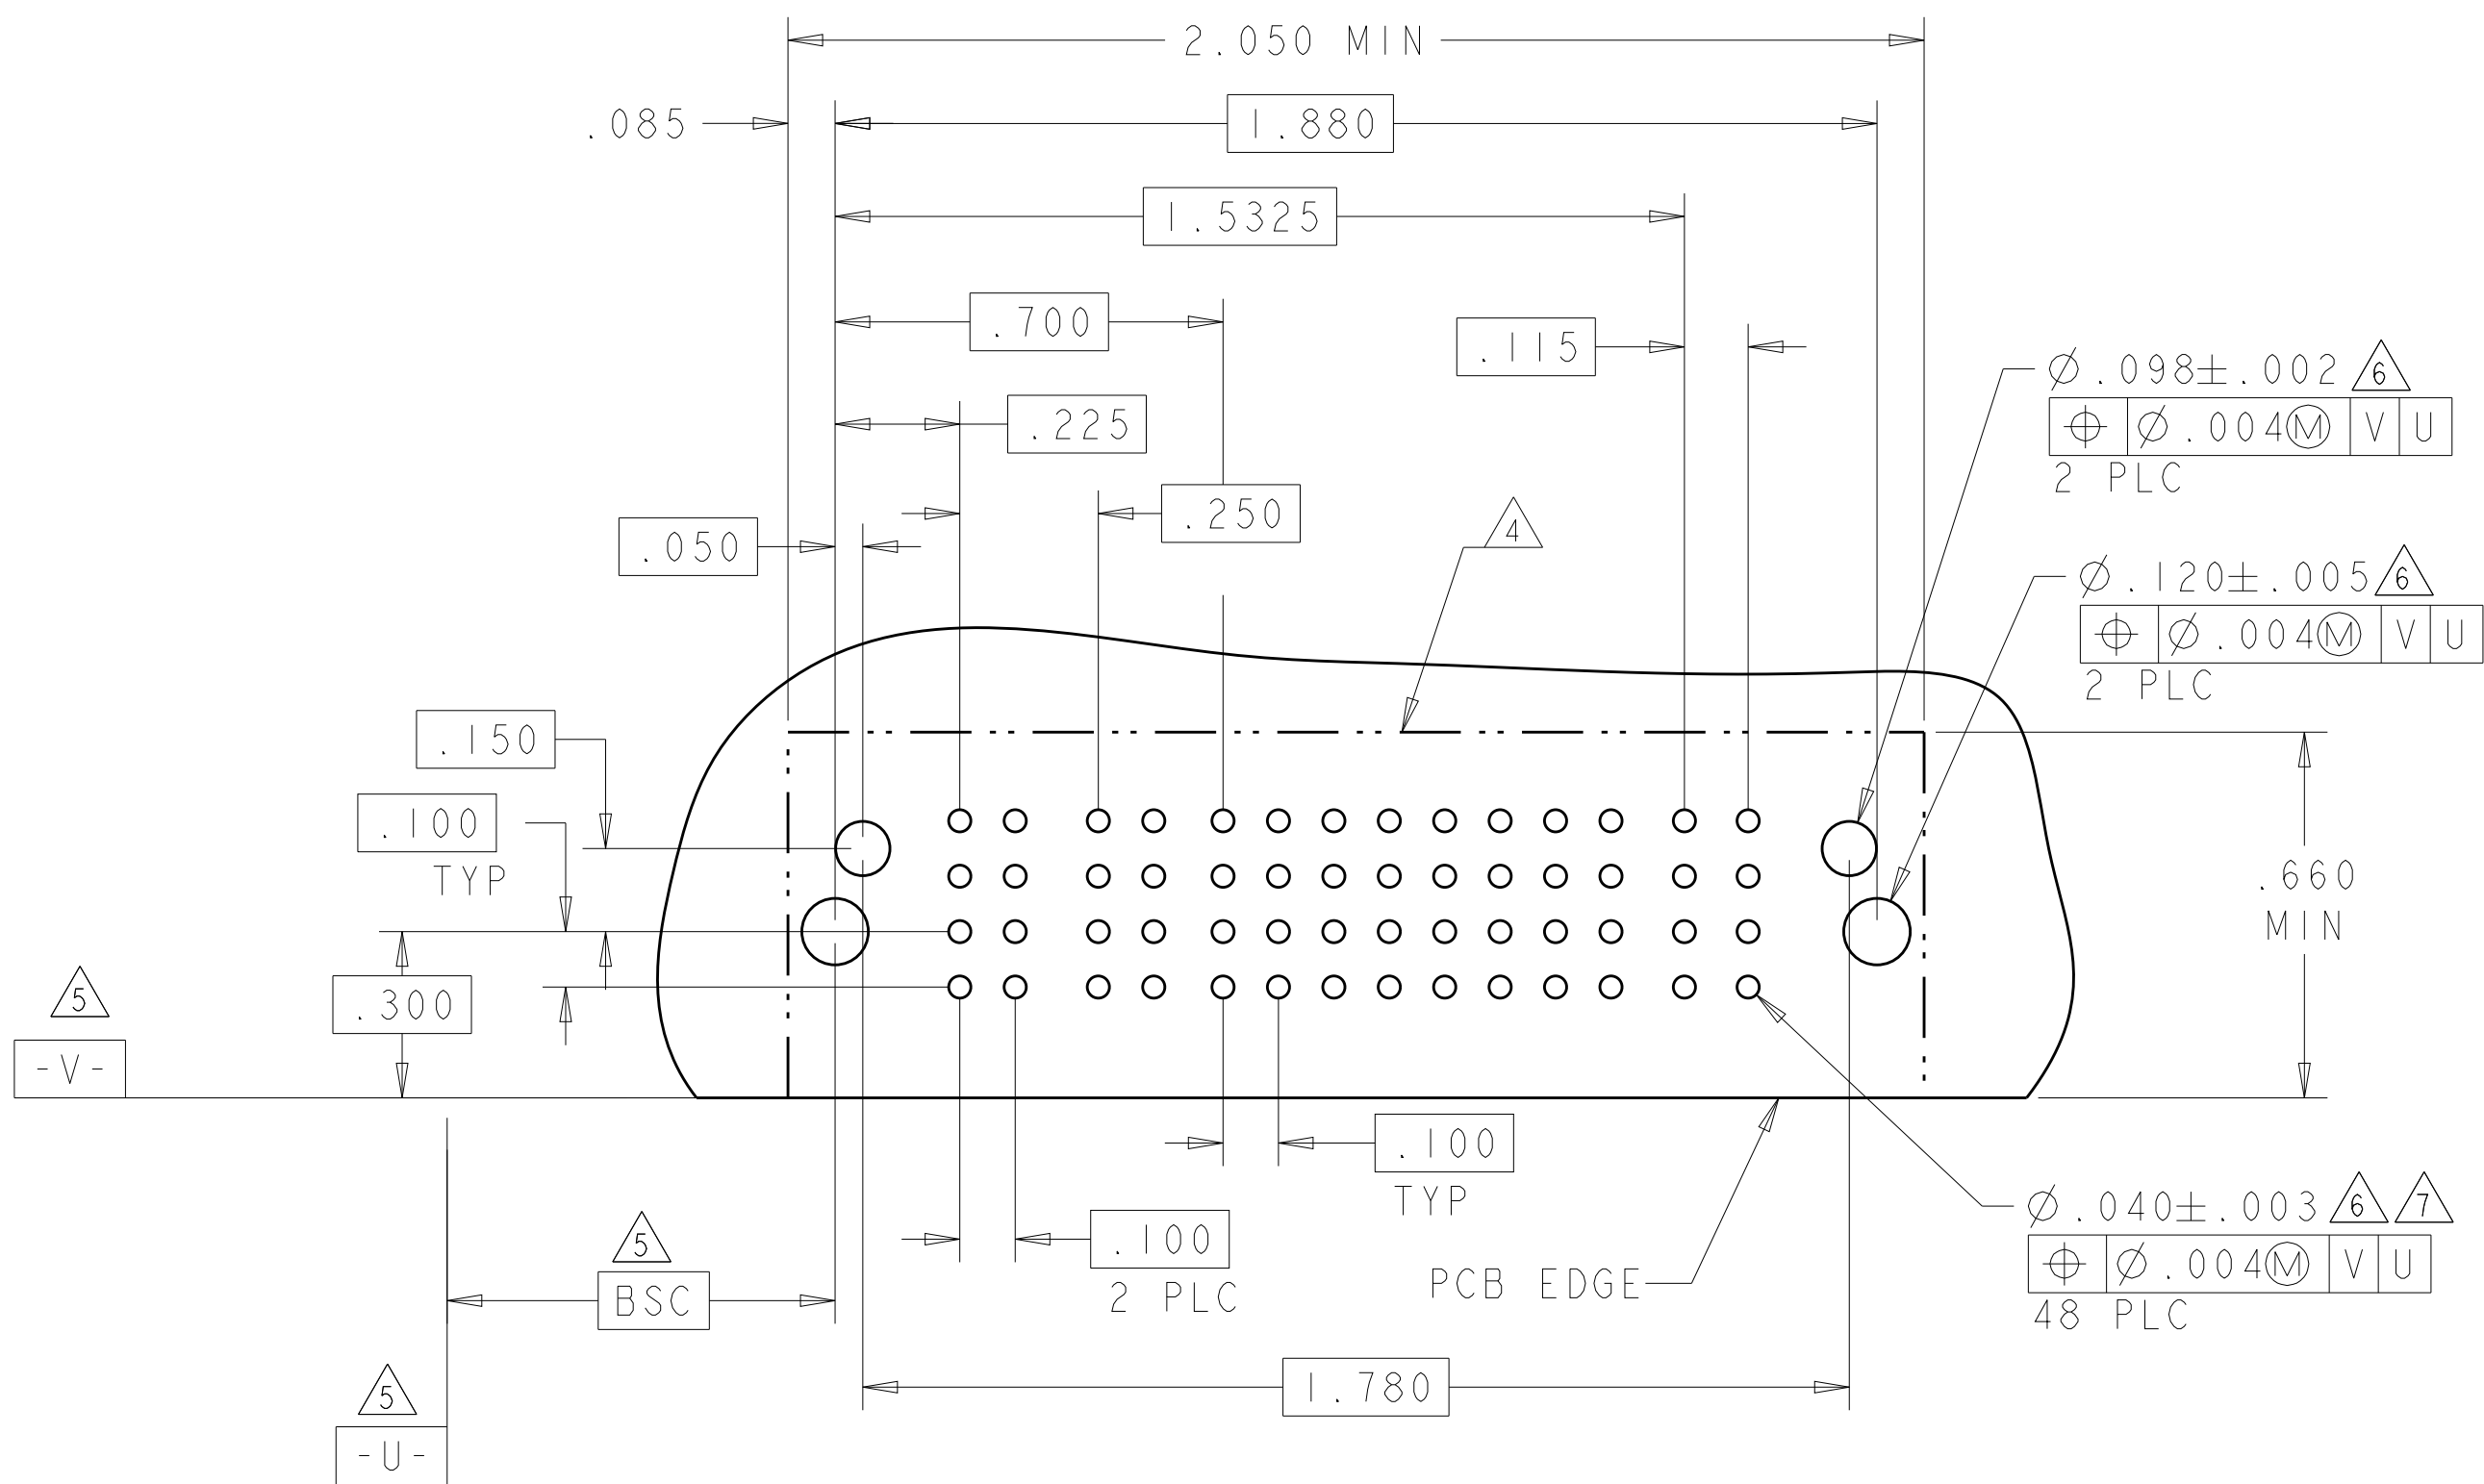4805 (3/11)


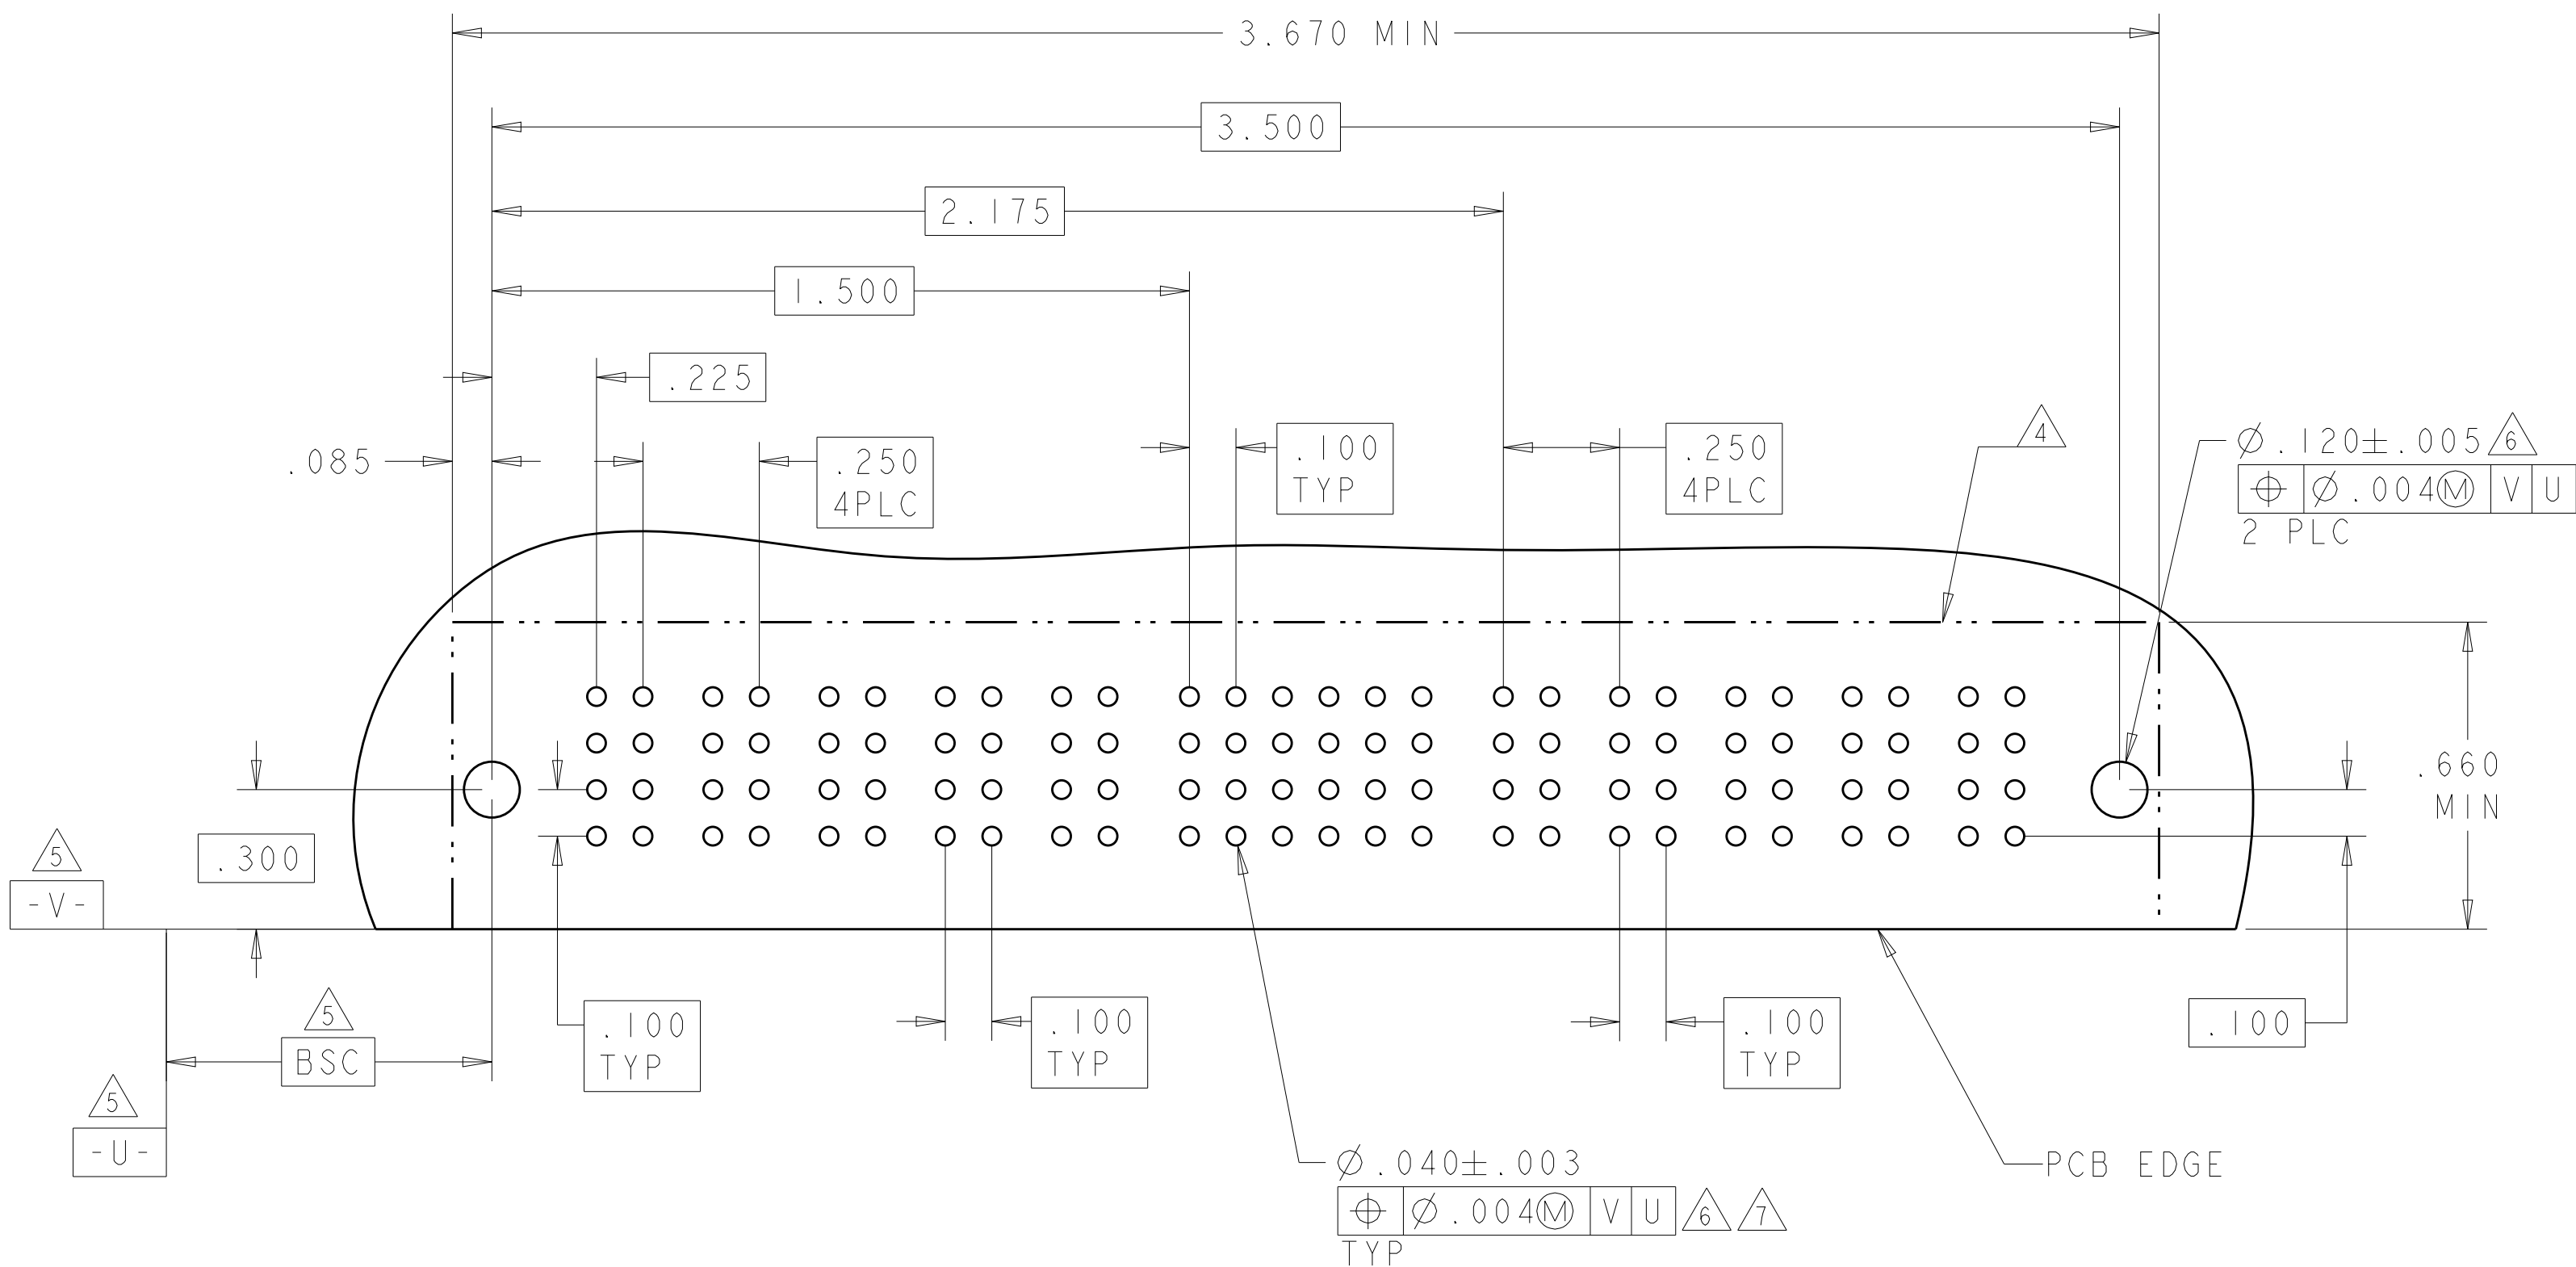
[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL								POWER		
			P1	P2	P3	P4	P5	1	2	3	4	5	6	5	6	P6	P7	
6450830-8	D		TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J	LM		
	C							K	K	K	K	K	K	K	K			
	B							N	N	N	N	N	N	N	N			
	A							S	S	S	S	S	S	S	S			
5P + 32S + 2LP																		

NO CONTACT LOADED

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
6450830-9	D		TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	
	K					K	K	K	K	K					
	N					N	N	N	N	N					
	S					S	S	S	S	S					
3P + 24S + 3P															

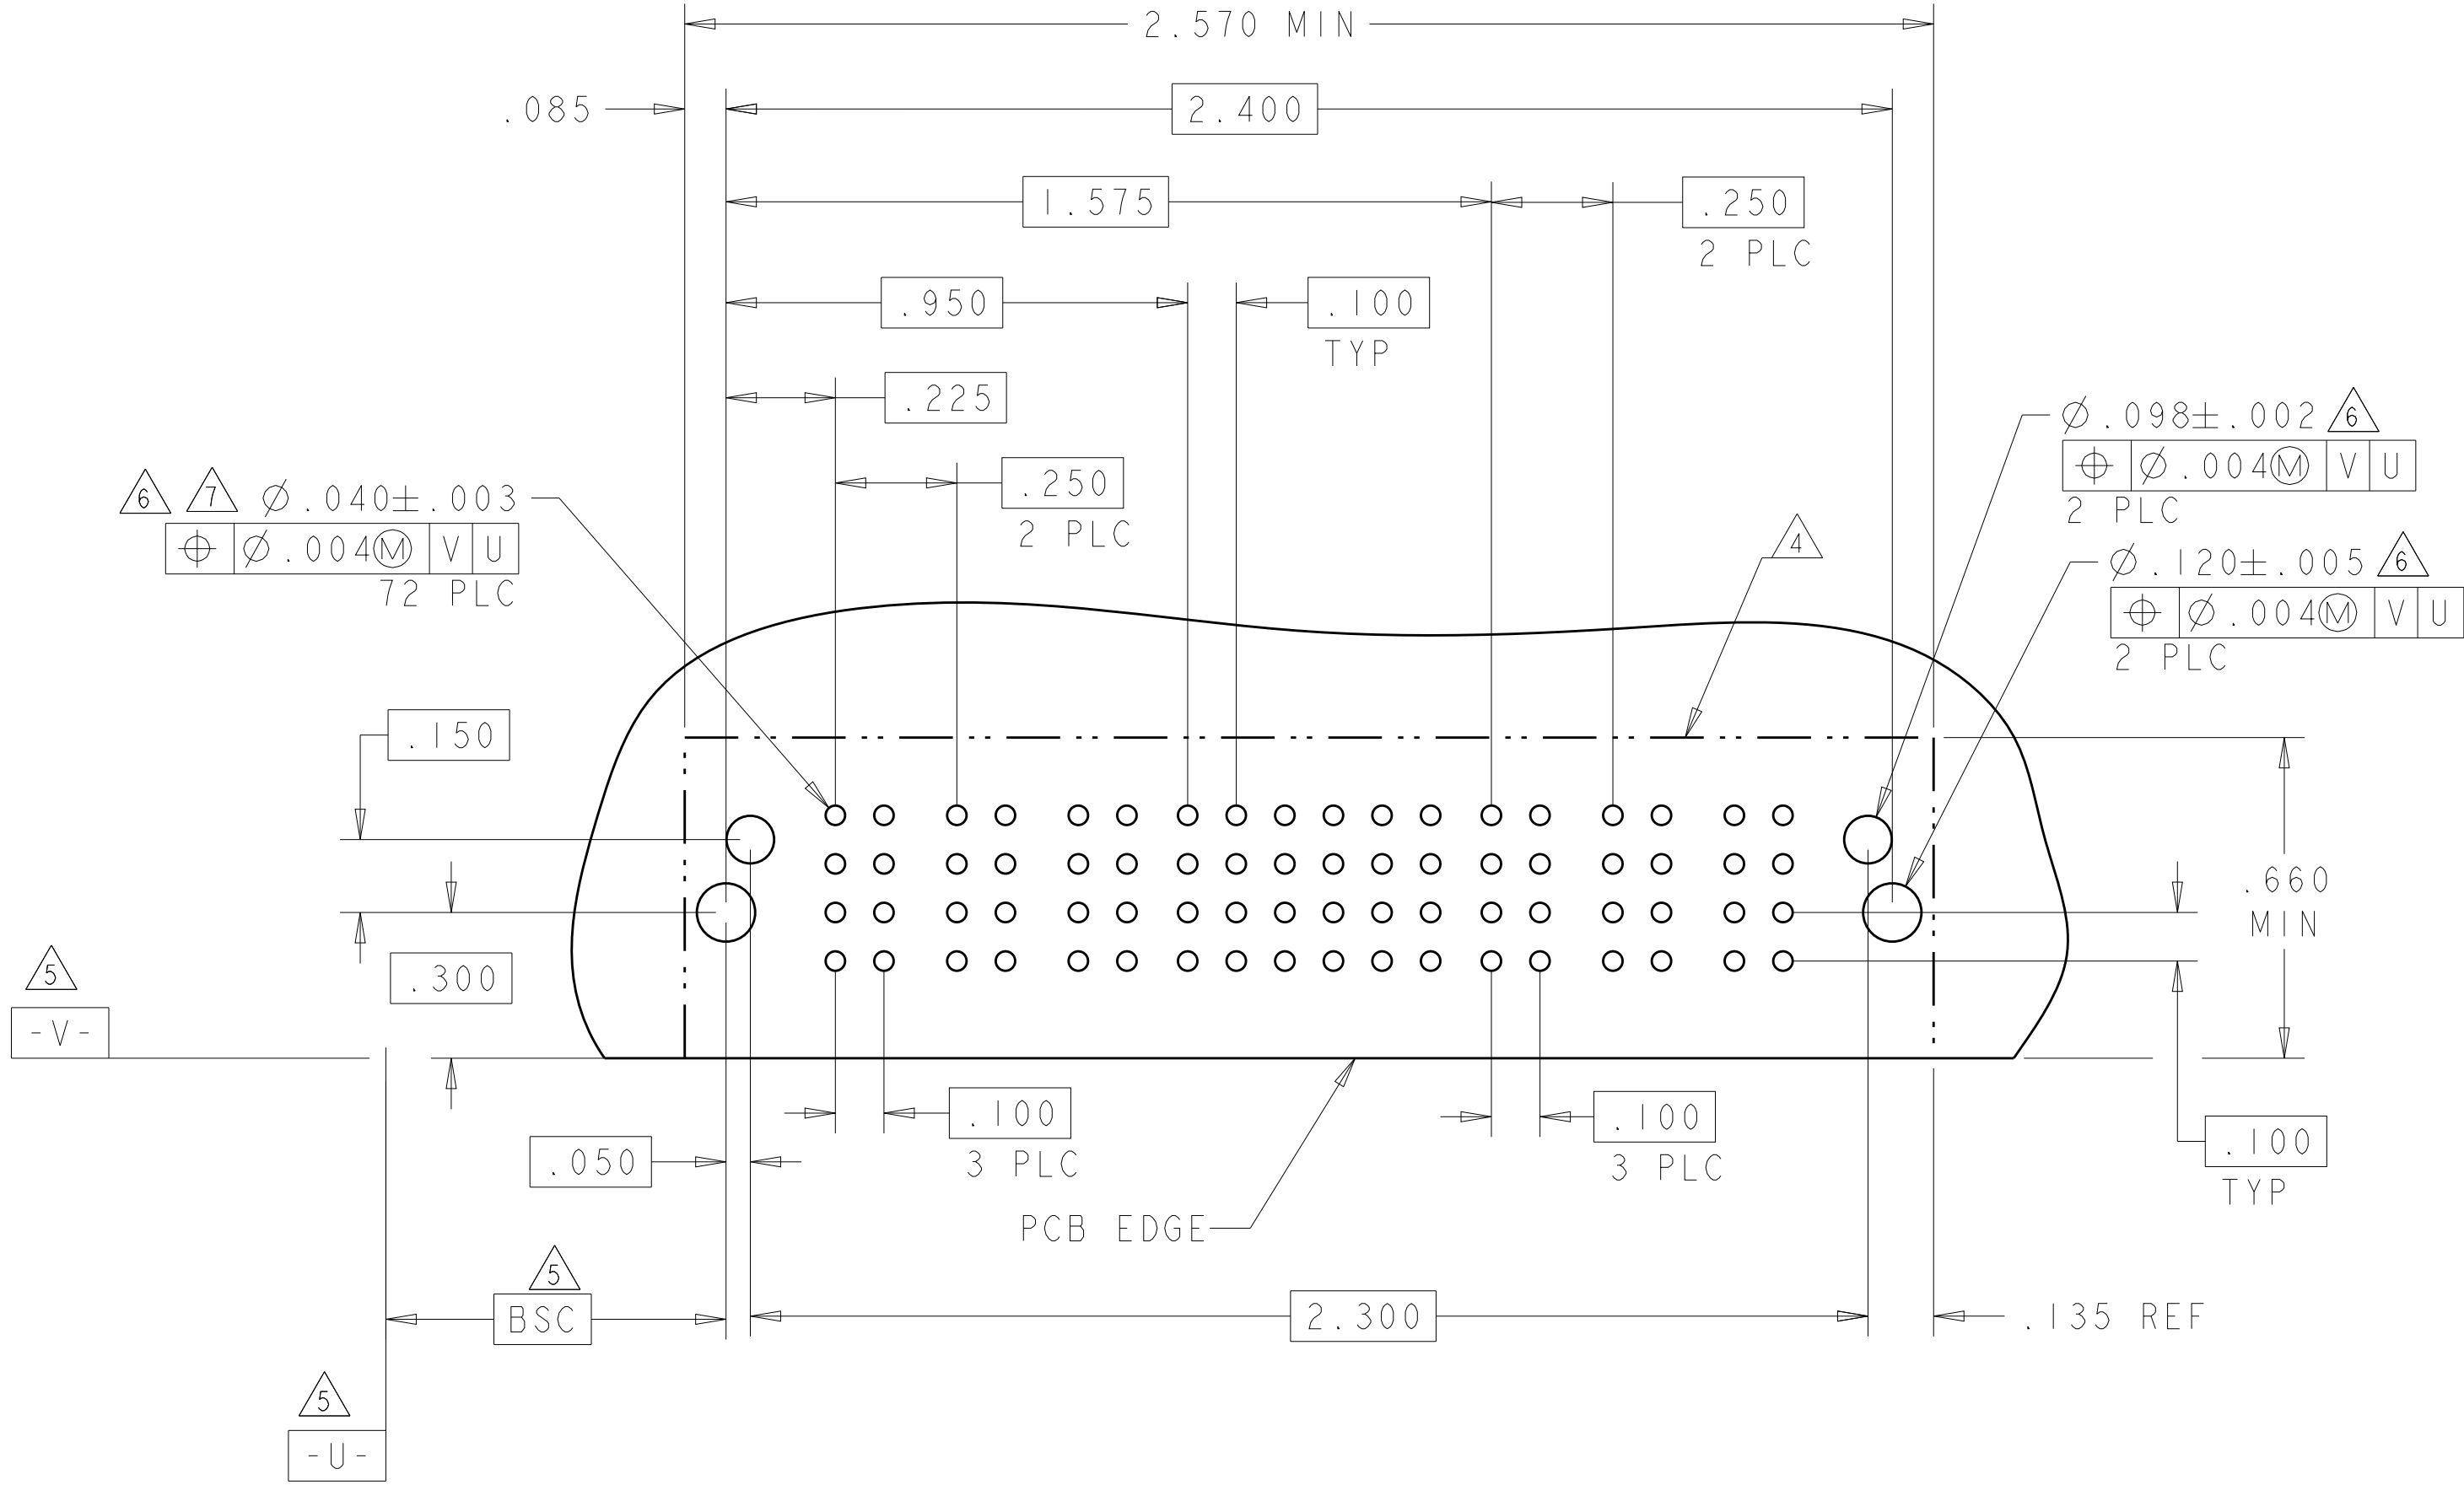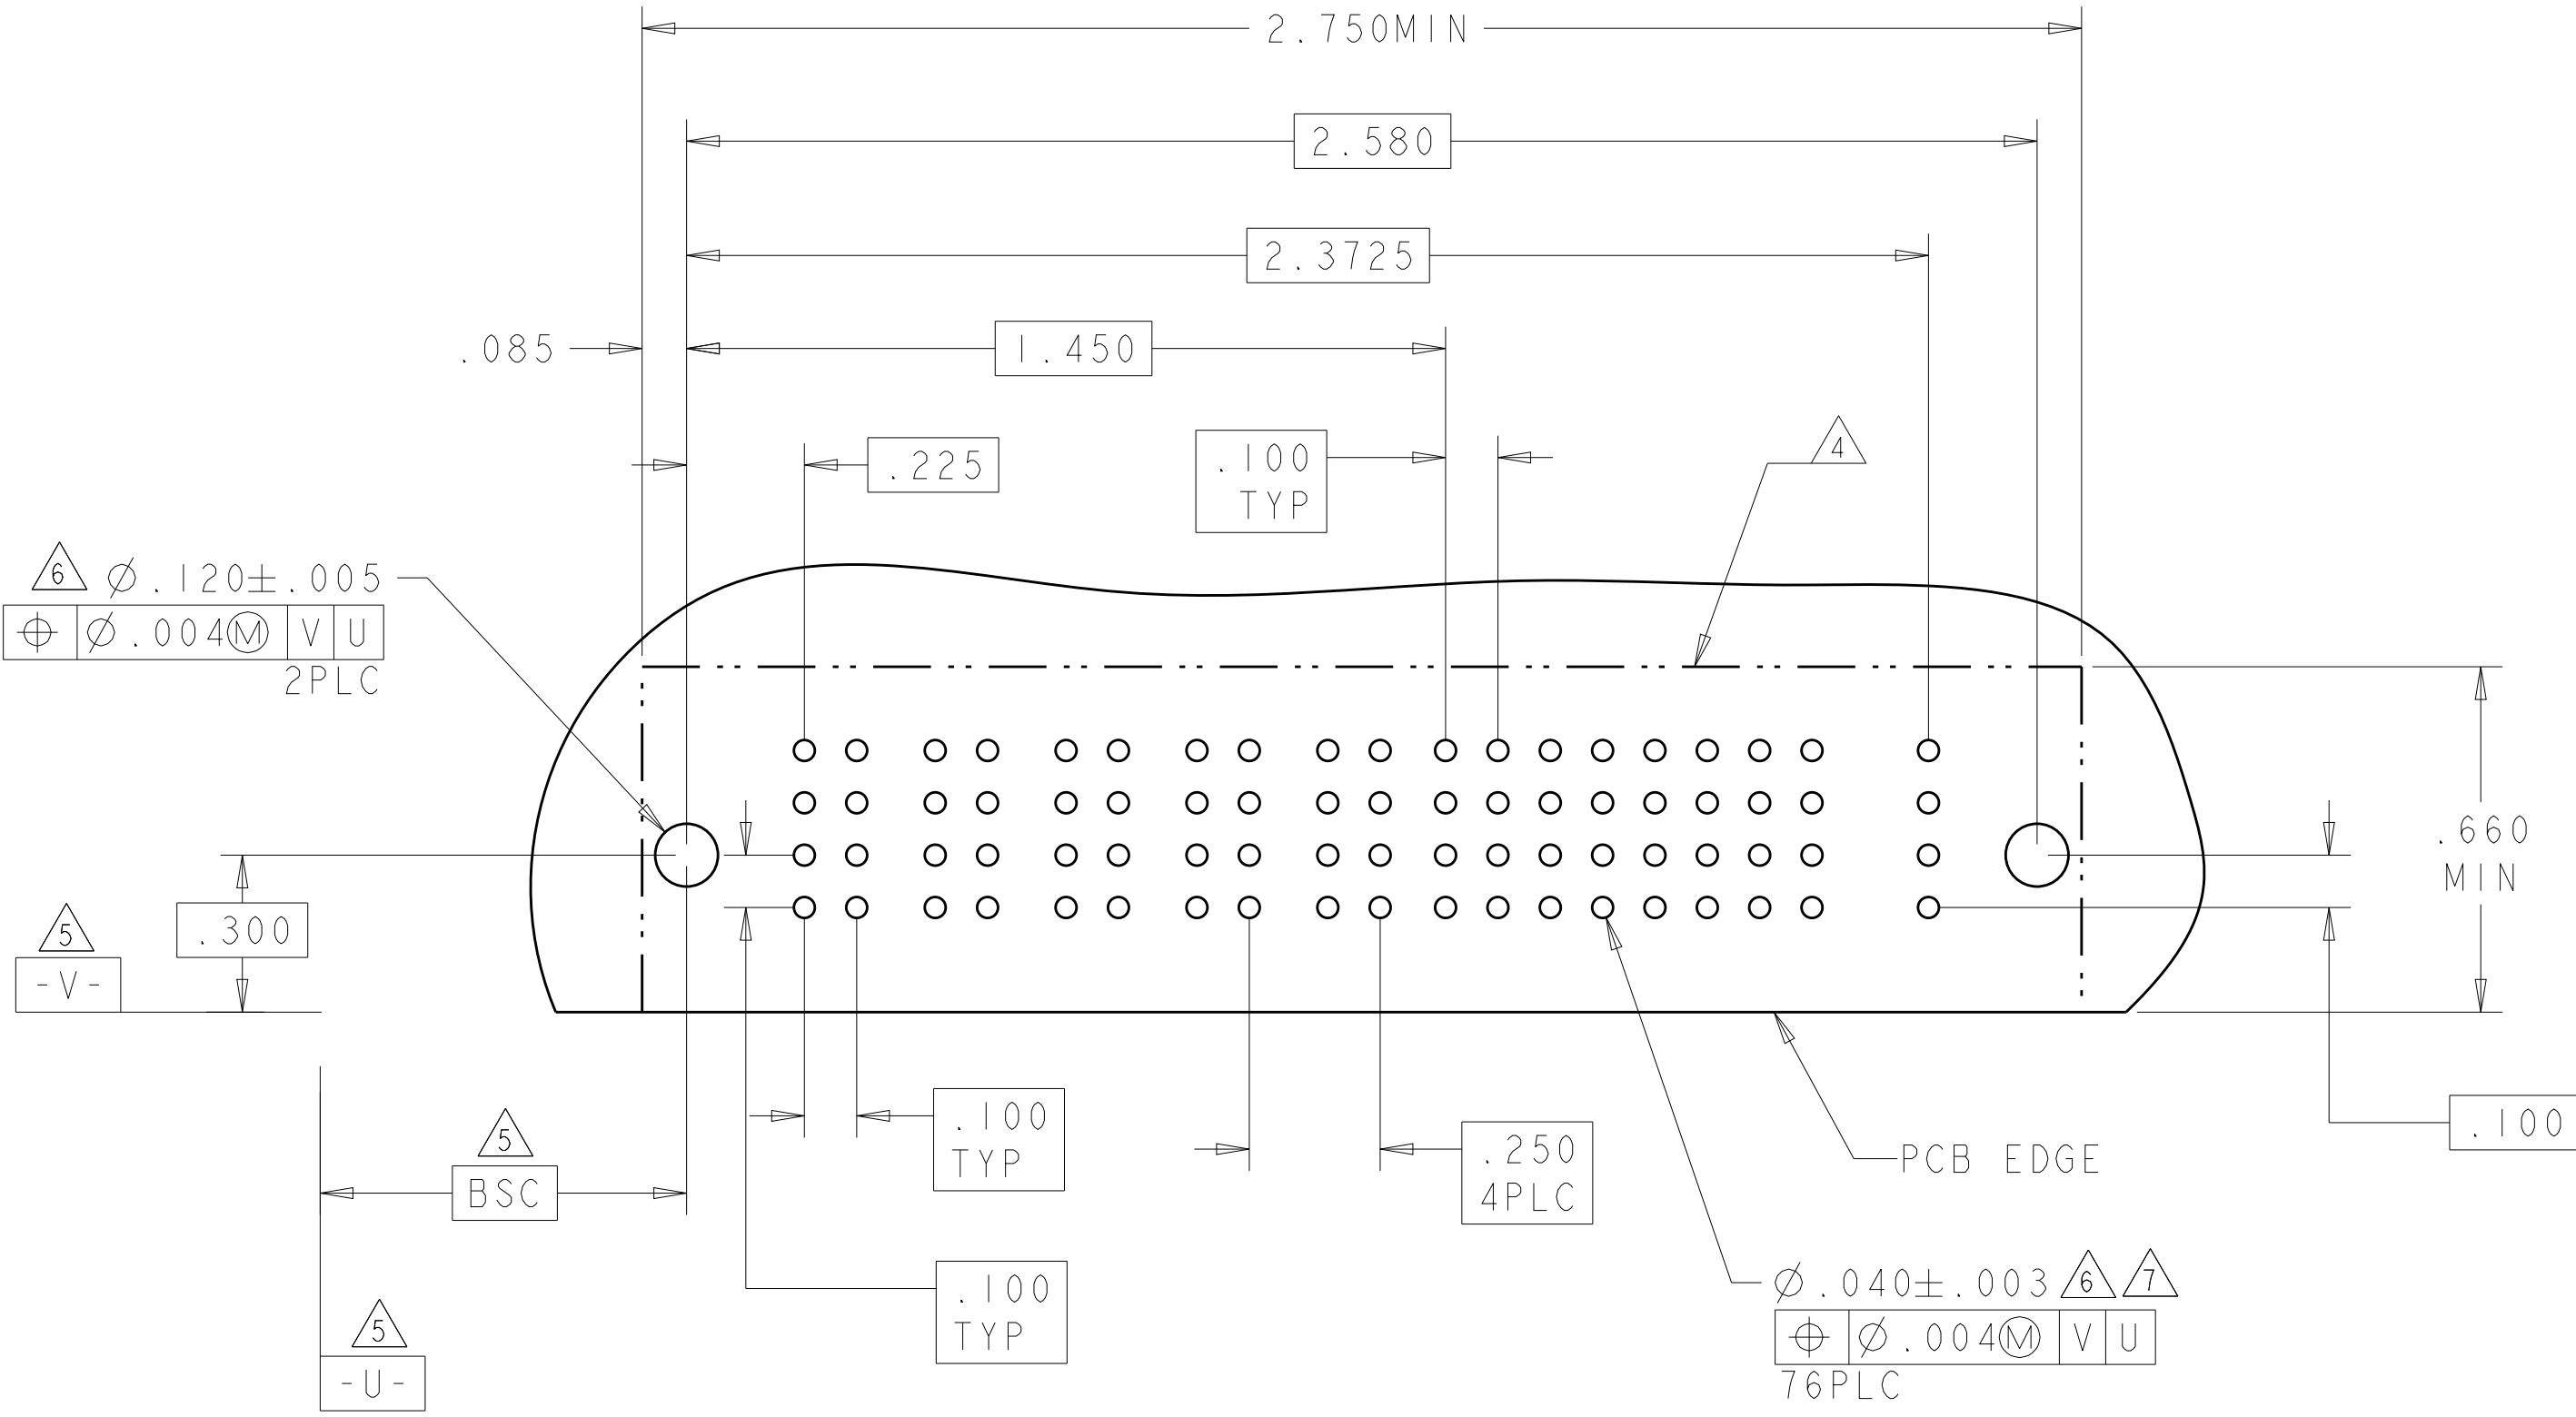

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

NAME

DIMENSIONS:
INCHES

MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH -

PRODUCT SPEC 108-2292
APPLICATION SPEC 114-13251
WEIGHT -

CUSTOMER DRAWING



TE Connectivity

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE A100779C=6450830
CAGE CODE
DRAWING NO
RESTRICTED TO -

SCALE 4:1
SHEET 7 OF 42
REV S2

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

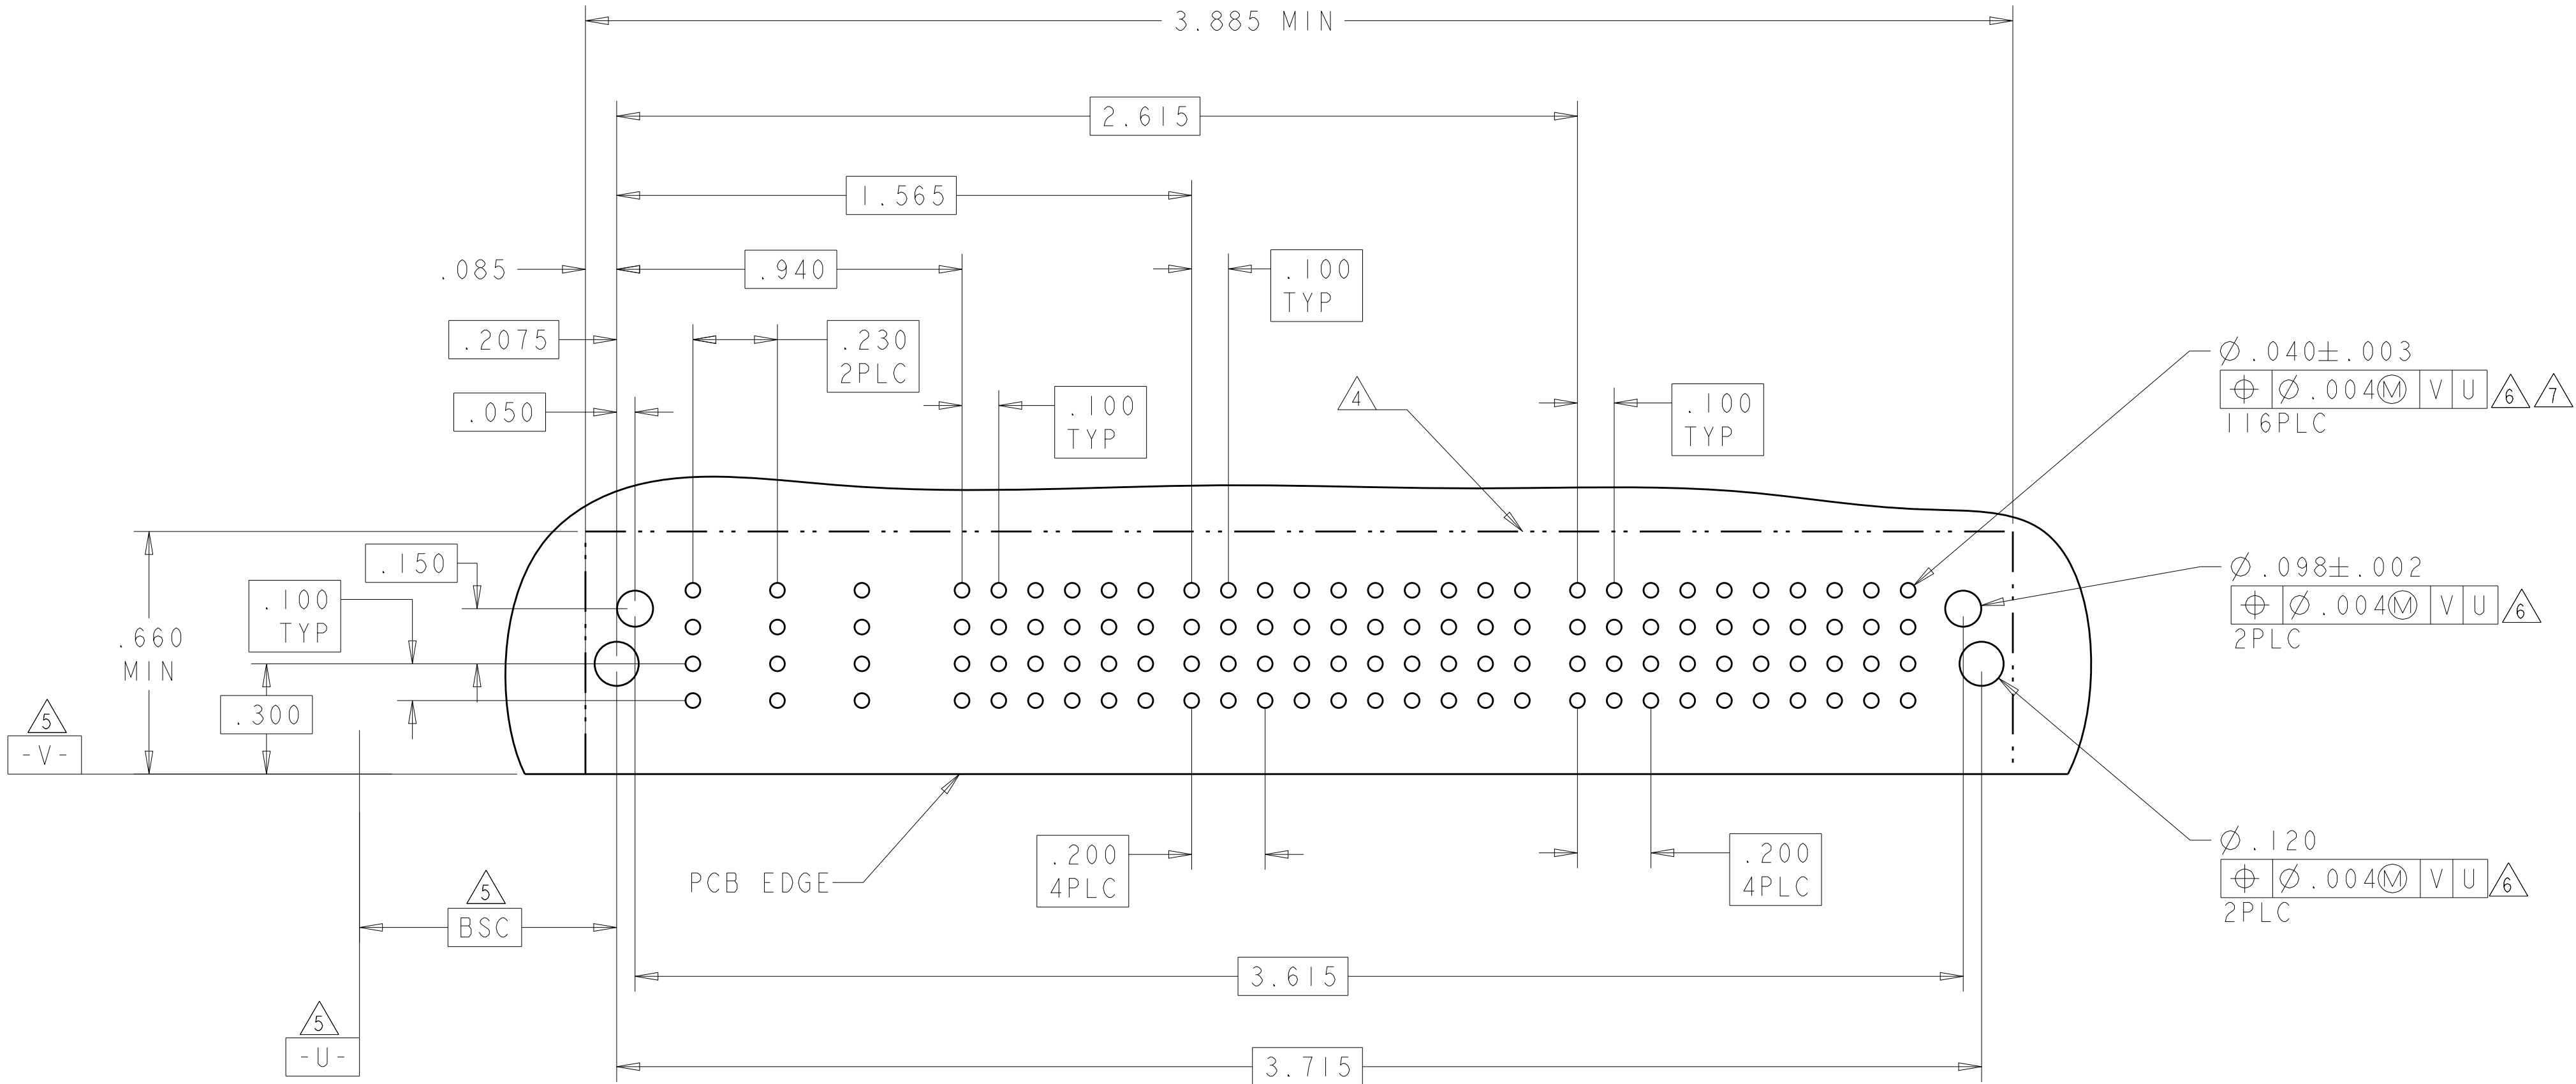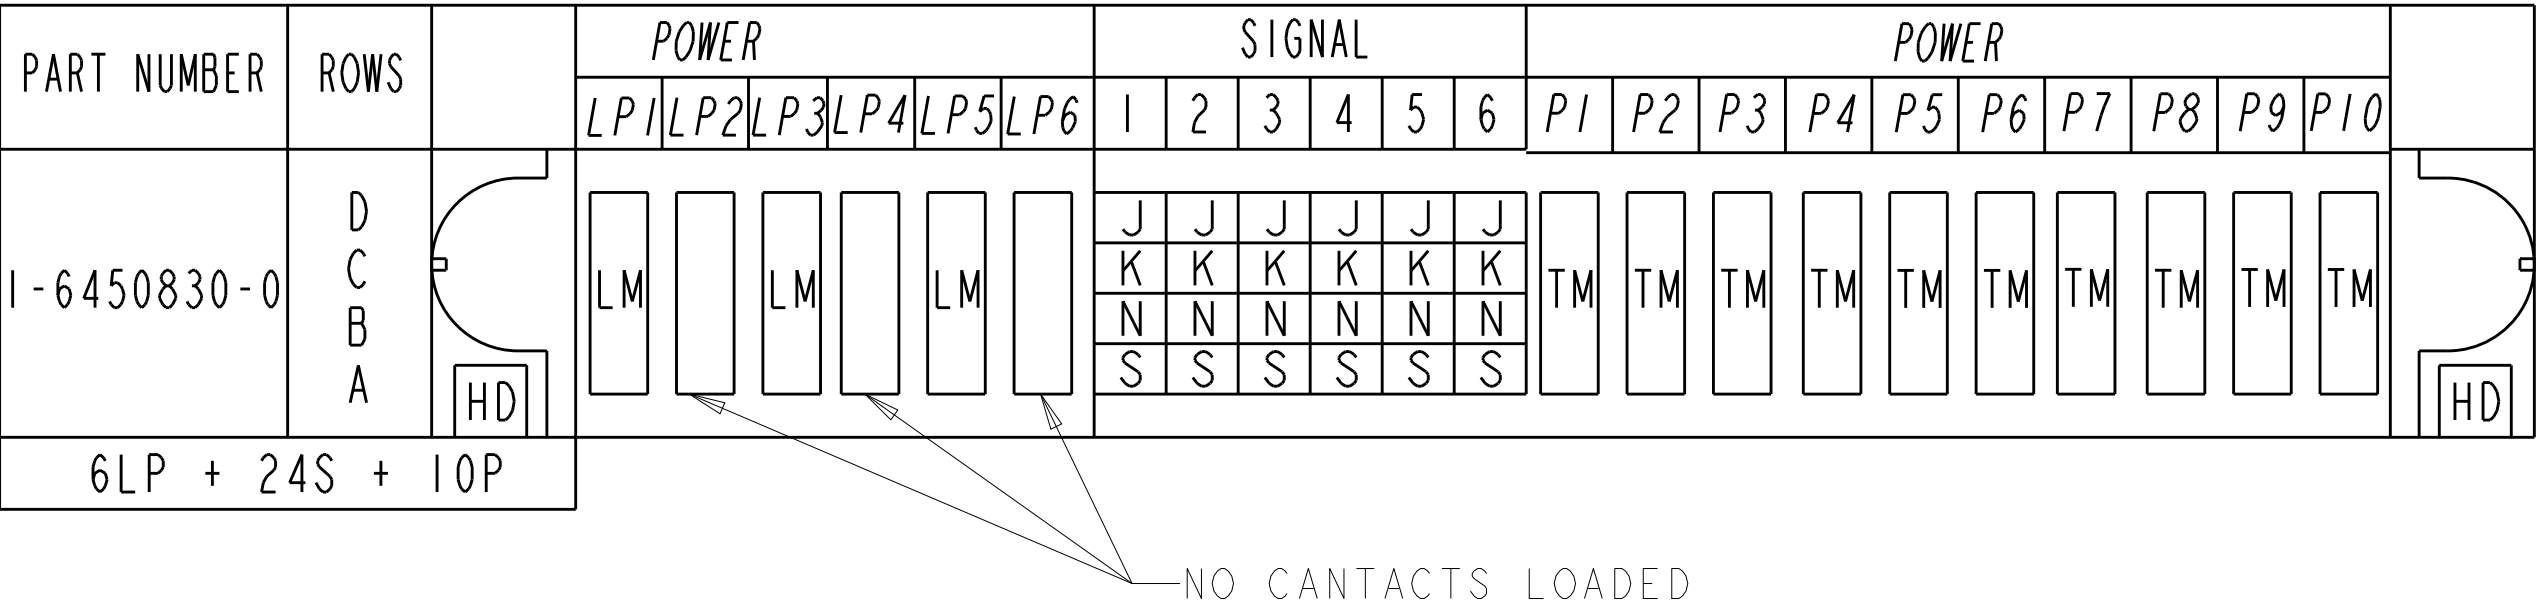

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.01

4 PLC ±.01

ANGLES ±.0020

FINISH #2

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

8

OF

42

REV

S2


4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER								SIGNAL					POWER					
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	LP1	LP2	LP3	LP4	LP5	
1-6450830-2	D C B A		TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	LMF		LM		LM		
										K	K	K	K	K							
										N	N	N	N	N							
										S	S	S	S	S							
8HDP + 20S + 5LP																					


.250
6 PLC

.200
6 PLC

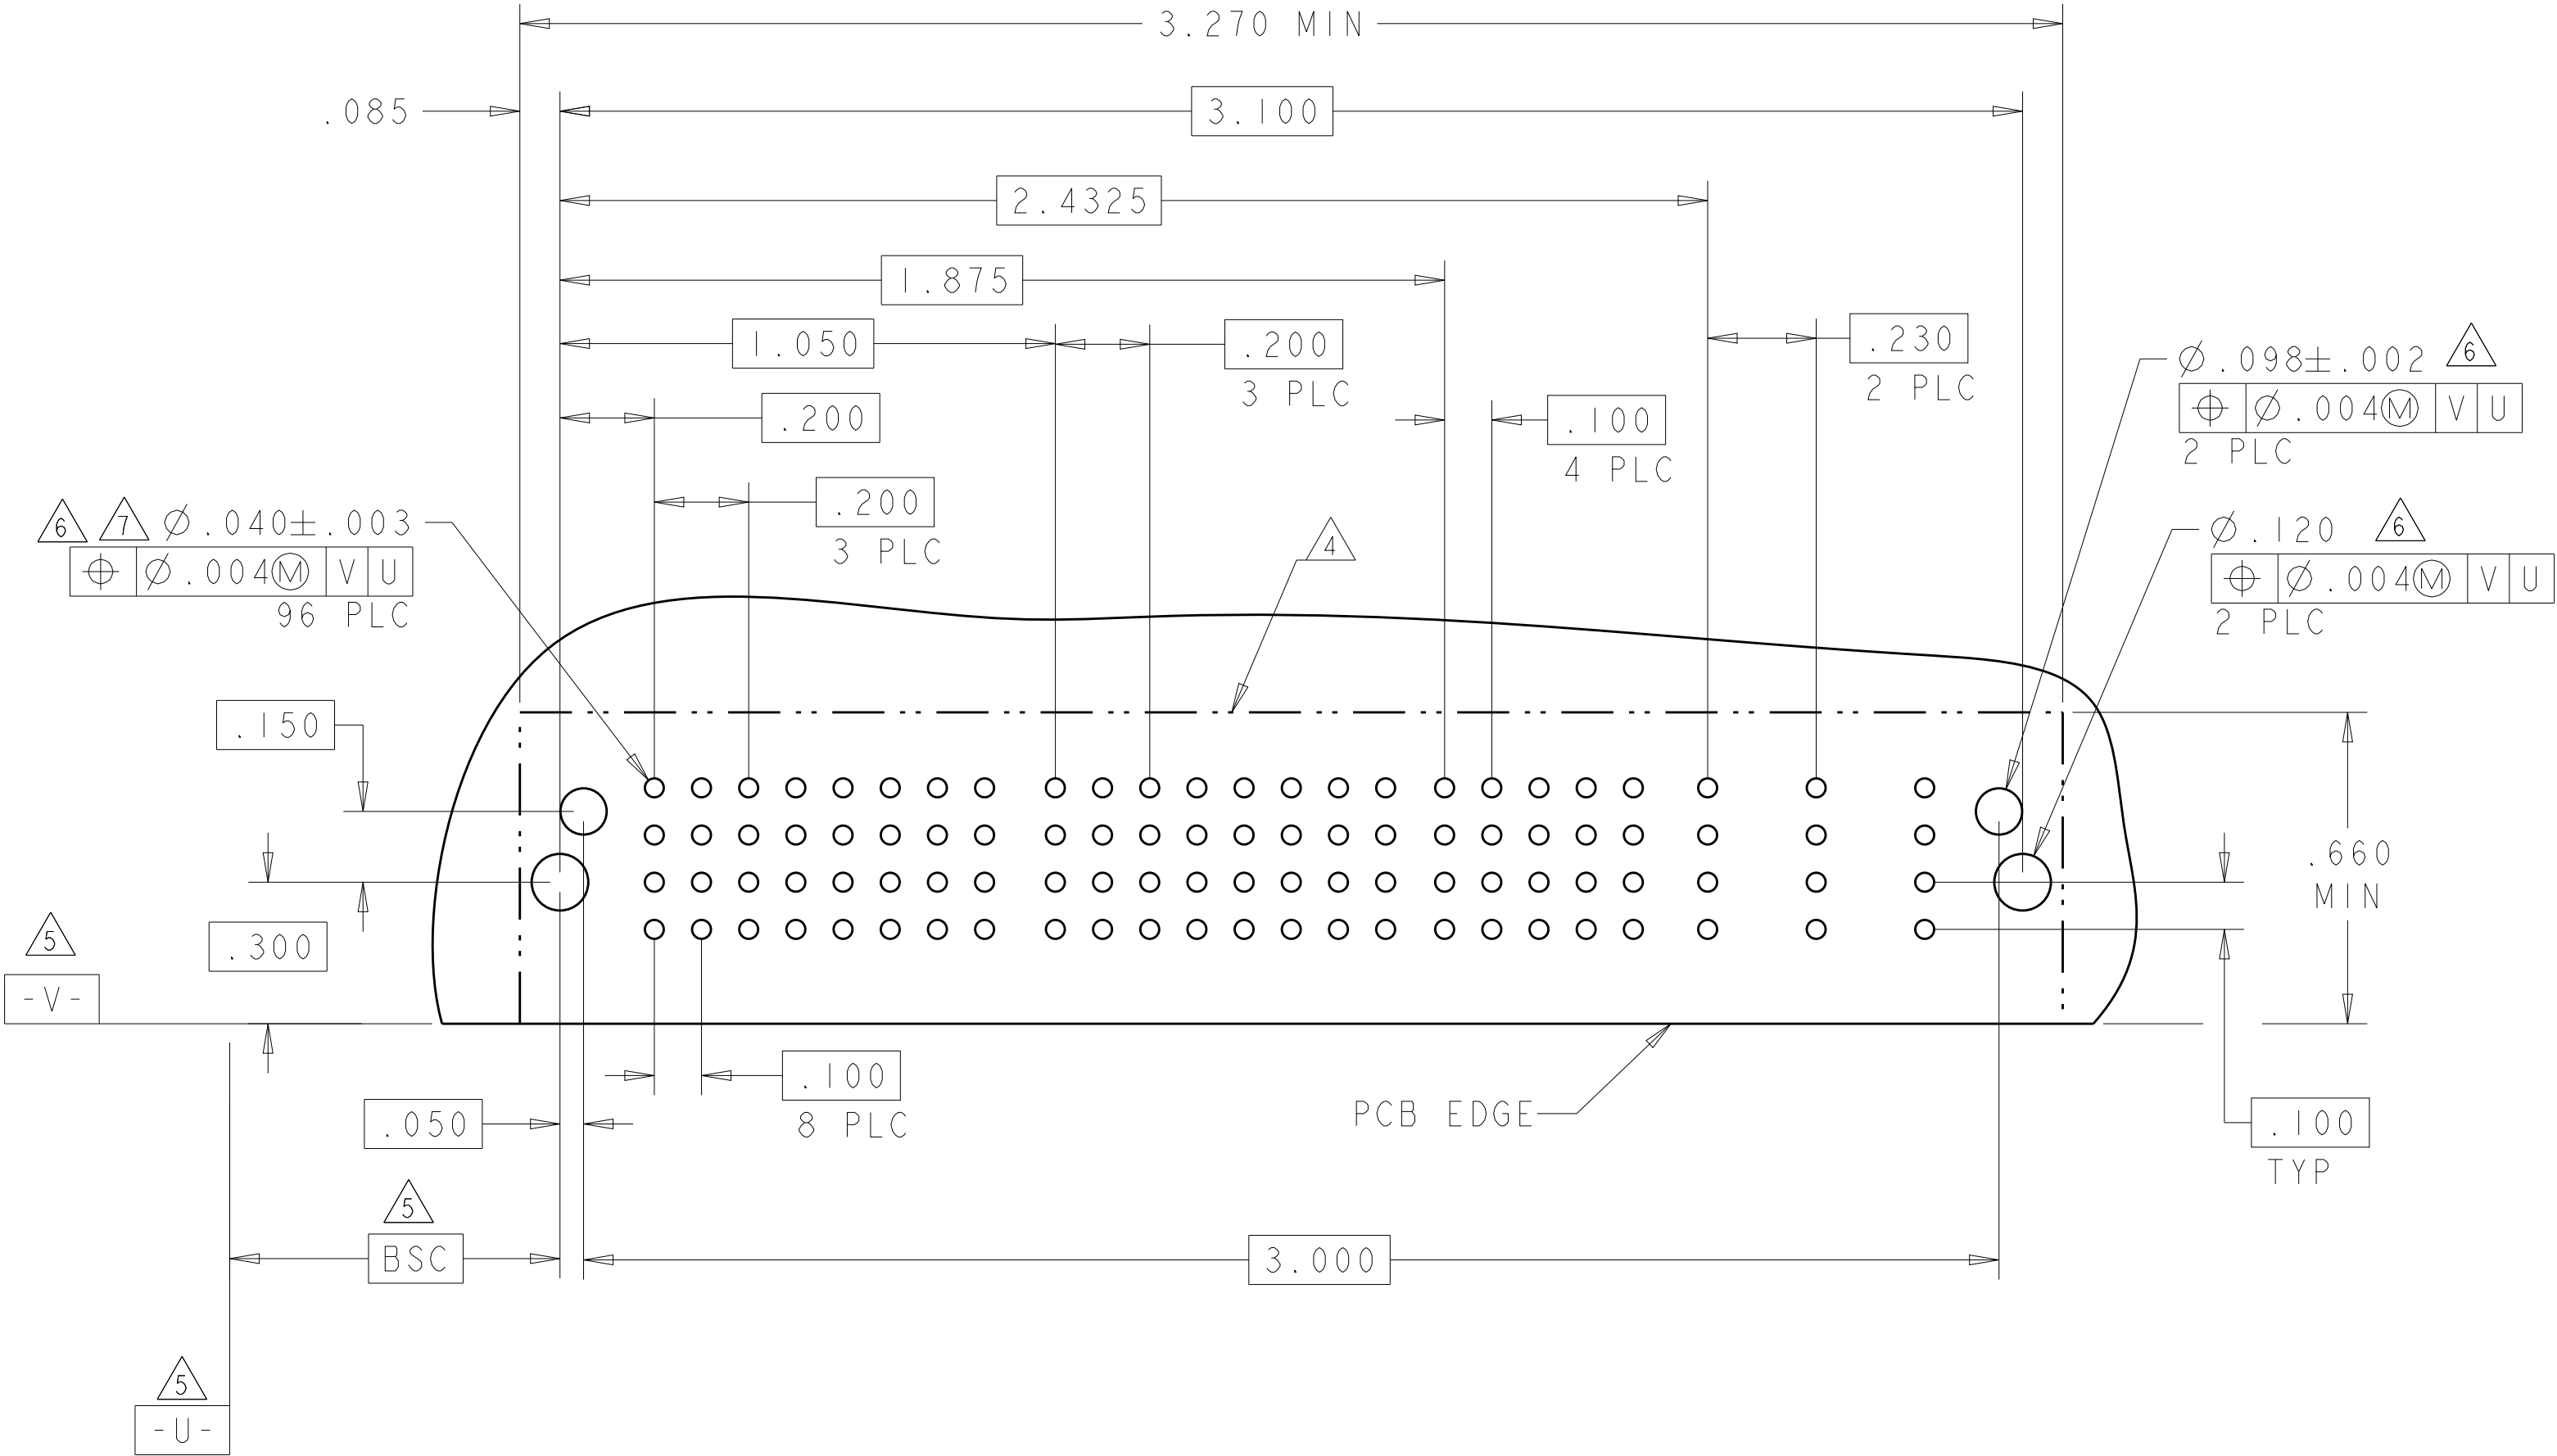

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
1-6450830-5	D C B A	 HD	TM	TM	TM	TM	J	J	J	J	J			TM	TM	 HD	
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

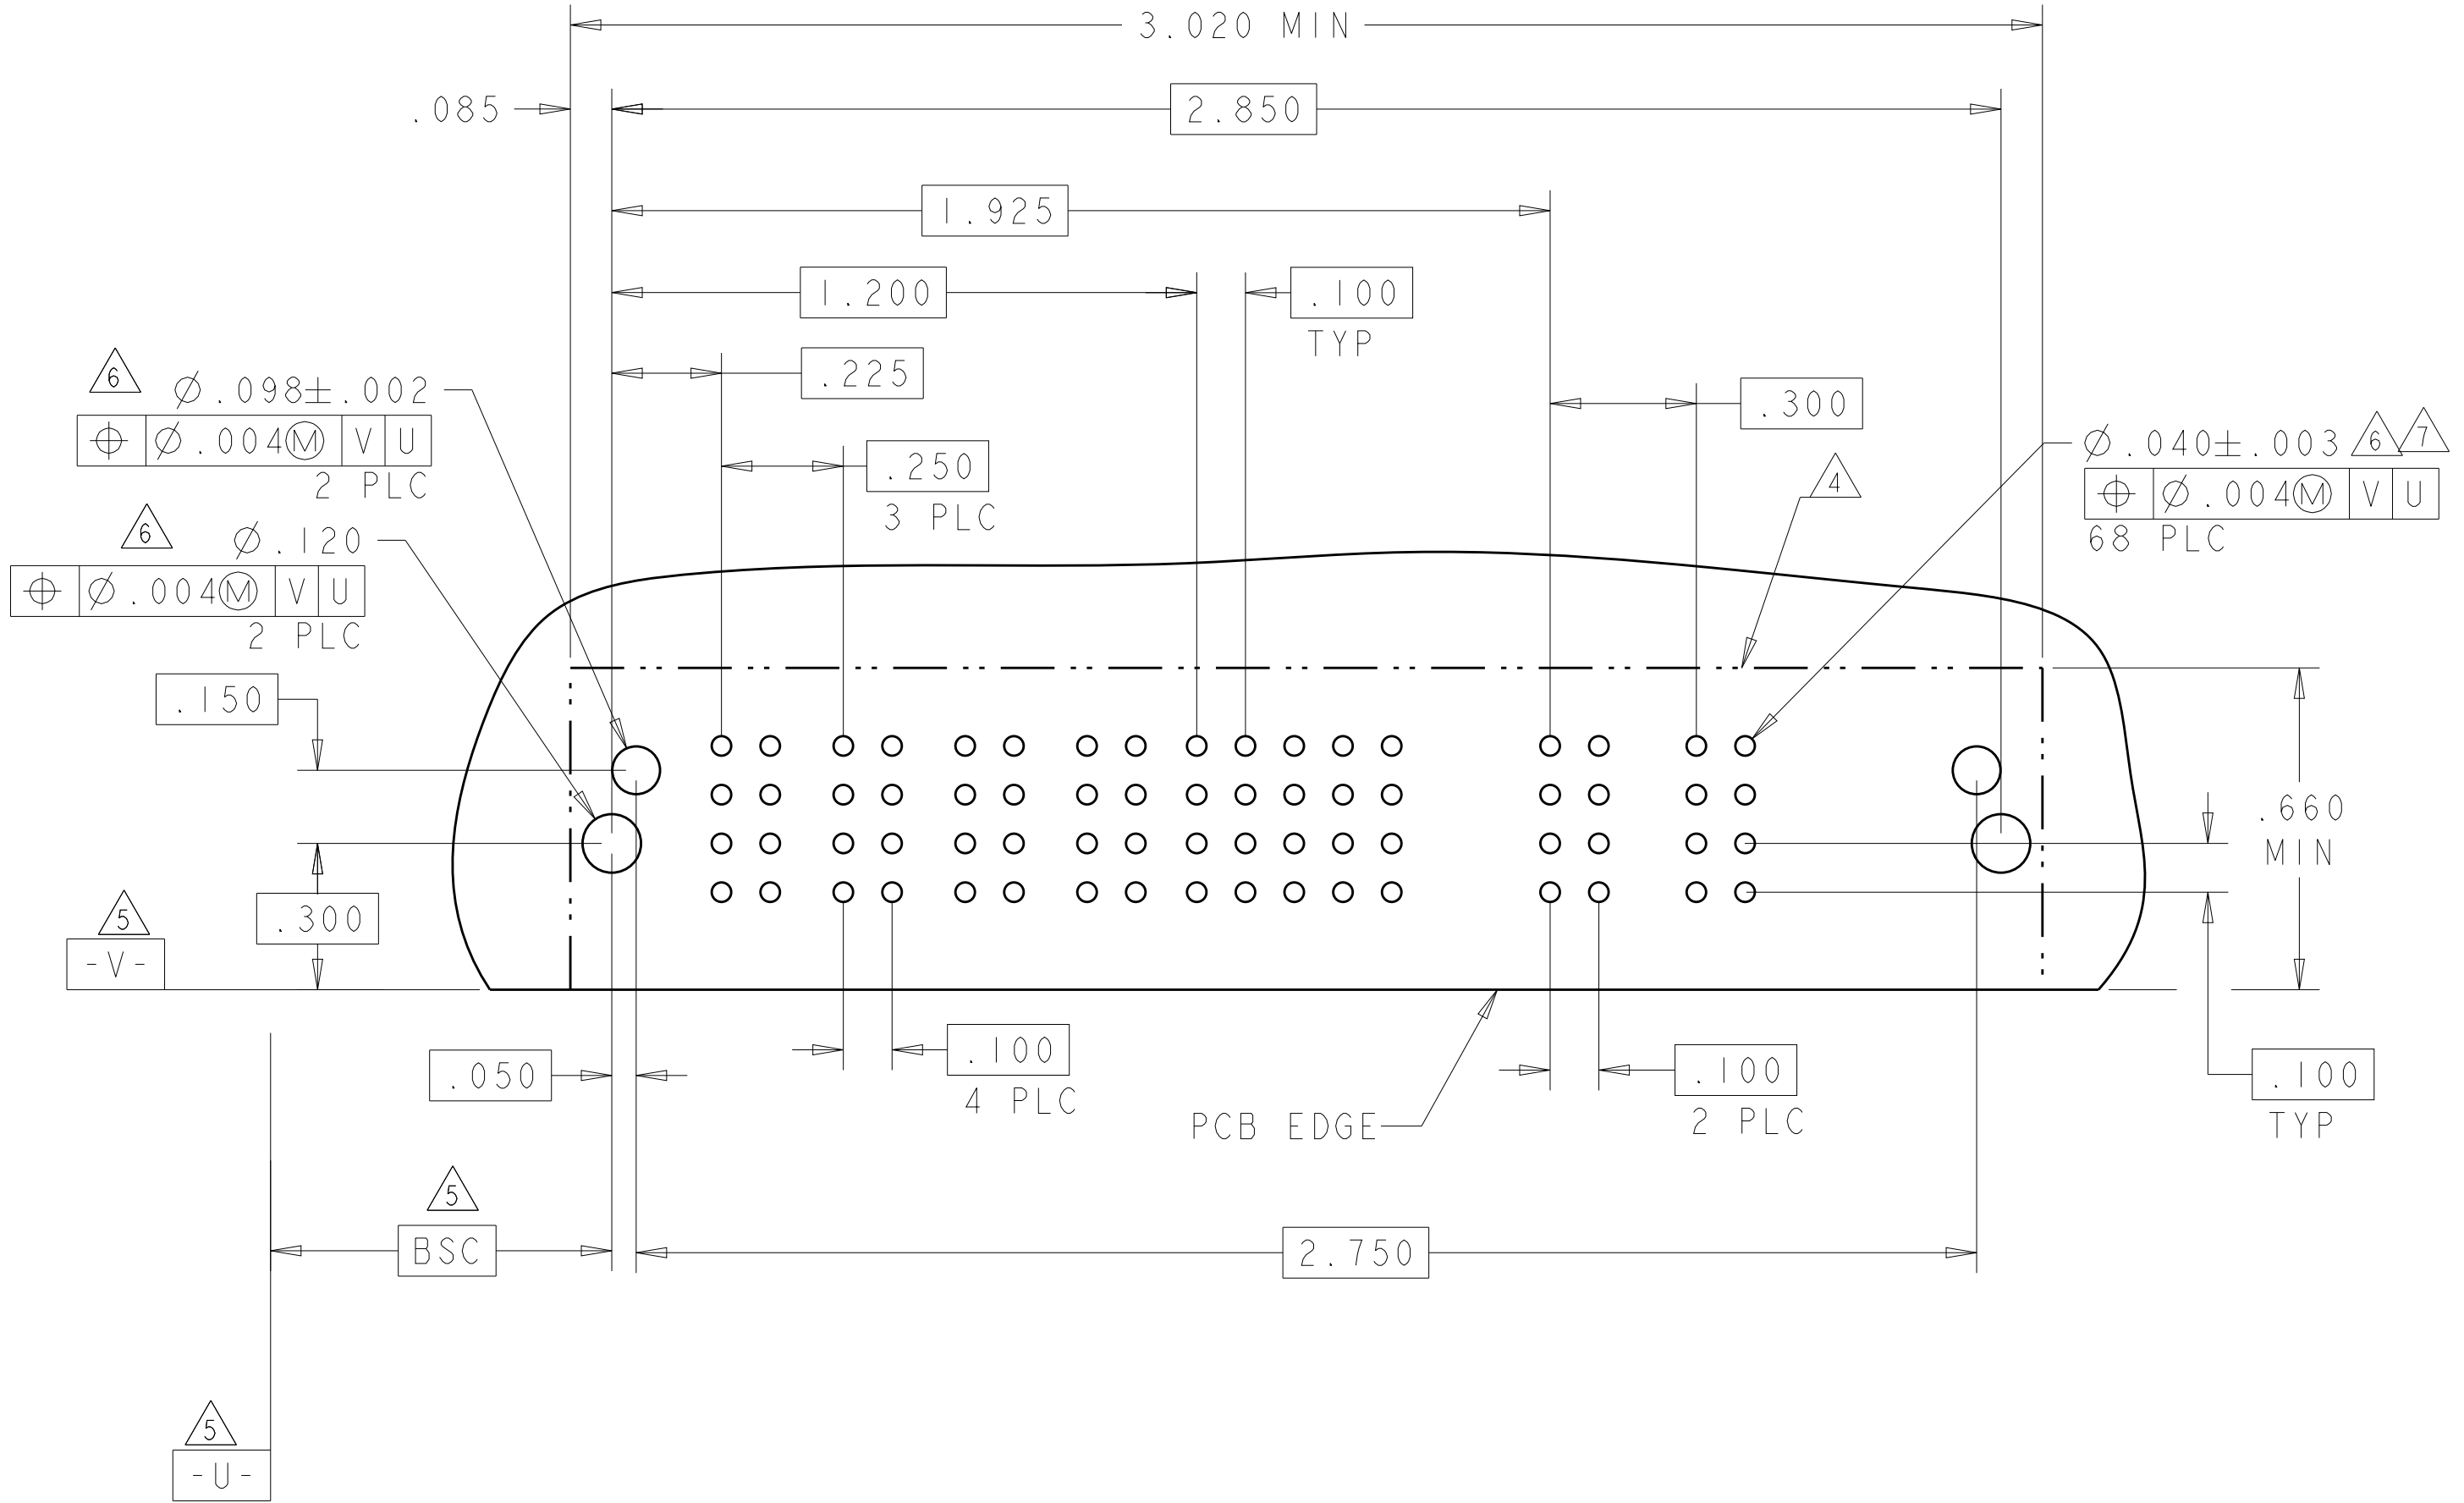

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

SCALE 4:1 SHEET 10 OF 42 REV S2

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830


RESTRICTED TO

-

TE Connectivity


TE Connectivity

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

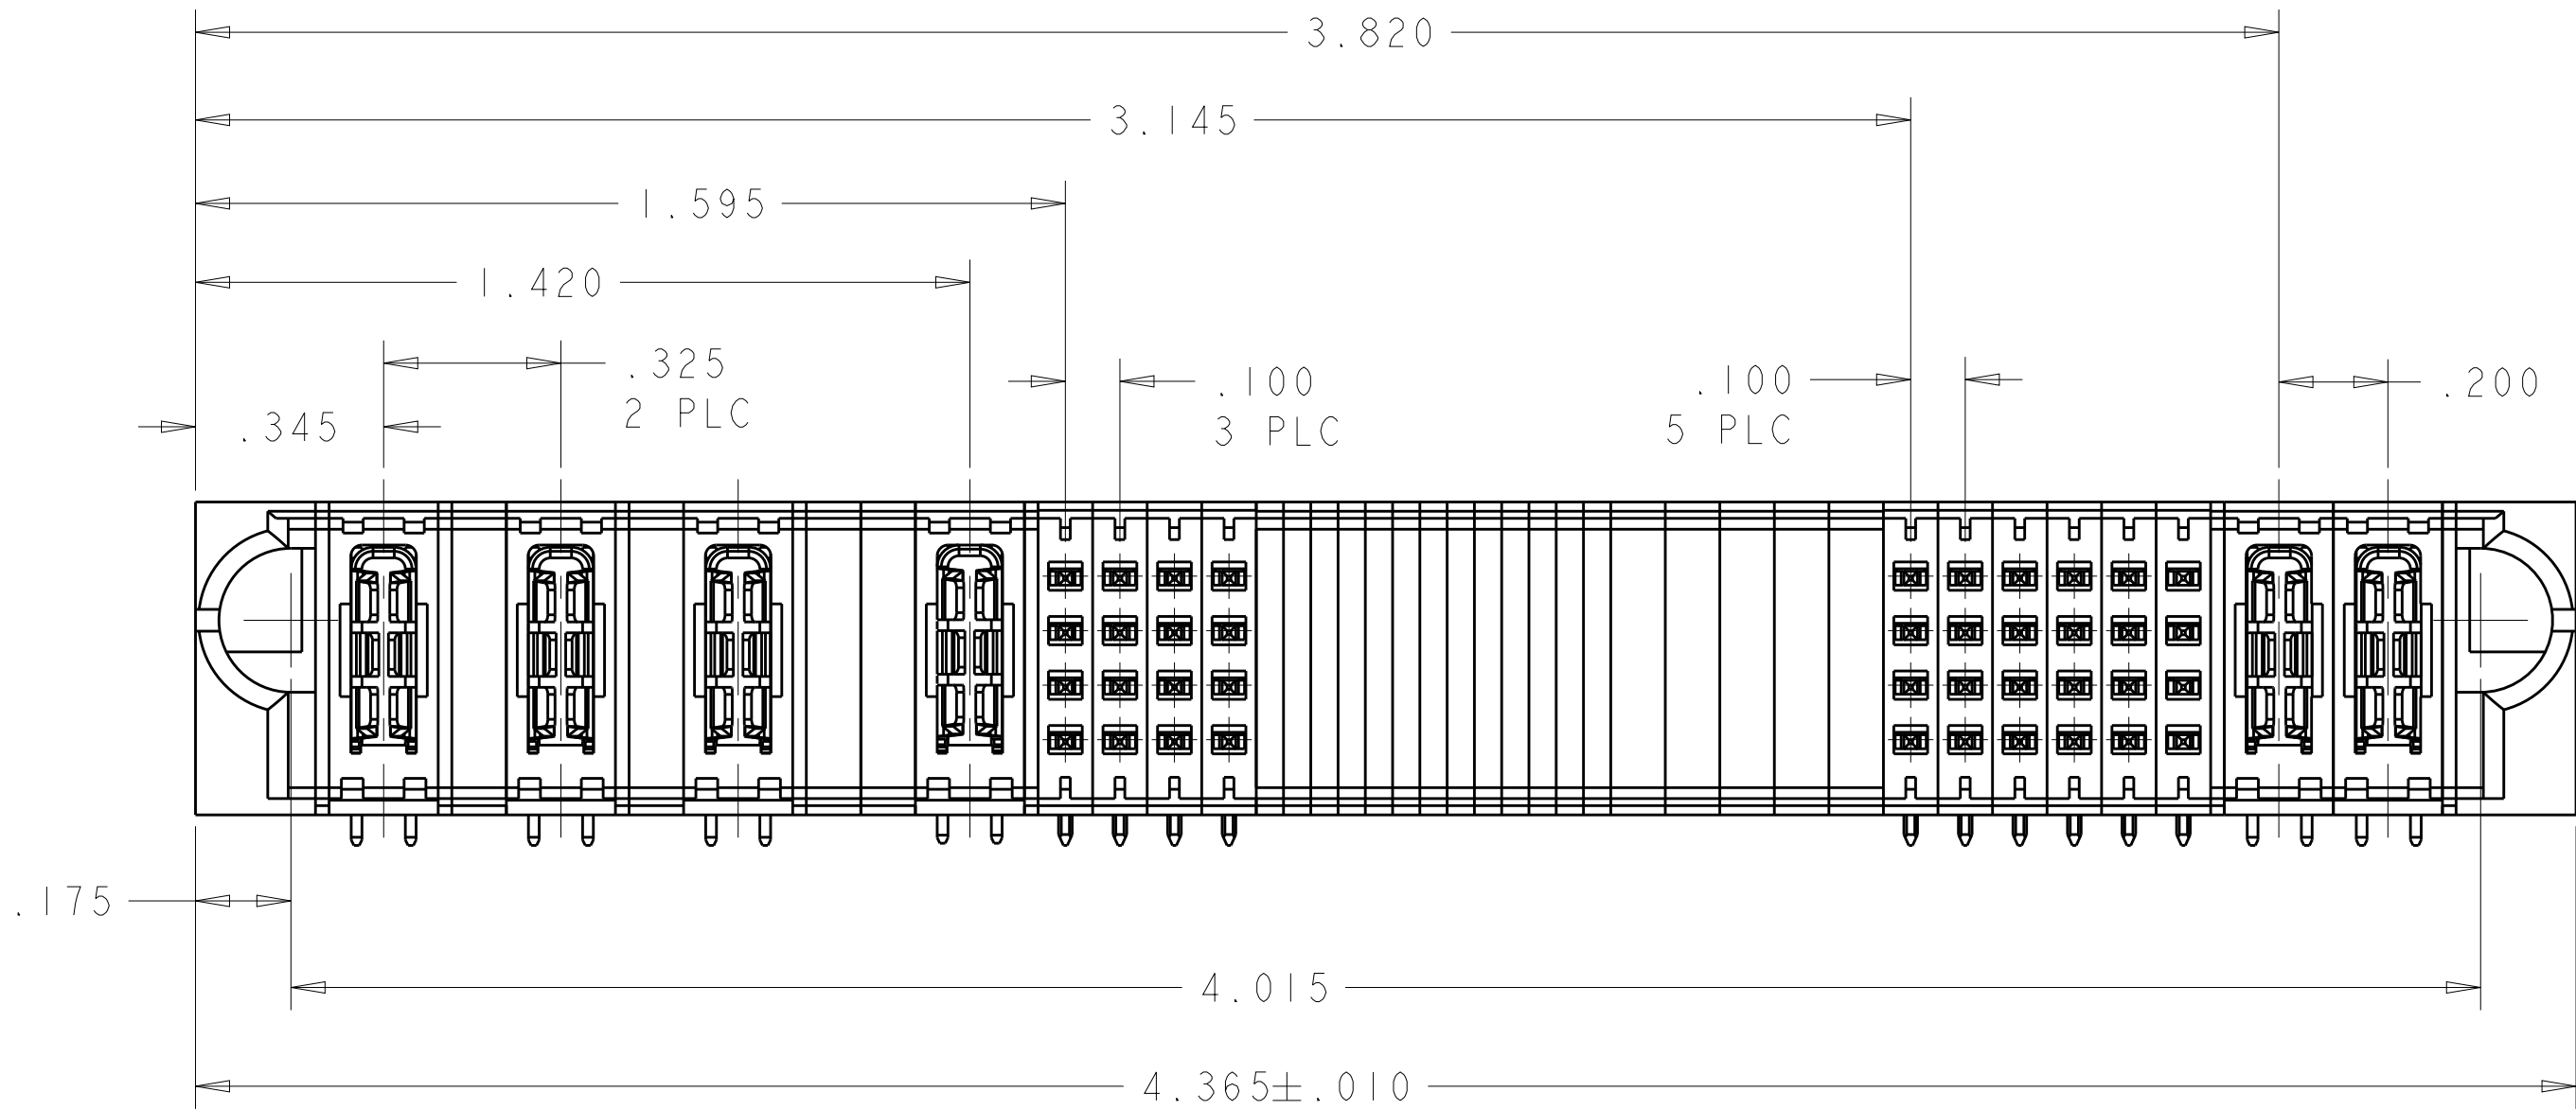

PART NUMBER: 1-6450830-8


PART NUMBER	ROWS		POWER				SIGNAL				BLANK	SIGNAL						POWER		
			P1	P2	P3	P4	1	2	3	4		5	6	7	8	9	10	P5	P6	
1-6450830-8	D			C B A			J	J	J	J	BLANK	J	J	J	J	J	J			
	K						K	K	K	K		K	K	K	K	K	K			
	N						N	N	N	N		N	N	N	N	N	N			
	S						S	S	S	S		S	S	S	S	S	S			
4P + 16S + 24S + 2HDP																				

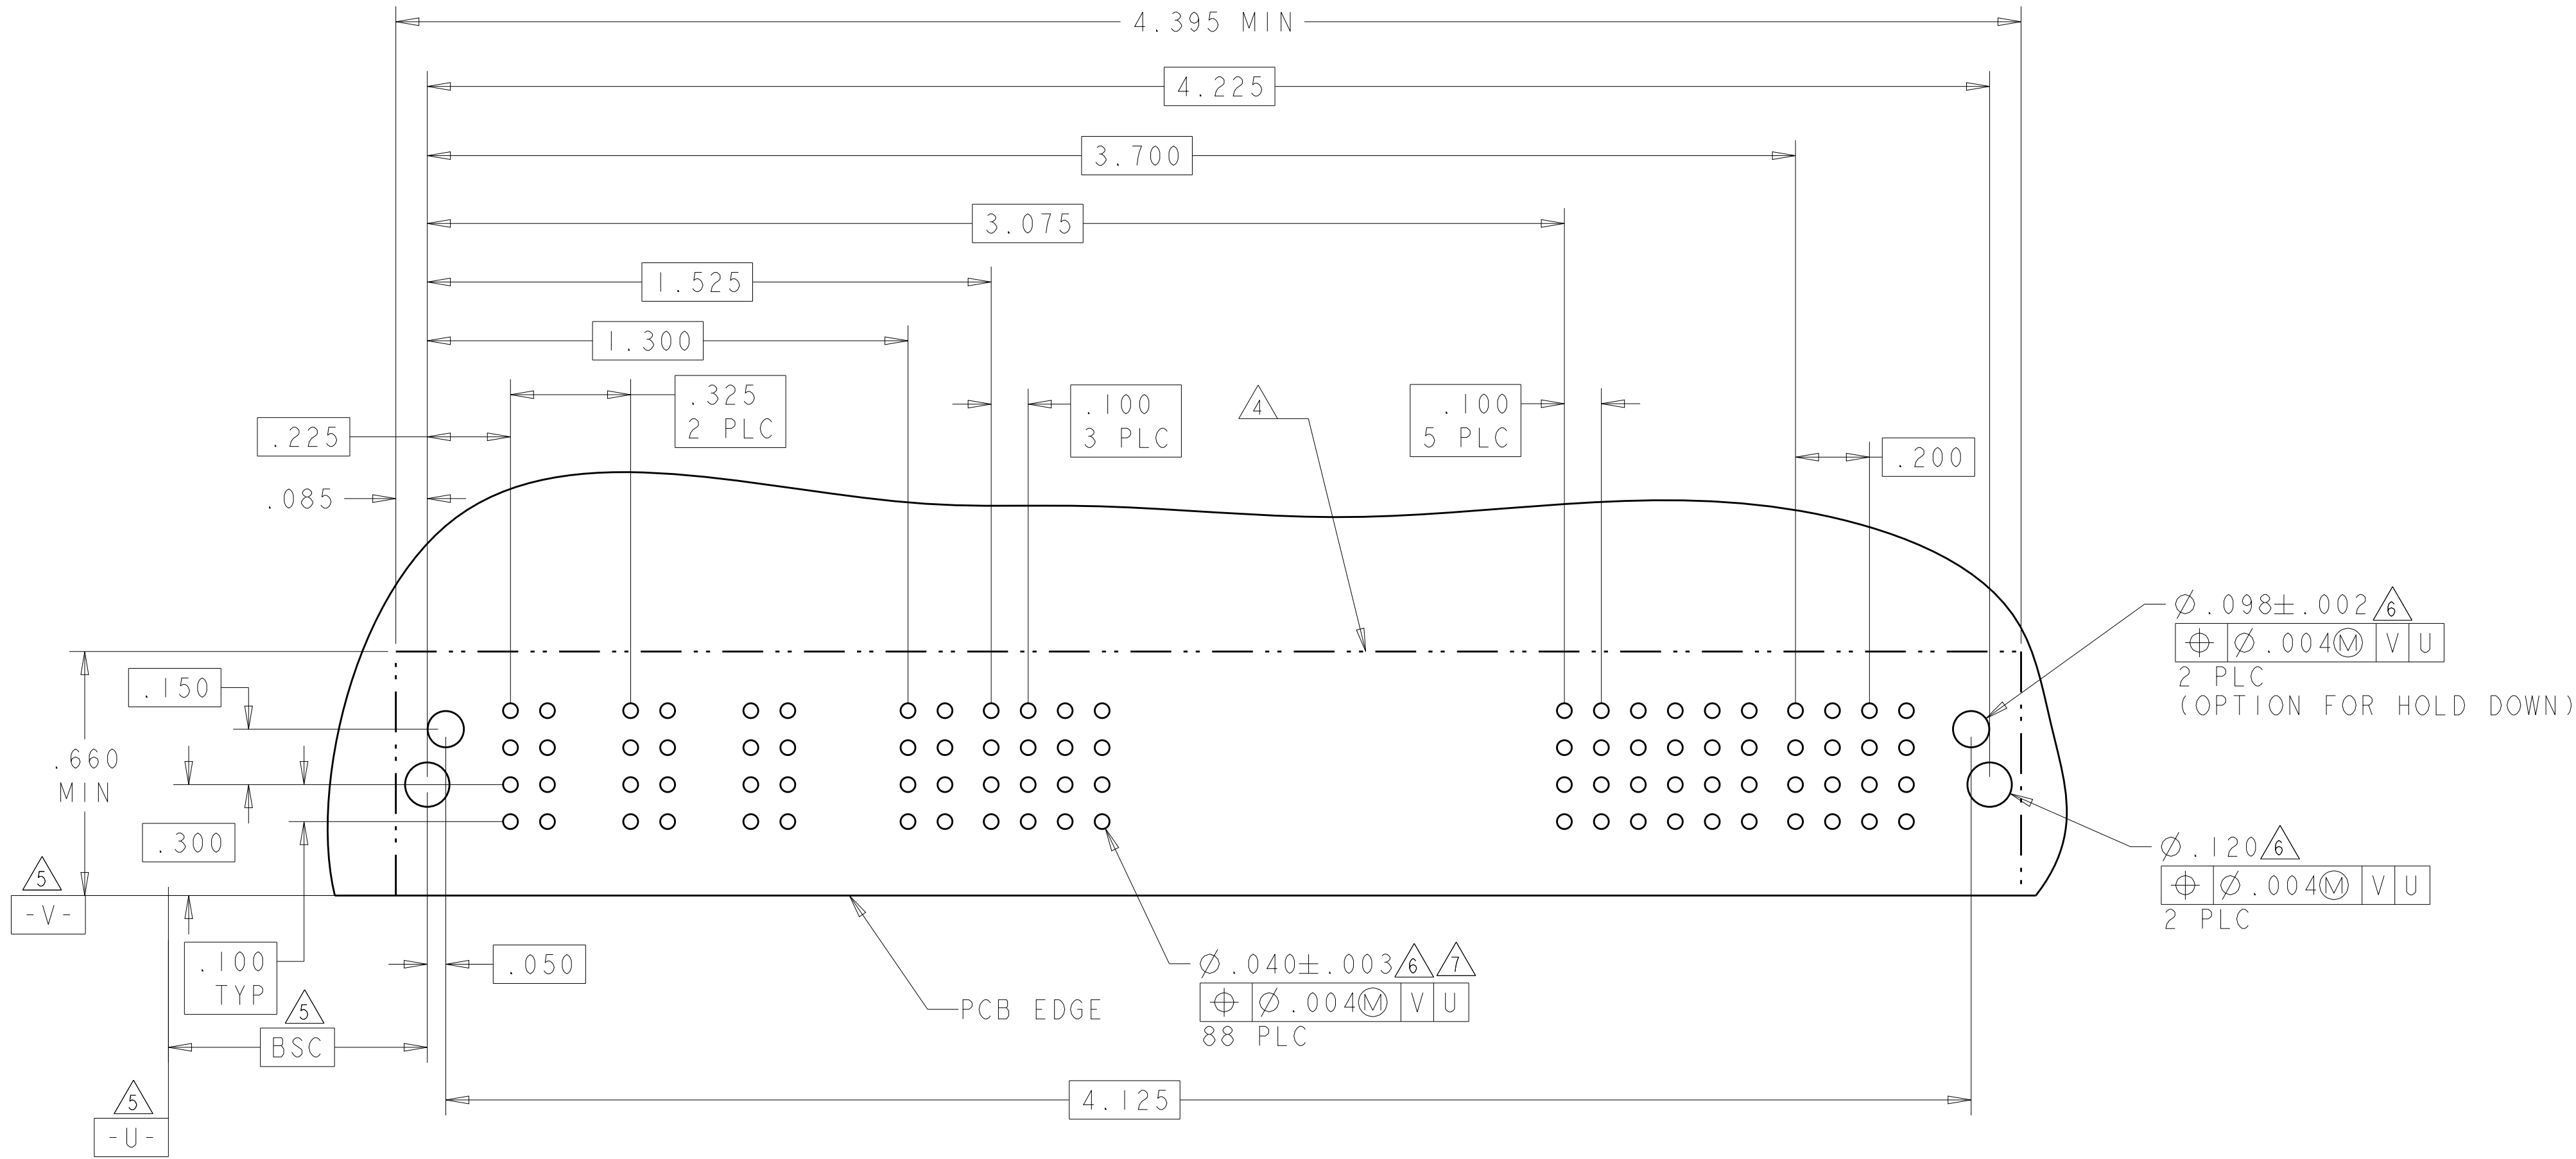


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±.2°		CUSTOMER DRAWING	
MATERIAL		FINISH		SCALE	
				4:1	
				SHEET 11 OF 42	
				REV S2	

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER			SIGNAL															
			PI	LPI	LP2	1	2	3	4	5	6	7	8	9	10	11	12	LP3	LP4	P2	
1-6450830-7	D		TM	LML	LML	E	E	E	E	E	E	E	E	E	E	E	LML	LMF	TM		
	F					F	F	F	F	F	F	F	F	F	F						
	G					G	G	G	G	G	G	G	G	G	G	G					
	H					H	H	H	H	H	H	H	H	H	H	H					
IP + 2LP + 48S + 2LP + IP																					

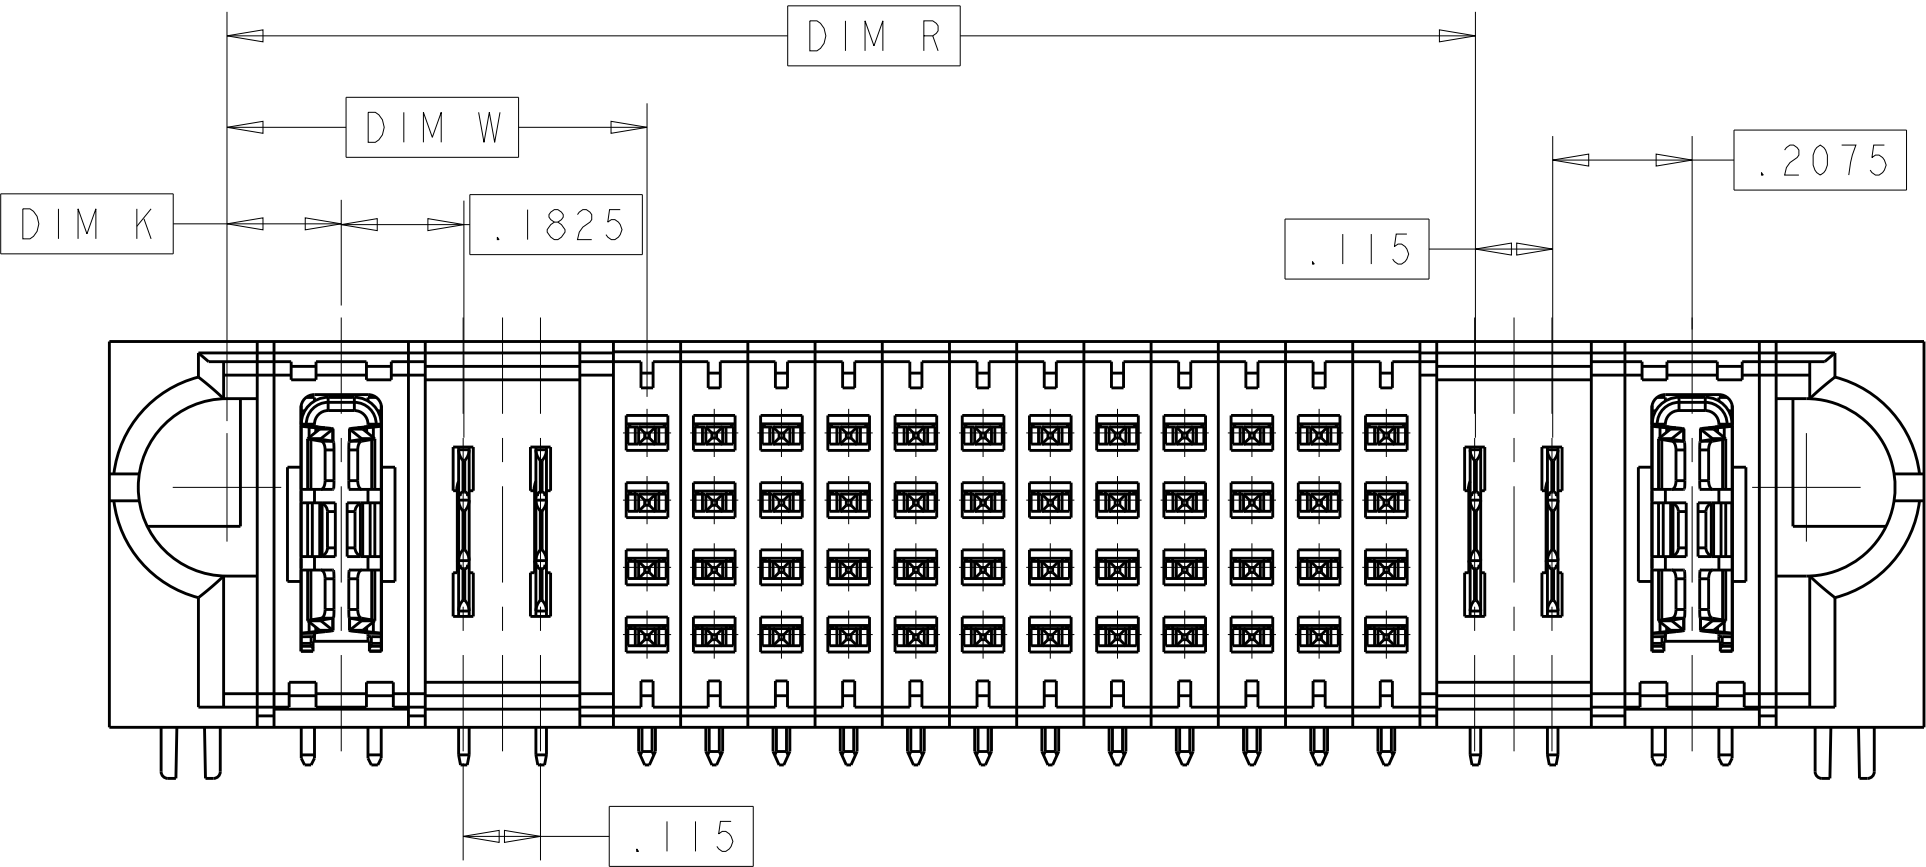

P/N:1-6450830-7 CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

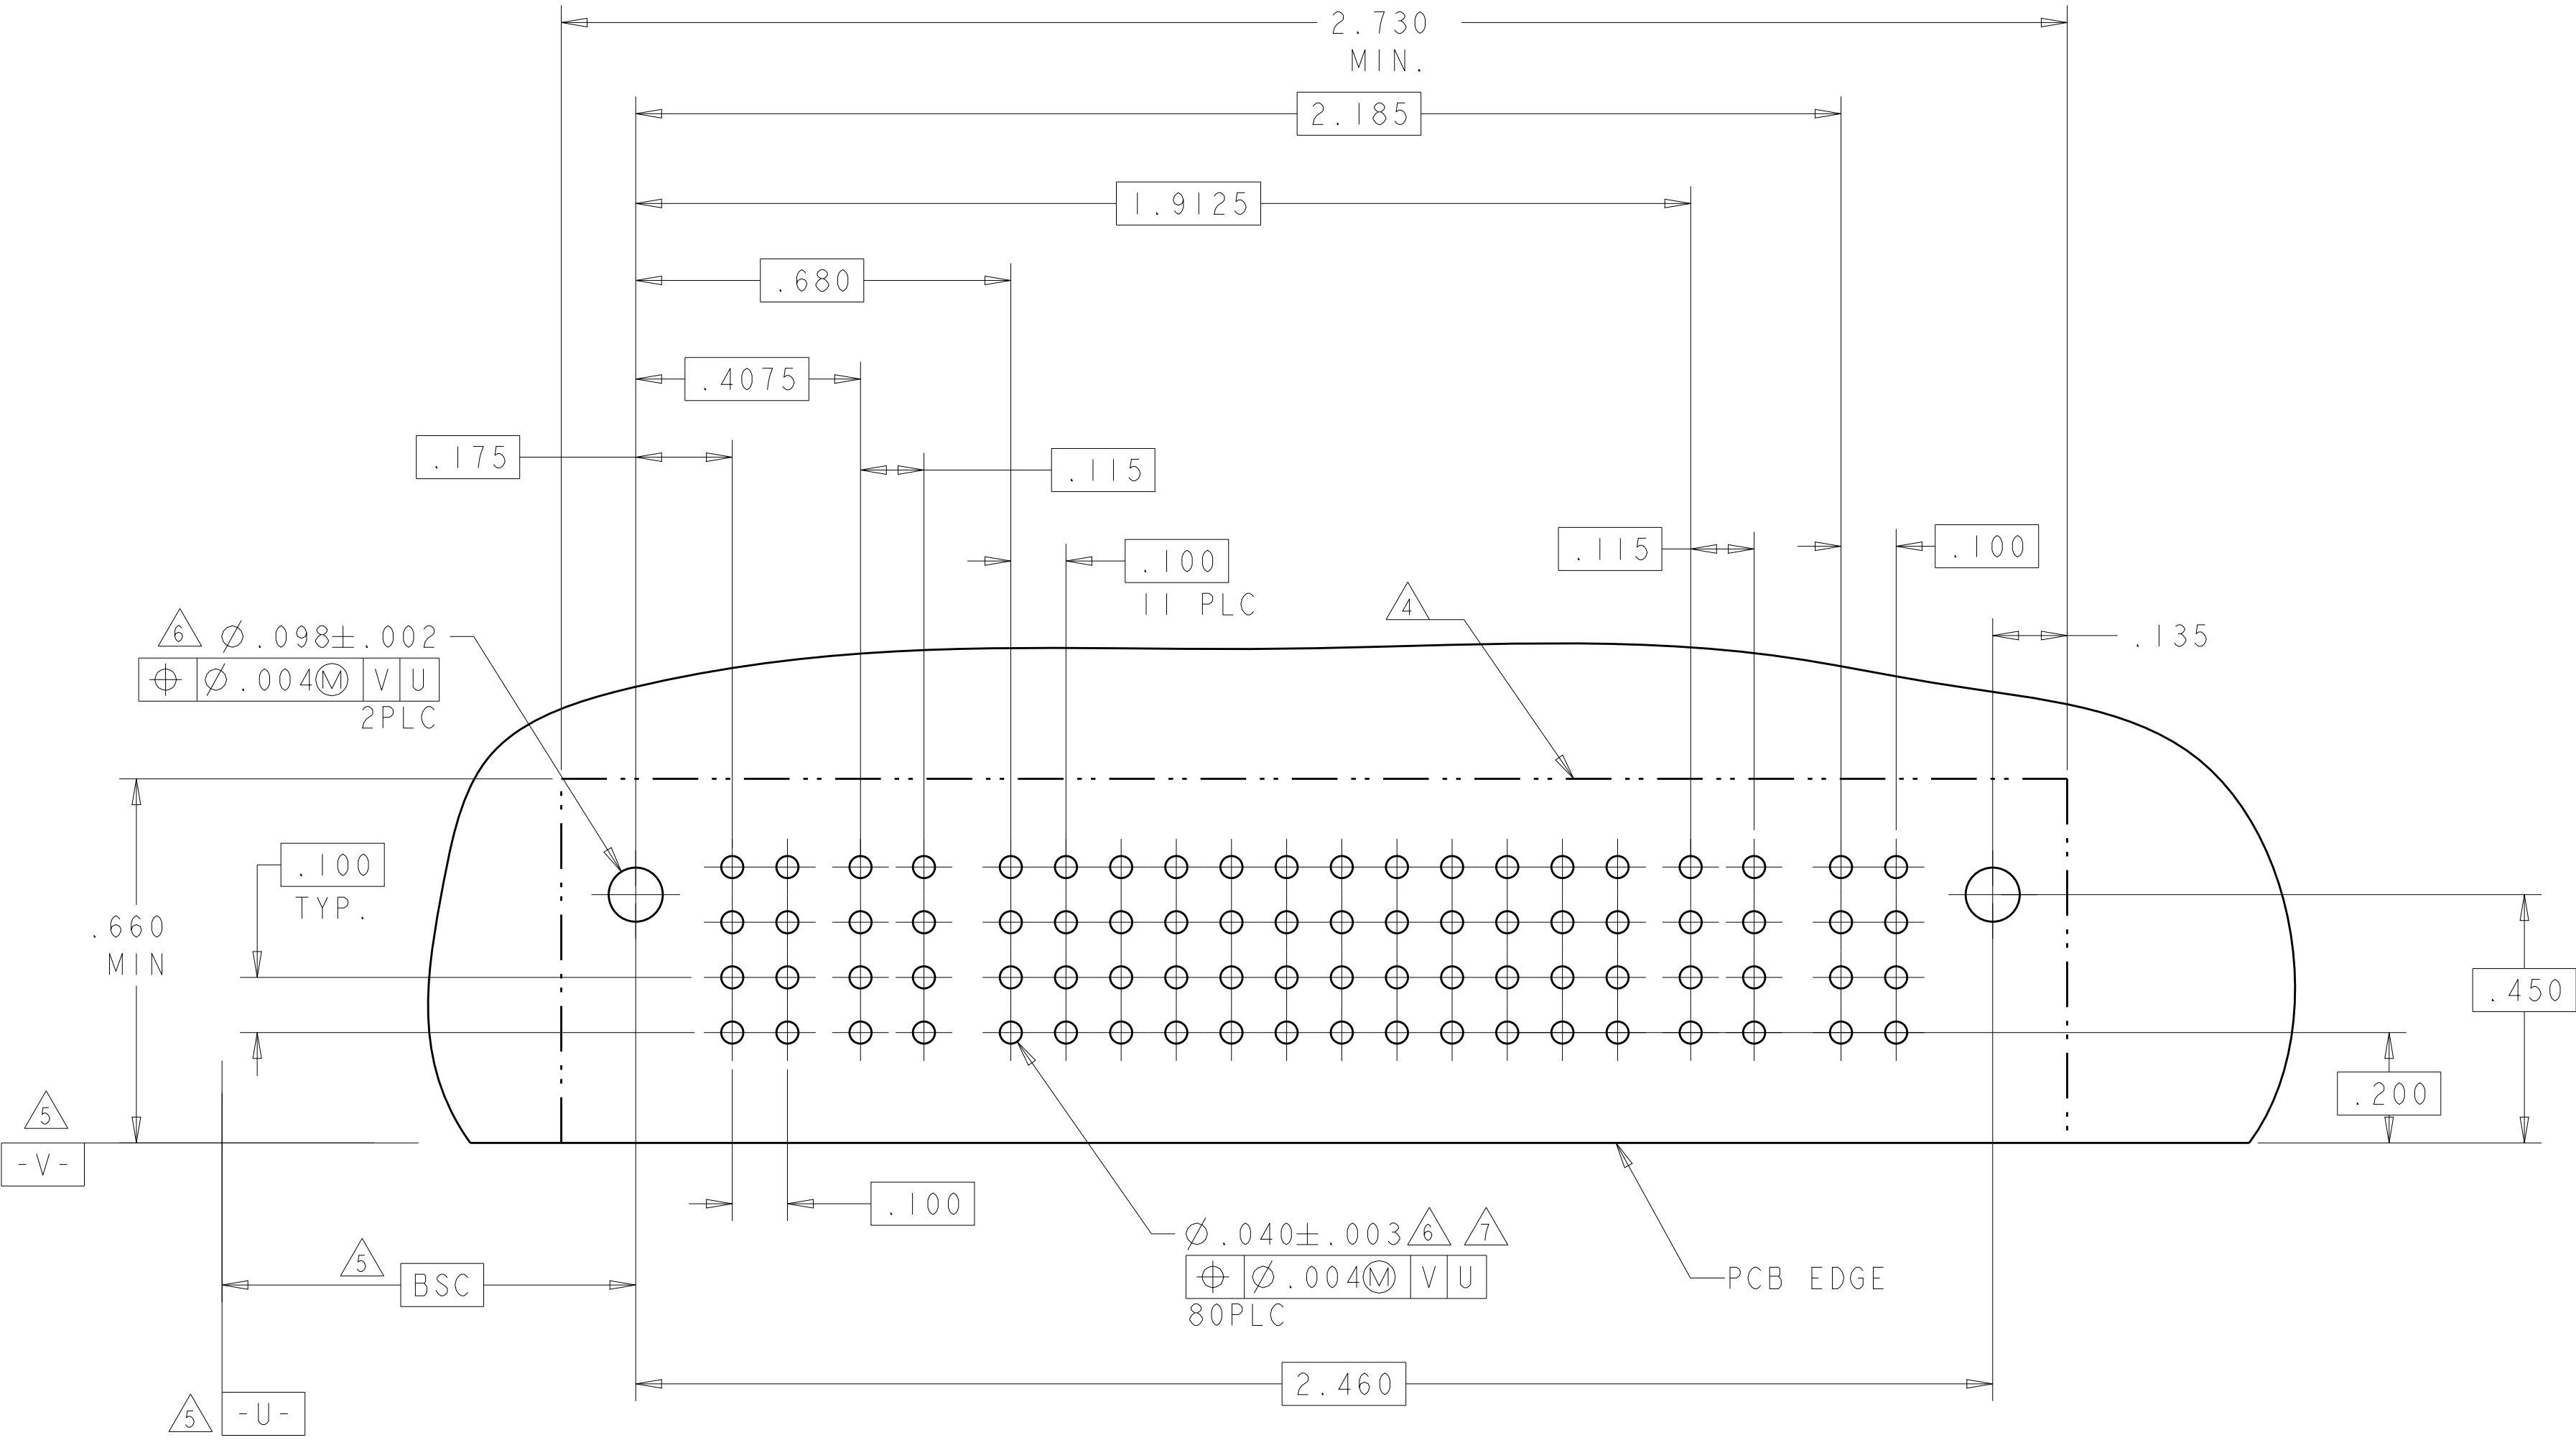

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S. ZHAO

CHK
S. ZHAO

APVD
S. ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

114-13251

WEIGHT

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450830

RESTRICTED TO
-



SCALE
4:1

SHEET
12


OF
42

REV
S2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
1-6450830-9	D C B A	 HD	 TM	 TM	 TM	 TM	J	J	J	J	J			 TM	 TM	 TM	 HD
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

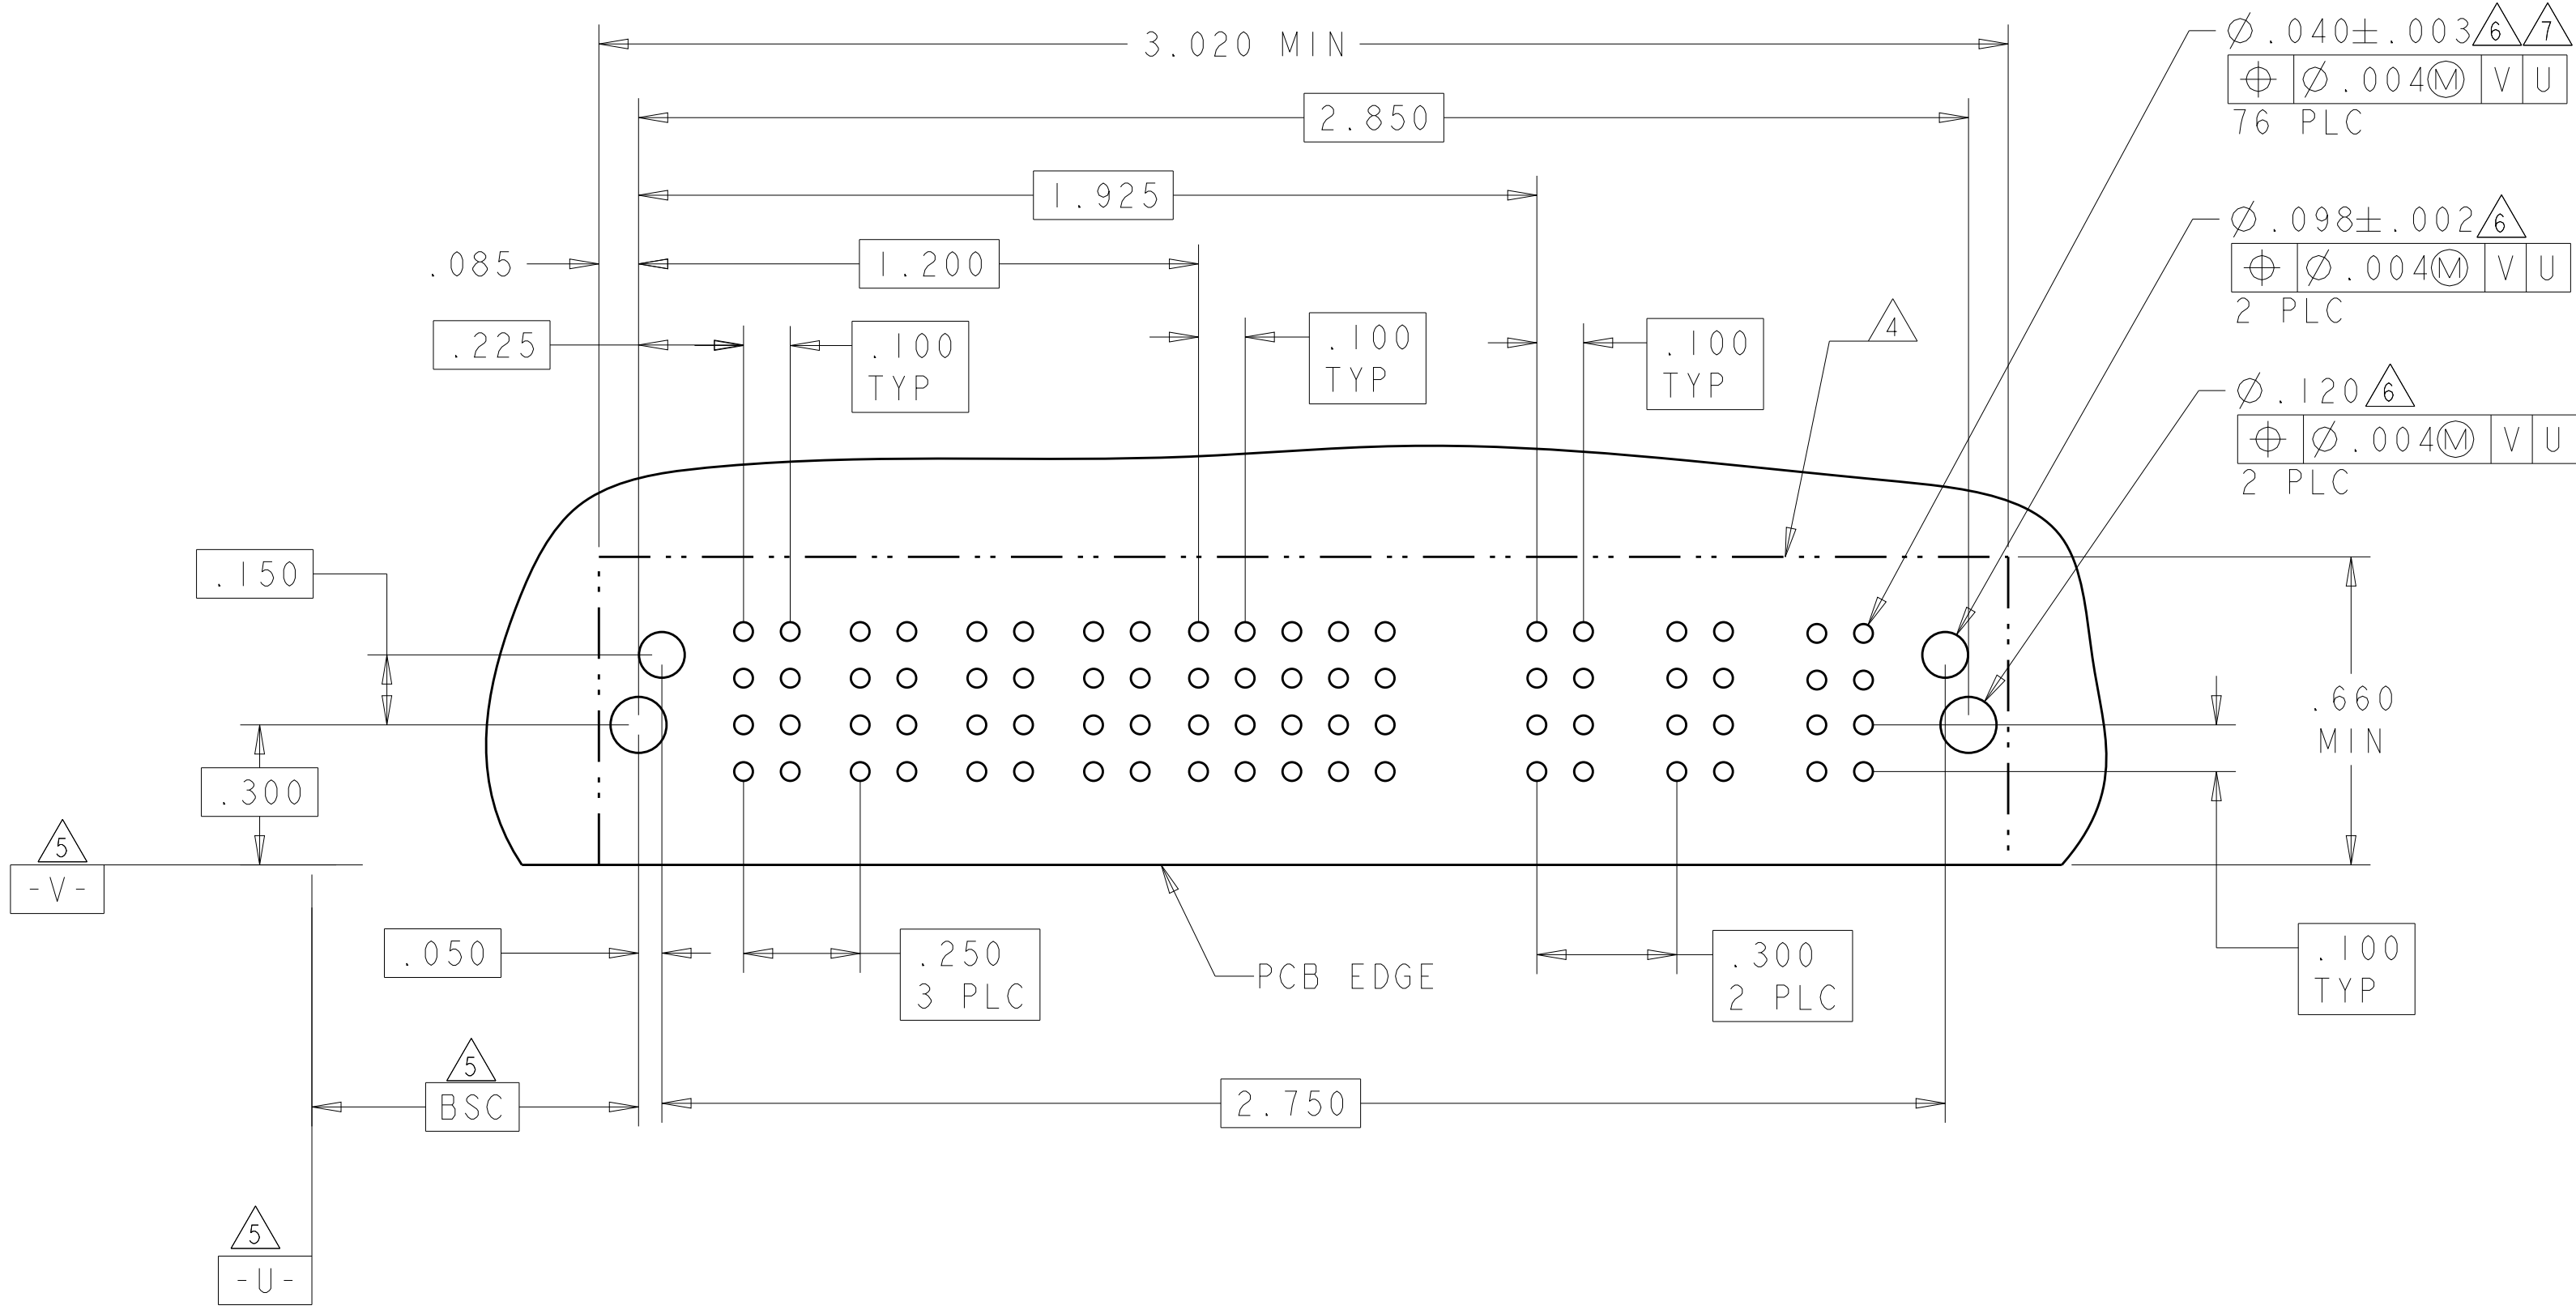

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH -

MATERIAL

-

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

13

OF


42

REV


S2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL										POWER		
			P1	P2	1	2	3	4	5	6	7	8	9	10	P3	P4	
2-6450830-4	D		TM	TM	J	J	J	J	J	J	J	J	J	J	TM	TM	
	C				K	K	K	K	K	K	K	K	K	K			
	B				N	N	N	N	N	N	N	N	N	N			
A	HD				S	S	S	S	S	S	S	S	S	S			HD
2P + 40S + 2P																	

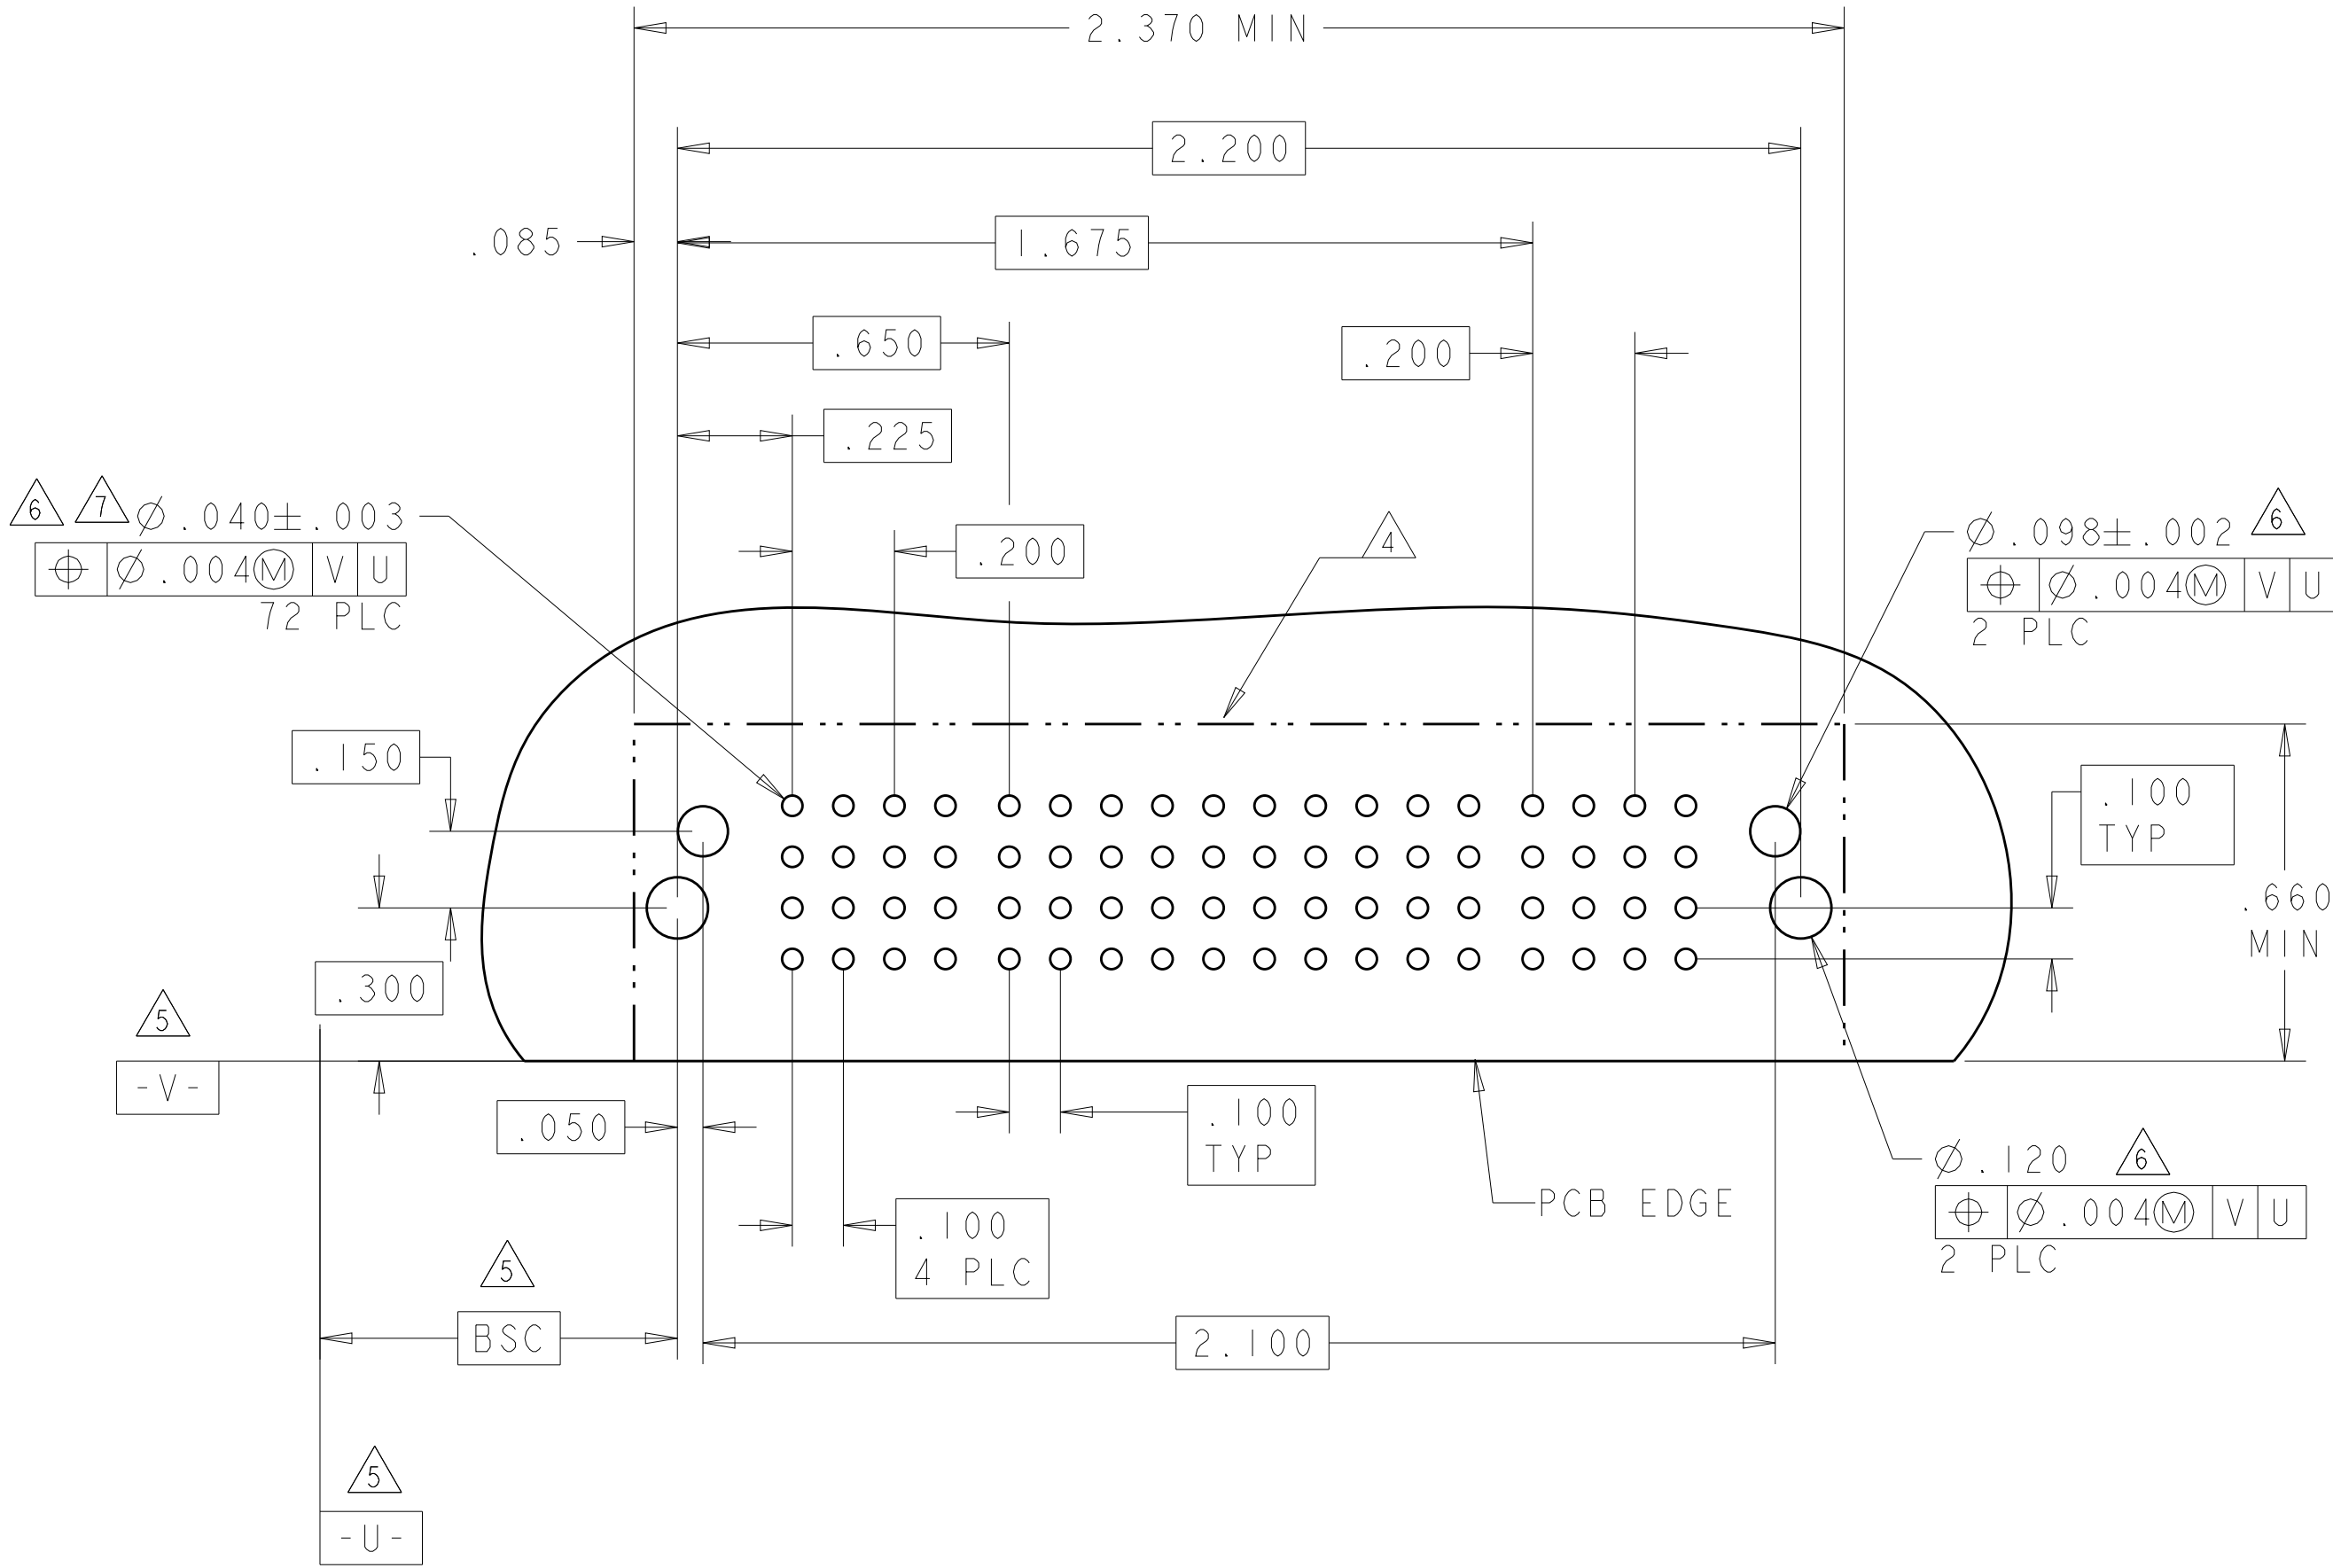

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
2-6450830-6	D		TM	J	J	J	J	J	J	TM	
	C			K	K	K	K	K	K		
	B			N	N	N	N	N	N		
	A			H	S	S	S	S	S		
			HD								
IP + 24S + IP											

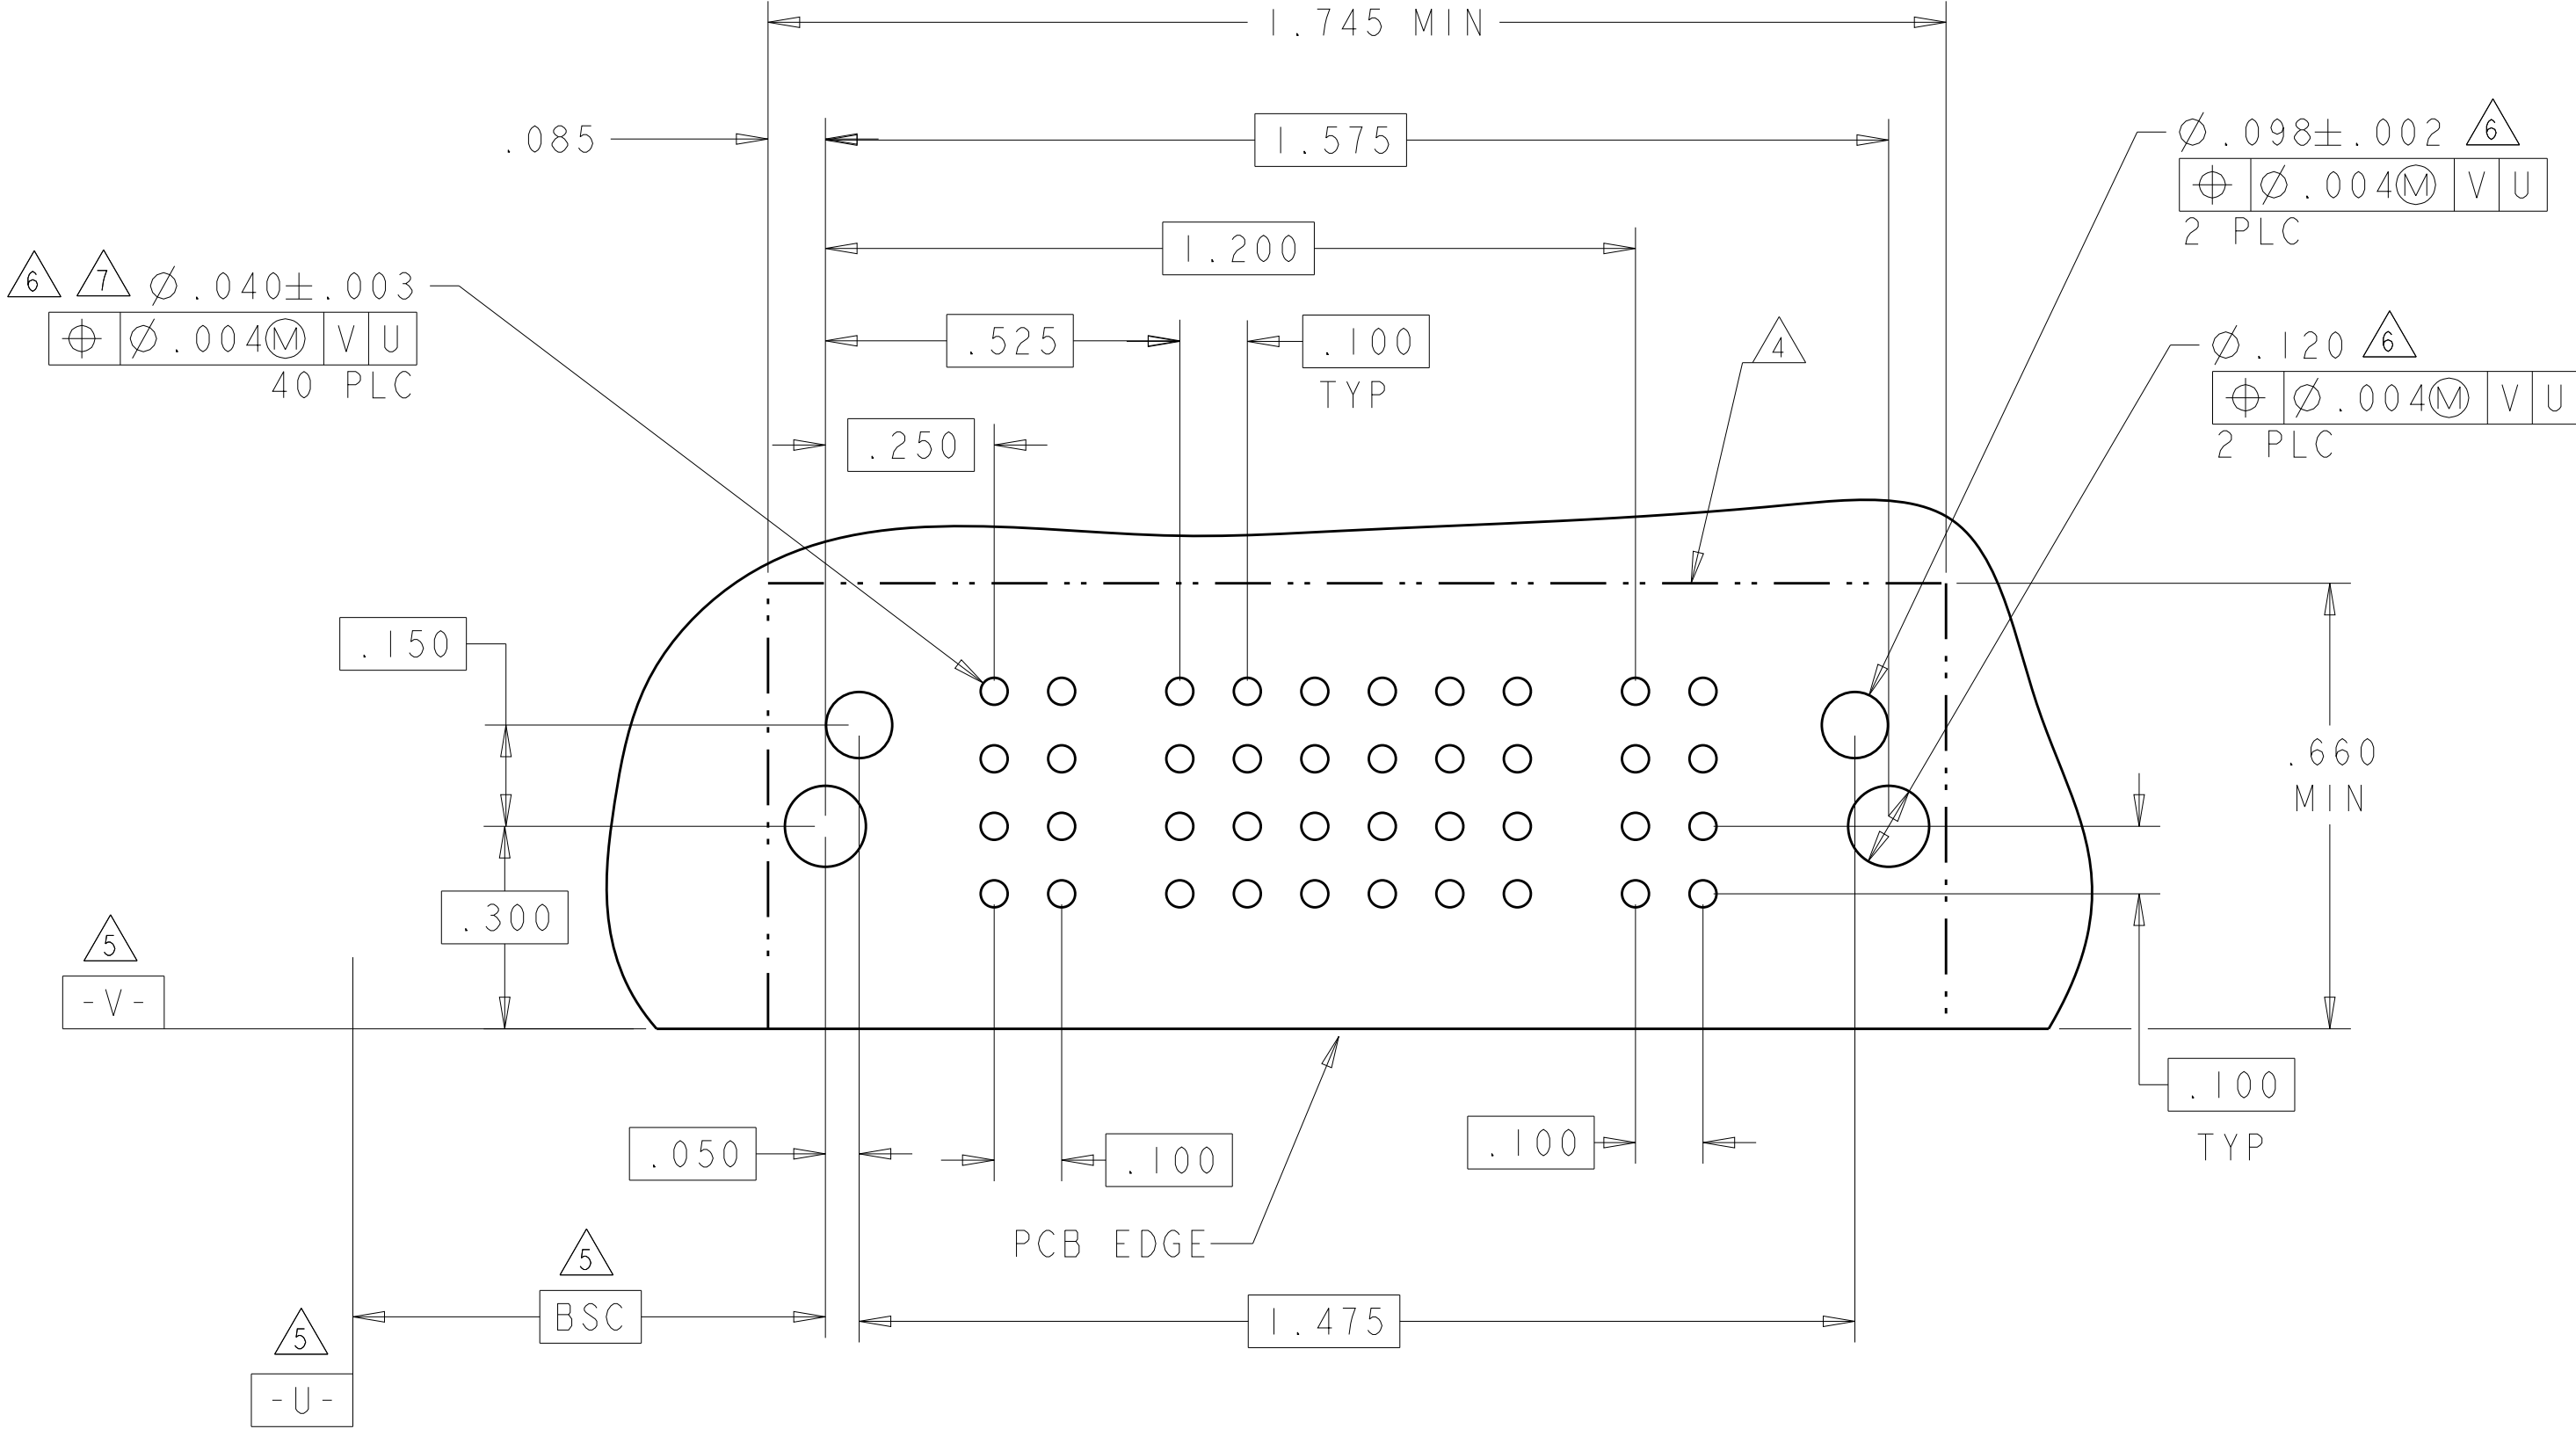

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S. ZHAO
CHK
S. ZHAO
APVD
S. ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
CUSTOMER DRAWING

NAME
RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
C=6450830

DRAWING NO
-

RESTRICTED TO
-

SCALE
4:1


SHEET
14

OF
42

REV
S2


TE Connectivity

PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P1	P2	1	2	3	4	5	P3	P4	
2-6450830-8	D		TM	TM	J	J	J	J	J	TM	TM	
	K				K	K	K	K				
	N				N	N	N	N				
	S				S	S	S	S				
	A	HD										HD
2P + 20S + 2P												

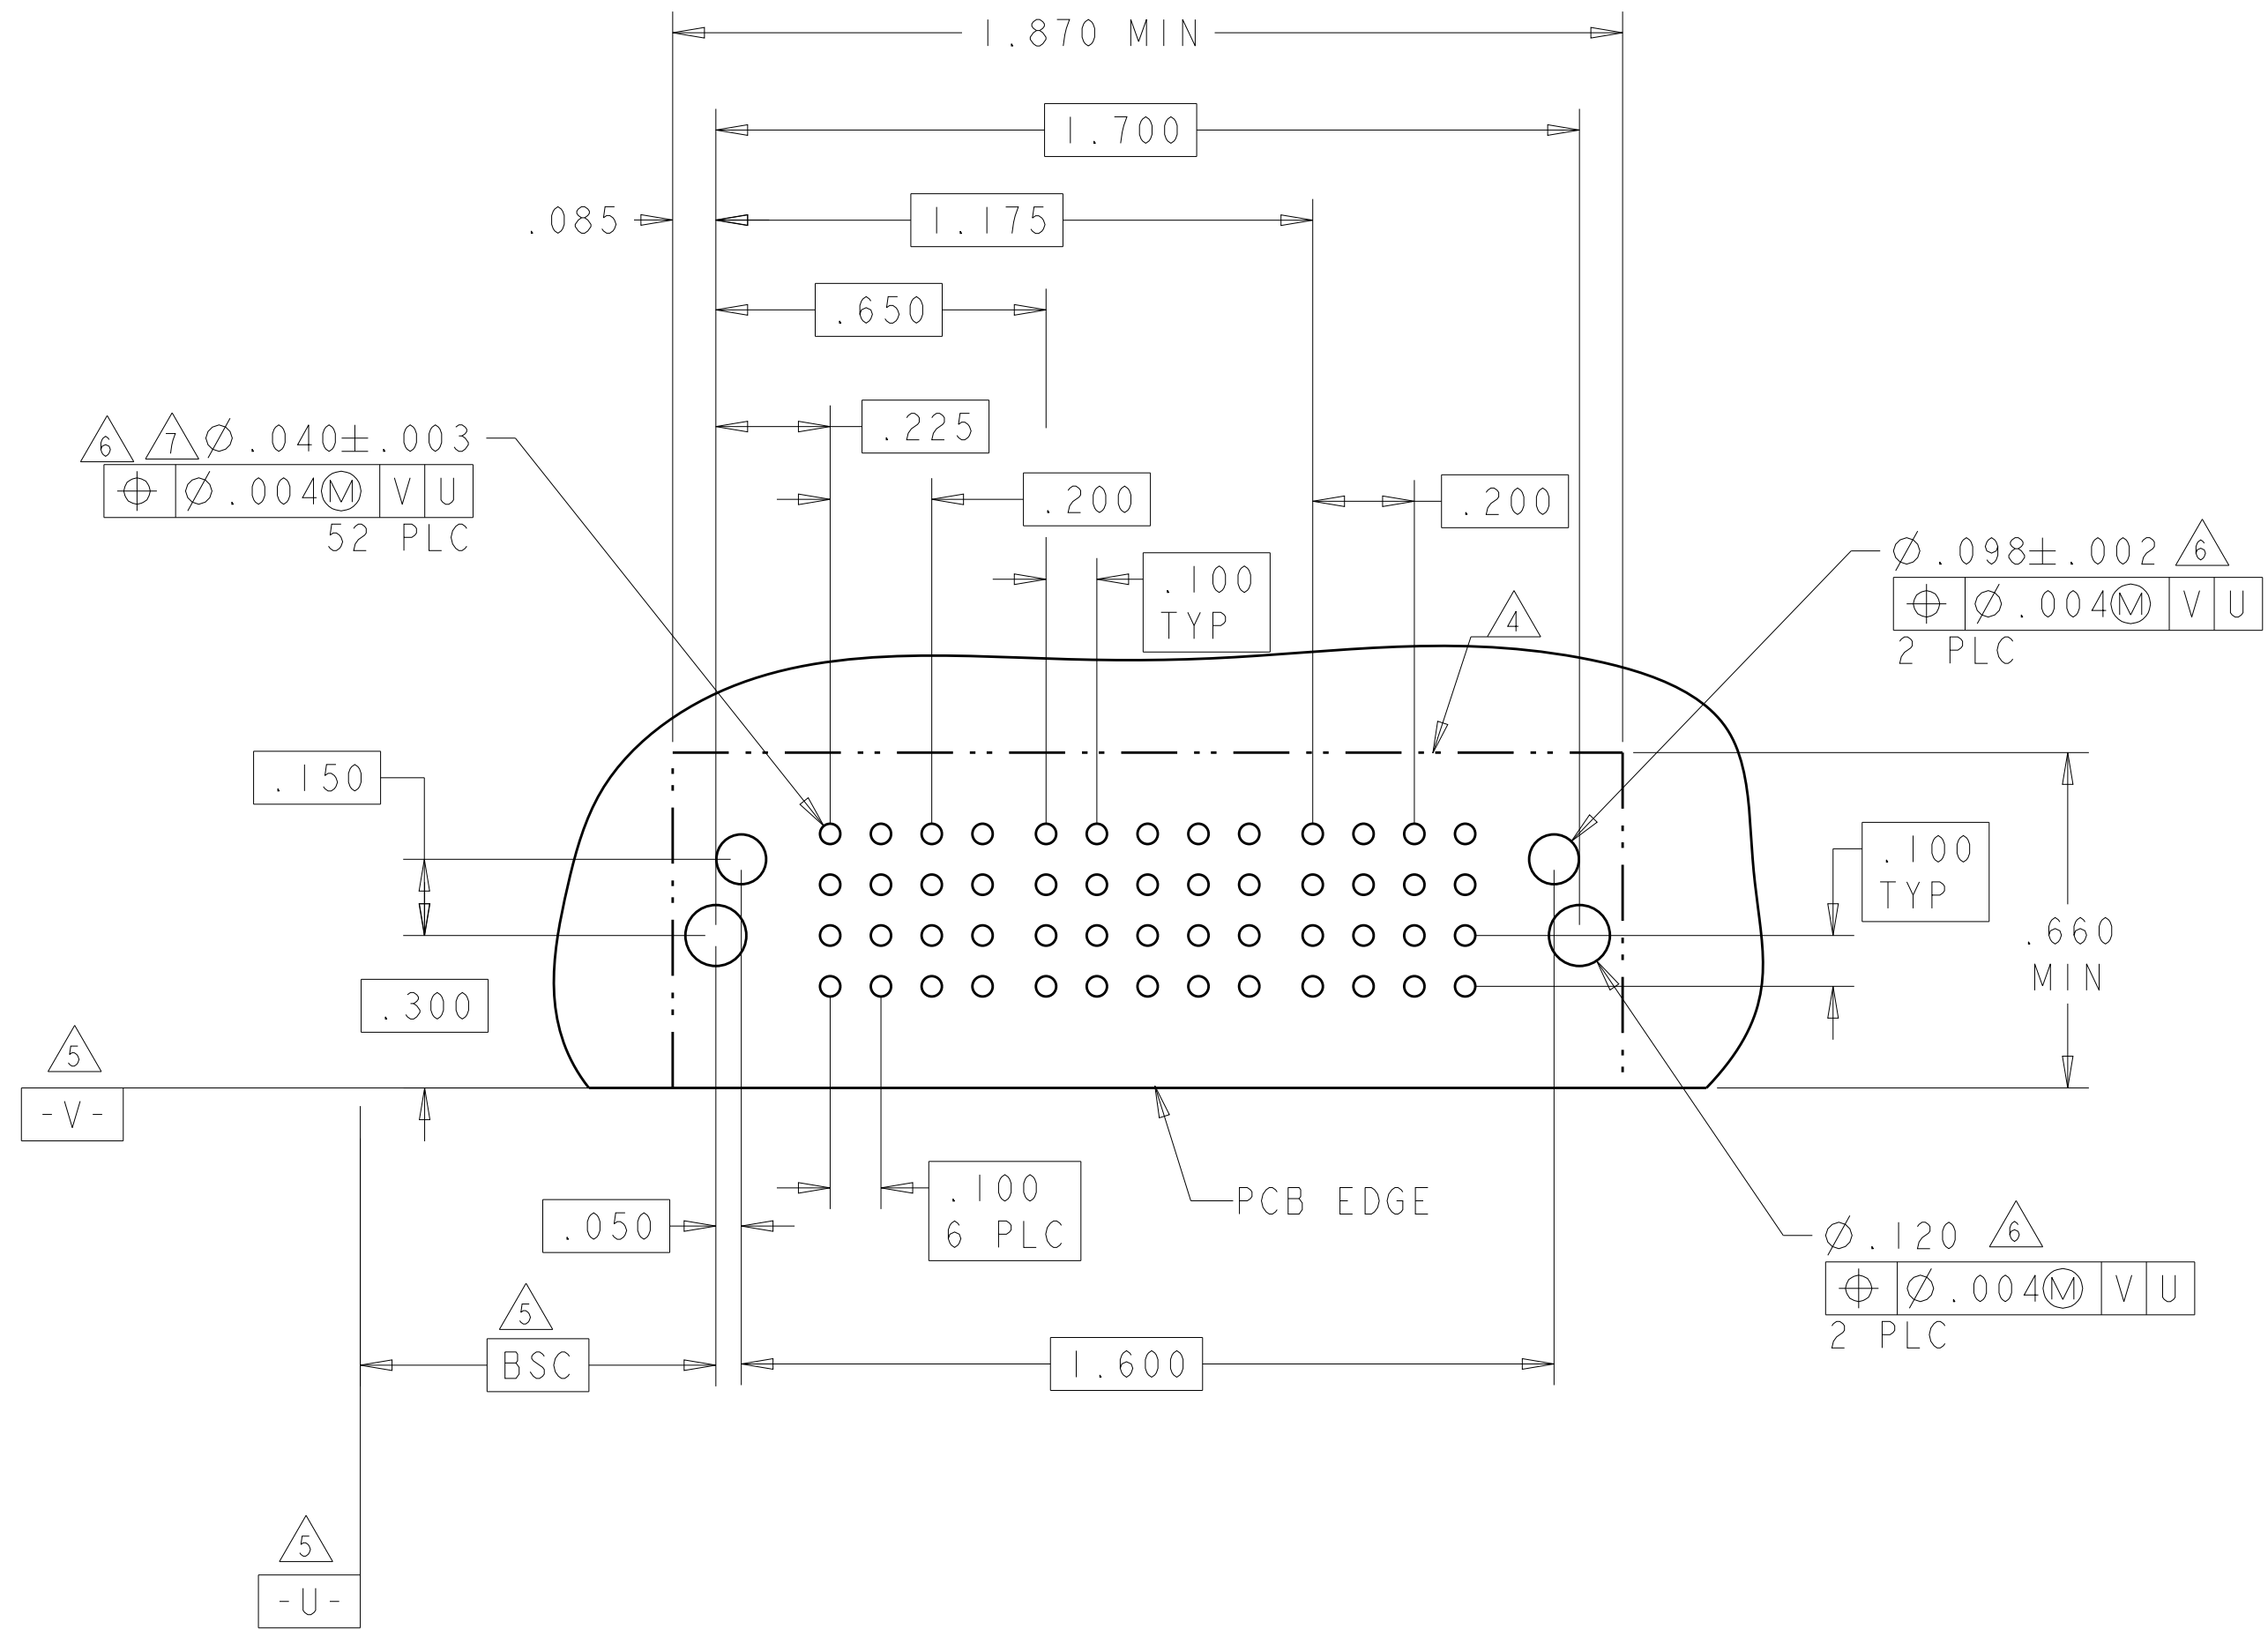4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	
2-6450830-9	D C B A	HD	TM	TM	TM	J	J	J	J	J	J	LM	LM	LM	LM	HD
						K	K	K	K	K	K					
						N	N	N	N	N	N					
						S	S	S	S	S	S					
3ACP + 24S + 4LP																

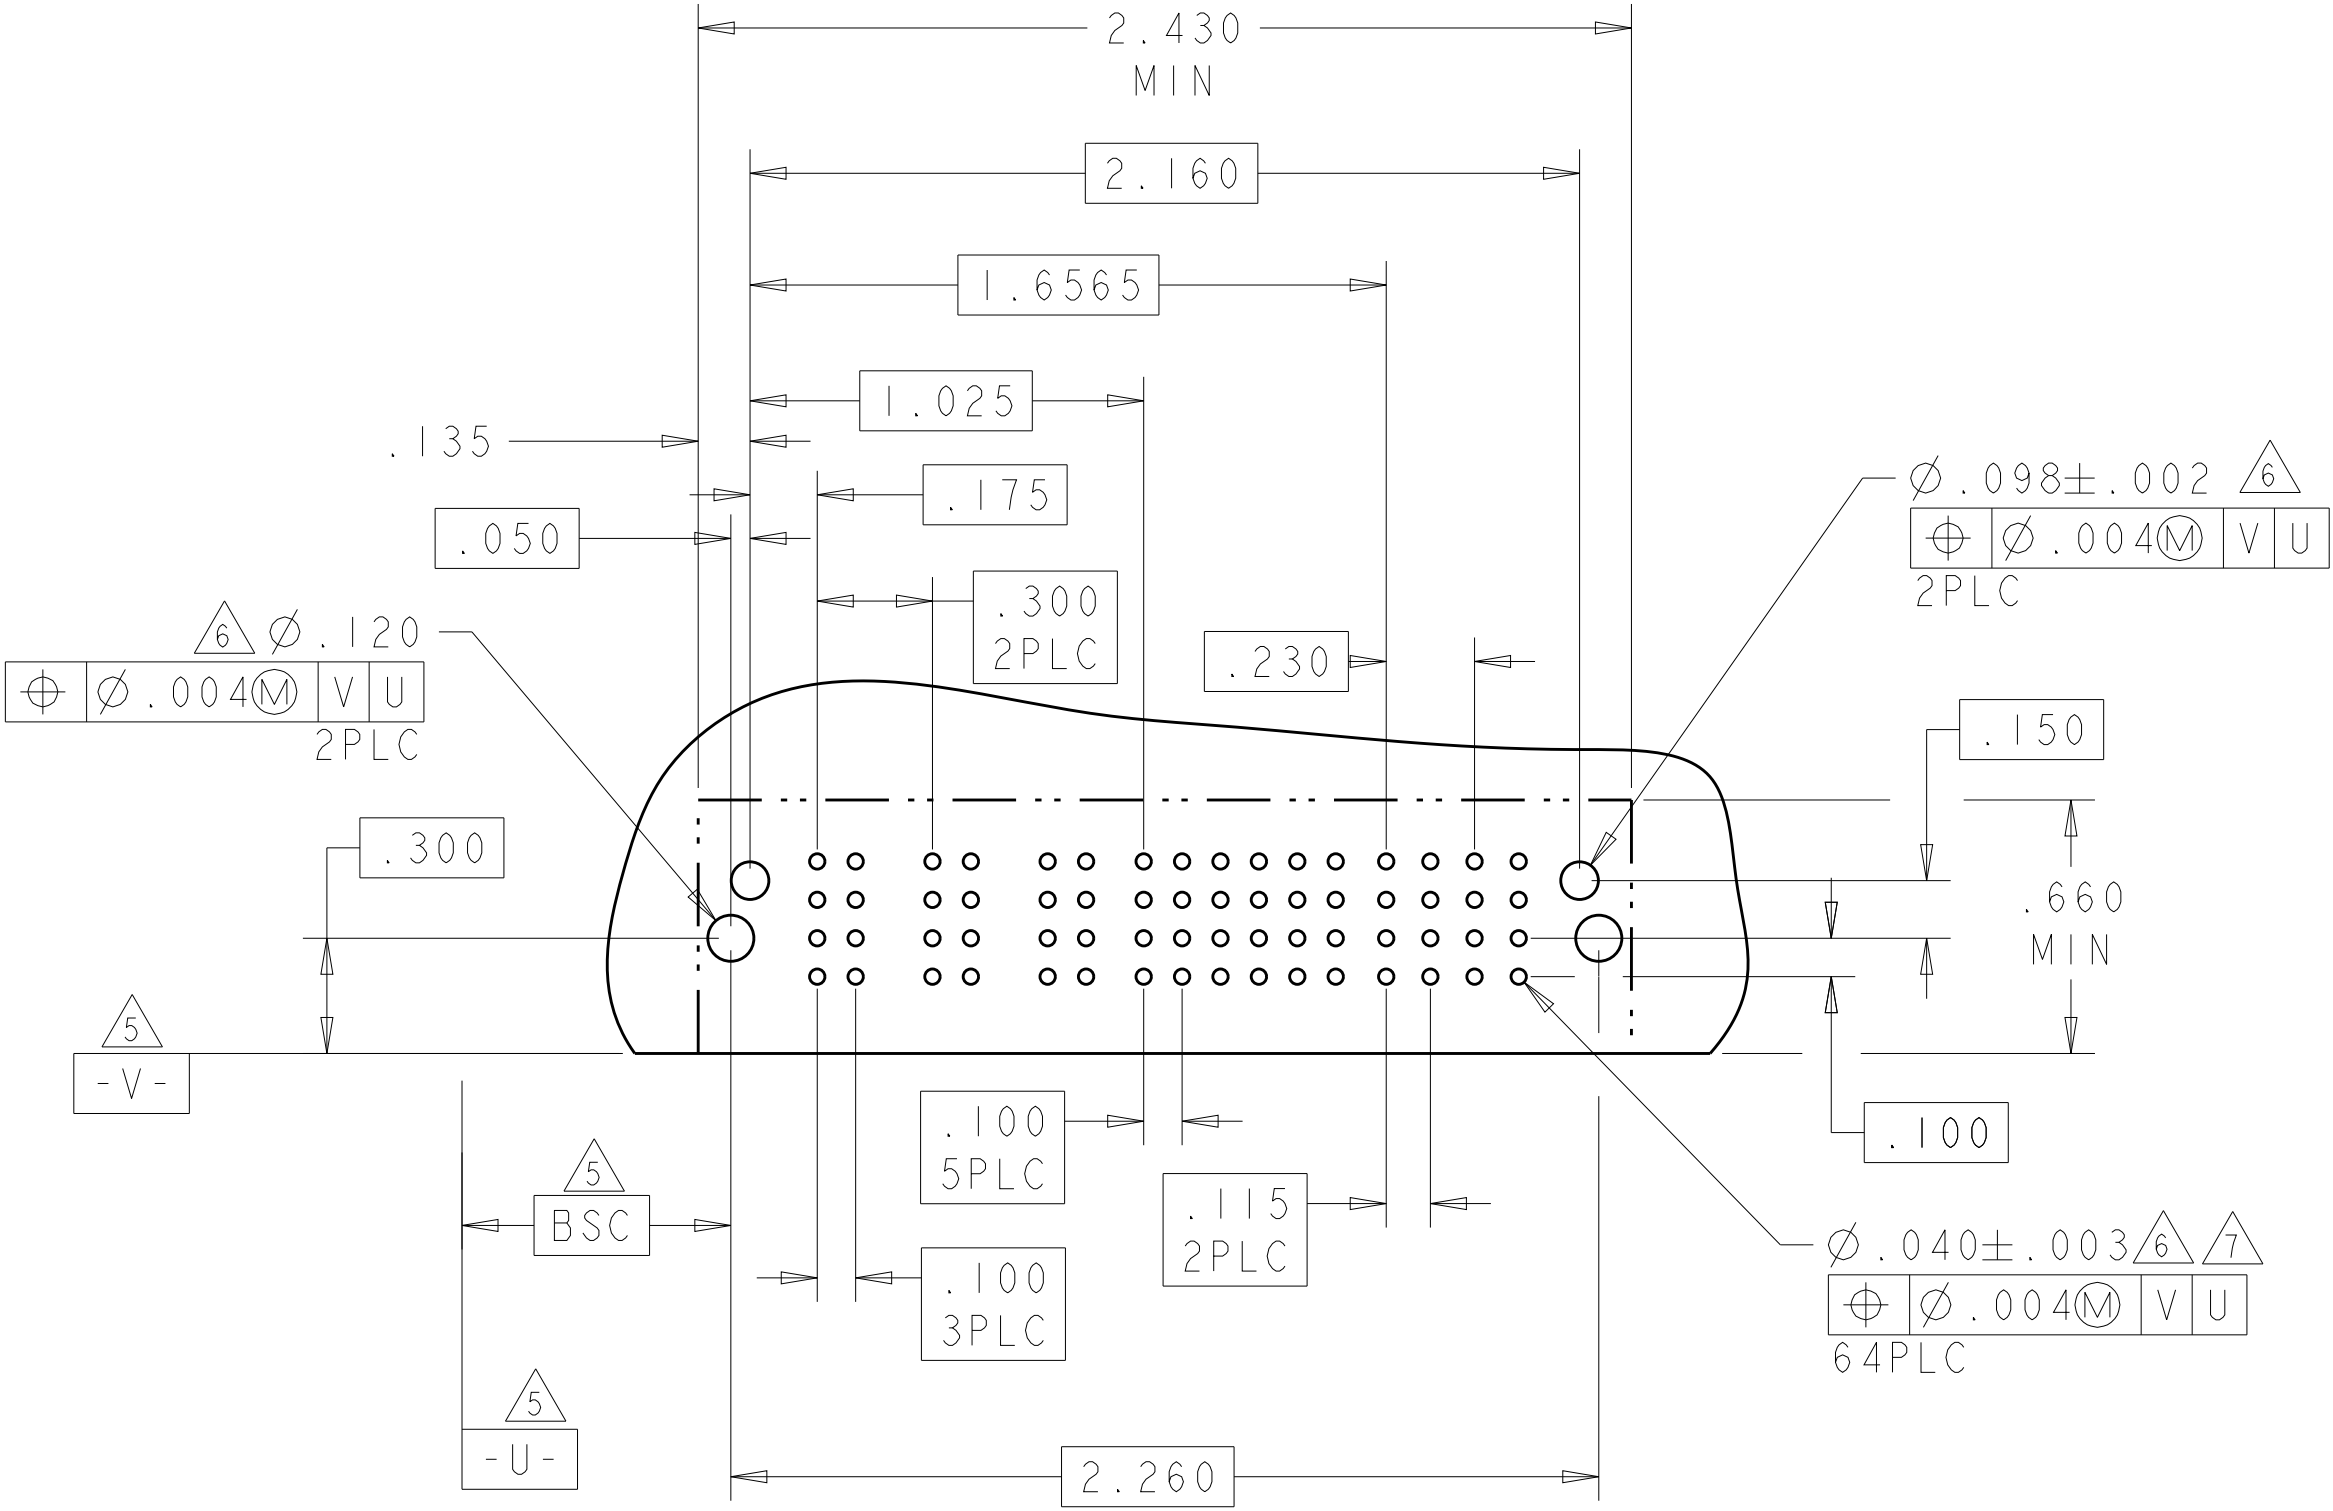

PART NUMBER	ROWS		POWER				BLANK	SIGNAL			POWER			
			P1	P2	P3	P4		1	2	3	P5	P6	P7	
3-6450830-0	D C B A						BLANK	F	J	J				
								F	FK	K				
								N	N	FN				
								S	S	S				
4ACP + 12S + 3P														






















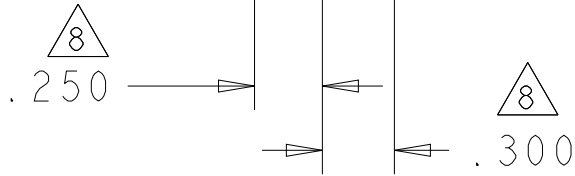


PART NUMBER	ROWS		POWER				BLANK	SIGNAL			POWER			
			P1	P2	P3	P4		1	2	3	P5	P6	P7	
3-6450830-2	D C B A	HD	TM TM			BLANK	F	J	J	TM TM			TM TM	HD
							F	FK	K					
							N	N	FN					
							S	S	S					
4ACP + 12S + 3P														

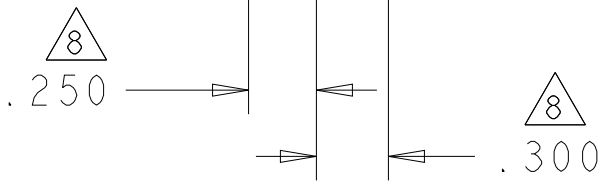


NO CONTACTS LOADED

PART NUMBER	ROWS		POWER				BLANK	SIGNAL			POWER			
			P1	P2	P3	P4		1	2	3	P5	P6	P7	
3-6450830-3	D C B A					BLANK	F	J	J					
							F	FK	K					
							N	N	FN					
							S	S	S					
4ACP + 12S + 3P														

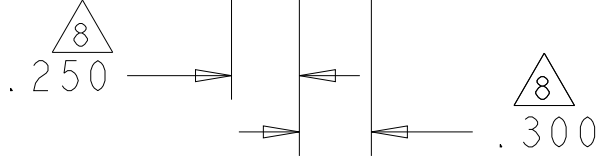



NO CONTACTS LOADED

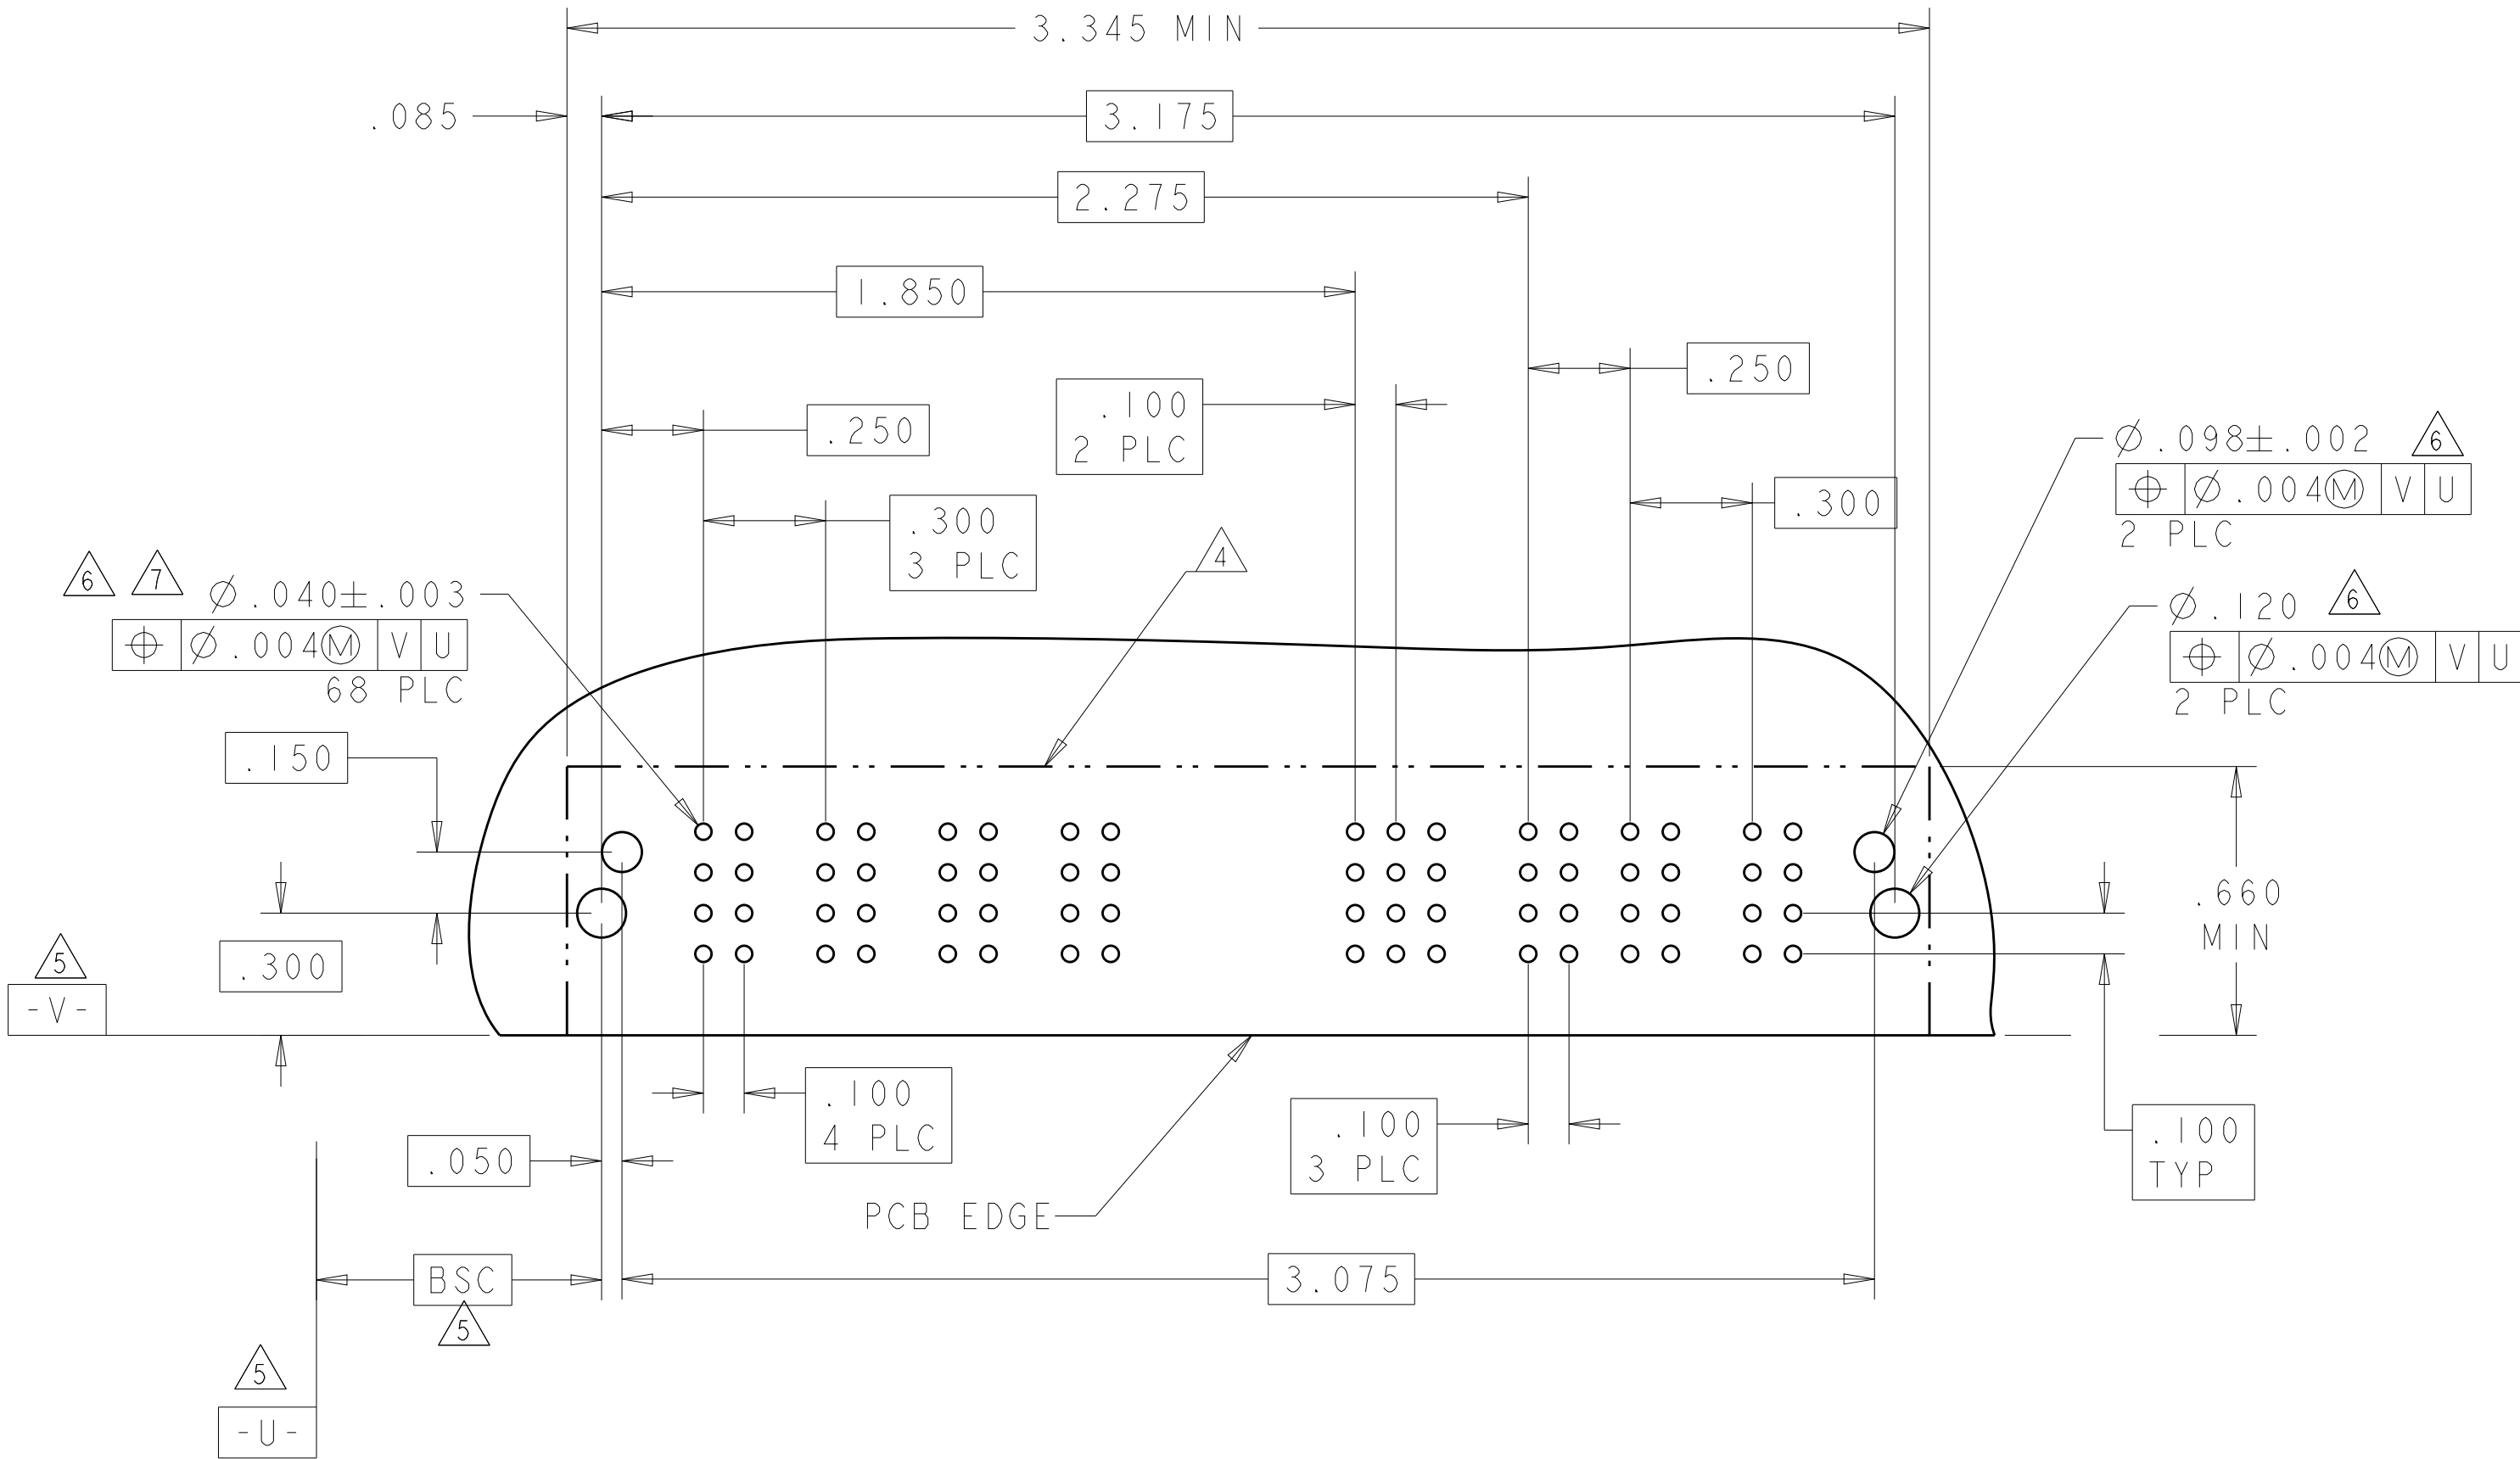



RECOMMENDED PCB LAYOUT FOR 3-6450830-0, 3-6450830-2 AND 3-6450830-3


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	STE TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	10APR2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
0 PLC ±.01		PRODUCT SPEC		SIZE A100779	
2 PLC ±.01		APPLICATION SPEC		CAGE CODE 6450830	
3 PLC ±.005		WEIGHT		SHEET 16	
4 PLC ±.002		CUSTOMER DRAWING		OF 42	
ANGLES ±.002		SCALE 4:1		REV S2	
FINISH		DATE 10APR2007			


PART NUMBER	ROWS		POWER		SIGNAL		POWER				
			P1	P2	I	2	L P1	L P2	L P3	L P4	
3-6450830-6	D		TM	TM	J	J	LM	LM	LM	LM	
	C				K	K					
	B				N	N					
	A				S	S					
HD			HD								
2ACP + 8S + 4LP											

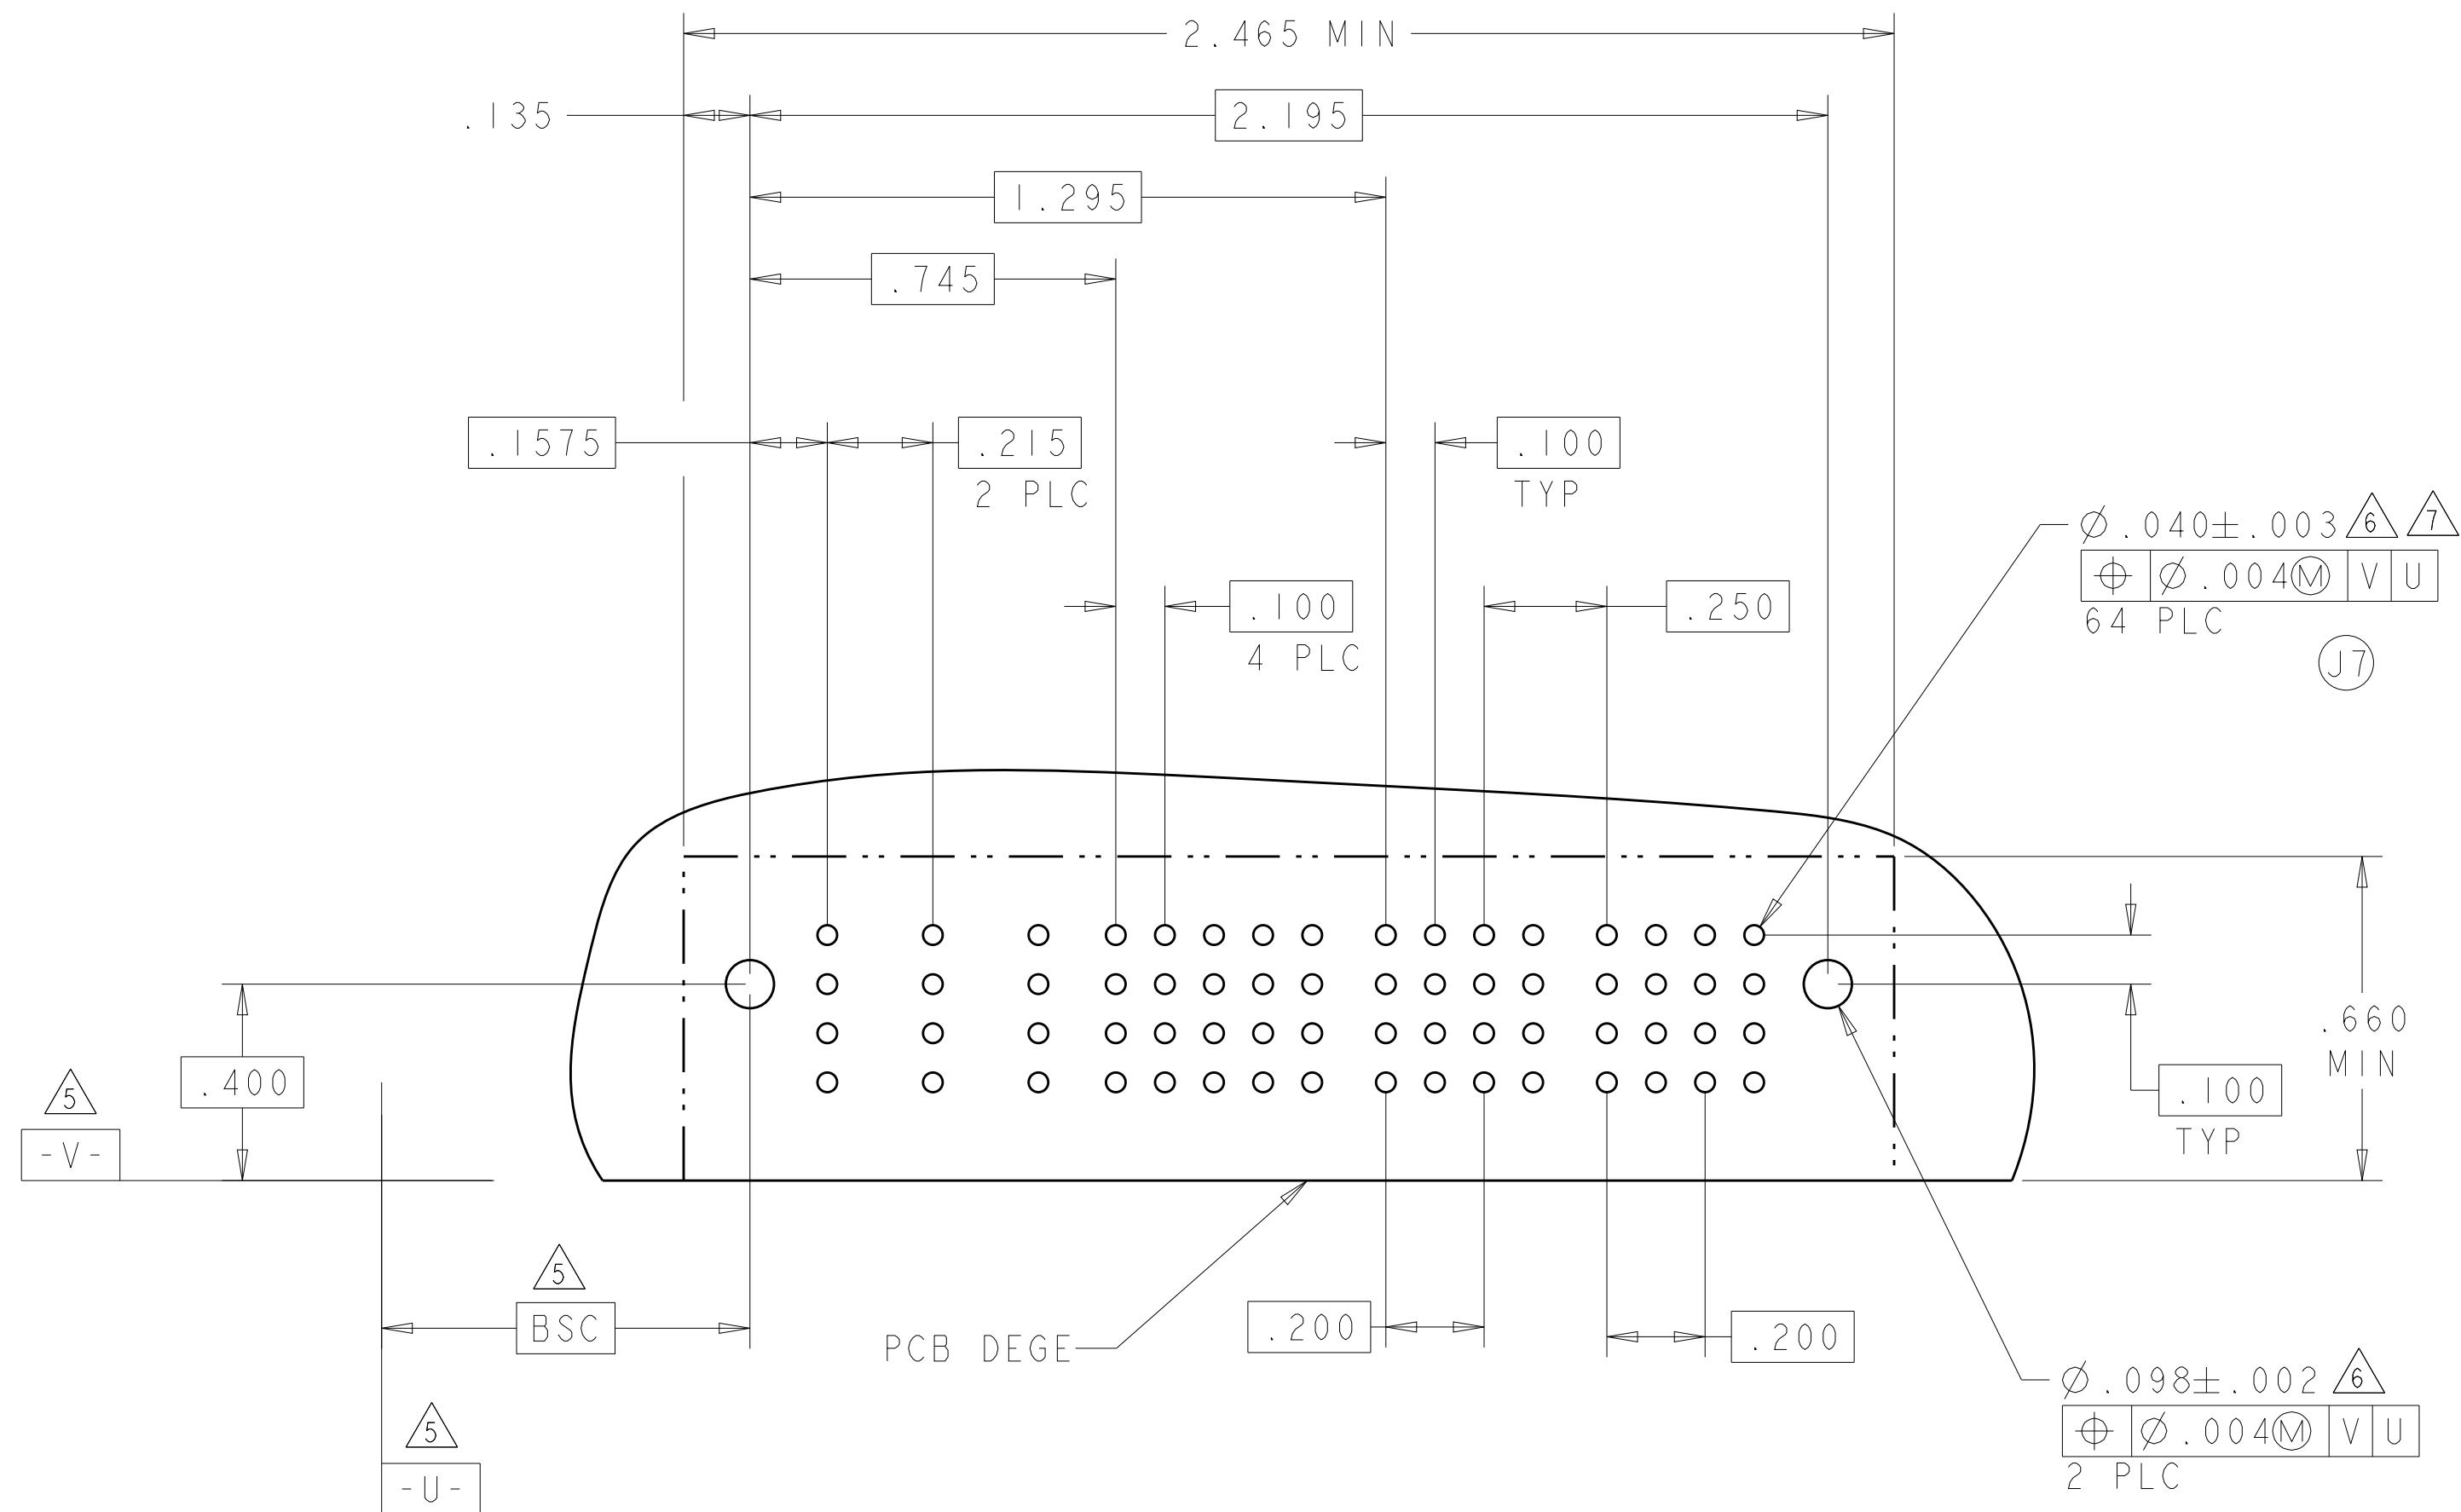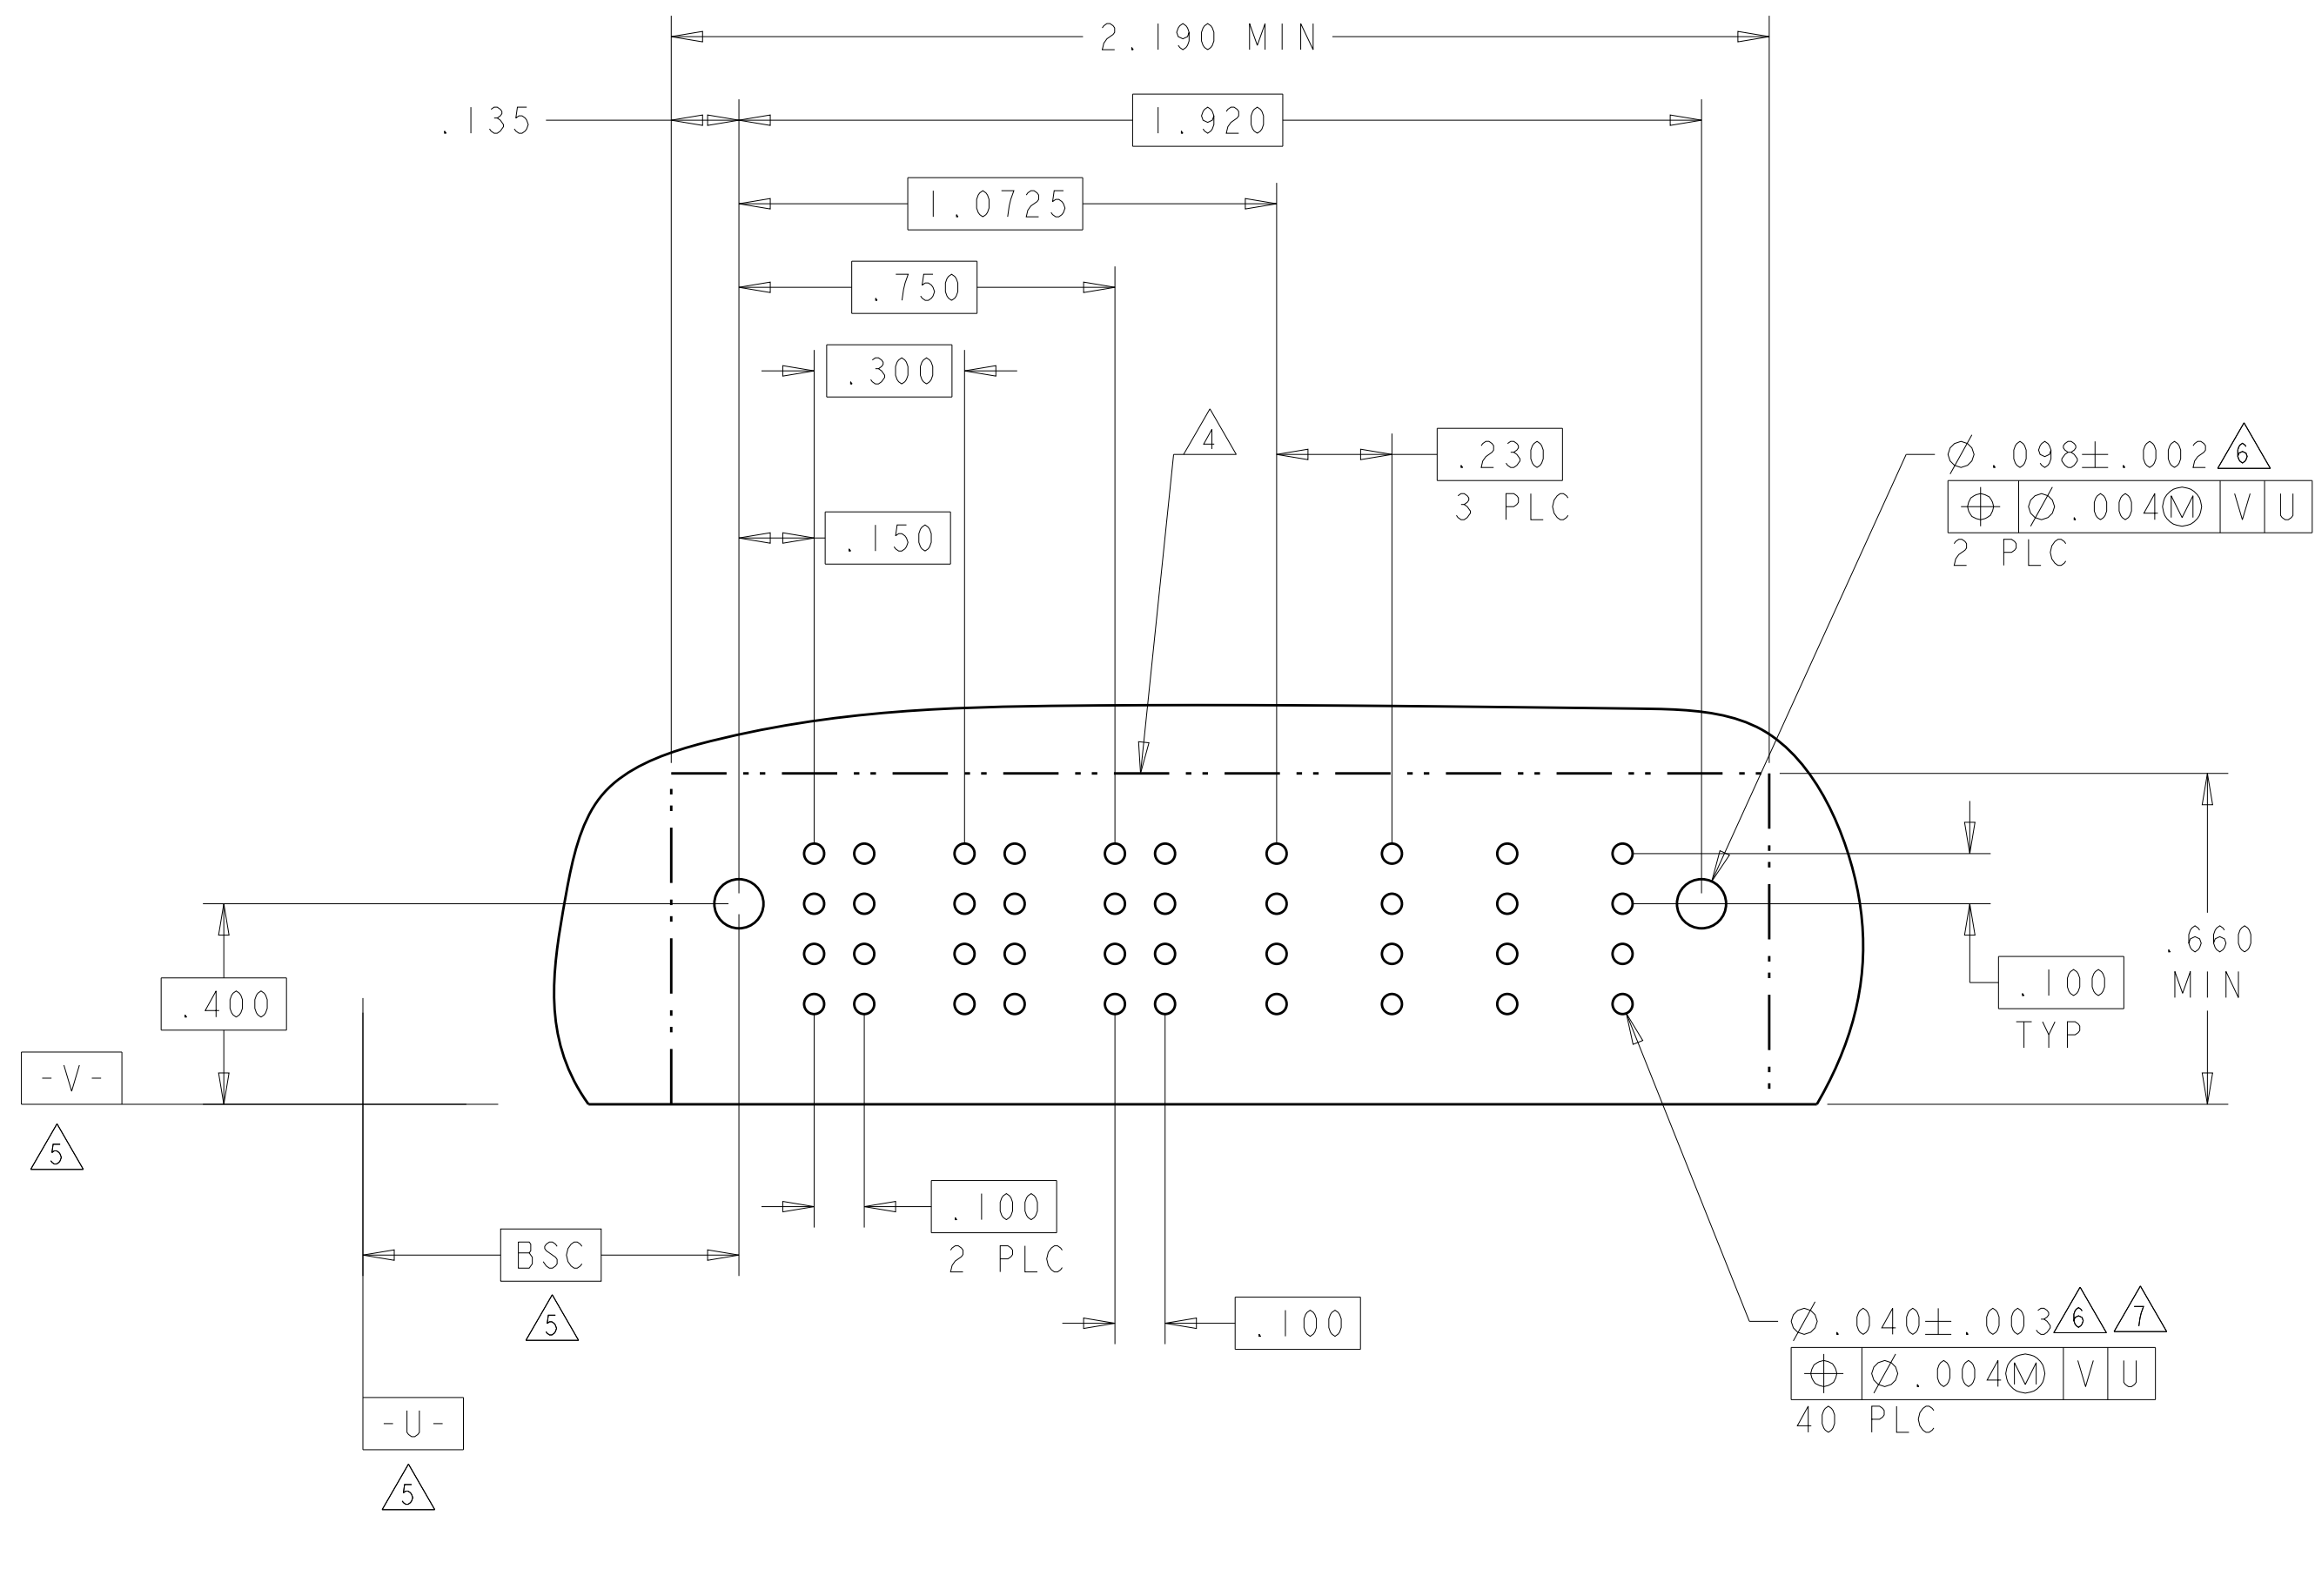


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS:		CHW S_ZHAO 10APR2007			
INCHES		APVD S_ZHAO -			
		NAME			
0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±?		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE		PRODUCT SPEC 108-2292	
MATERIAL		FINISH		APPLICATION SPEC	
-		-		114-13251	
-		WEIGHT		SIZE	
-		-		A 00779	
-		CUSTOMER DRAWING		C 6450830	
-		SCALE		DRAWING NO	
-		4:1		18 OF 42	
-		SHEET		REV	
-		18		S2	

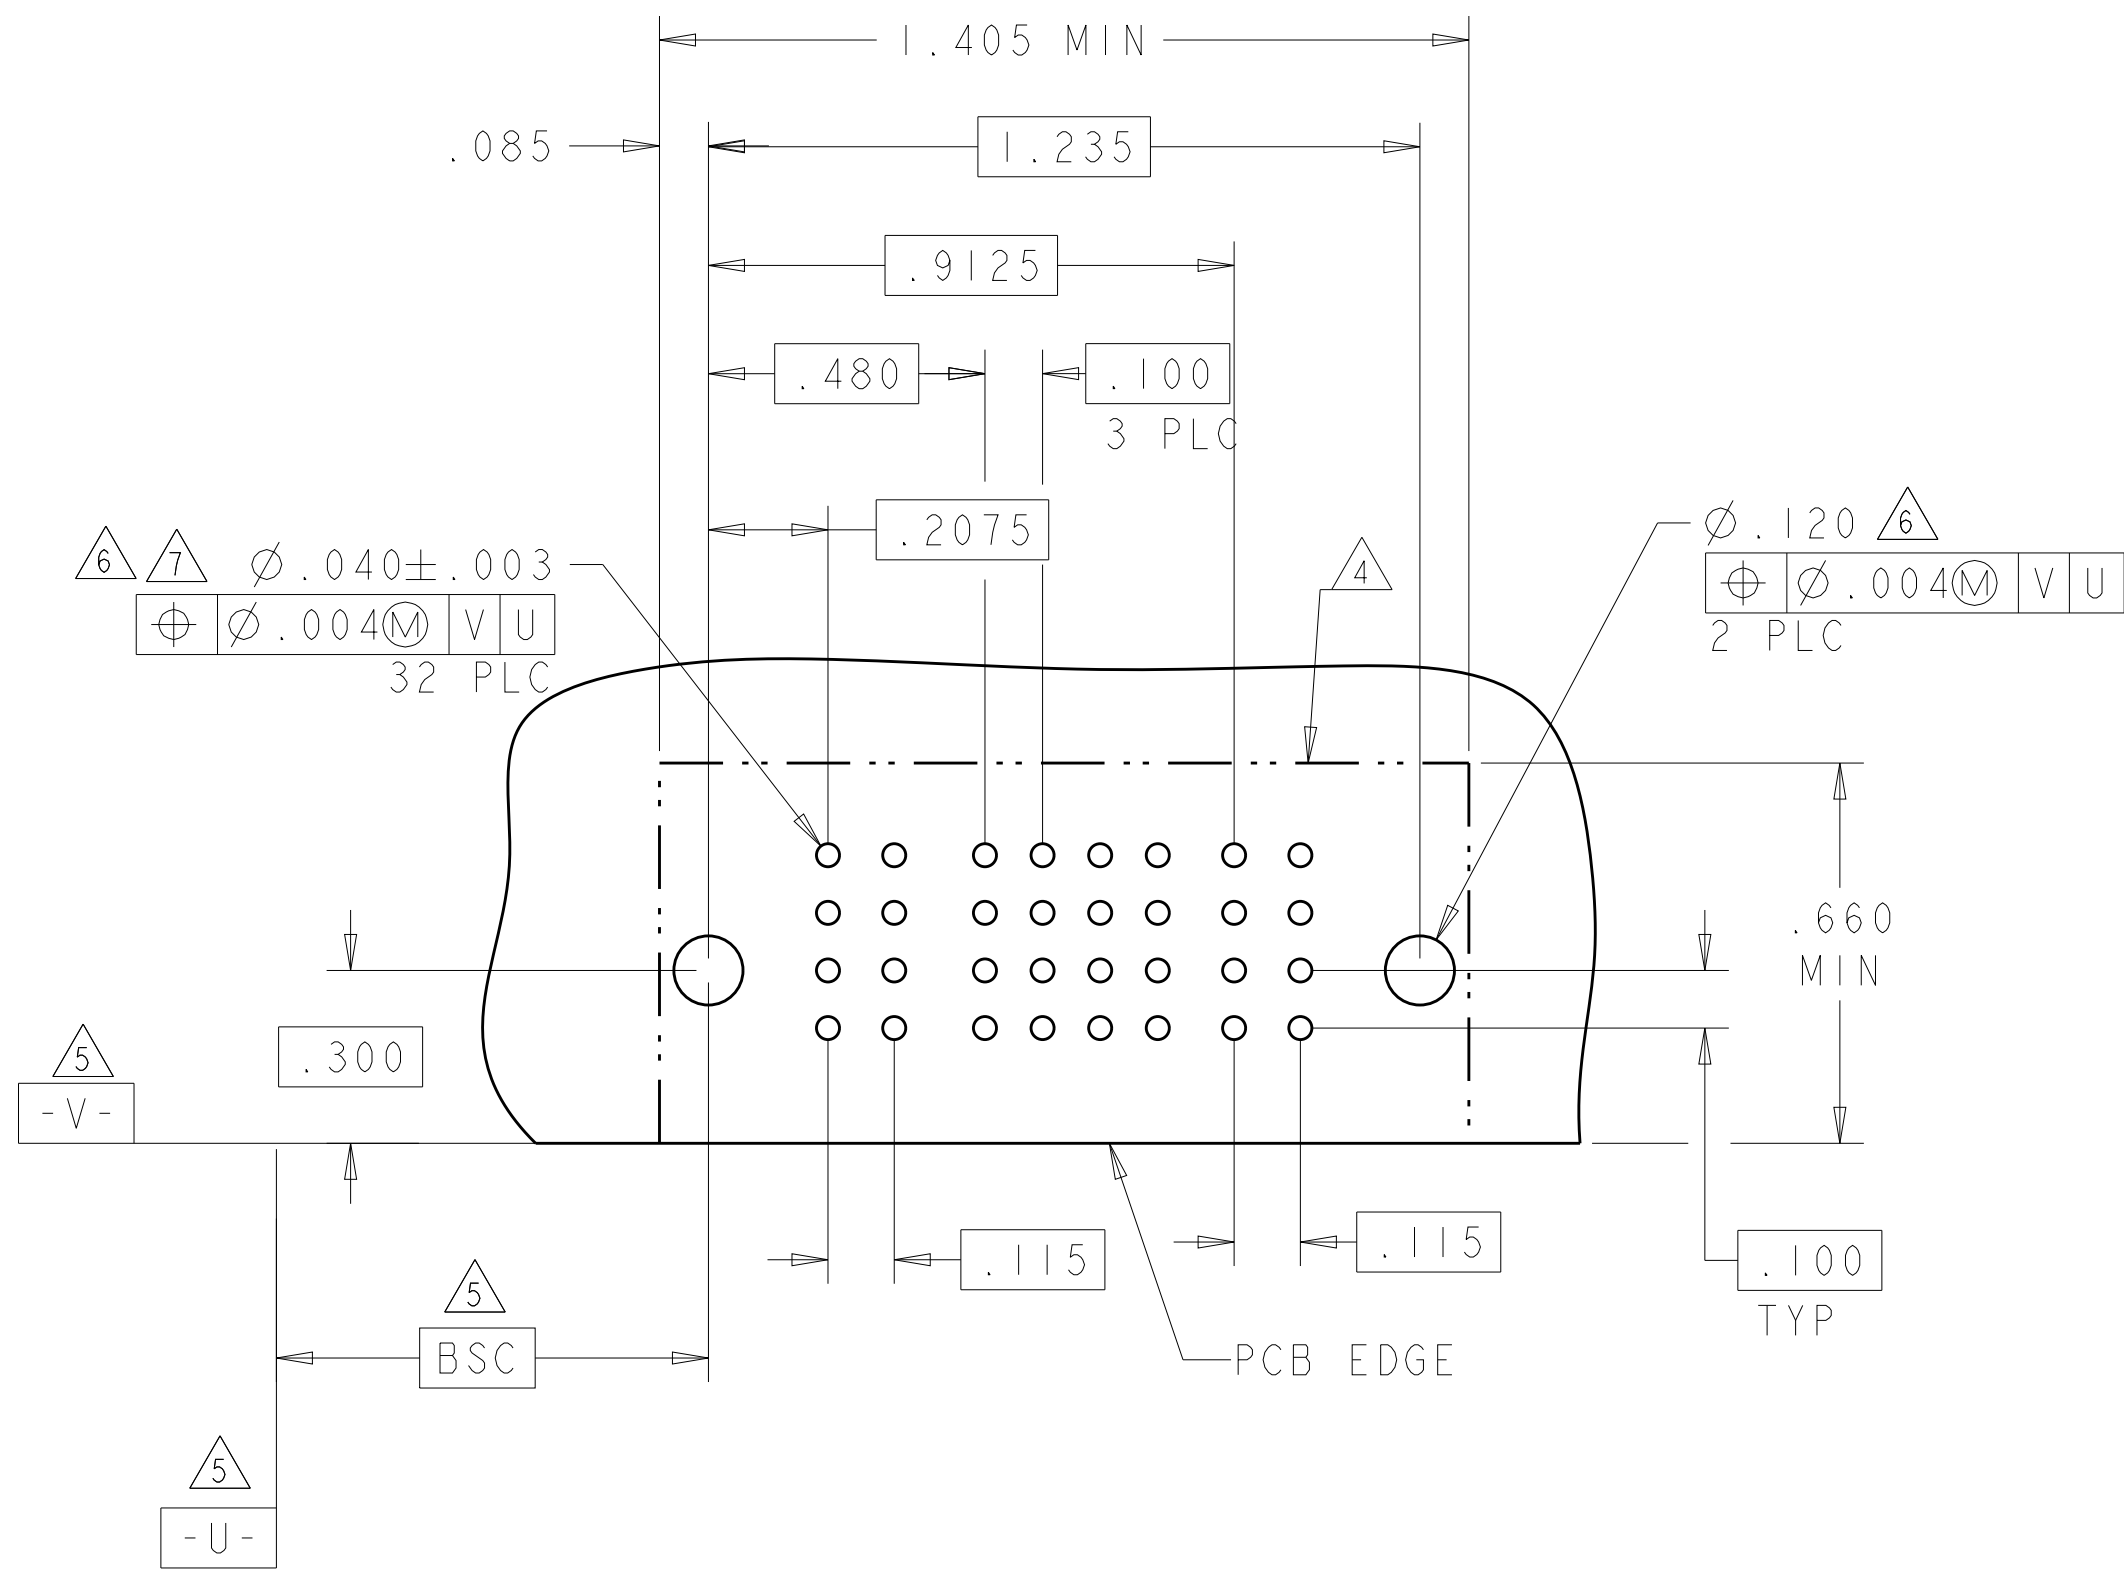[illegible]4805 (3/11)

4805 (3/11)

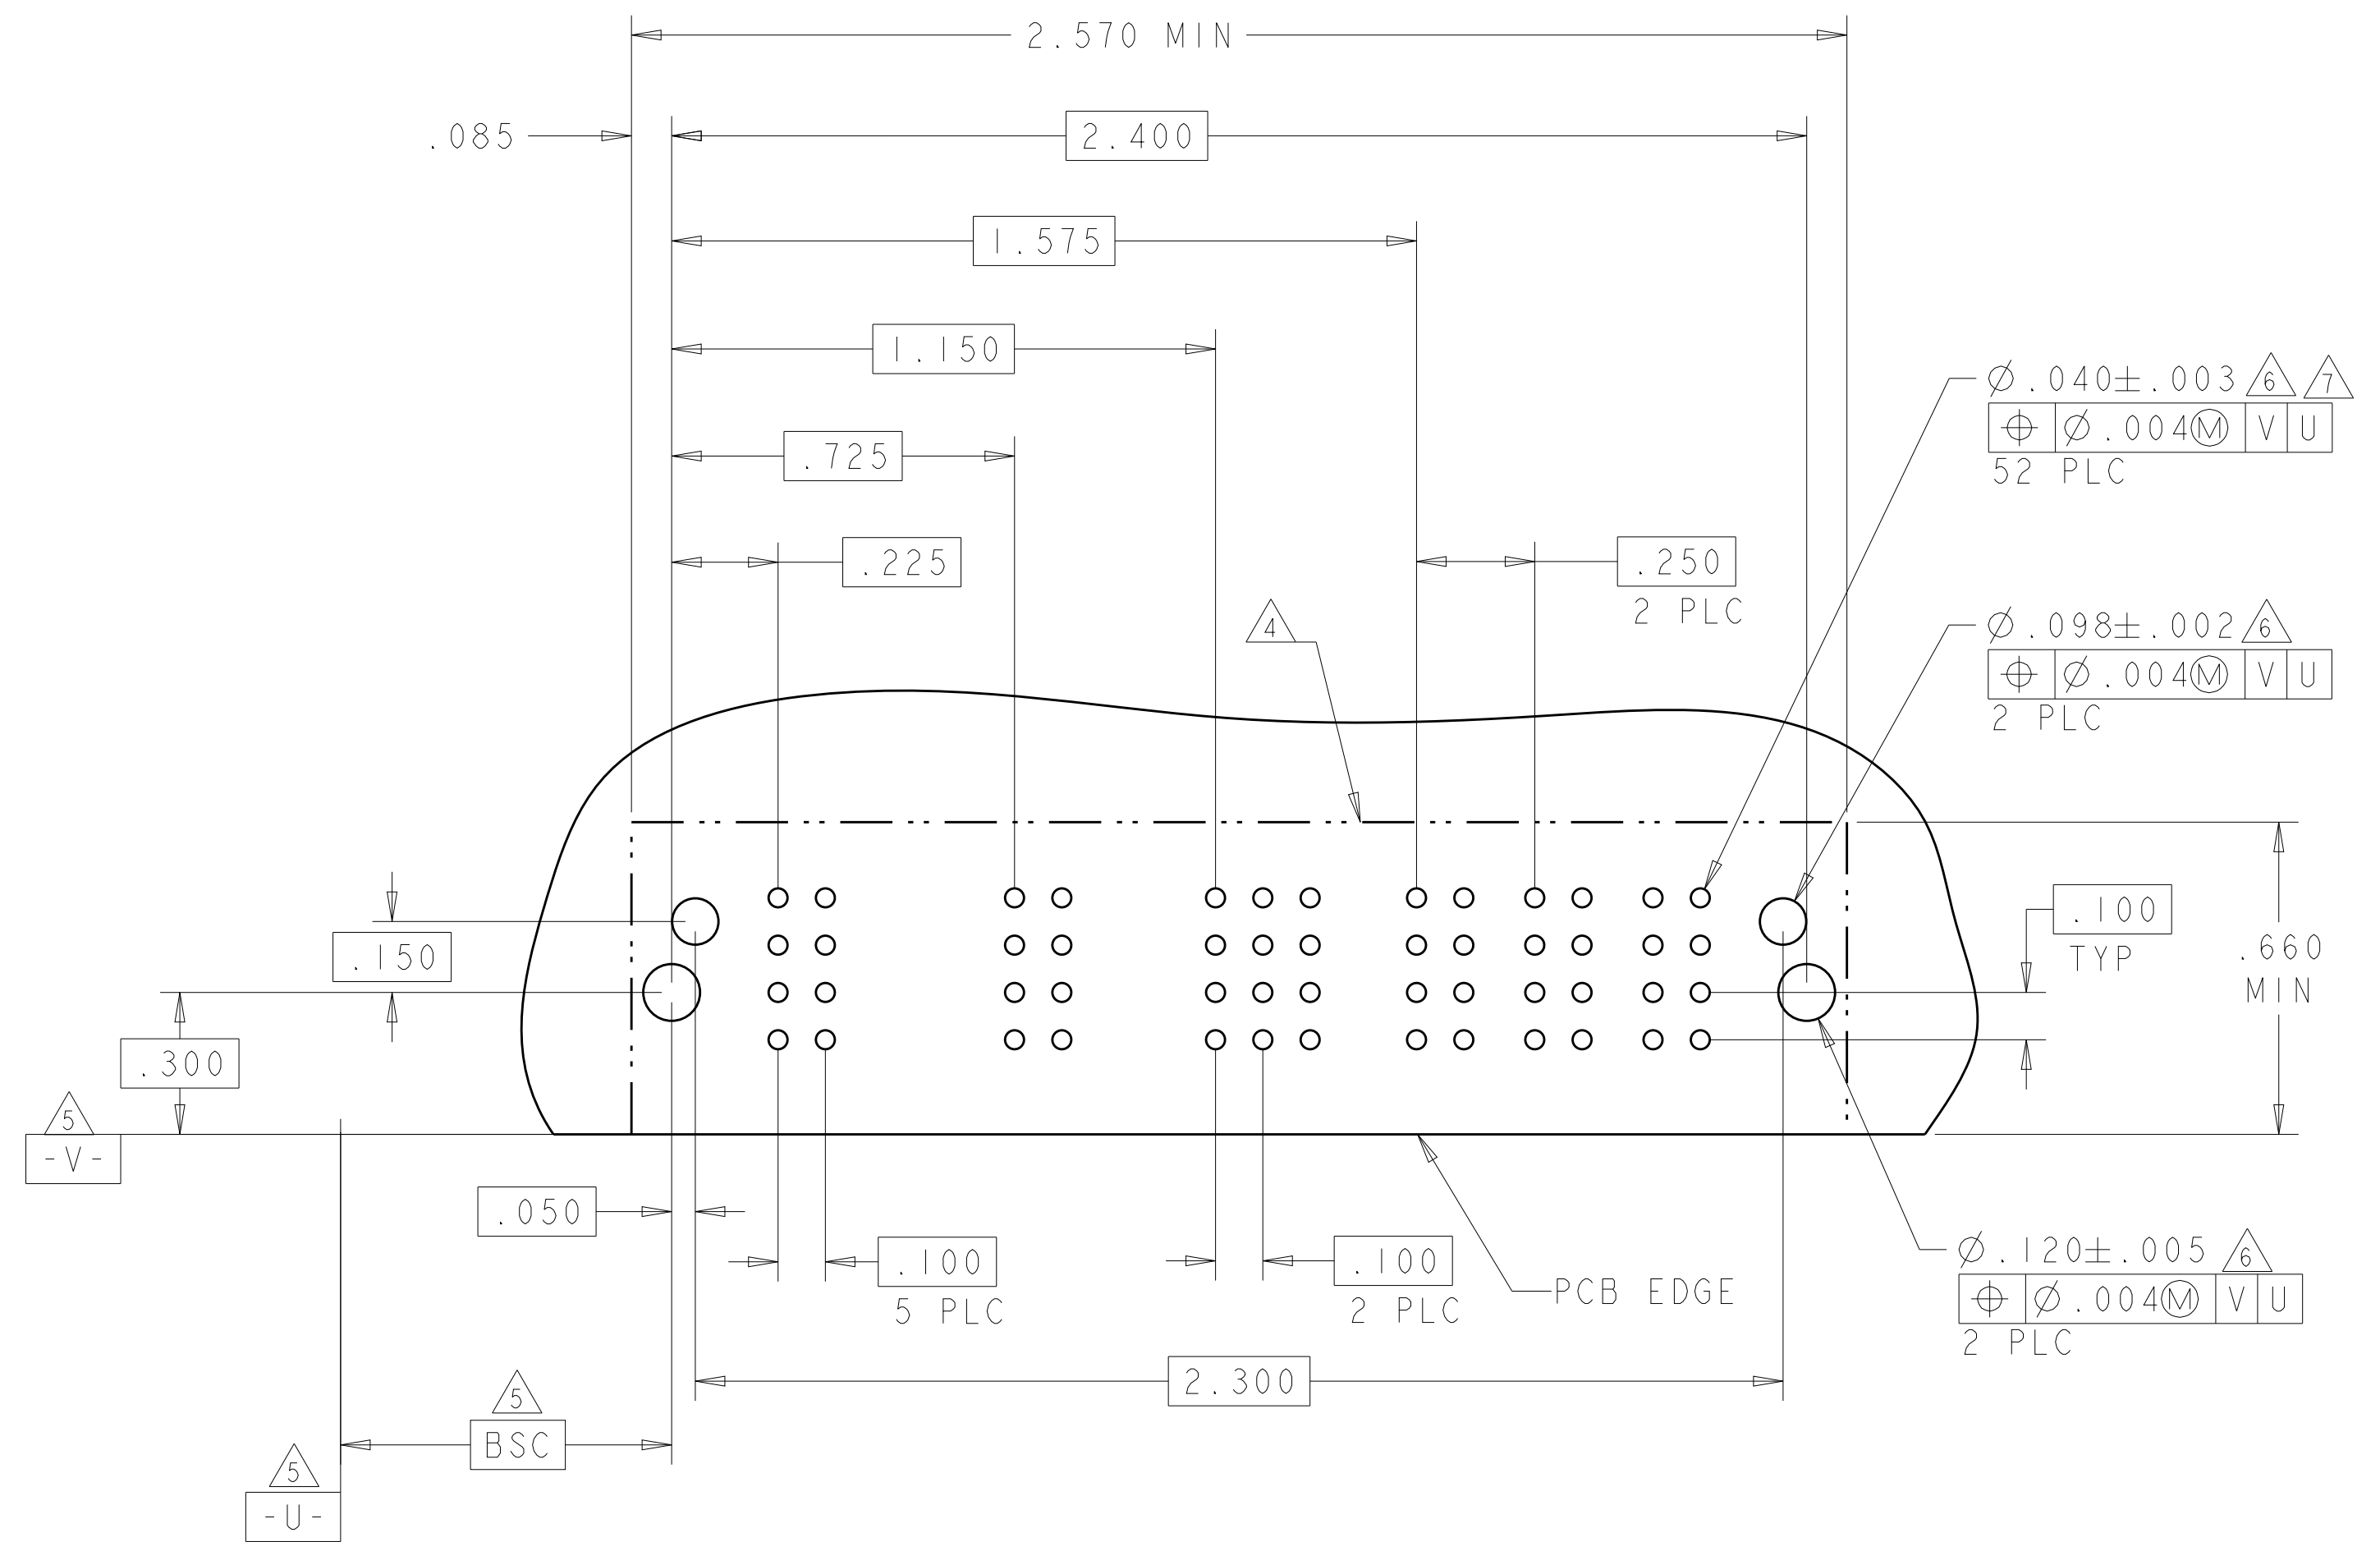[illegible]4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	1	2	P3	P4	
4-6450830-7	D		LM	LM	F J E		TM	TM	
	C				K	F			
	B				N	N			
	A				S	S			
2LP + 8S + 2P			HD						HD

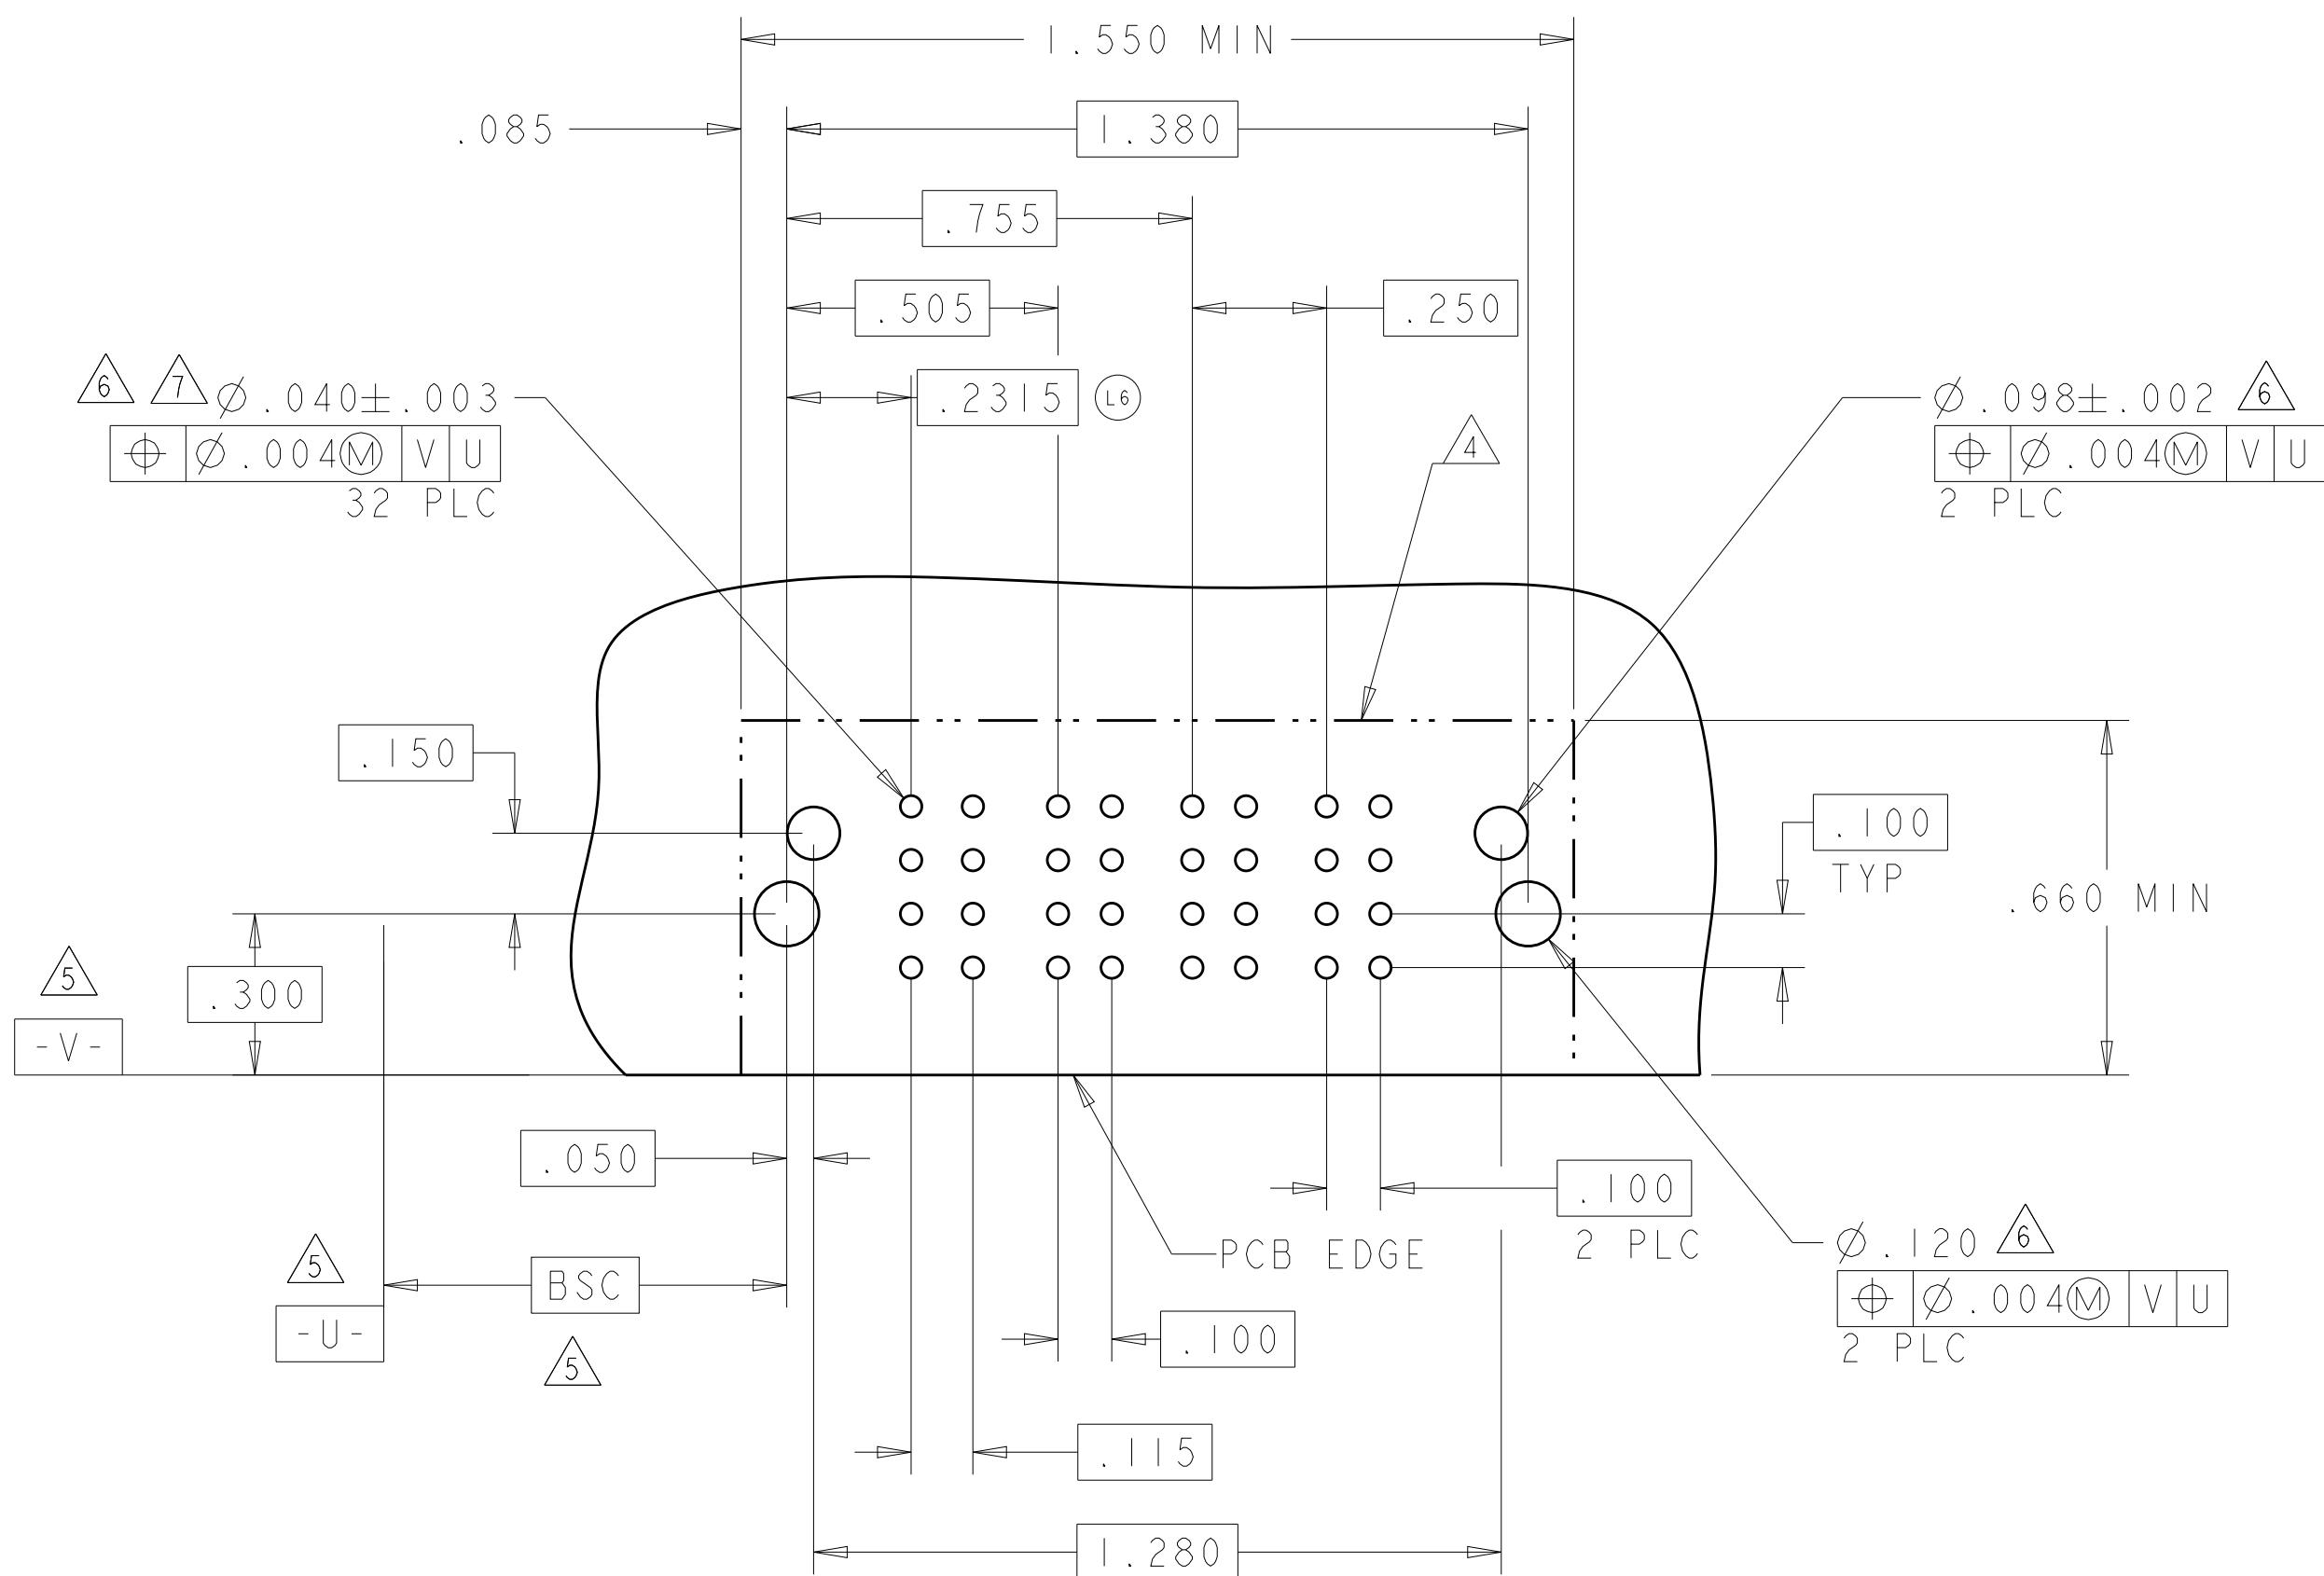4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	1	2	3	4	5	6	PI	P2	P3	
4-6450830-8	D C B A		LM		LM		LM		LM		J	J	J	J	J	J	TM	TM	TM	
											K	K	K	K	K	K				
											N	N	N	N	N	N				
											S	S	S	S	S	S				
8LP + 24S + 3P																				

NO CONTACT LOADED

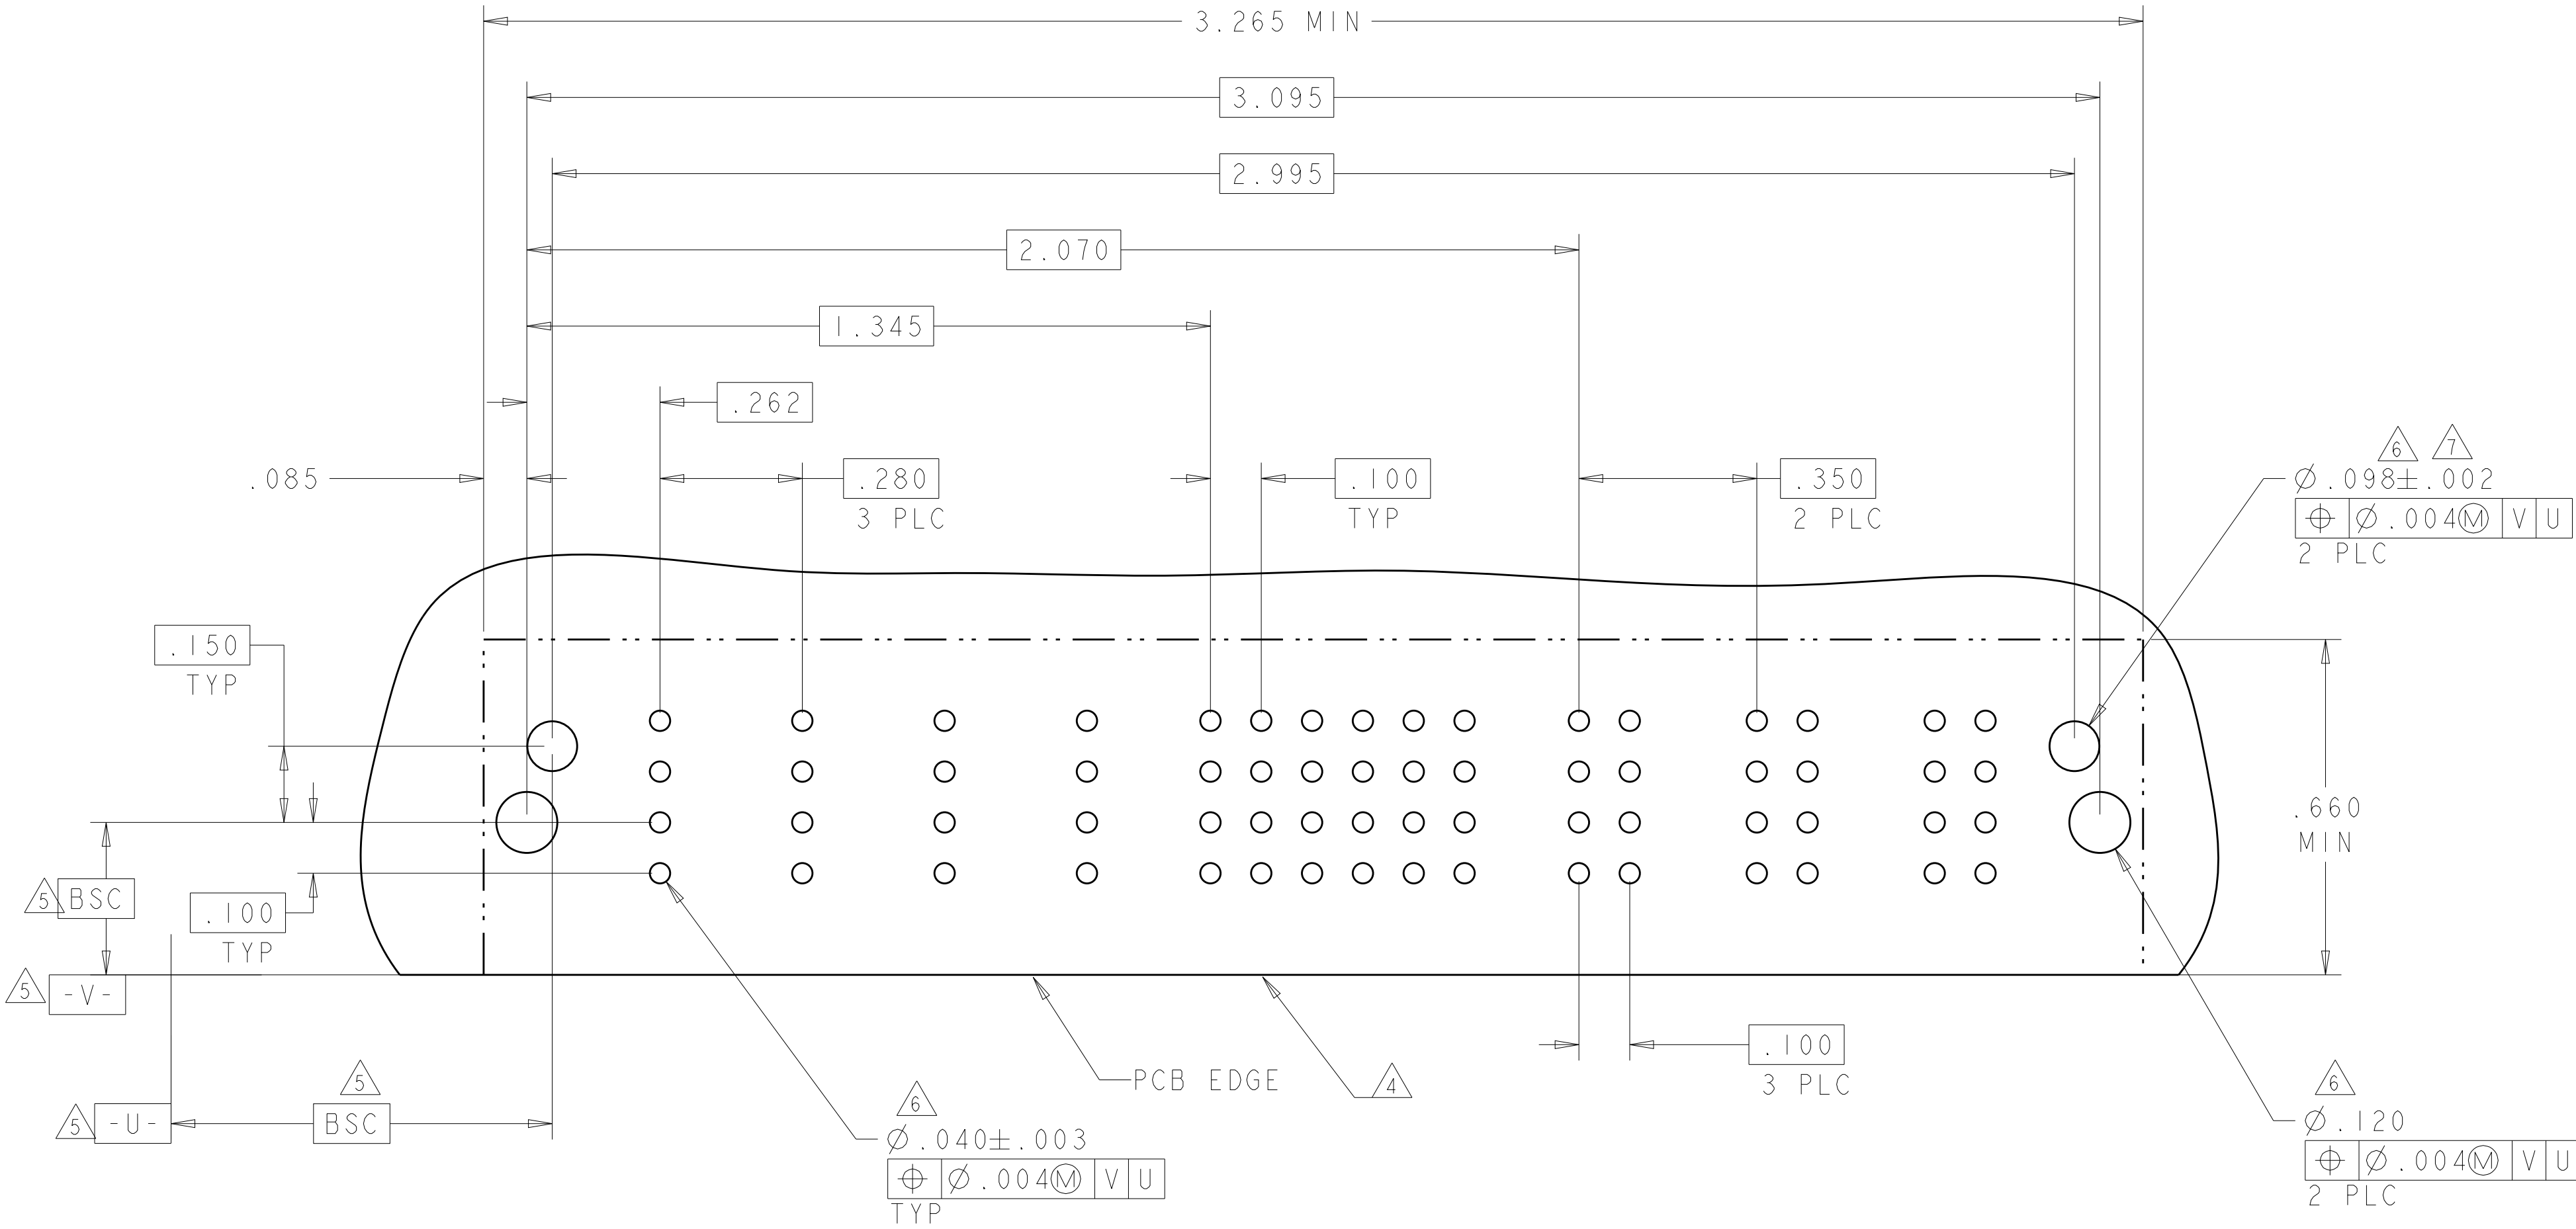

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO	10APR2007		
		CHK S.ZHAO	10APR2007		
DIMENSIONS: INCHES		APVD S.ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH		108-2292 APPLICATION SPEC	
MATERIAL -		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 24 OF 42 REV S2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-



L 8

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
4-6450830-9	D		TM	TM				J	J		TM	TM	TM		
	C							K	K						
	B							G	G						
	A				HD				S	S					
3P + 24S + 3P															


NO CONTACT LOADED

M


PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P1	P2	1	2	P3	P4	P5	
5-6450830-0	D		LM	LM	J	J	LMF	LMF	LMF	
	C				K	K				
	B				N	N				
	A				S	S				
2LP + 8S + 3LP										

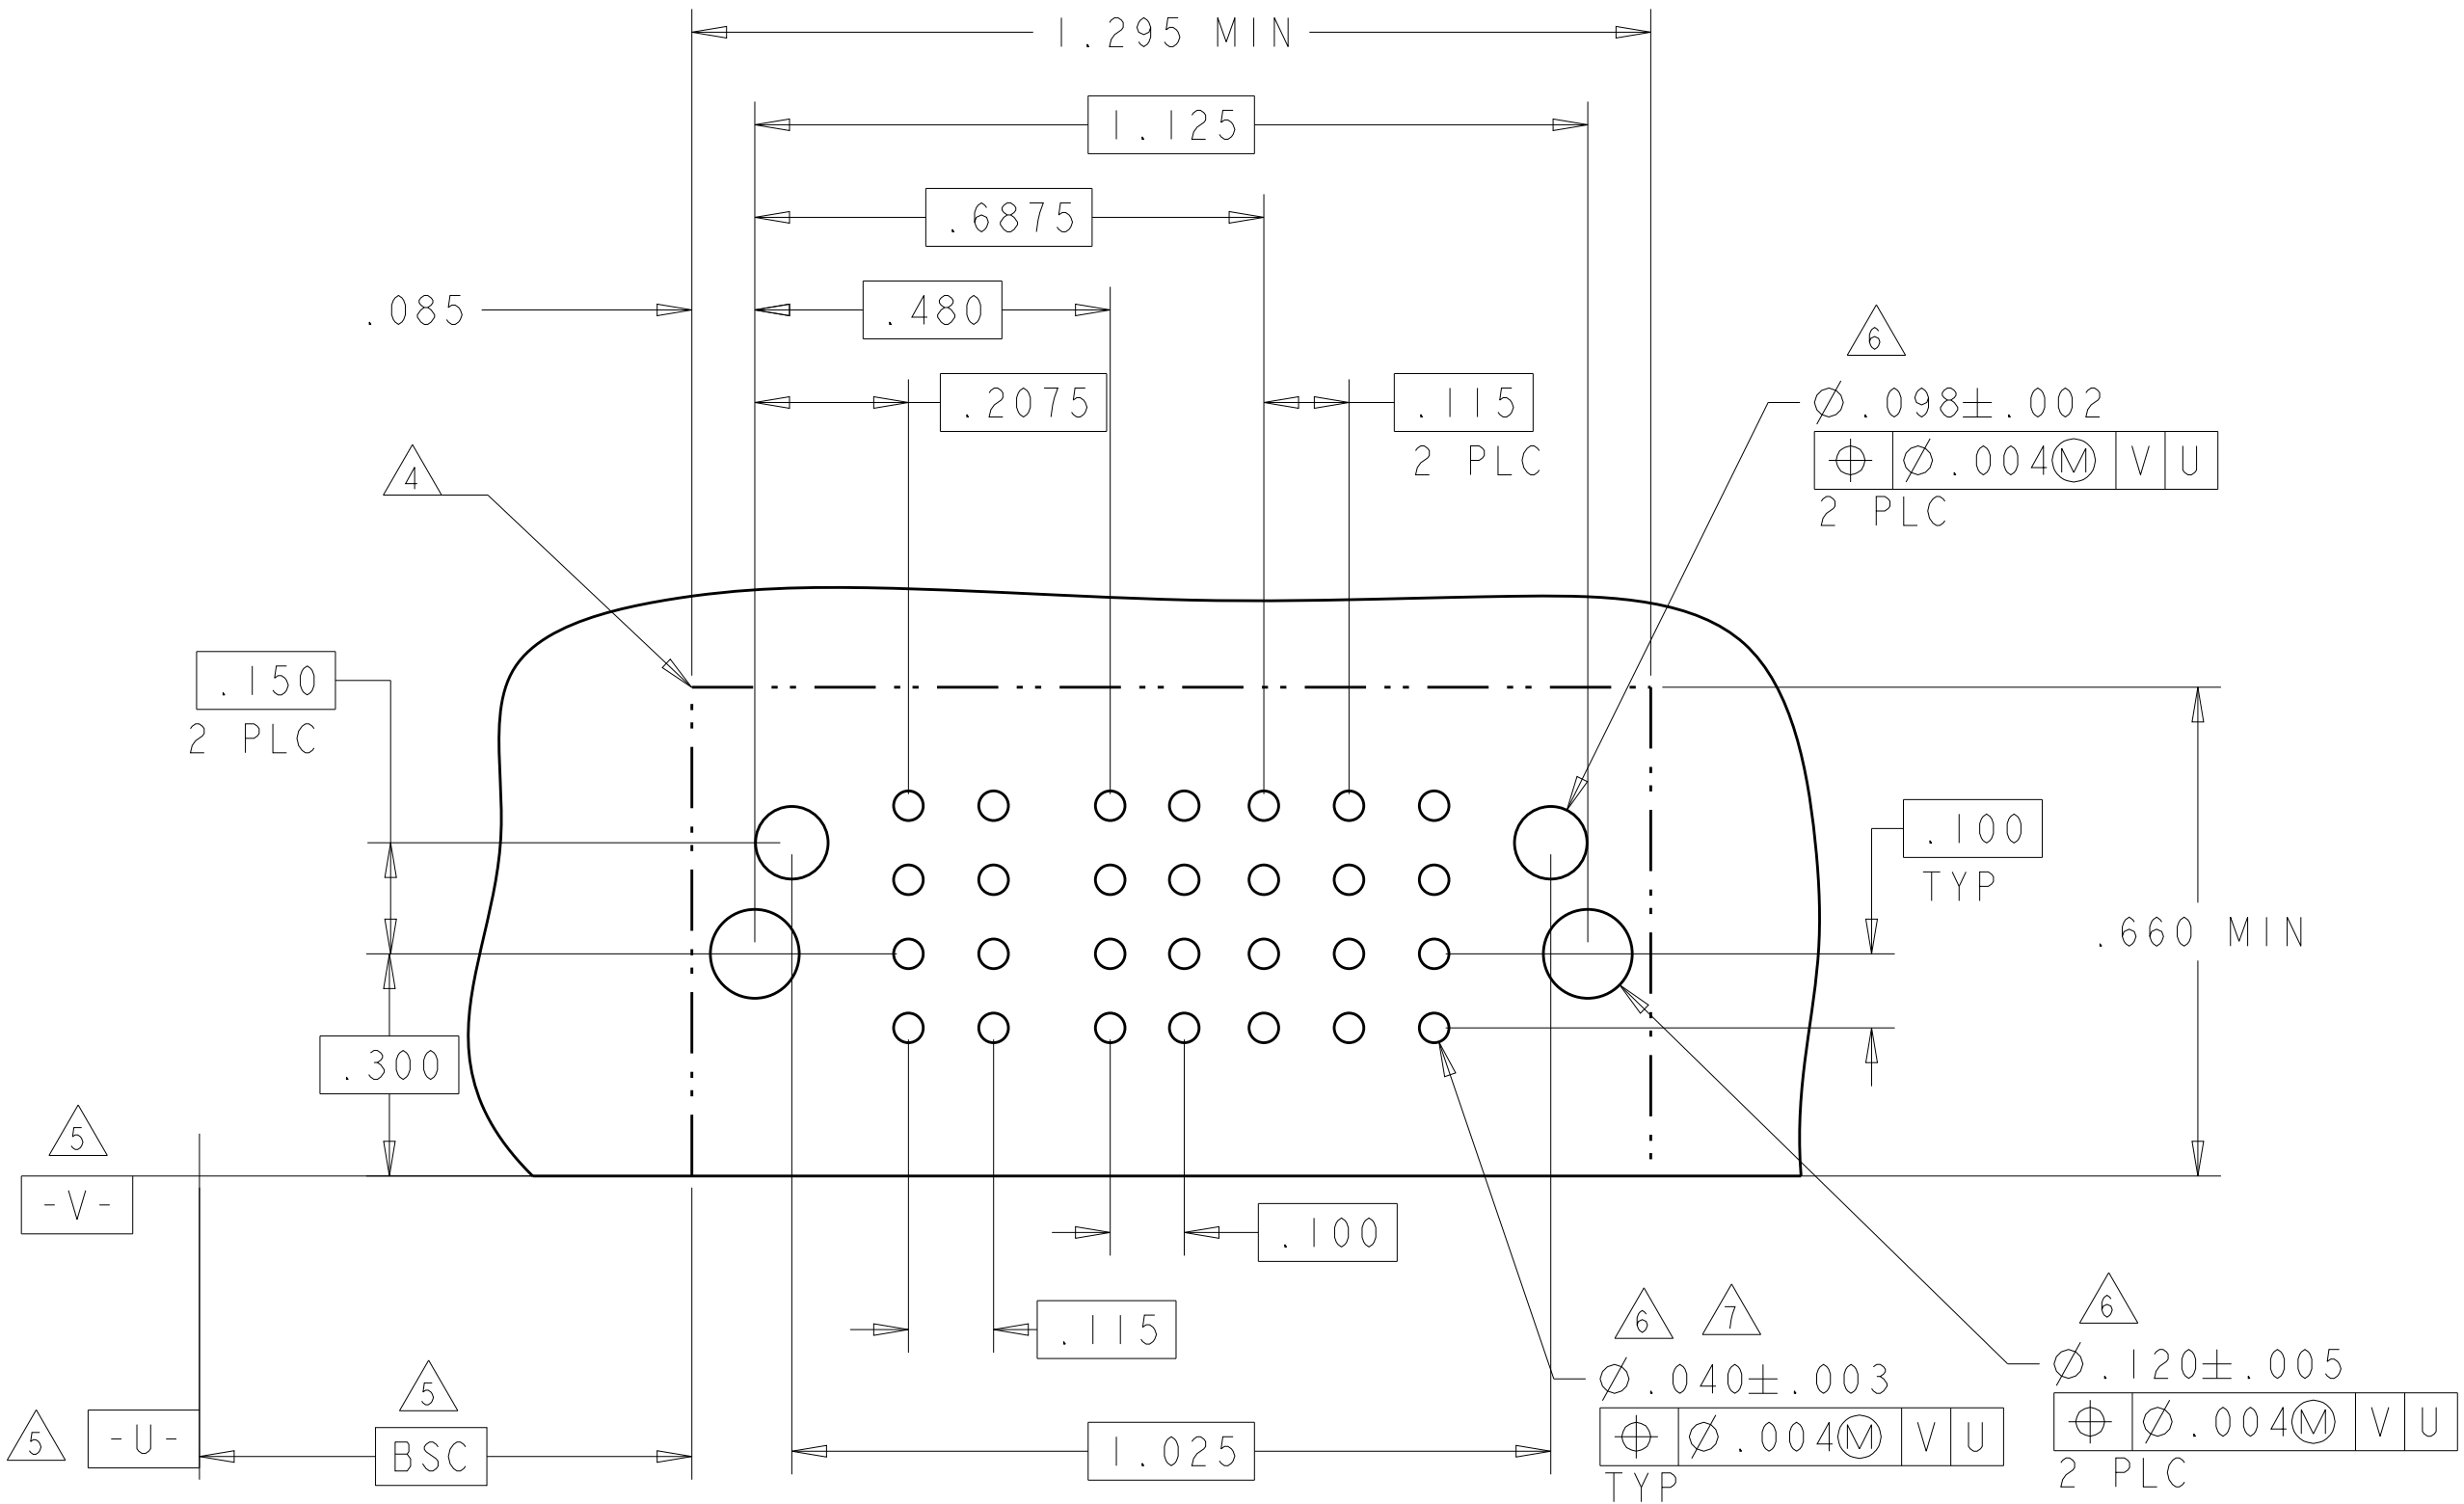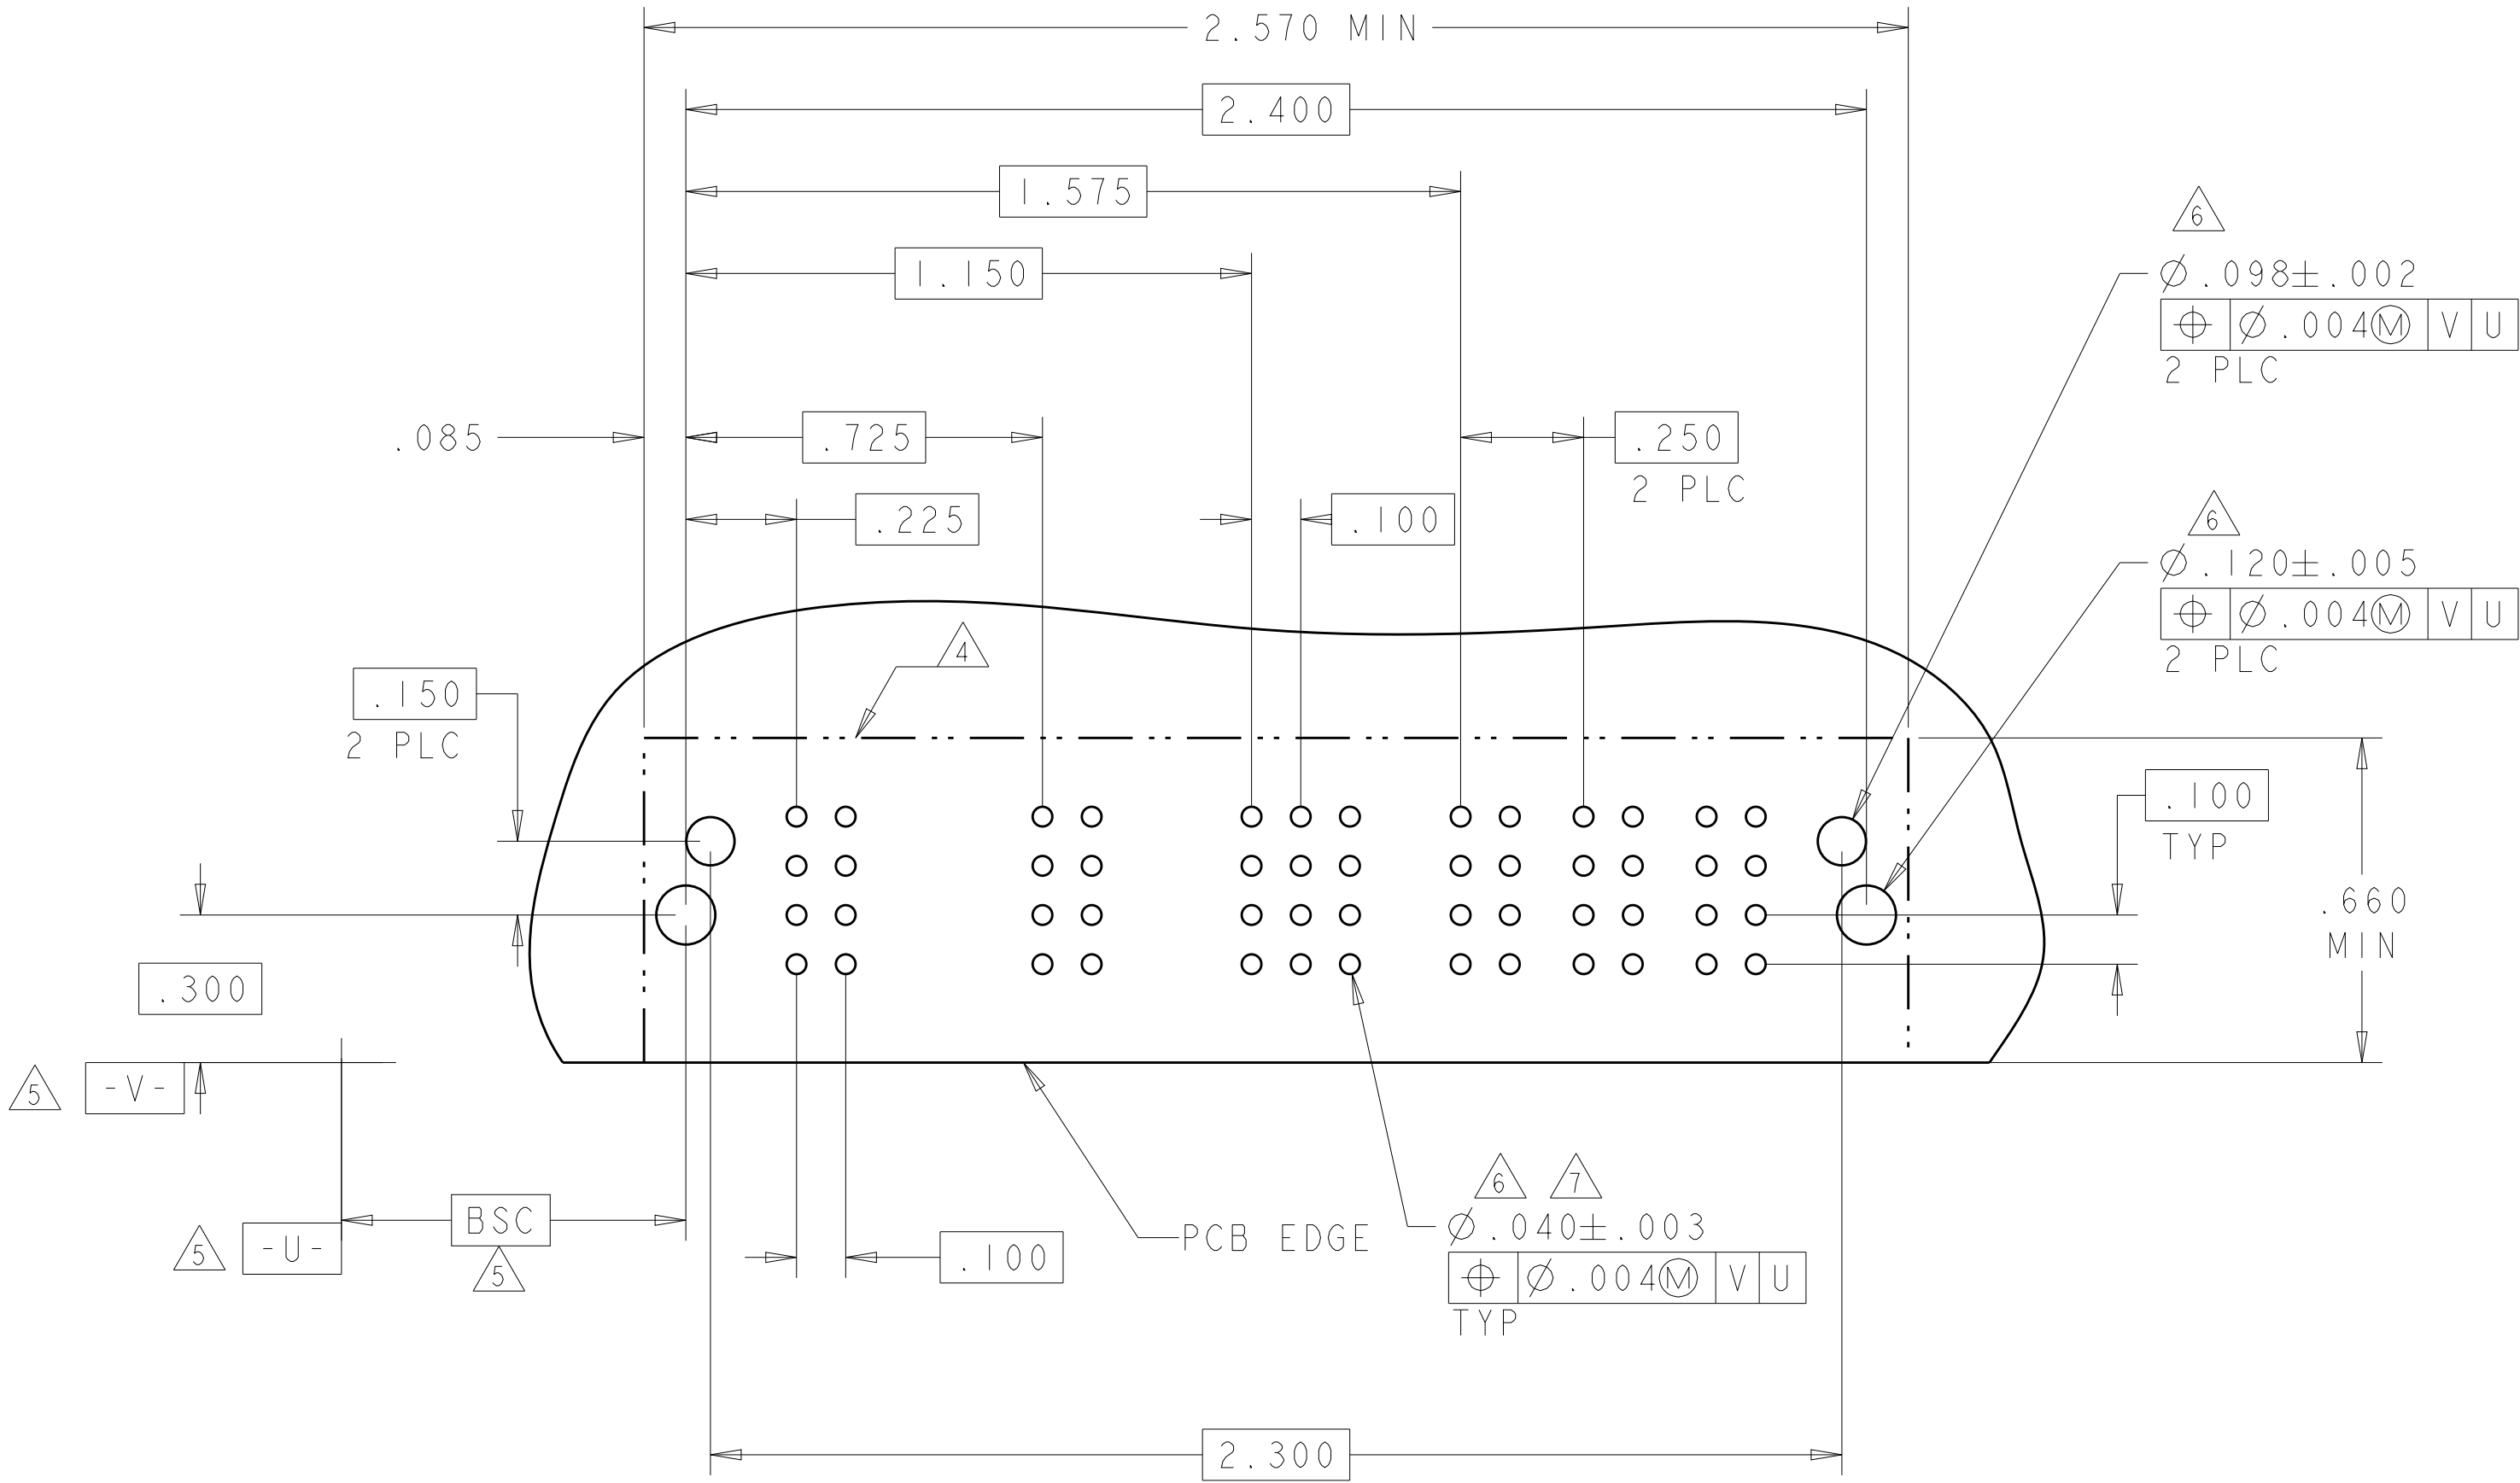


PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P1	P2	P3	P4	1	2	3	4	5	P5	P6	P7	P8	
5-6450830-2	D		TM	TM	TM	TM	J	J	J	J	J	TM	TM	TM	TM	
	K						K	K	K	K						
	N						N	N	N	N						
	A	HD														
4P + 20S + 4P																

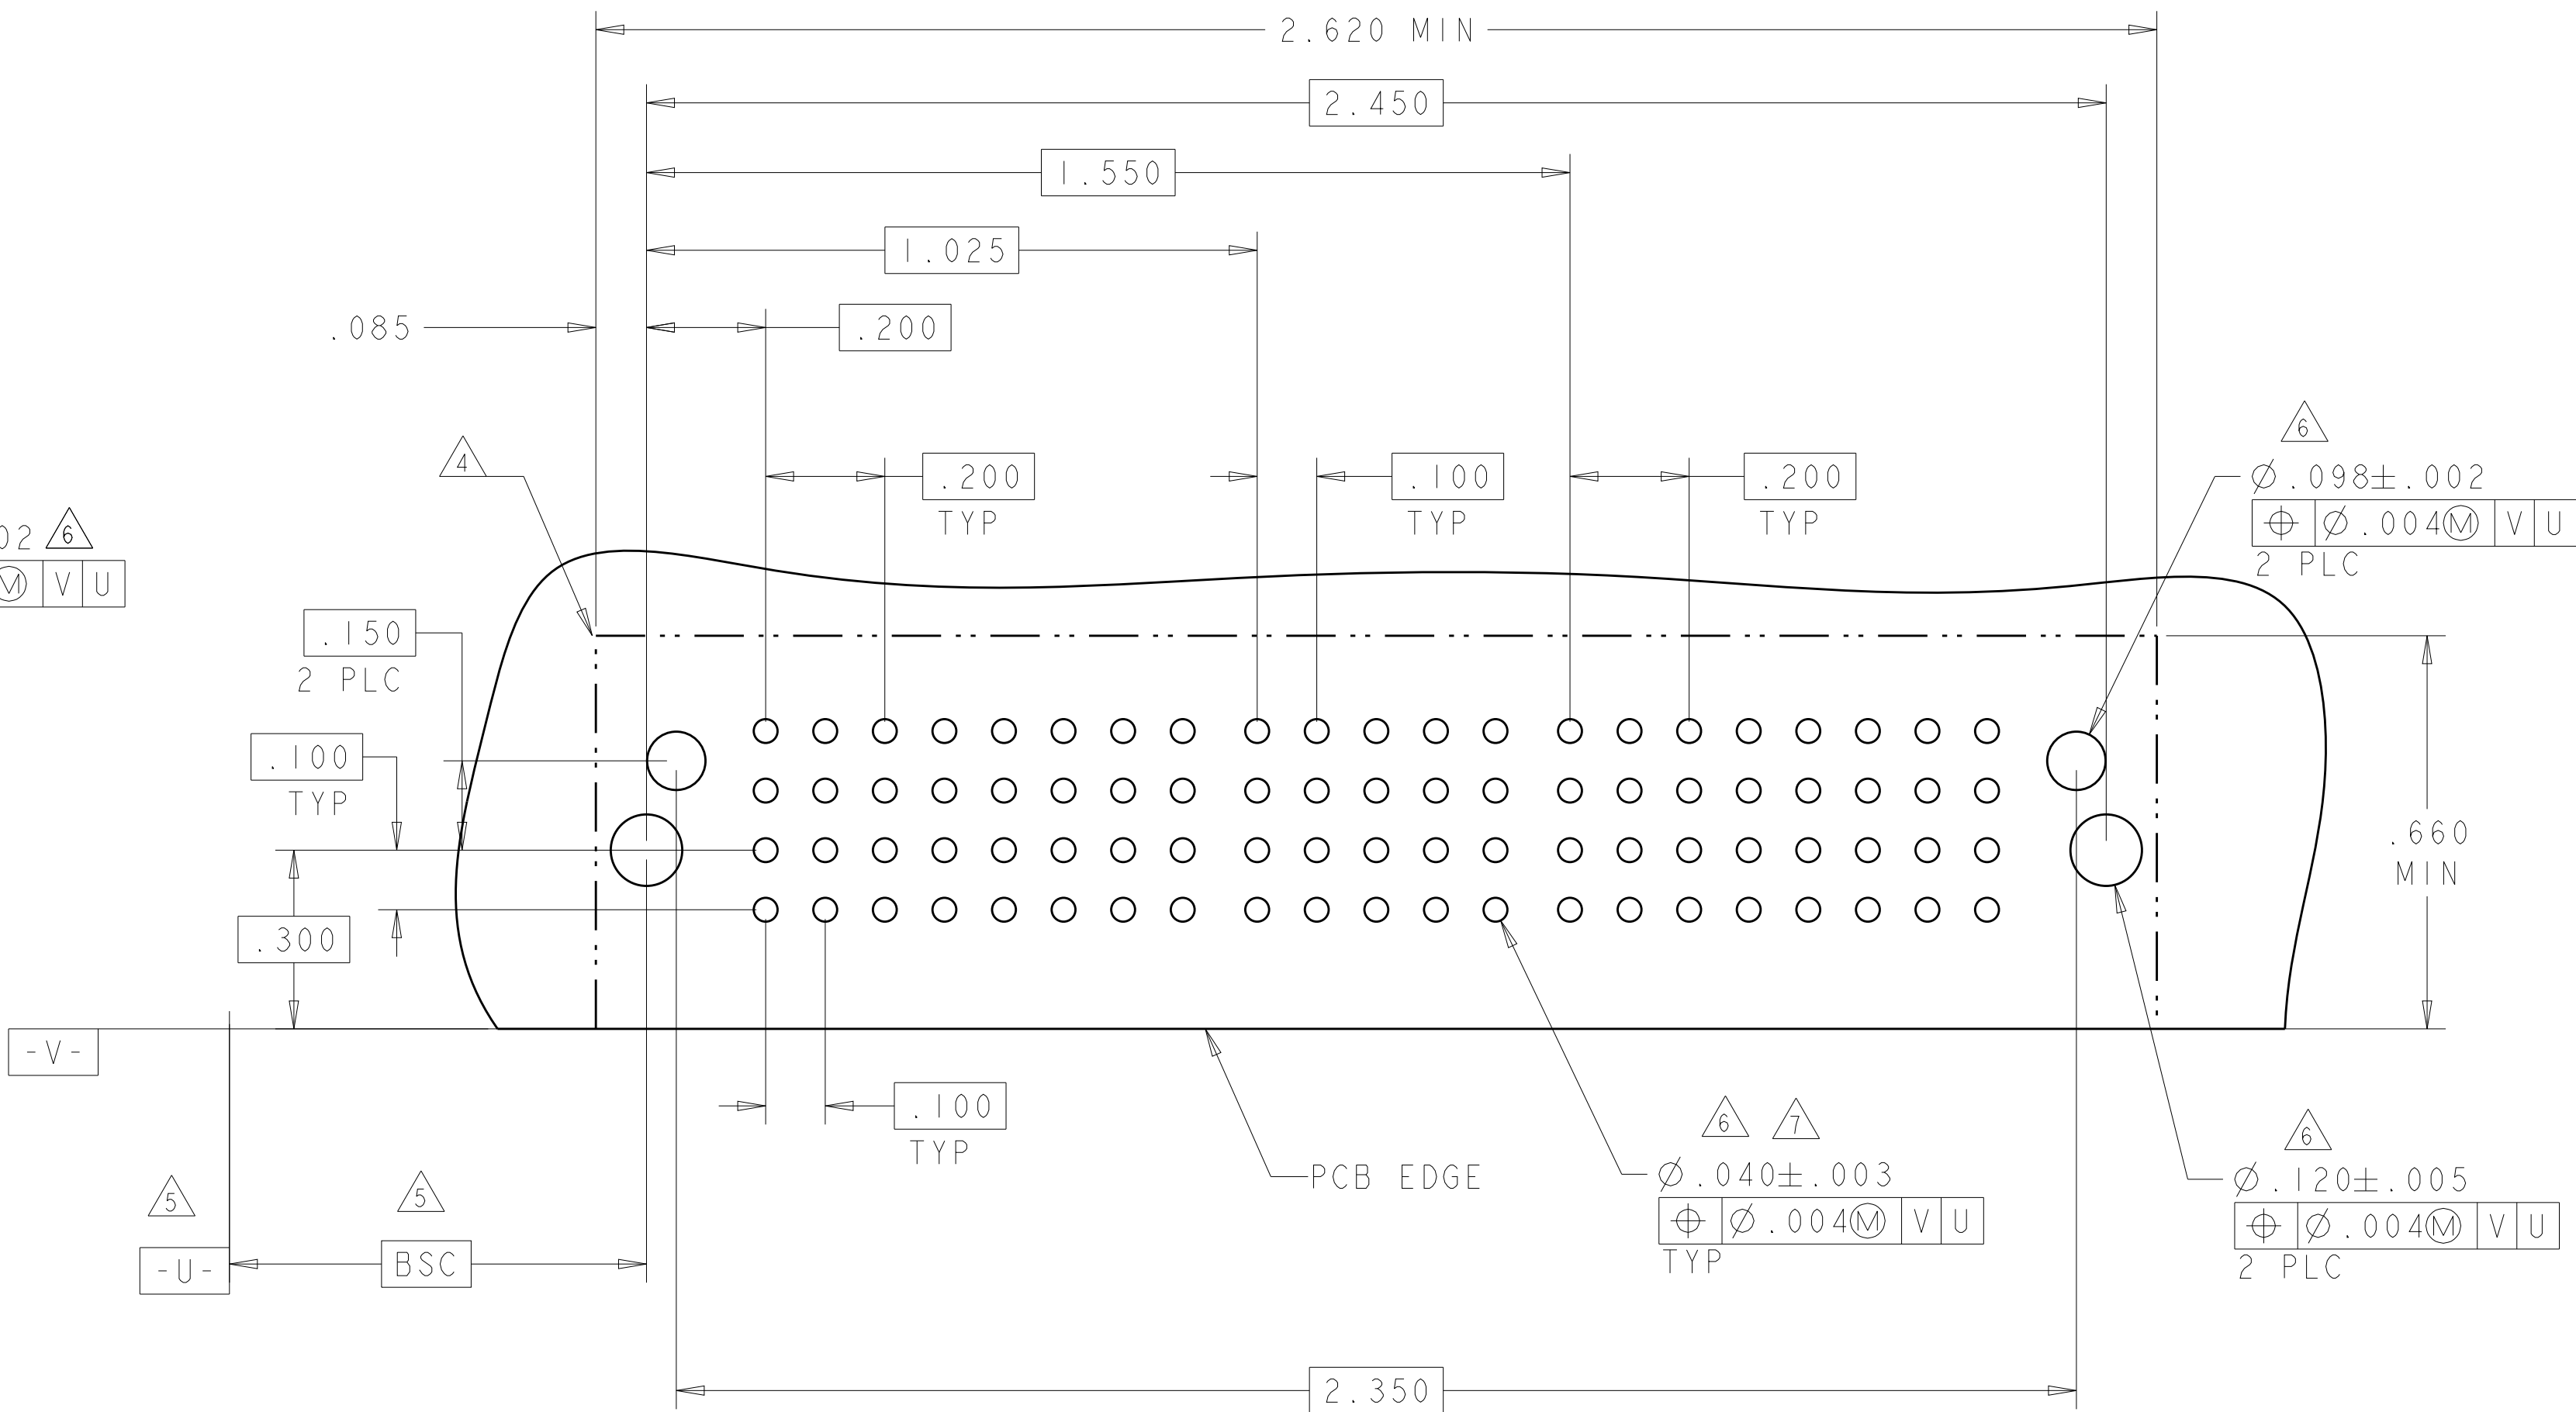4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	I	Z	P4	P5	
5-6450830 - 4	D		TM	TM	J	J	TM	TM	
	C				K	K			
	B				N	N			
	A				S	S			
2P + 8S + 2P									

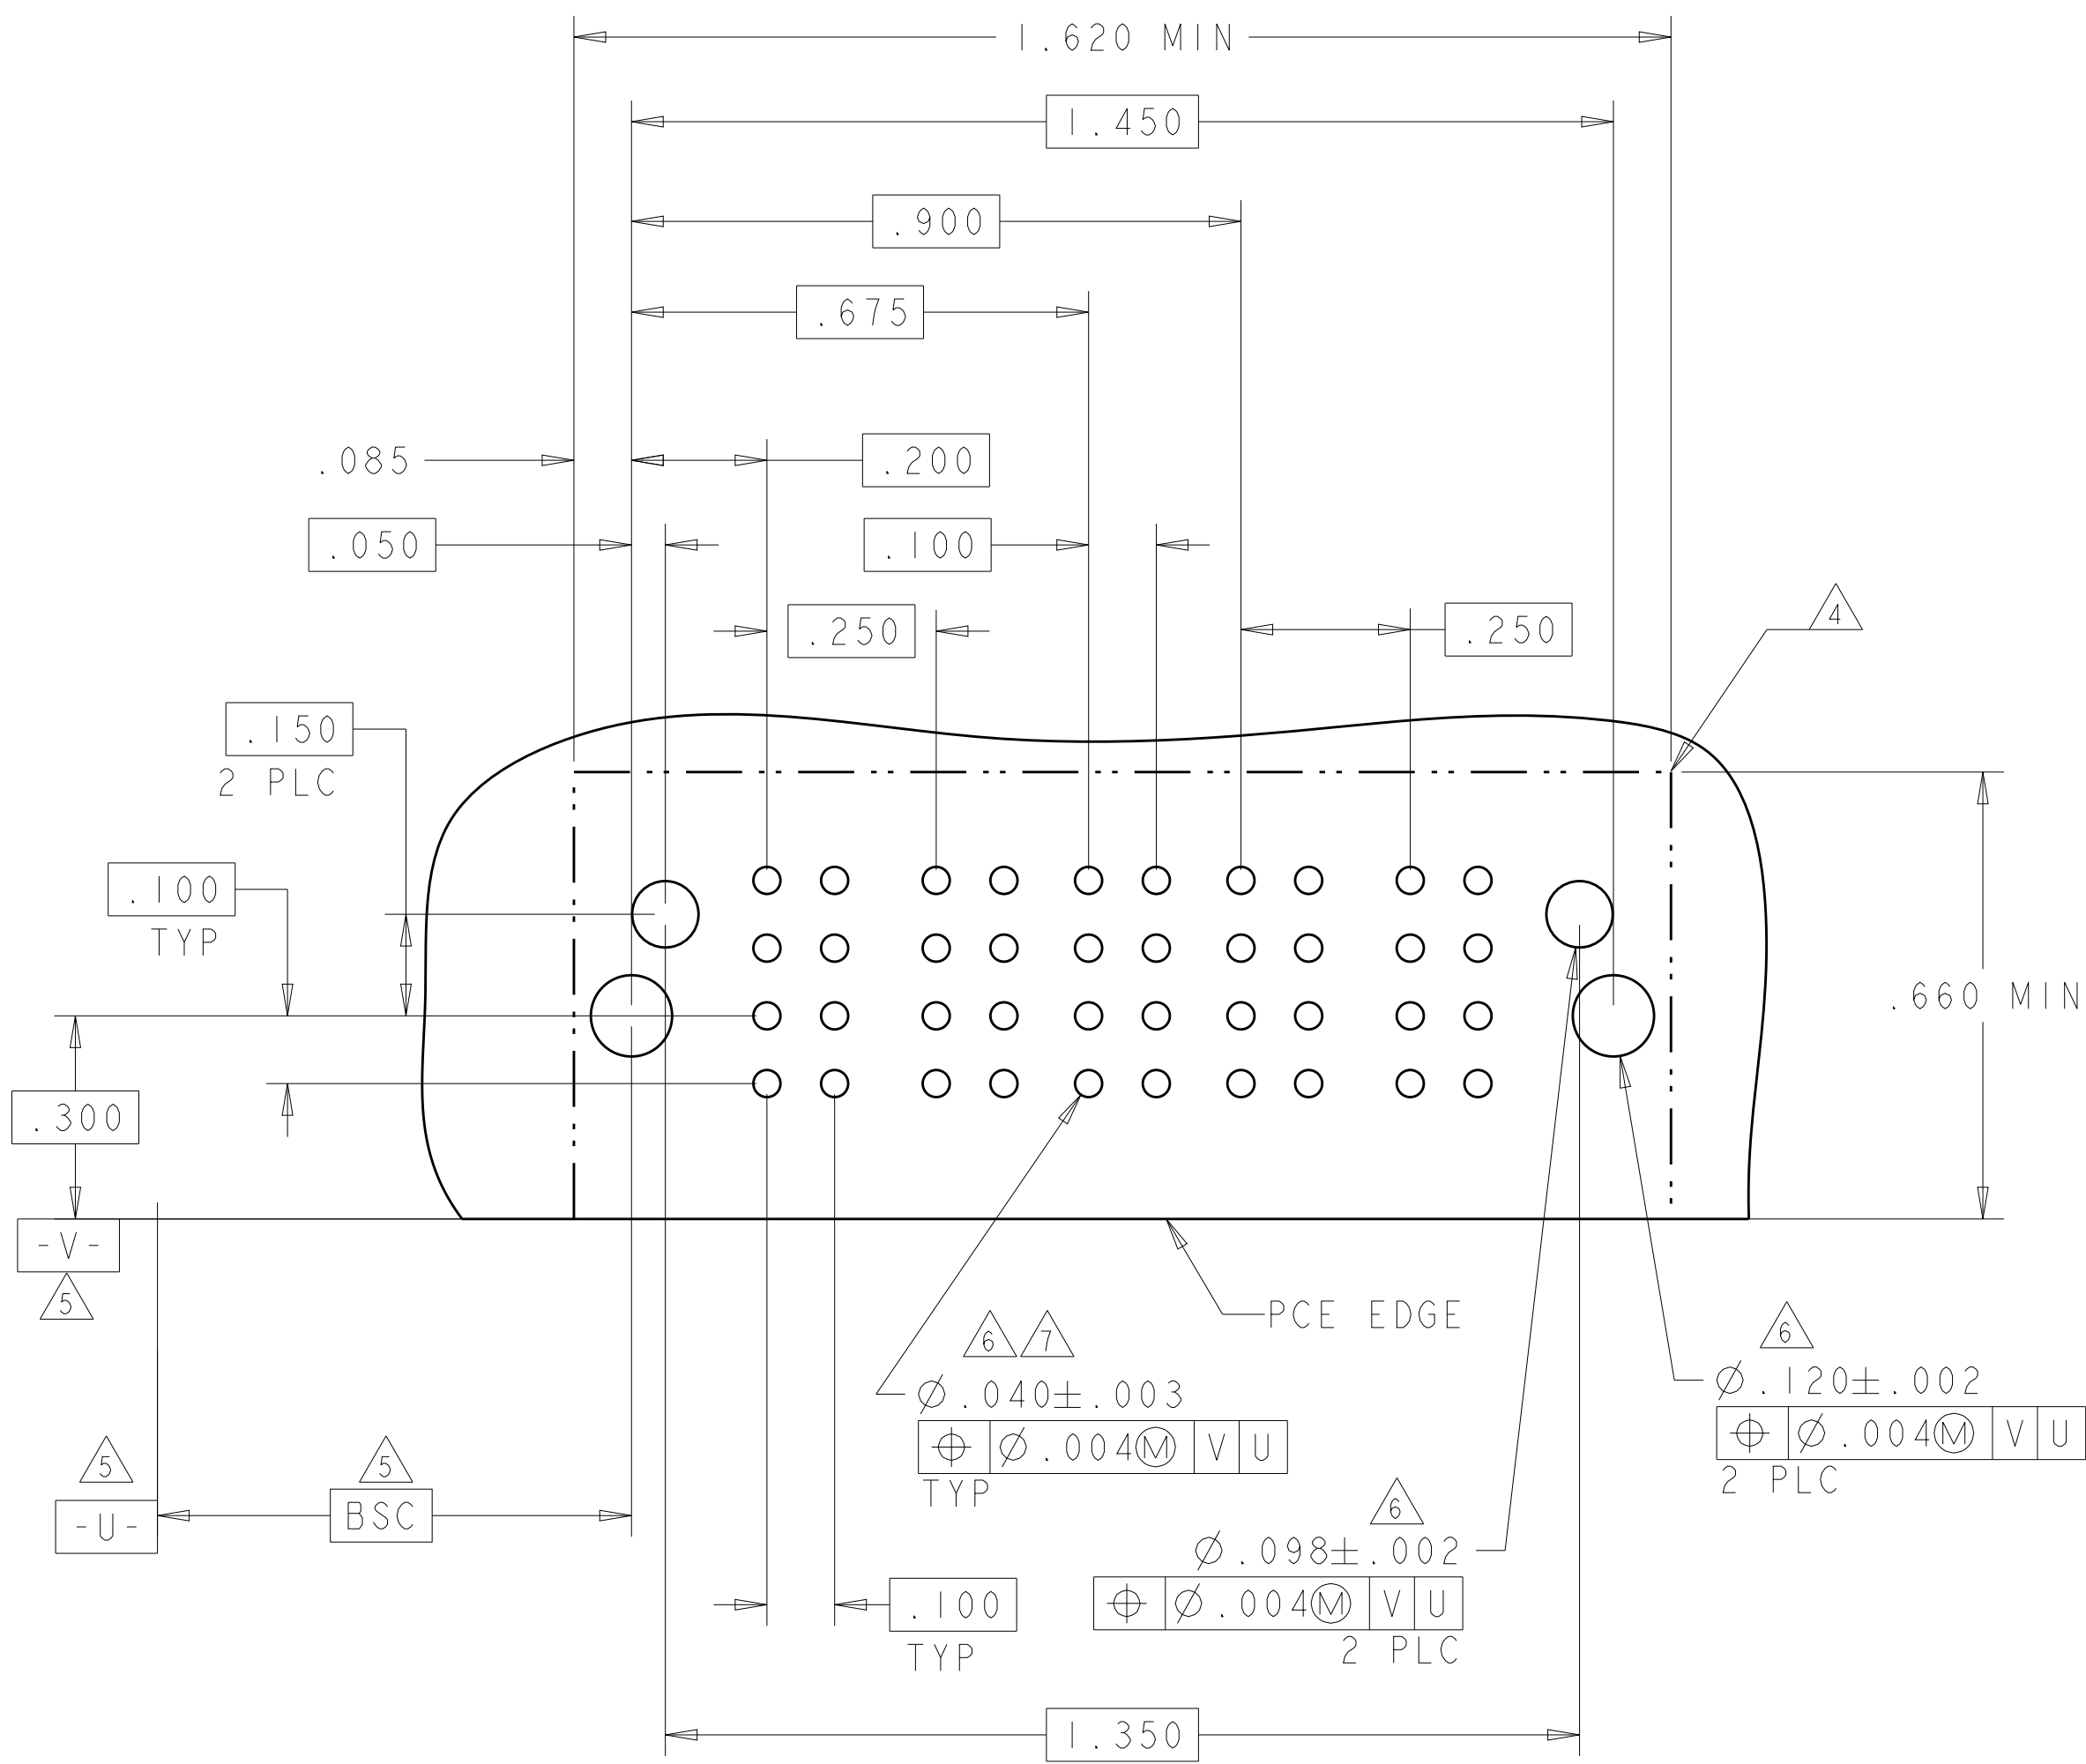
4805 (3/11)

PART NUMBER	ROWS	POWER			SIGNAL				POWER						
		P1	P2	P3	1	2	3	4	P4	P5	P6	P7	P8		
5-6450830-6	C		TM	TM	TM	J	J	J	J	TM	TM	TM	TM	TM	
	K					K	K	K							
	N					N	N	N							
	S					S	S	S							
	A	HD													HD
3ACP + 16S + 5P															

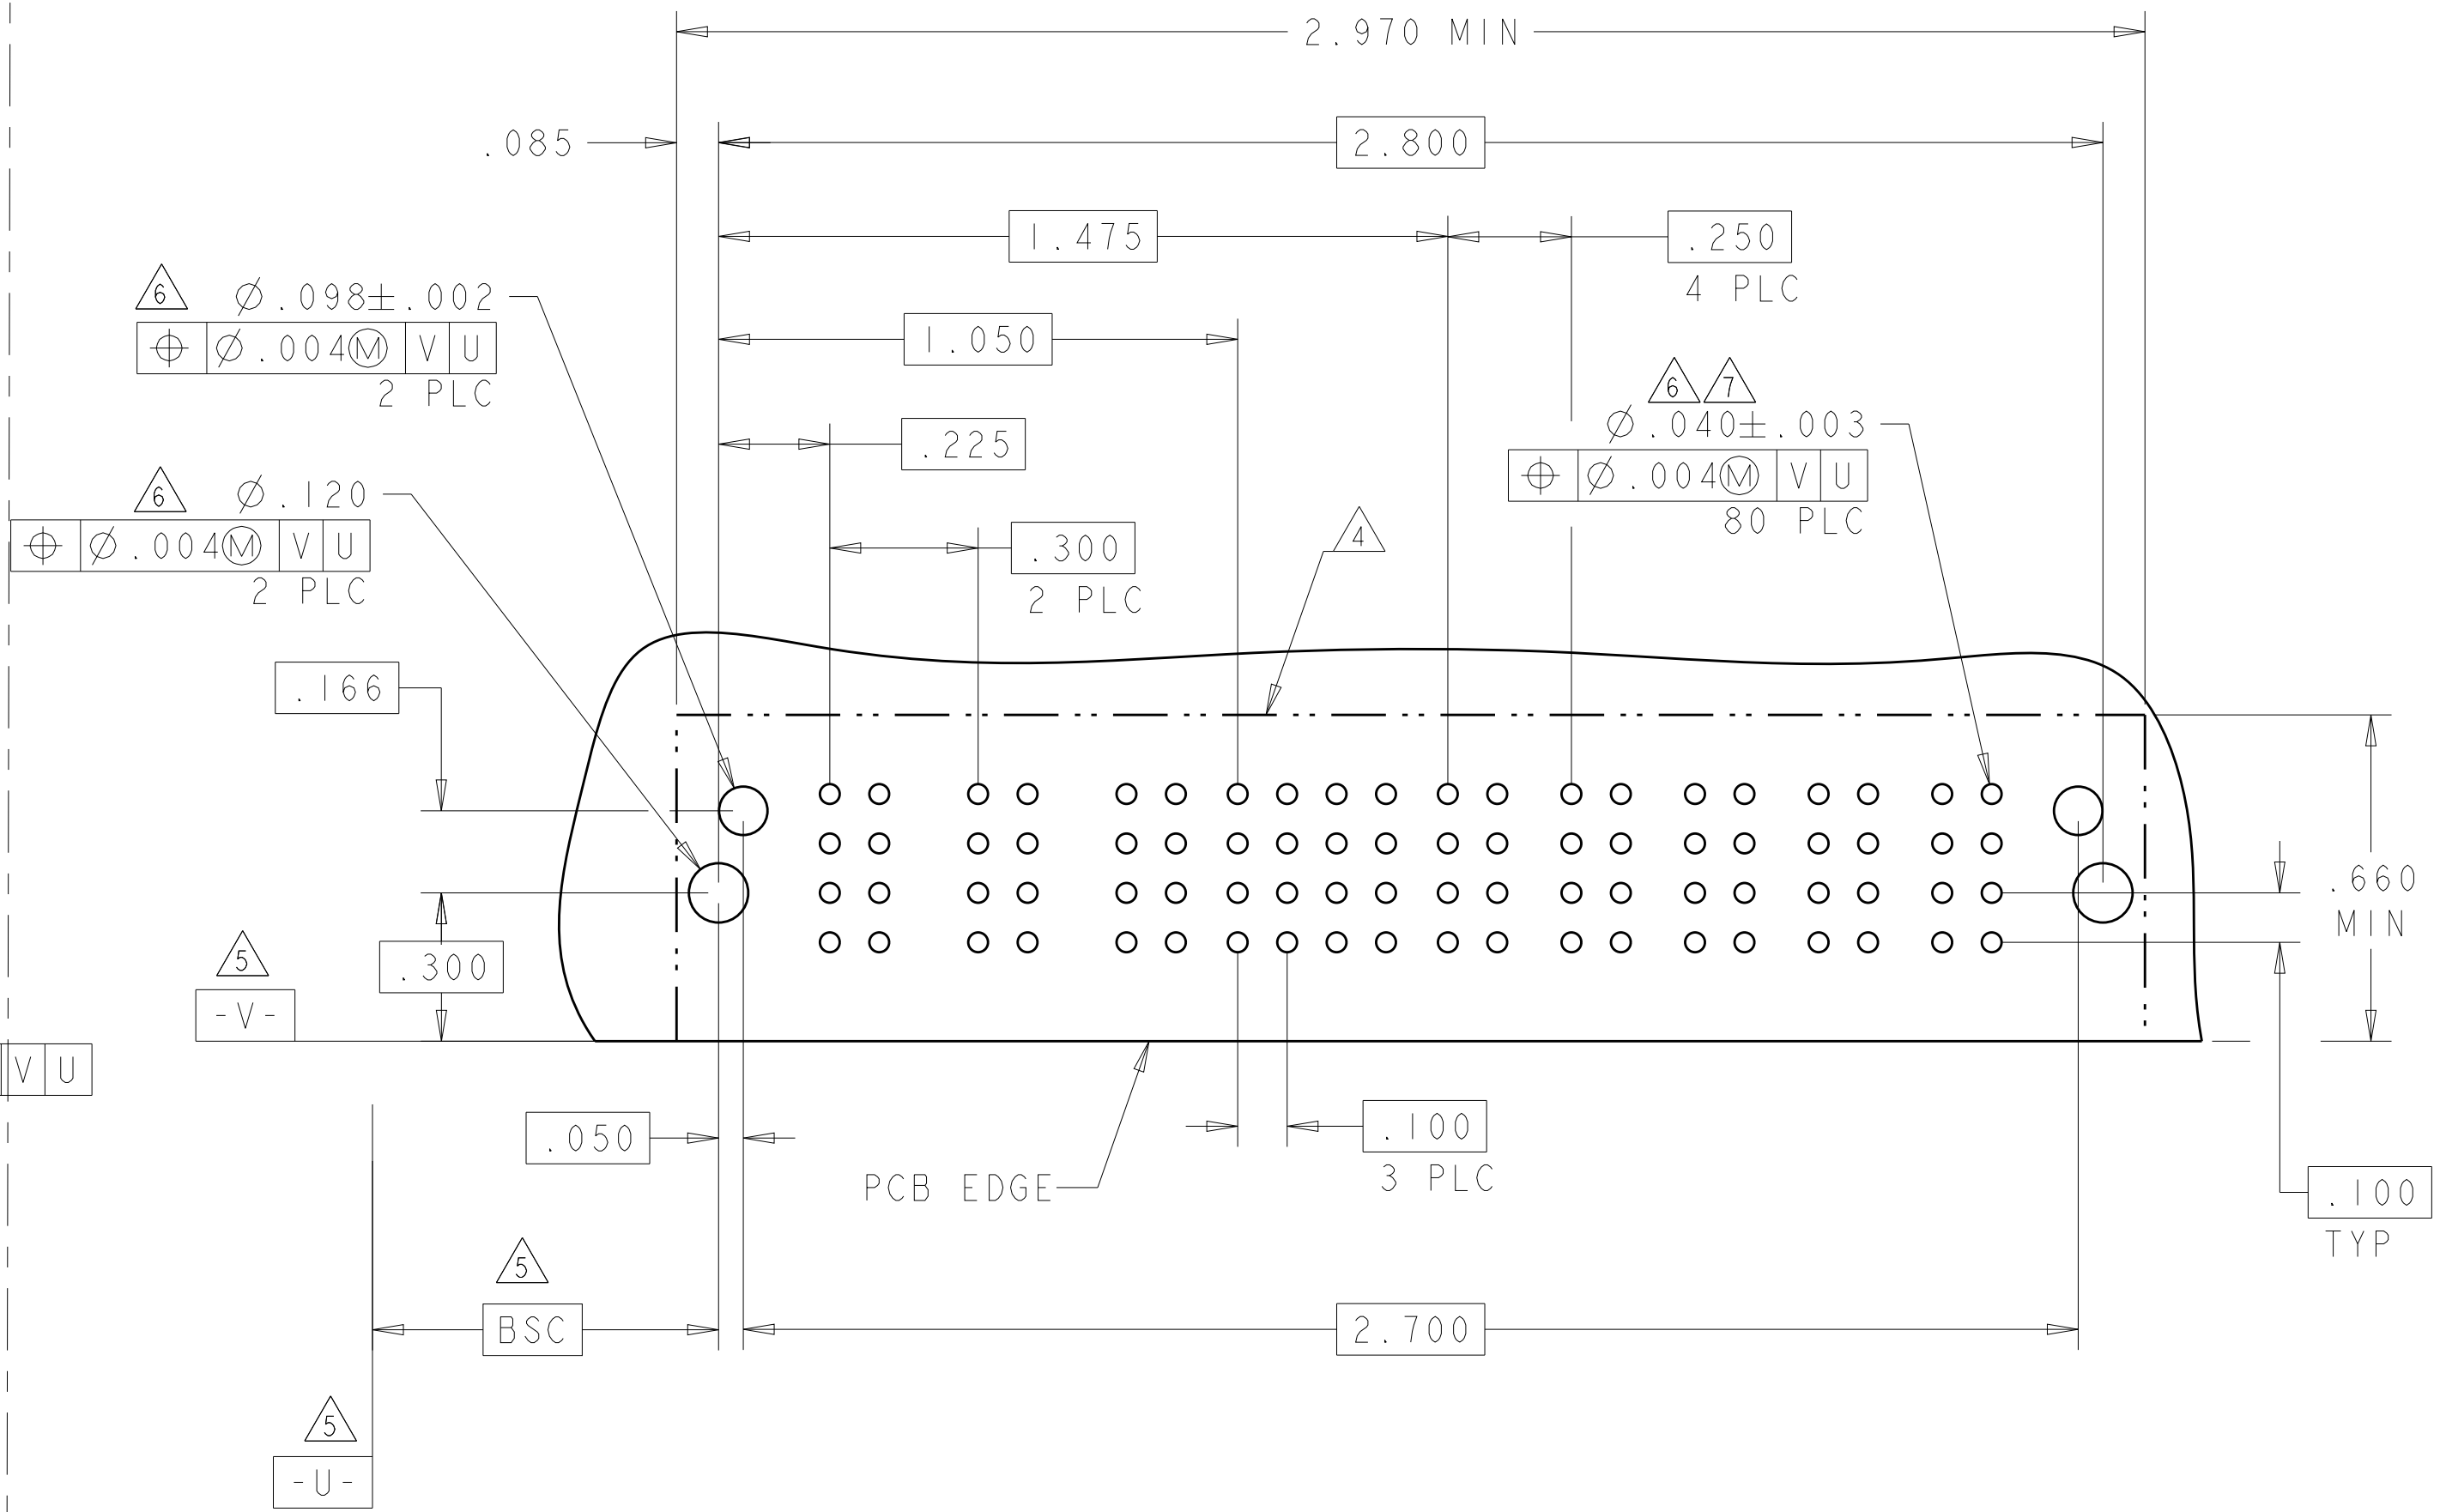4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	SEE SHEET 1		-	-	-


PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
5-6450830-7	D		TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	
	C						K	K	K	K	K	K					
	B						N	N	N	N	N	N					
	A						HD	S	S	S	S	S					
4P + 24S + 4P																	

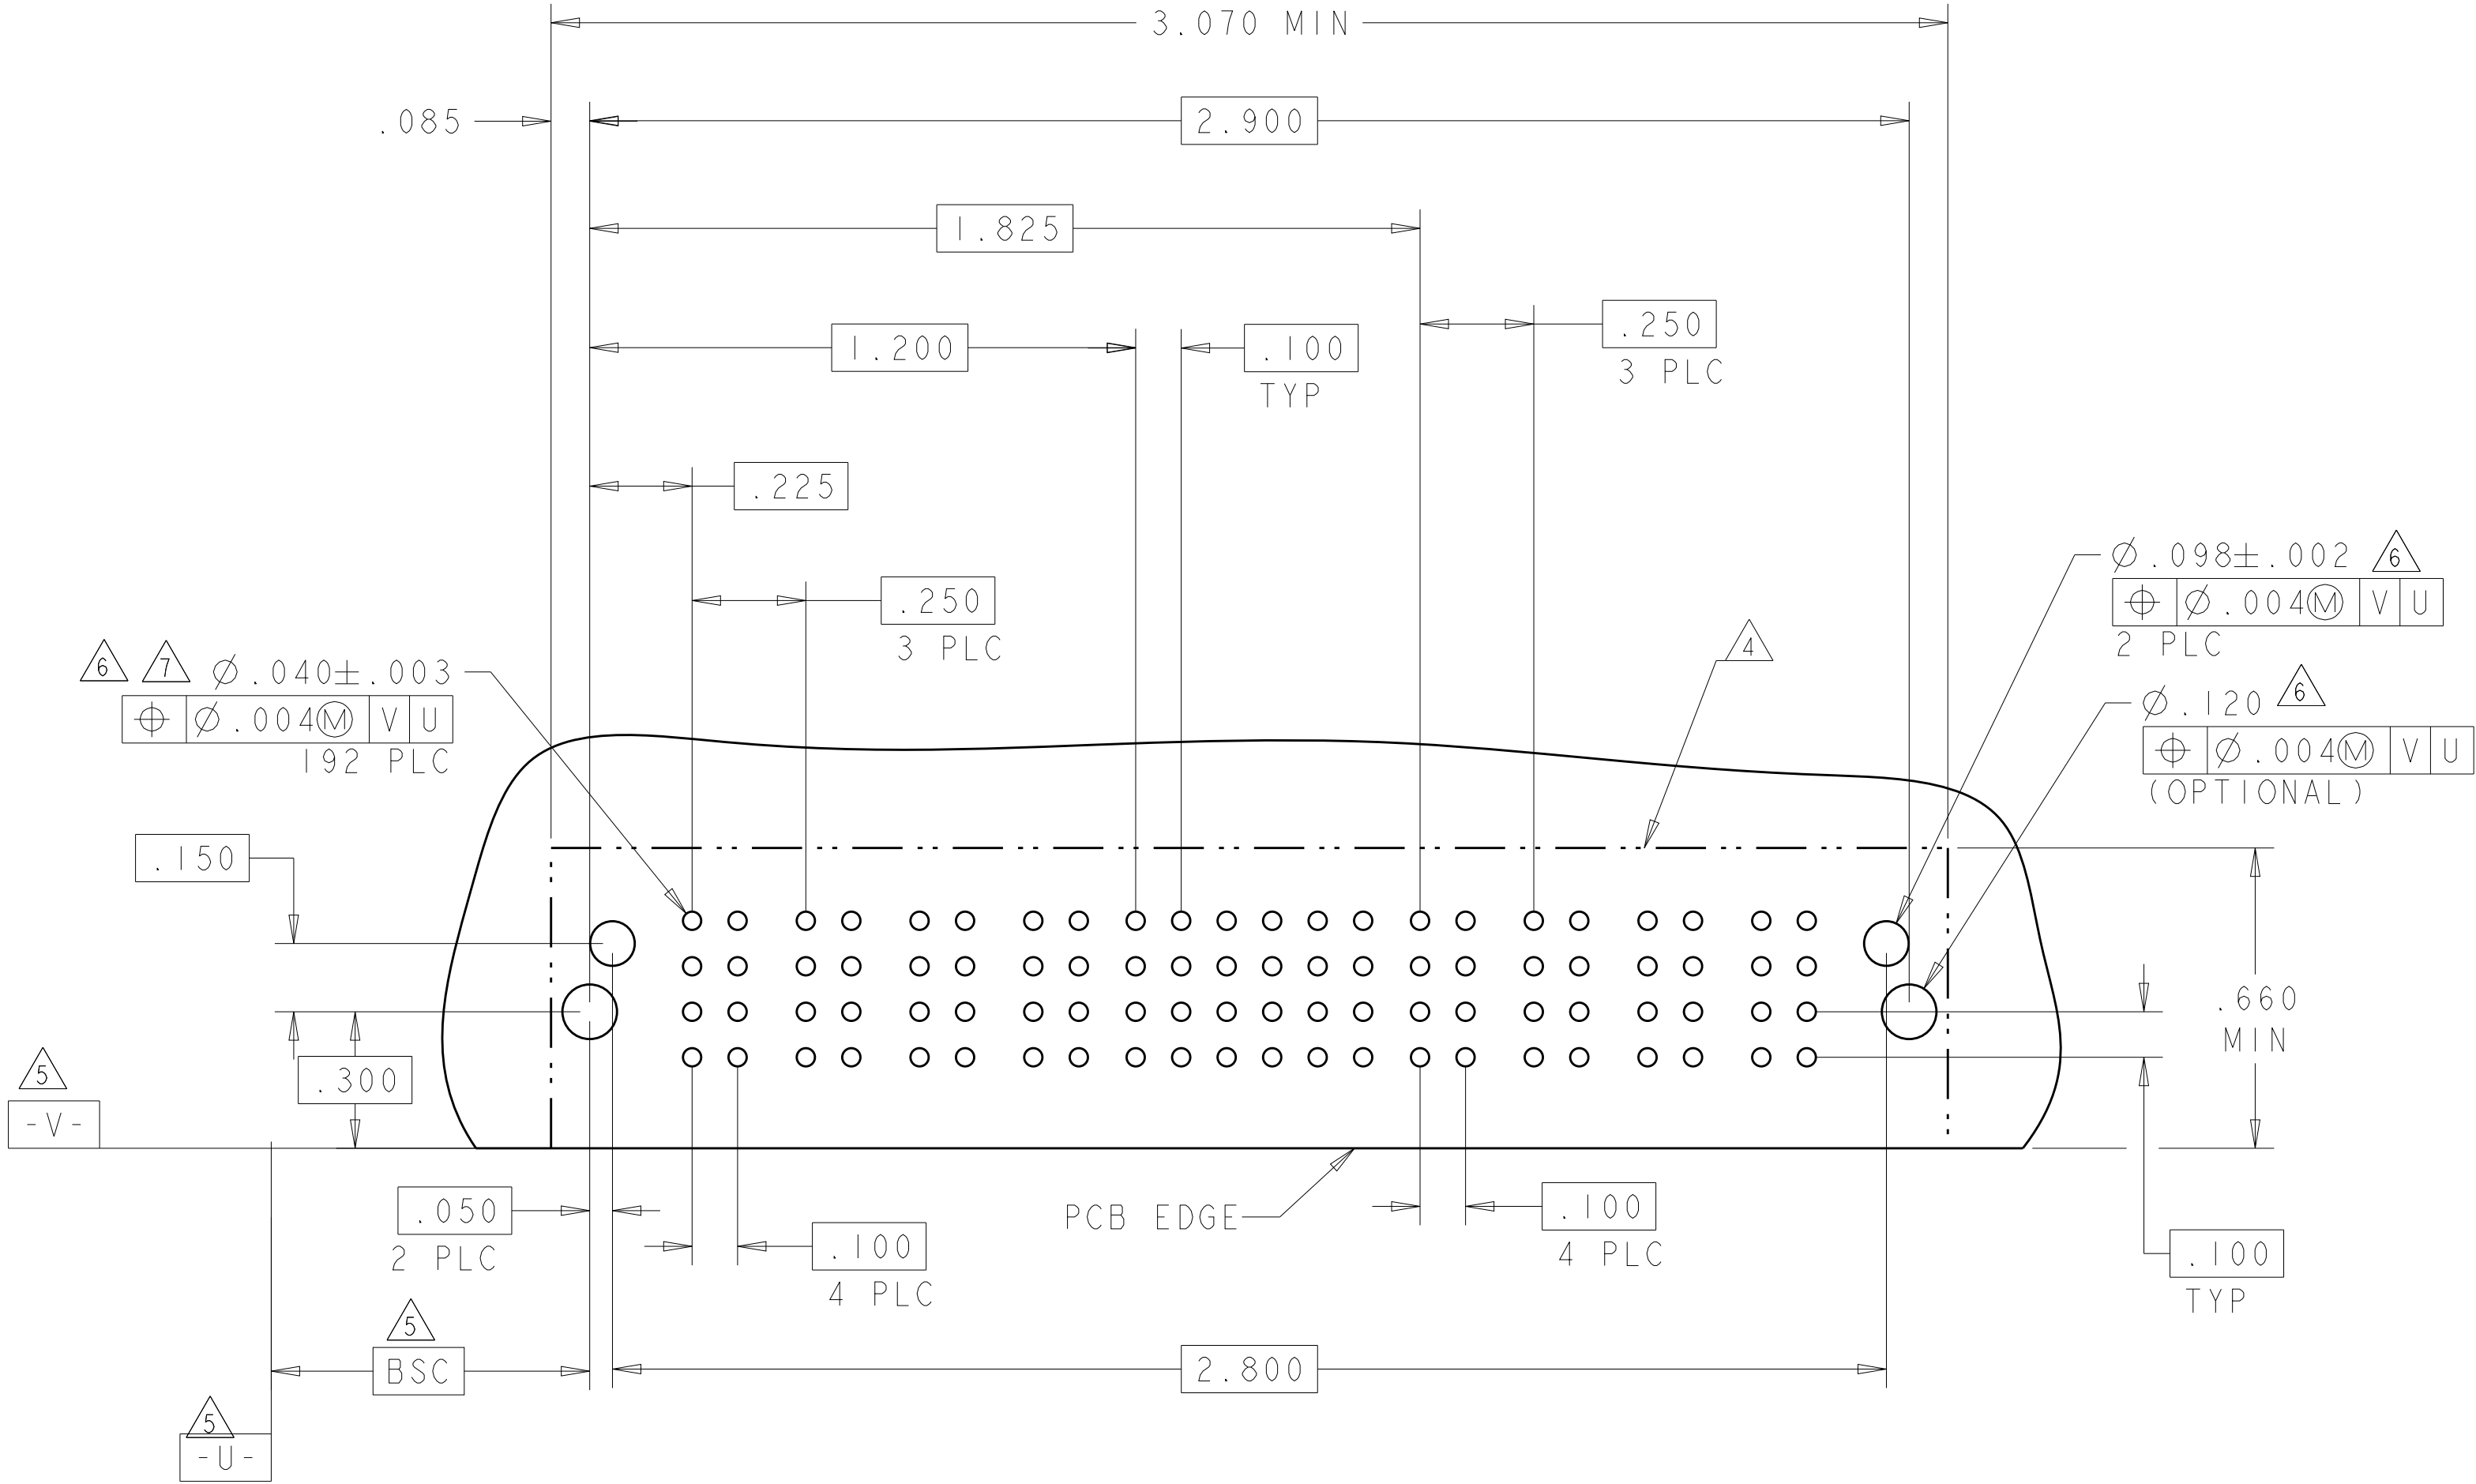





LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


N6

PART NUMBER	ROWS		POWER							SIGNAL							
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6		
5-6450830-8	D		TM	TM	TM	TM	TM	TM	TM	FJ	FJ	FJ	FJ	FJ	FJ	TM	
	C									K	K	K	K	K	K		
	B									N	N	N	N	N	N		
	A	HD								S	S	S	S	S	S		
7ACP + 24S + 1P																	

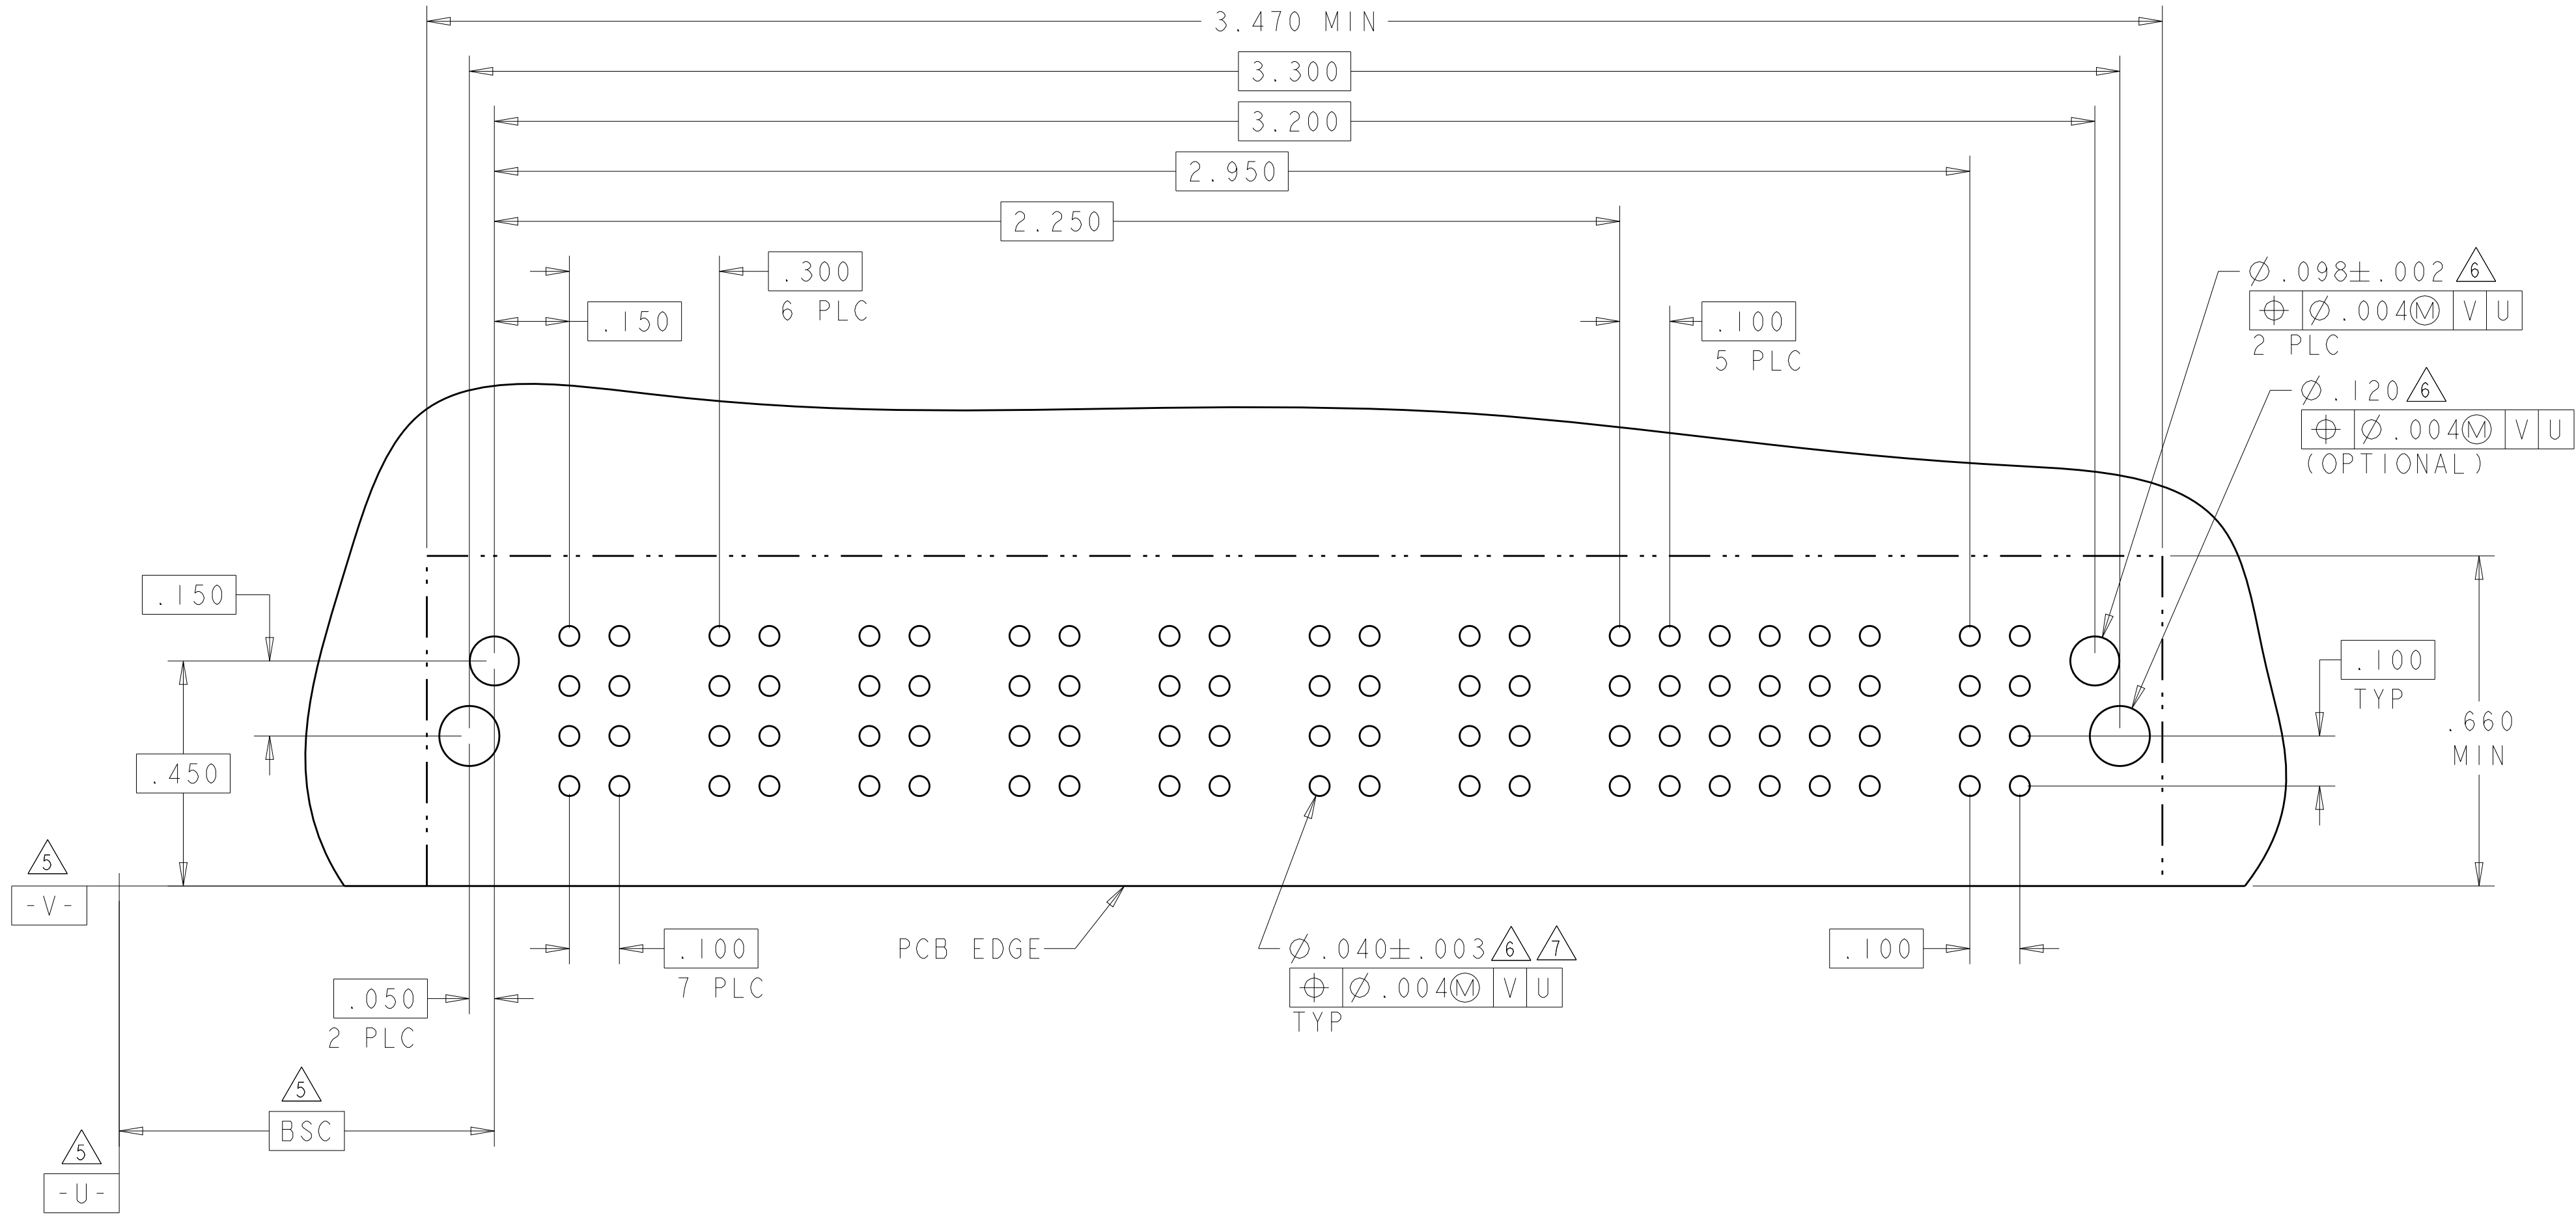


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO	10APR2007	 TE Connectivity				
		CHK S.ZHAO	10APR2007					
DIMENSIONS: INCHES		APVD S.ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	SIZE A	CAGE CODE 00779	DRAWING NO 6450830	RESTRICTED TO -
		PRODUCT SPEC 108-2292						
		APPLICATION SPEC 114-13251						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT -		SCALE 4:1		SHEET 30 OF 42		REV S2
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		CUSTOMER DRAWING						
MATERIAL -		FINISH -						

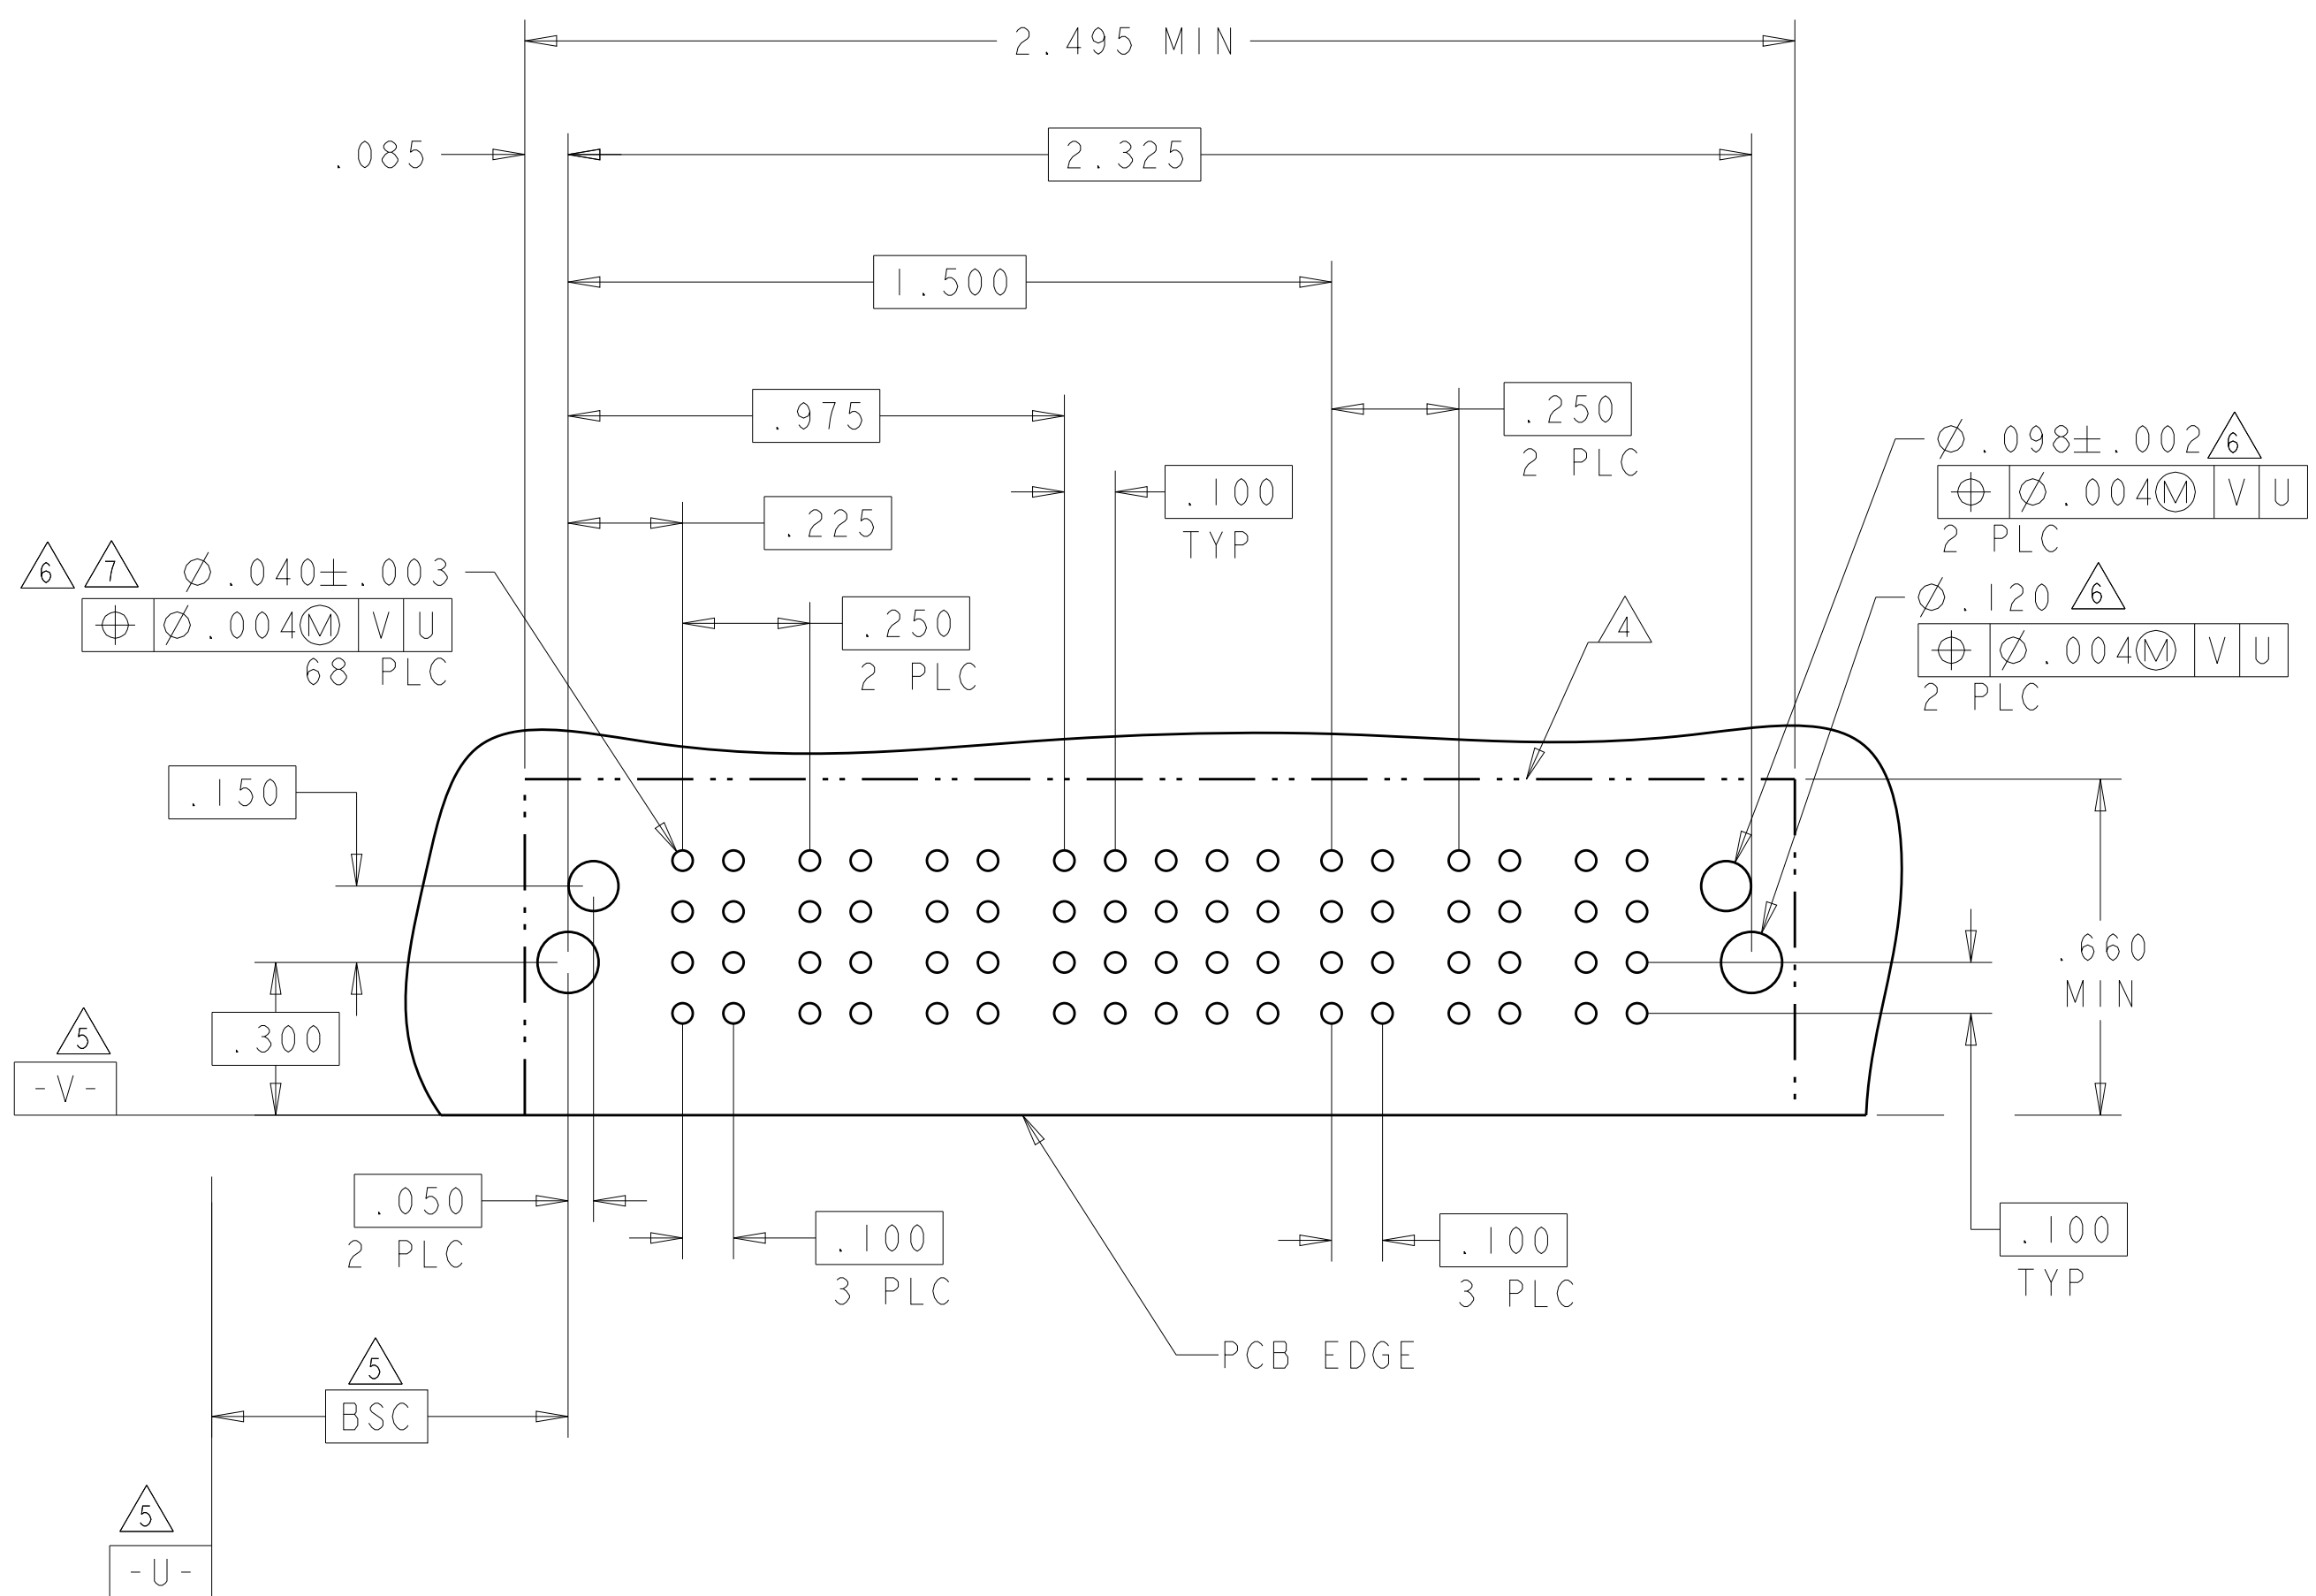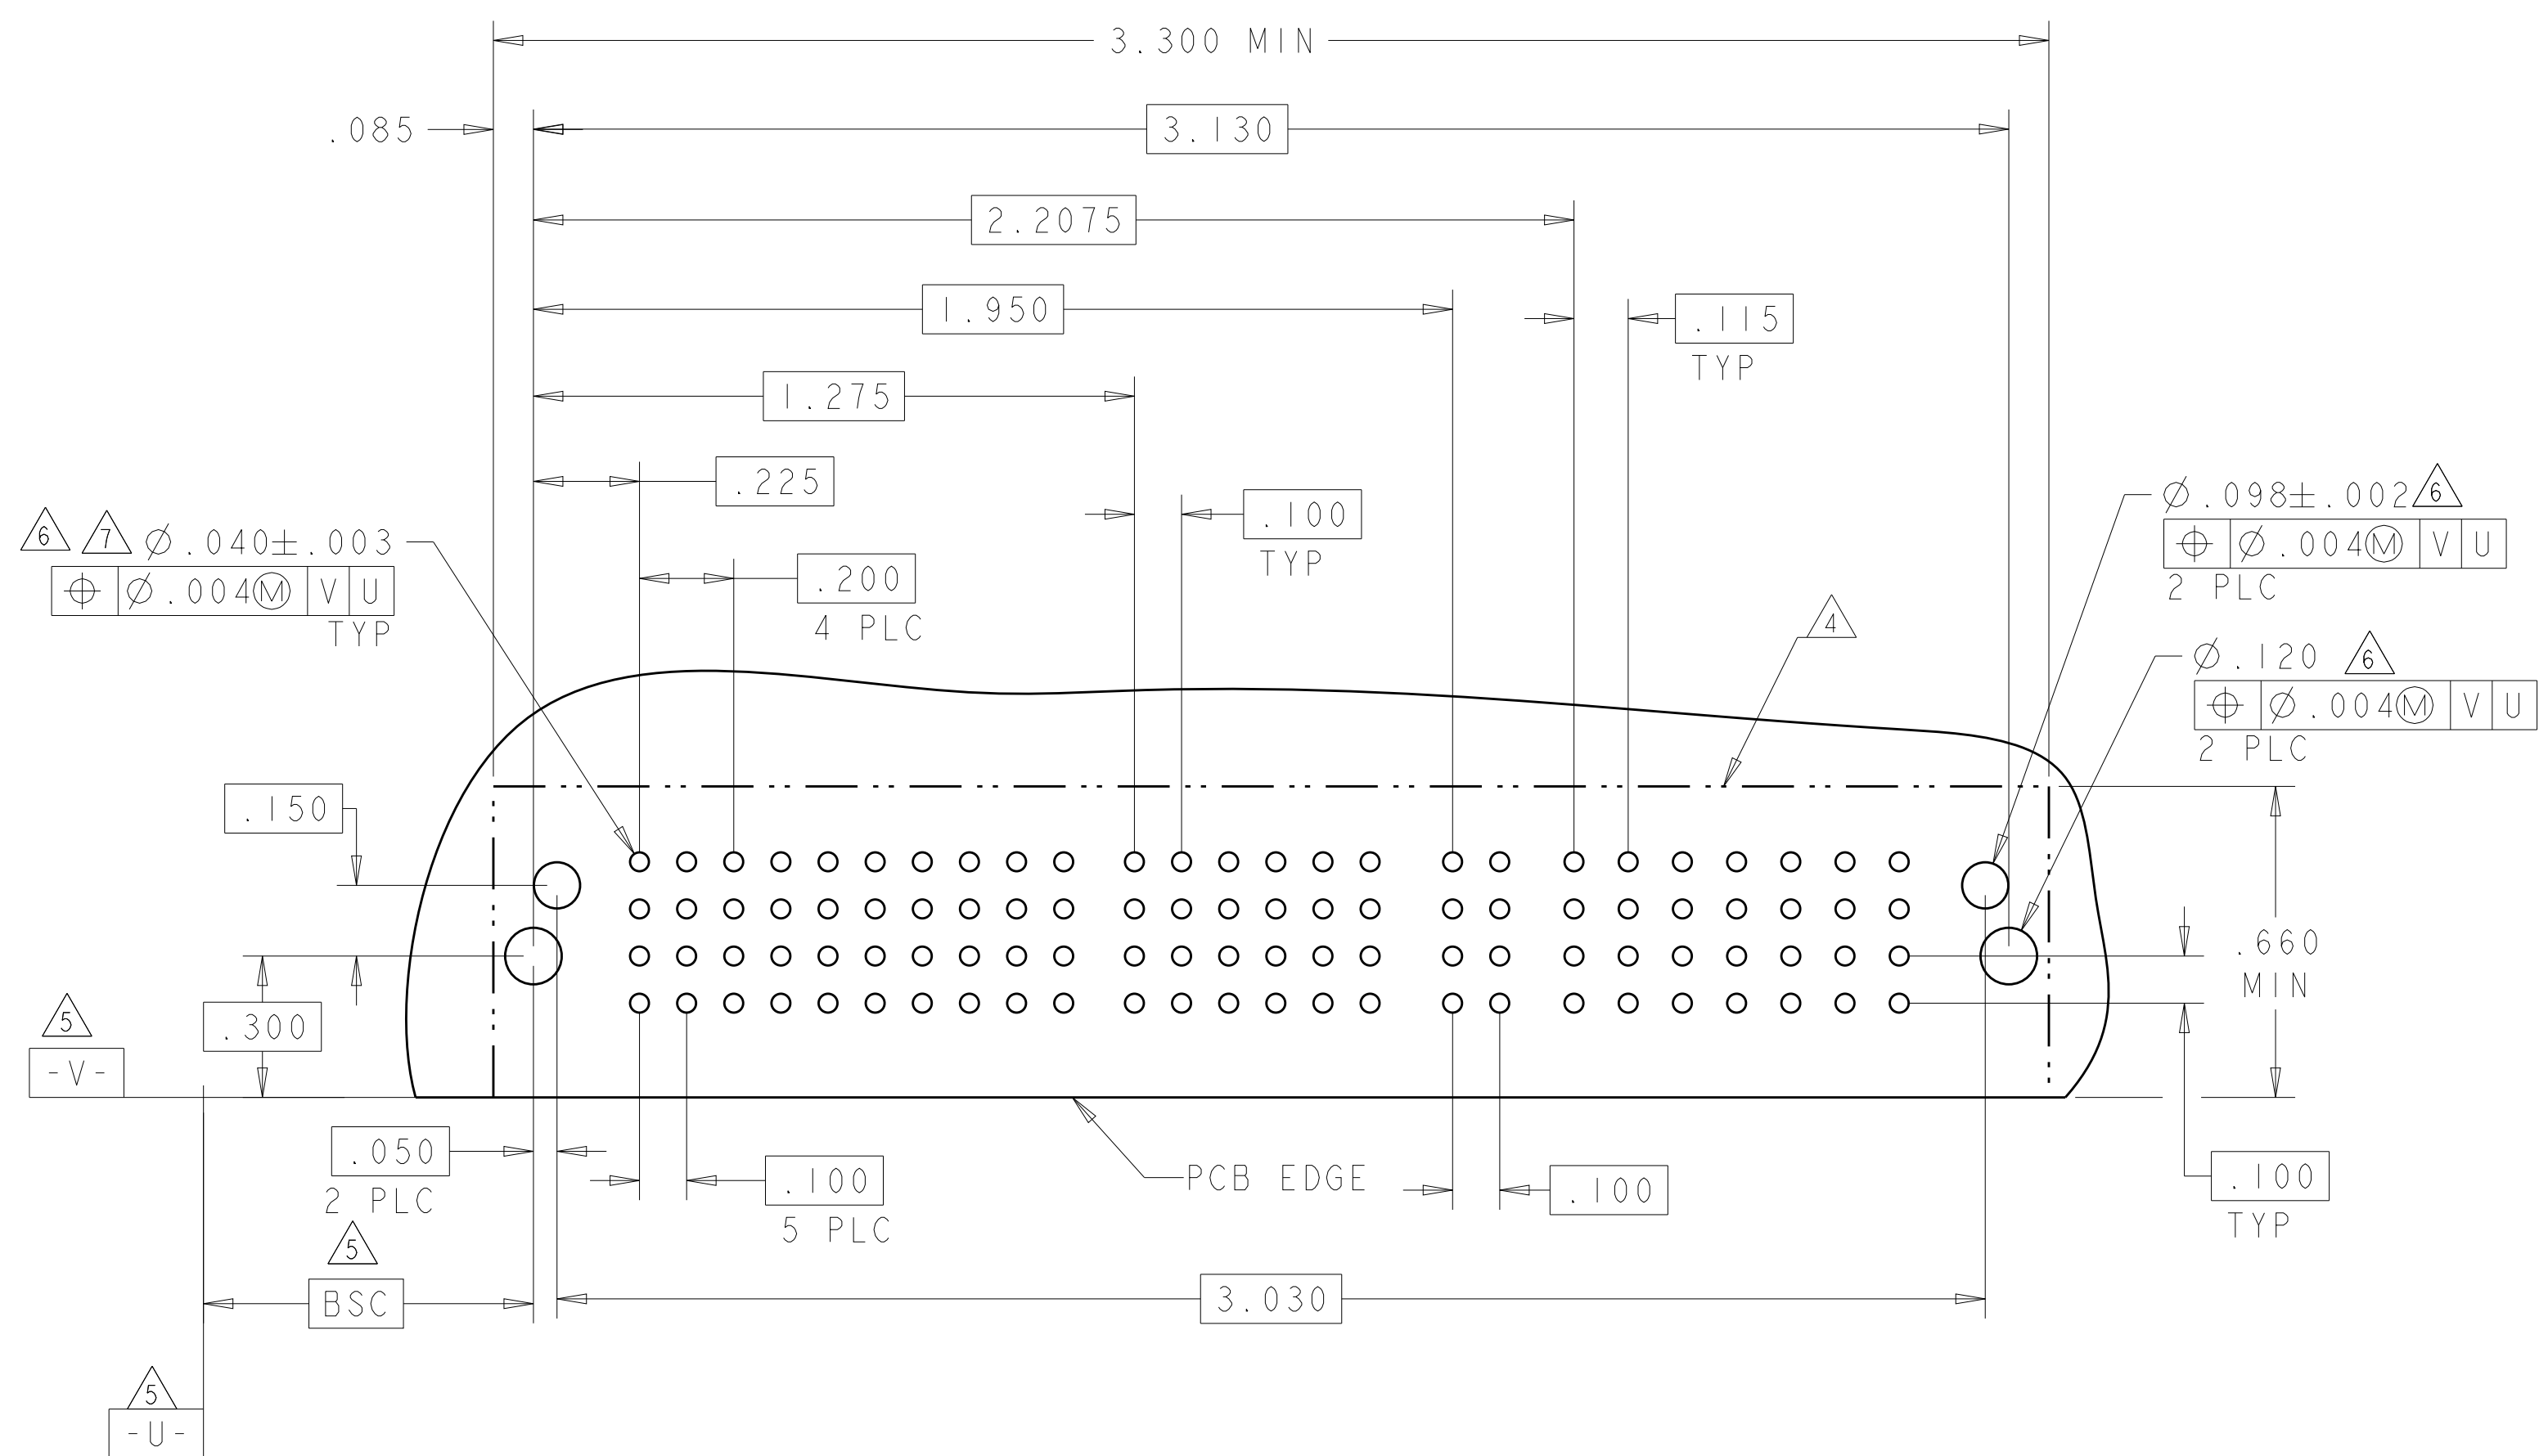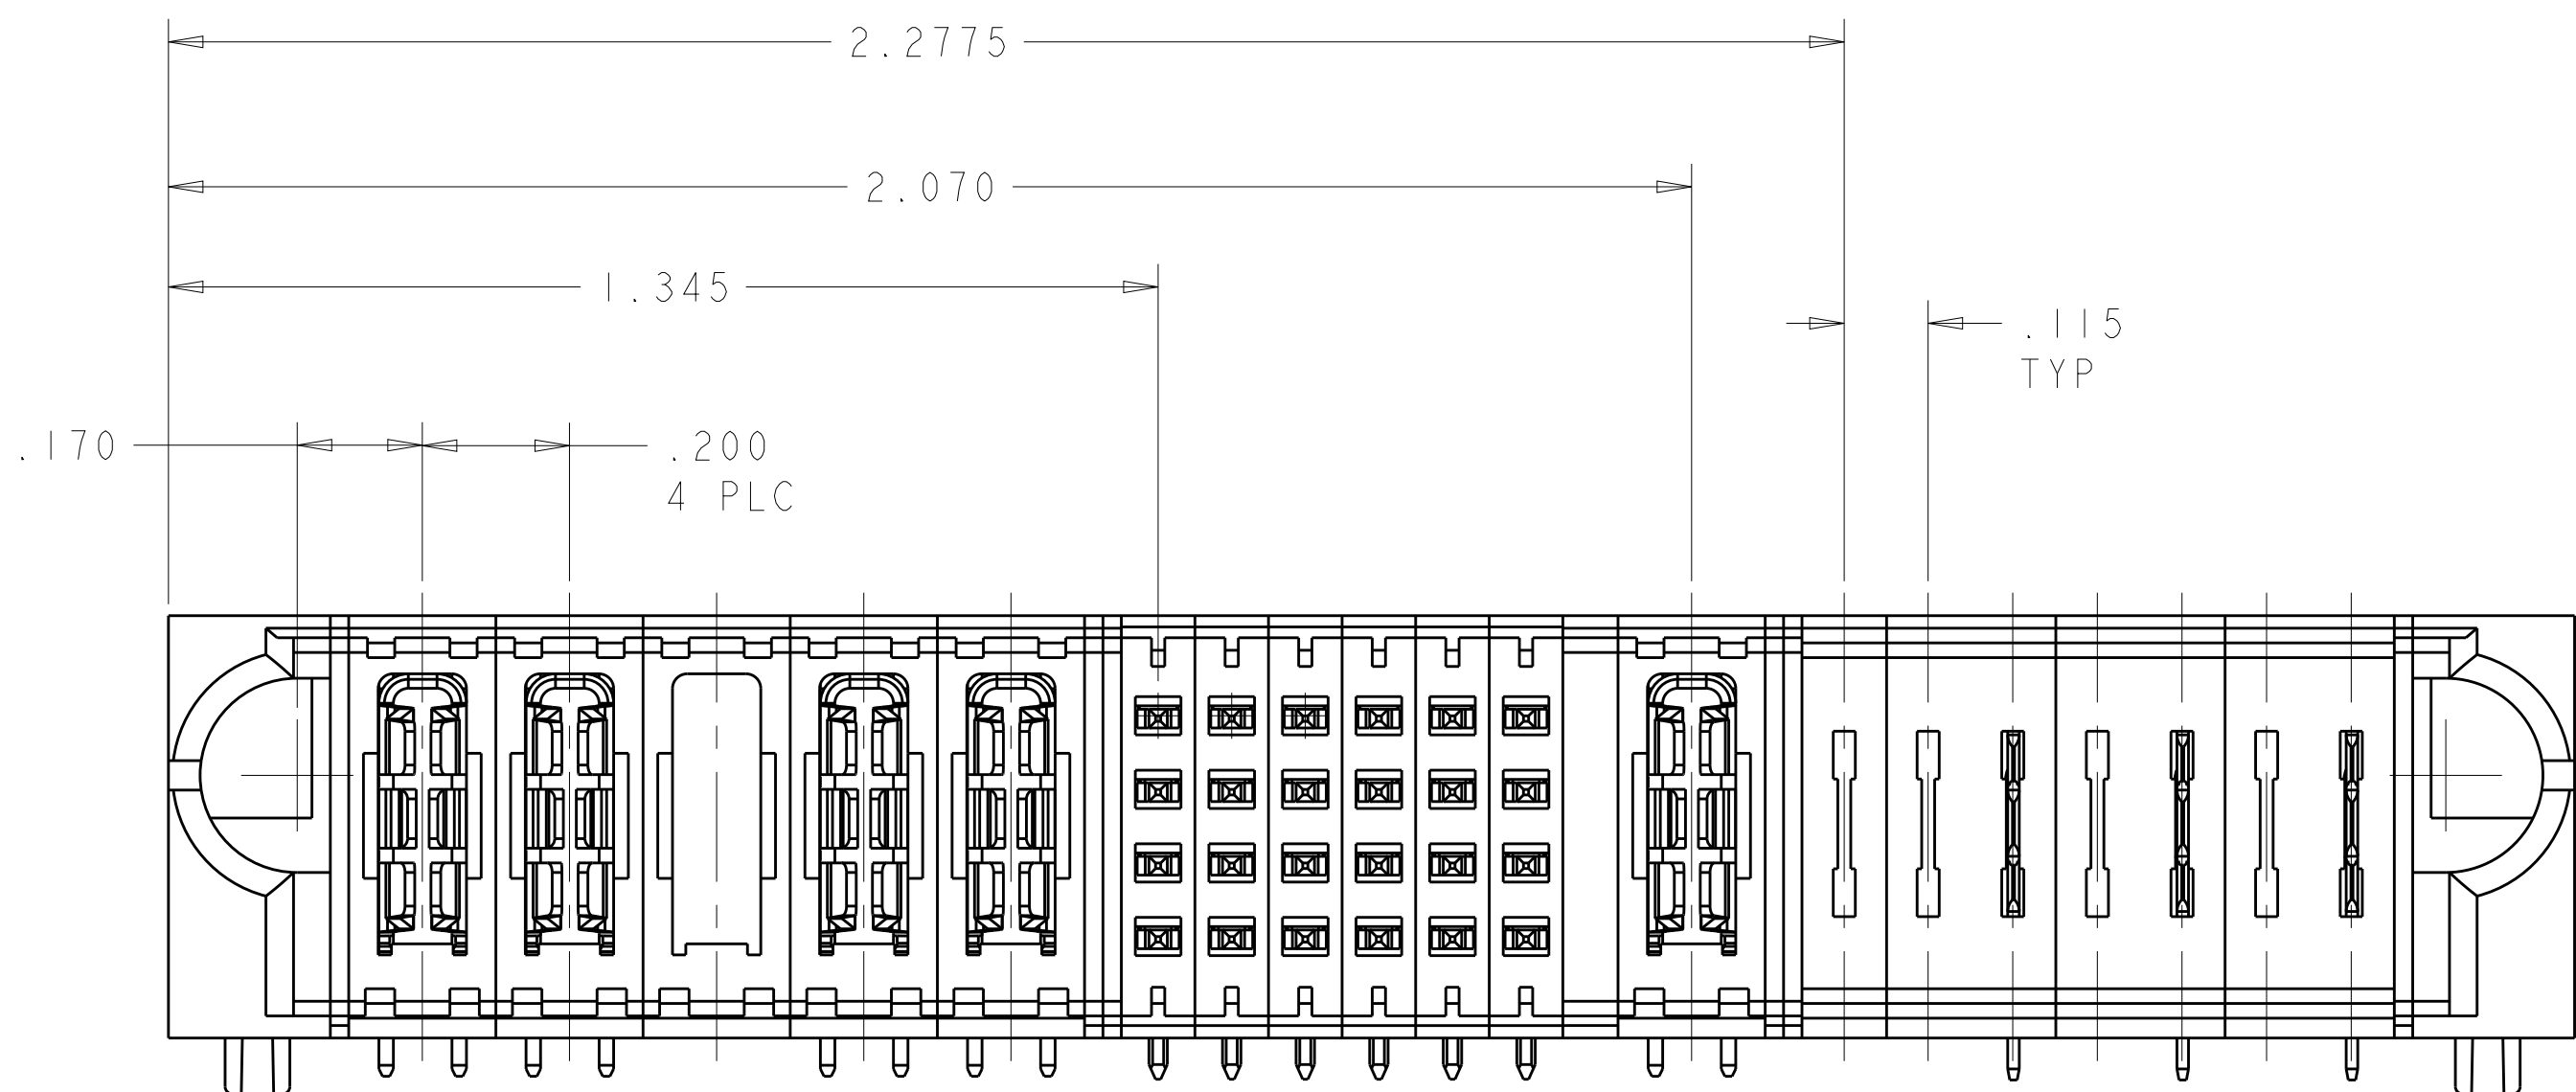[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007 CHG S. ZHAO 10APR2007 APP'D S. ZHAO		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.01 2 PLC ±.005 3 PLC ±.002 ANGLES ±0°		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO A100779C6450830	
WEIGHT -		CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE 4:1 SHEET 31 OF 42 REV S	

PART NUMBER	ROWS		POWER					SIGNAL						POWER				
			P1	P2	P3	P4	P5	1	2	3	4	5	6	LP1	LP2	LP3	LP4	
6-6450830-6	C		TM	TM	TM	TM	TM	J	J	J	J	J	J	LMF	LM	LM		
	K							K	K	K	K	K						
	N							N	N	N	N	N						
	S							S	S	S	S	S						
5ACP + 24S + 4LP																		

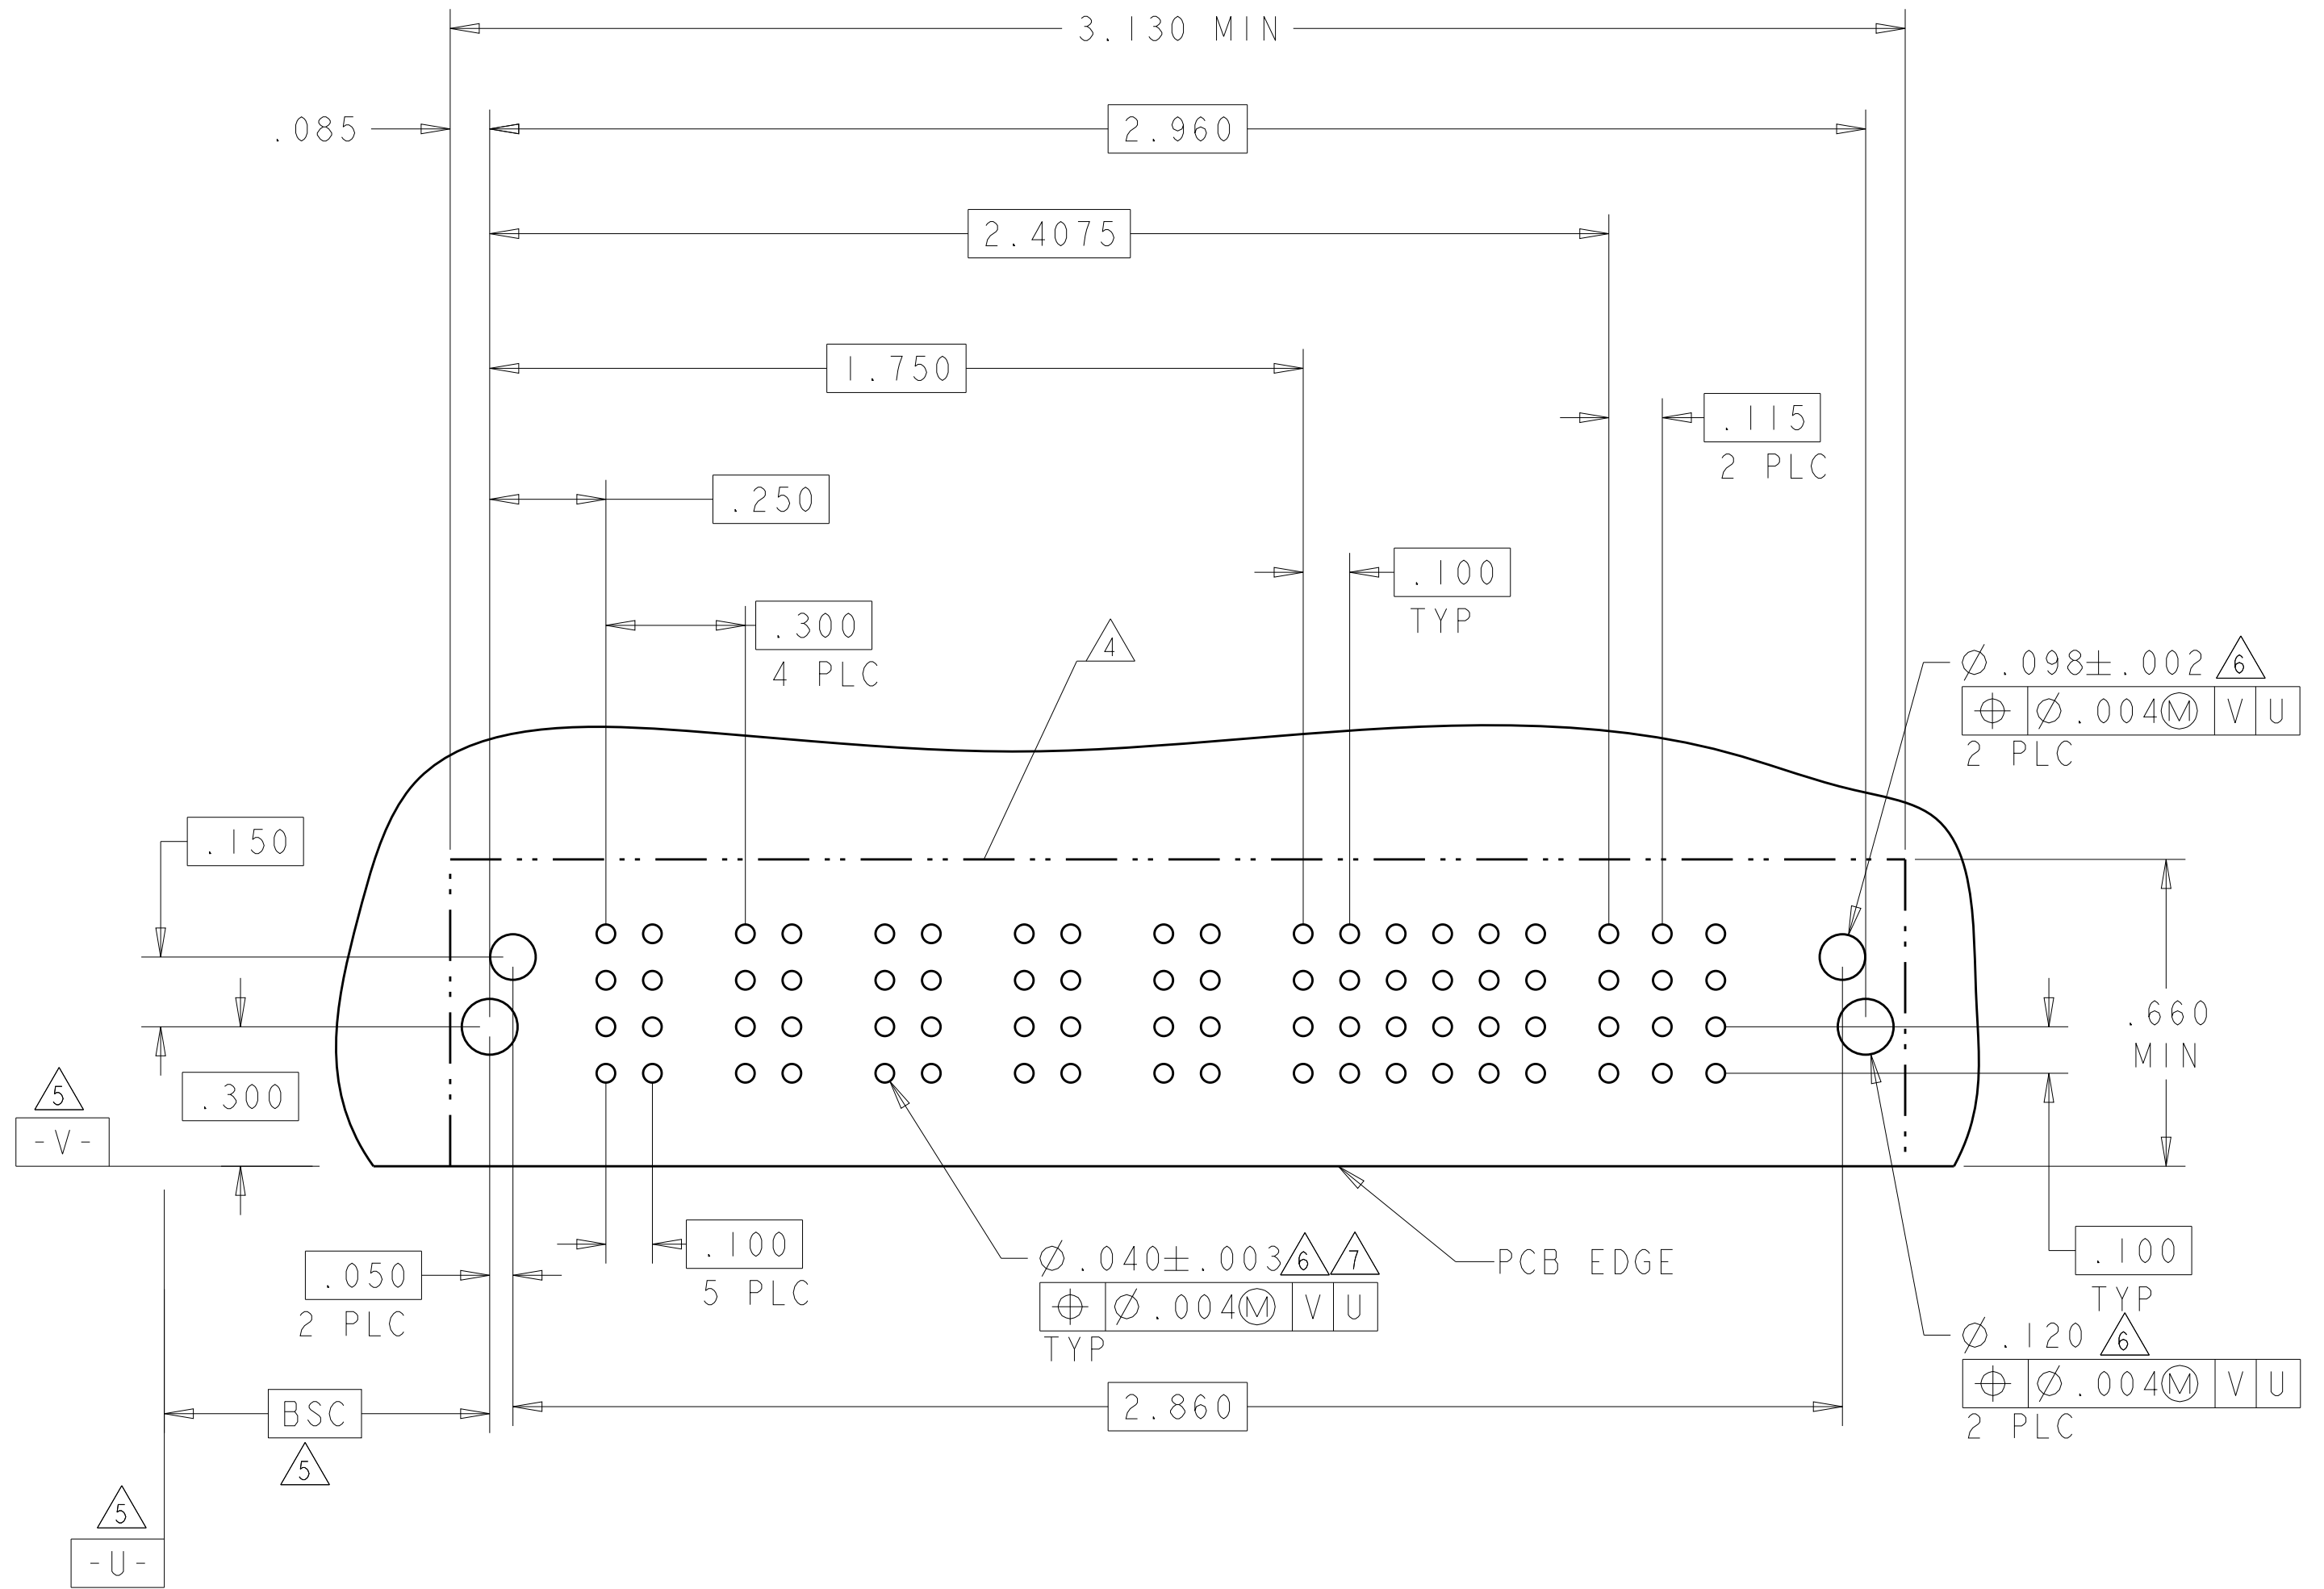[illegible]


[illegible]4805 (3/11)


PART NUMBER	ROWS		LOW POWER						SIGNAL																								LOW POWER											
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20	21	22	23	24	LP7	LP8	LP9	LP10									
6-6450830-9	D		LMF	LM	LM	LM	LMF	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	LMF	LM	LM	LM						
	C								K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K						K	K	K	K	K
	B								N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N						N	N	N	N	N
	A	HD							S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S						S	S	S	S	S
6LP + 96S + 4LP																																												

This mechanical drawing shows the edge view of a PCB, detailing its dimensions and tolerances. The drawing includes the following features and specifications:

- Overall Dimensions:**
 - Top width: 4.120 MIN
 - Bottom width: 3.850
 - Left side width: .085
 - Right side width: .115 (3 PLC)
- Internal Dimensions and Tolerances:**
 - Top internal width: 3.3975
 - Top internal width: .940
 - Top internal width: .2075
 - Top internal width: .115 (5 PLC)
 - Top internal width: .100 TYP
 - Bottom internal width: .050 (2 PLC)
 - Bottom internal width: .100 TYP
 - Bottom internal width: .120 (2 PLC)
- Geometric Features:**
 - A central rectangular area with rounded corners, defined by a dashed line.
 - A series of small circles (vias) arranged in a grid within the central area.
 - Two larger circles (mounting holes) on the left and right sides.
 - A label "PCB EDGE" pointing to the bottom edge.
- Surface Features and Tolerances:**
 - Top surface: $\phi .098 \pm .002$ (6) (2 PLC)
 - Bottom surface: $\phi .040 \pm .003$ (6) (7) (TYP) ($\phi .004$ M) (V) (U)
 - Right side: $\phi .120$ (2 PLC)
- Other Labels:**
 - "BSC" (Basic) label on the left side.
 - "-V-" and "-U-" labels on the left side.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS:		CHN S_ZHAO 10APR2007			
INCHES		APVD S_ZHAO -			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±?		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251			
MATERIAL		WEIGHT -			
FINISH		SIZE CAGE CODE DRAWING NO		RESTRICTED TO	
-		A 00779 © 6450830		-	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 34 OF 42 REV S2	

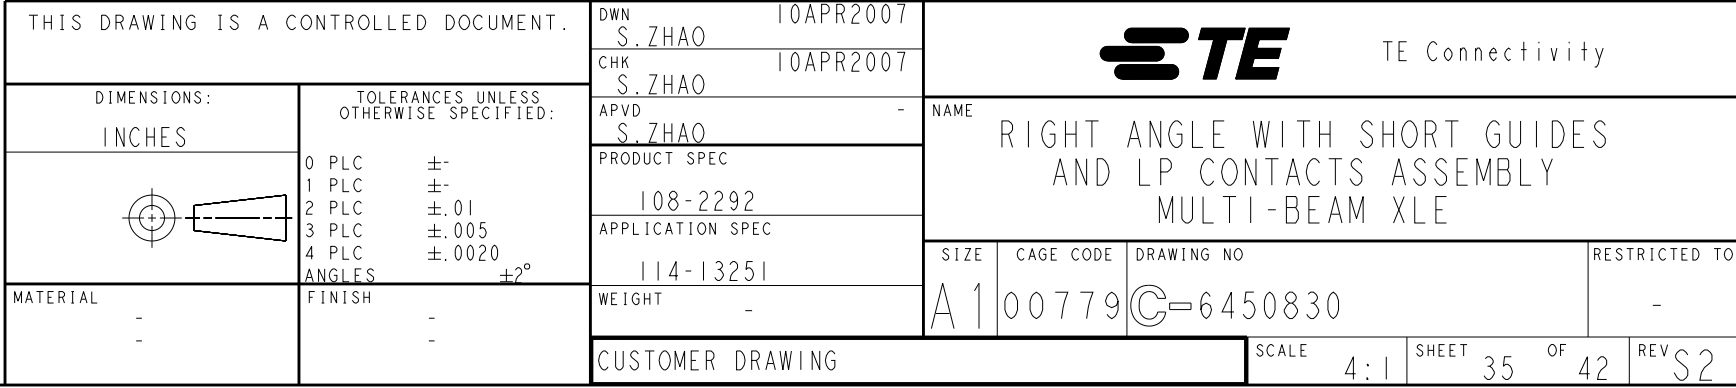

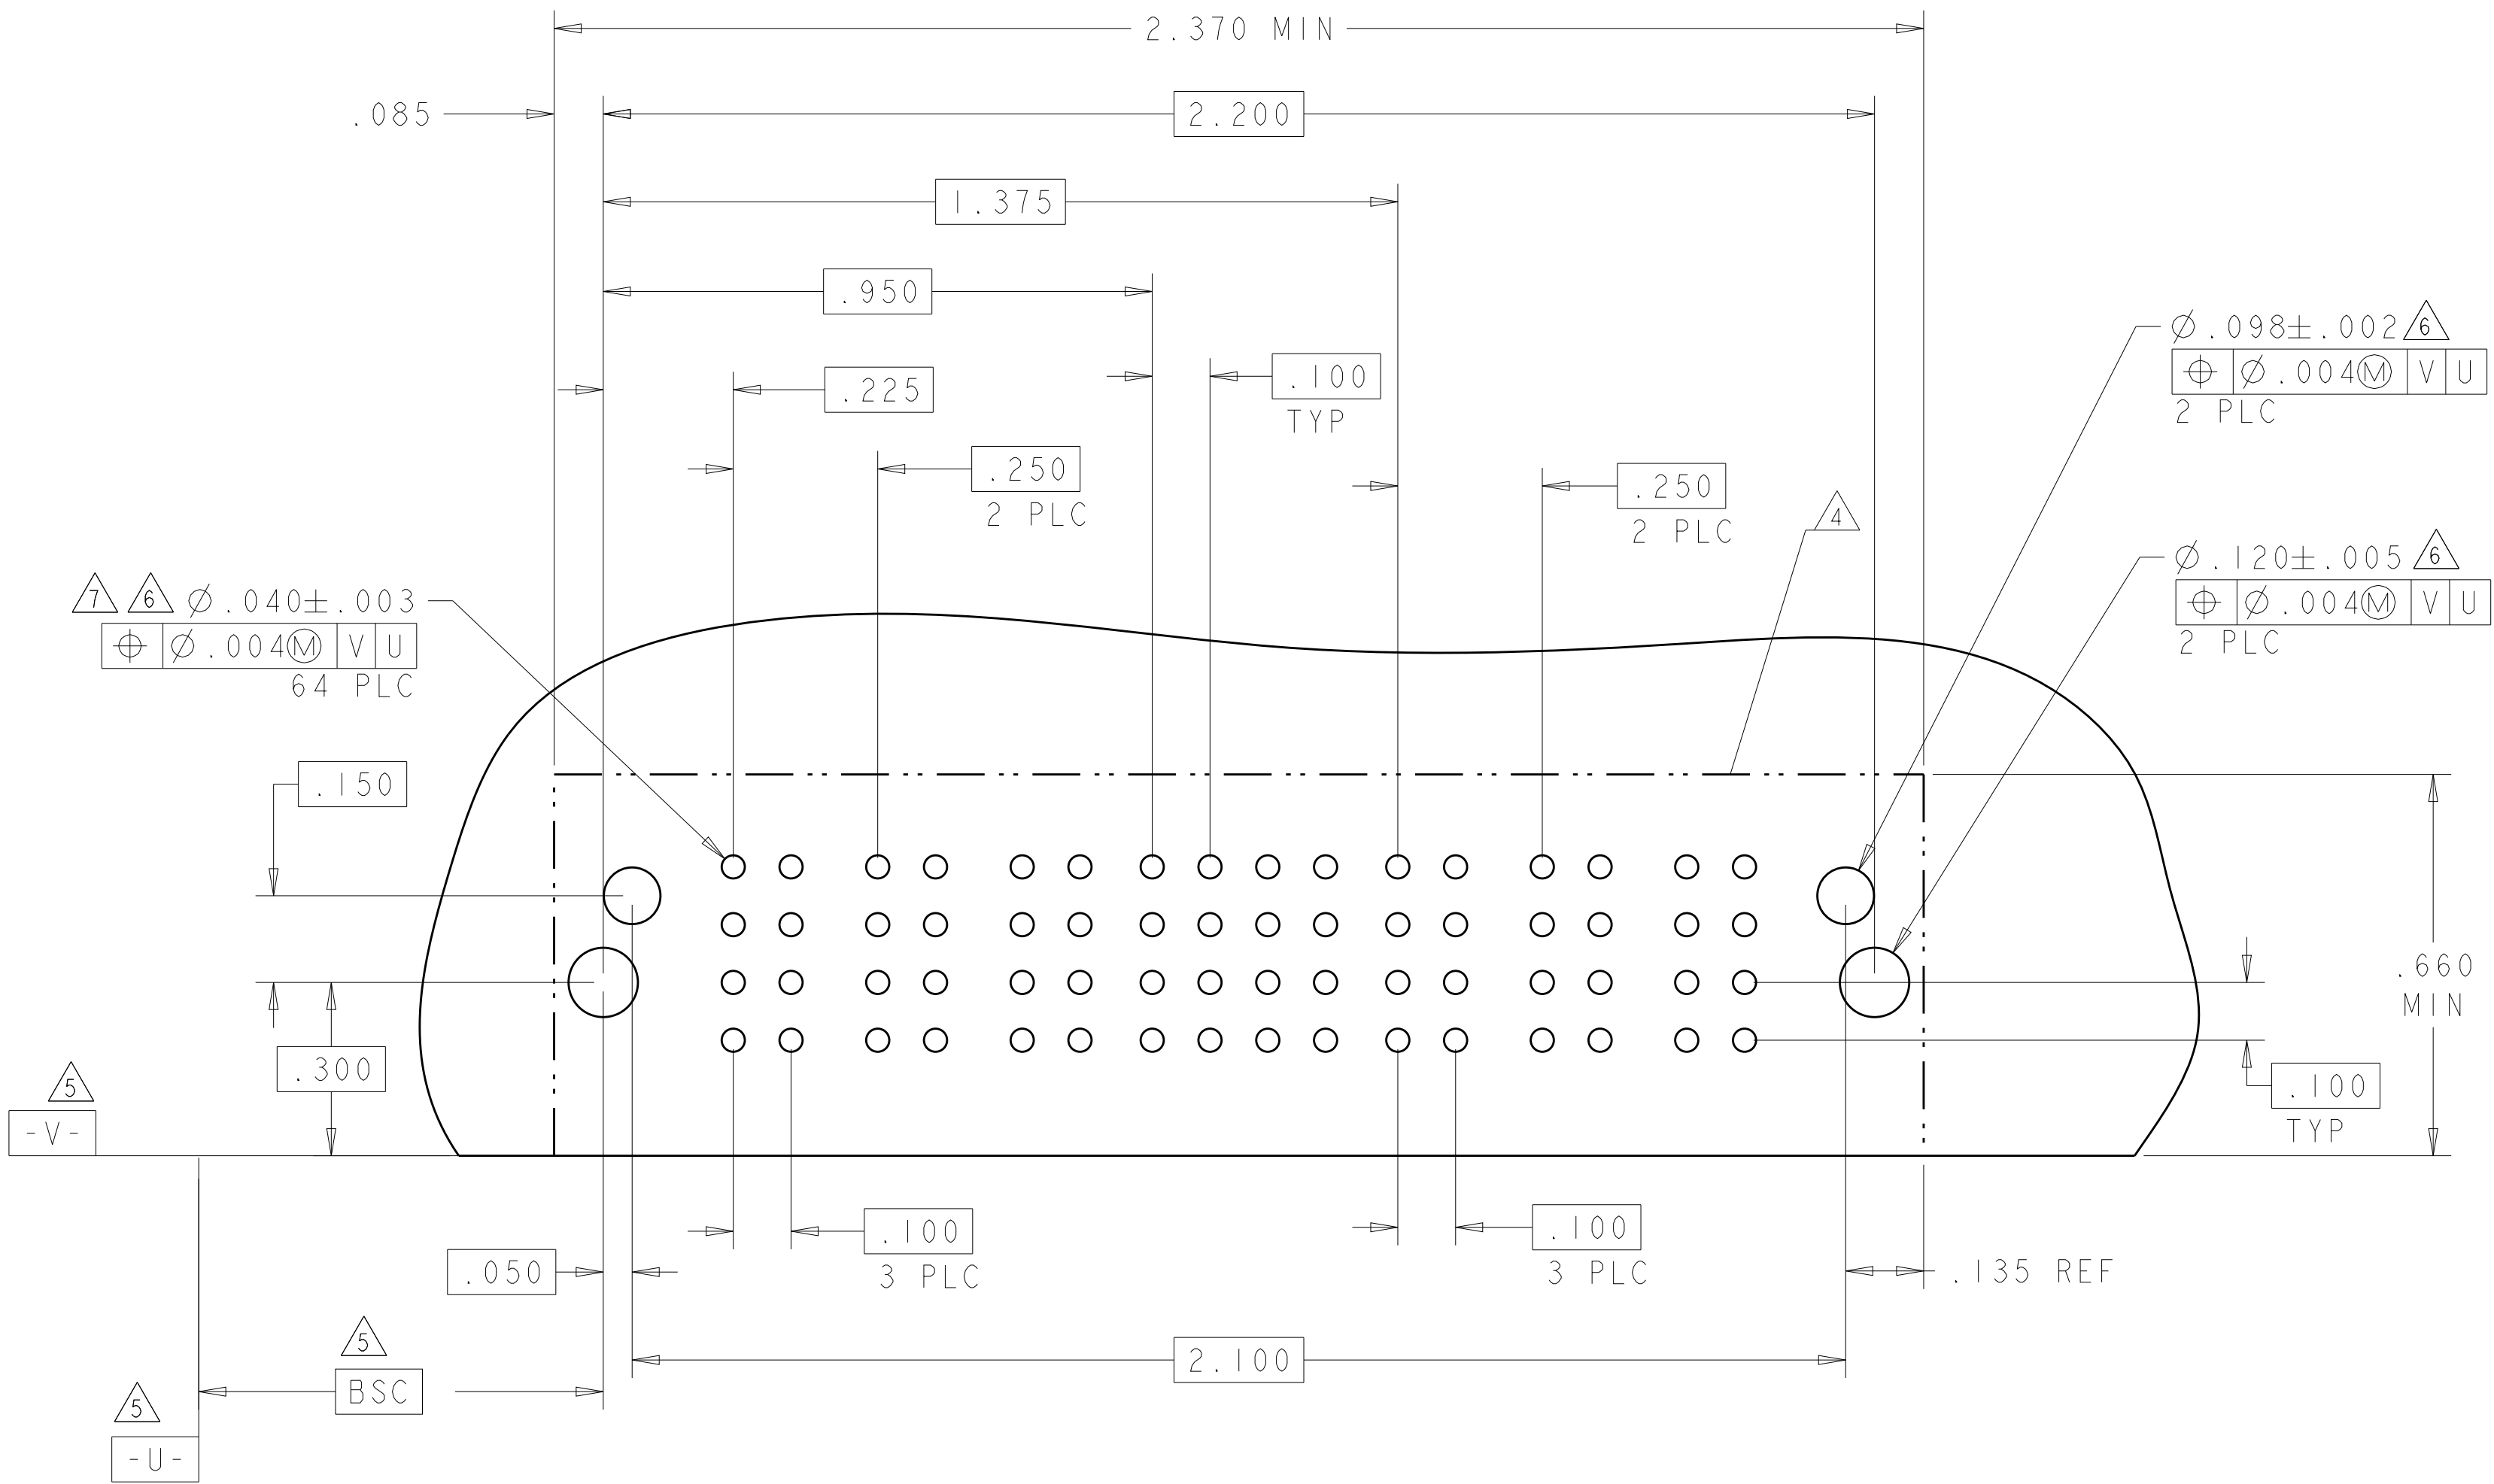[illegible]4805 (3/11)



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


R3


PART NUMBER	ROWS		LOW POWER			SIGNAL			LOW POWER				
			LP1	LP2	LP3	1	2	3	LP4	LP5	LP6	LP7	
7-6450830-6	D		LM	LM	LM	J	J	J	LM	LM	LM	LM	
	C					K	K	K					
	B					N	N	N					
	A					S	S	S					
3LP + 12S + 4LP													


PART NUMBER	ROWS		POWER				SIGNAL												POWER	
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	11	12	P4	
7-6450830-7	D		TM	TM	TM	TM	E			E	J		J		J	E		E	TM	
	C						F	F	F	F		K		K		F		F		
	B						G		G		N		N		N	G		N		
	A						H	H	H	H	H		S		H		H			
4P + 48S + 1P																				

BLANK SIGNAL PINS ARE UNLOADED PINS

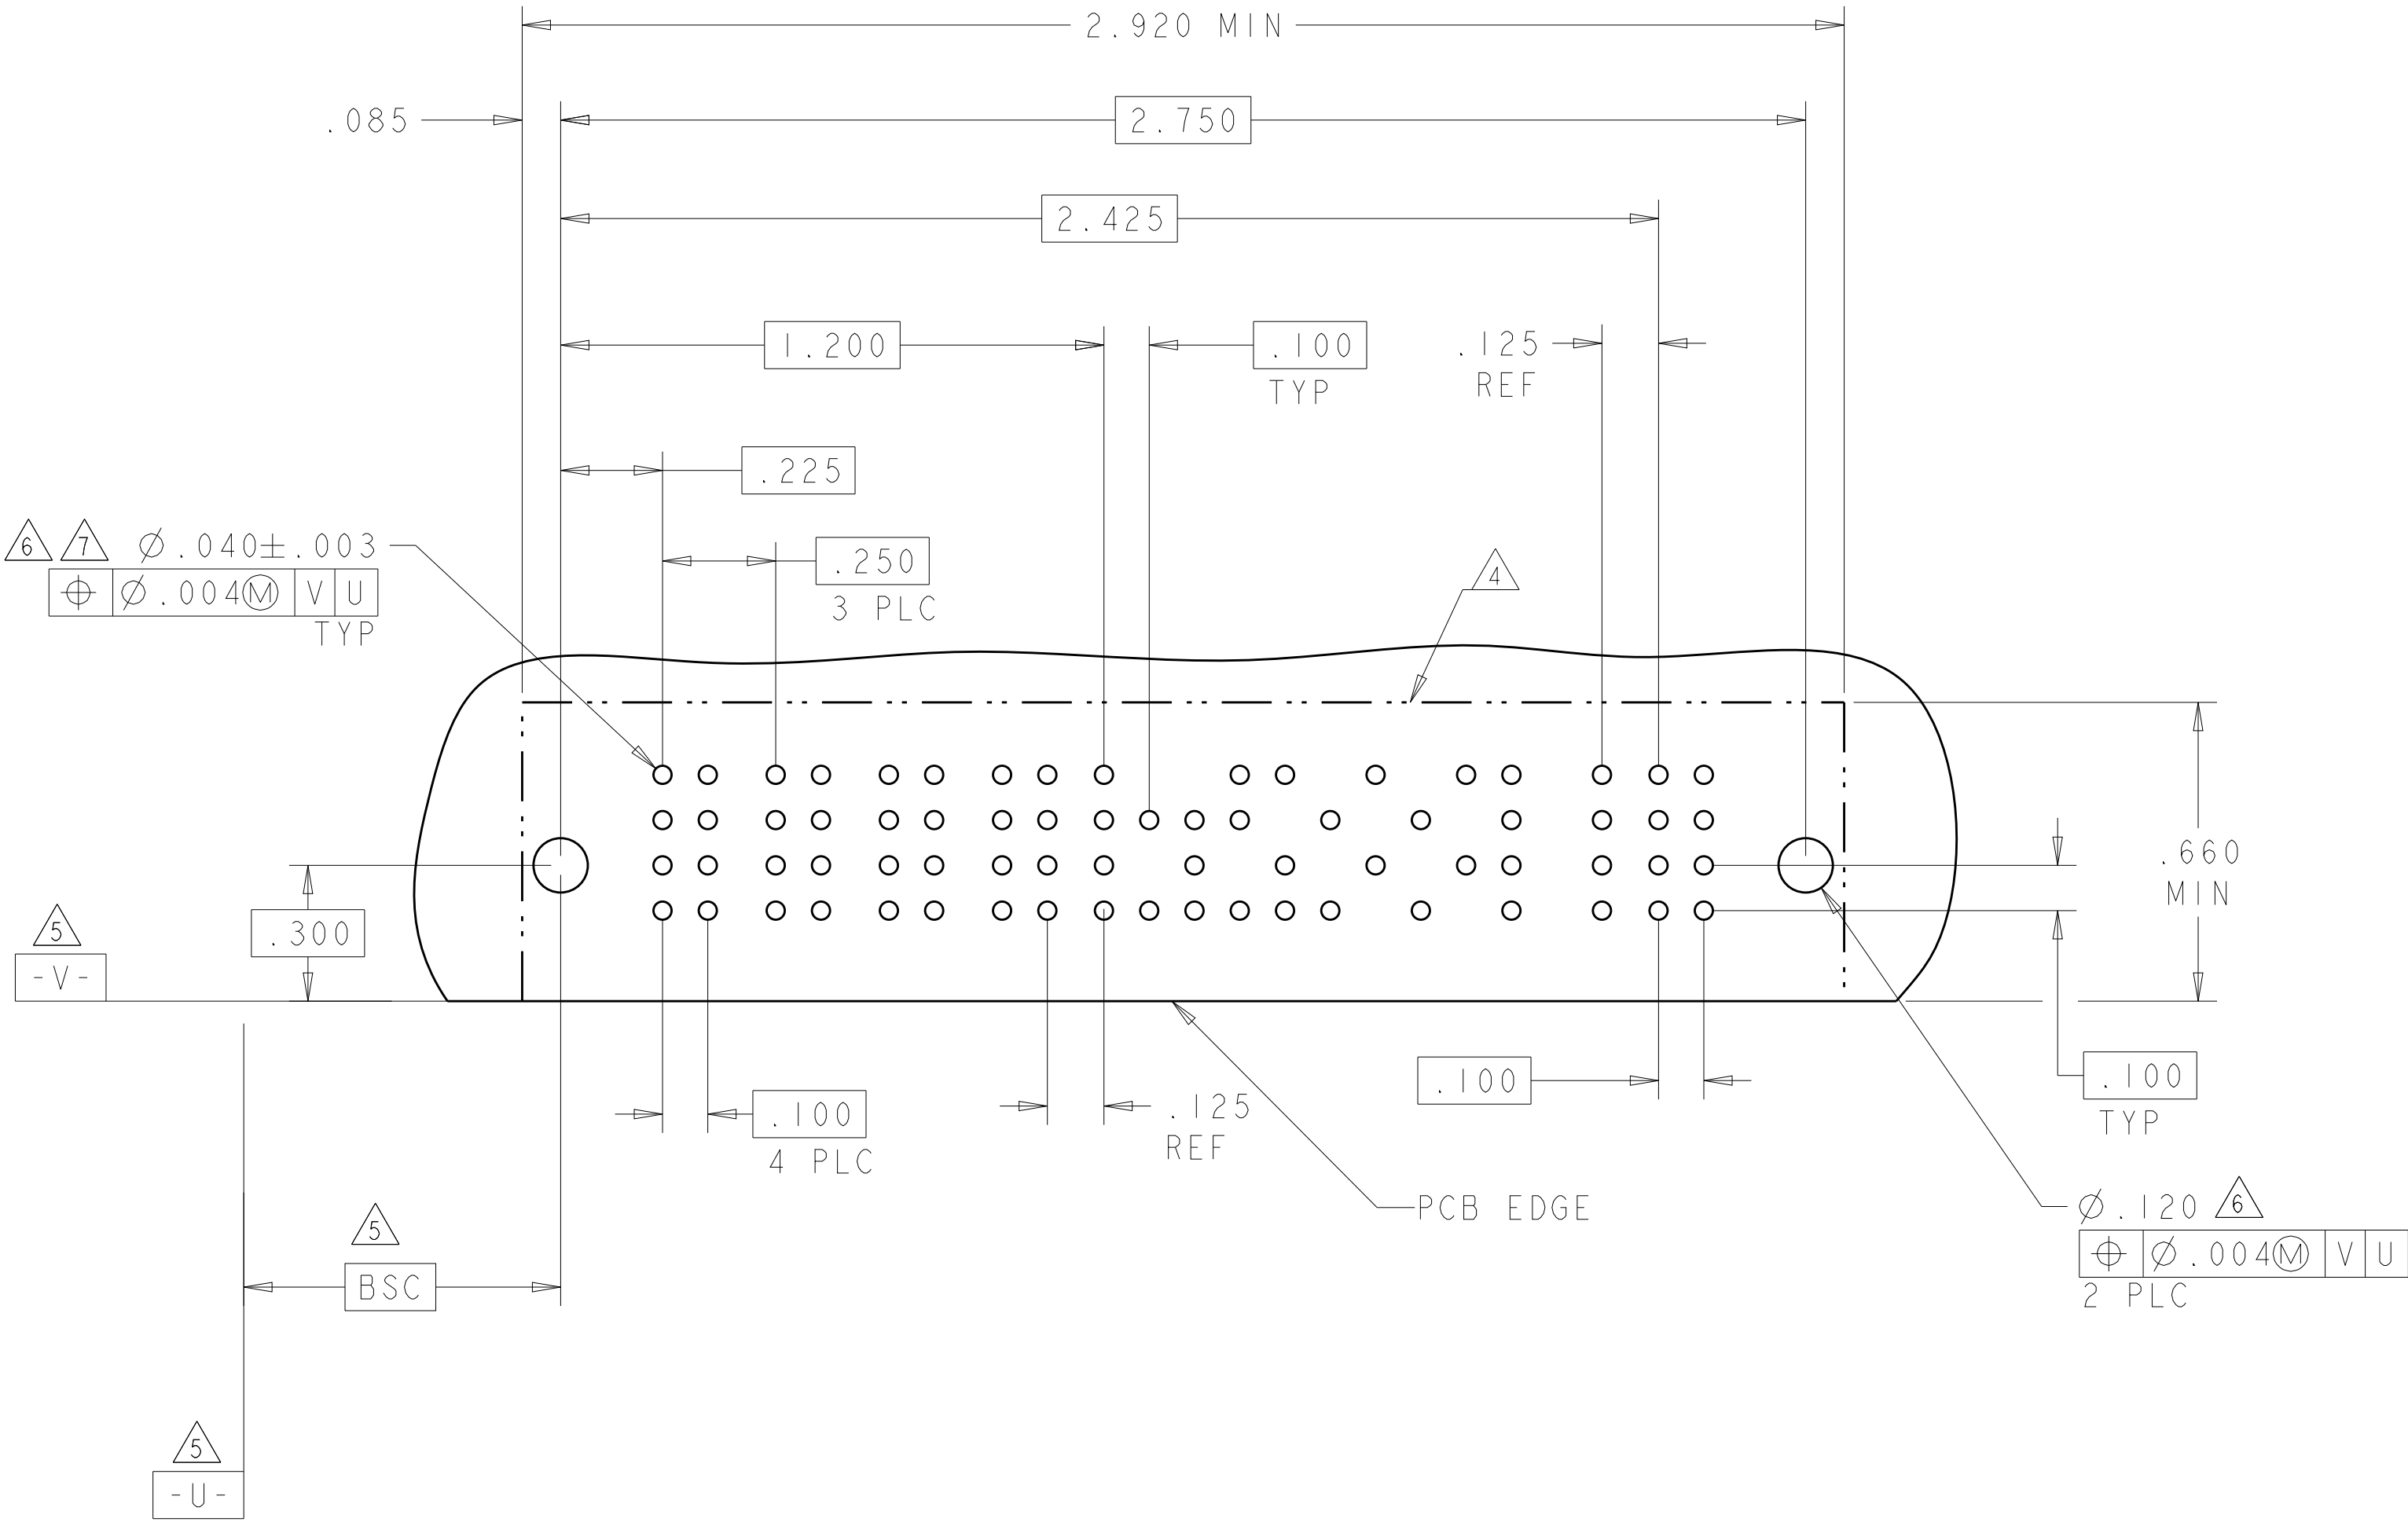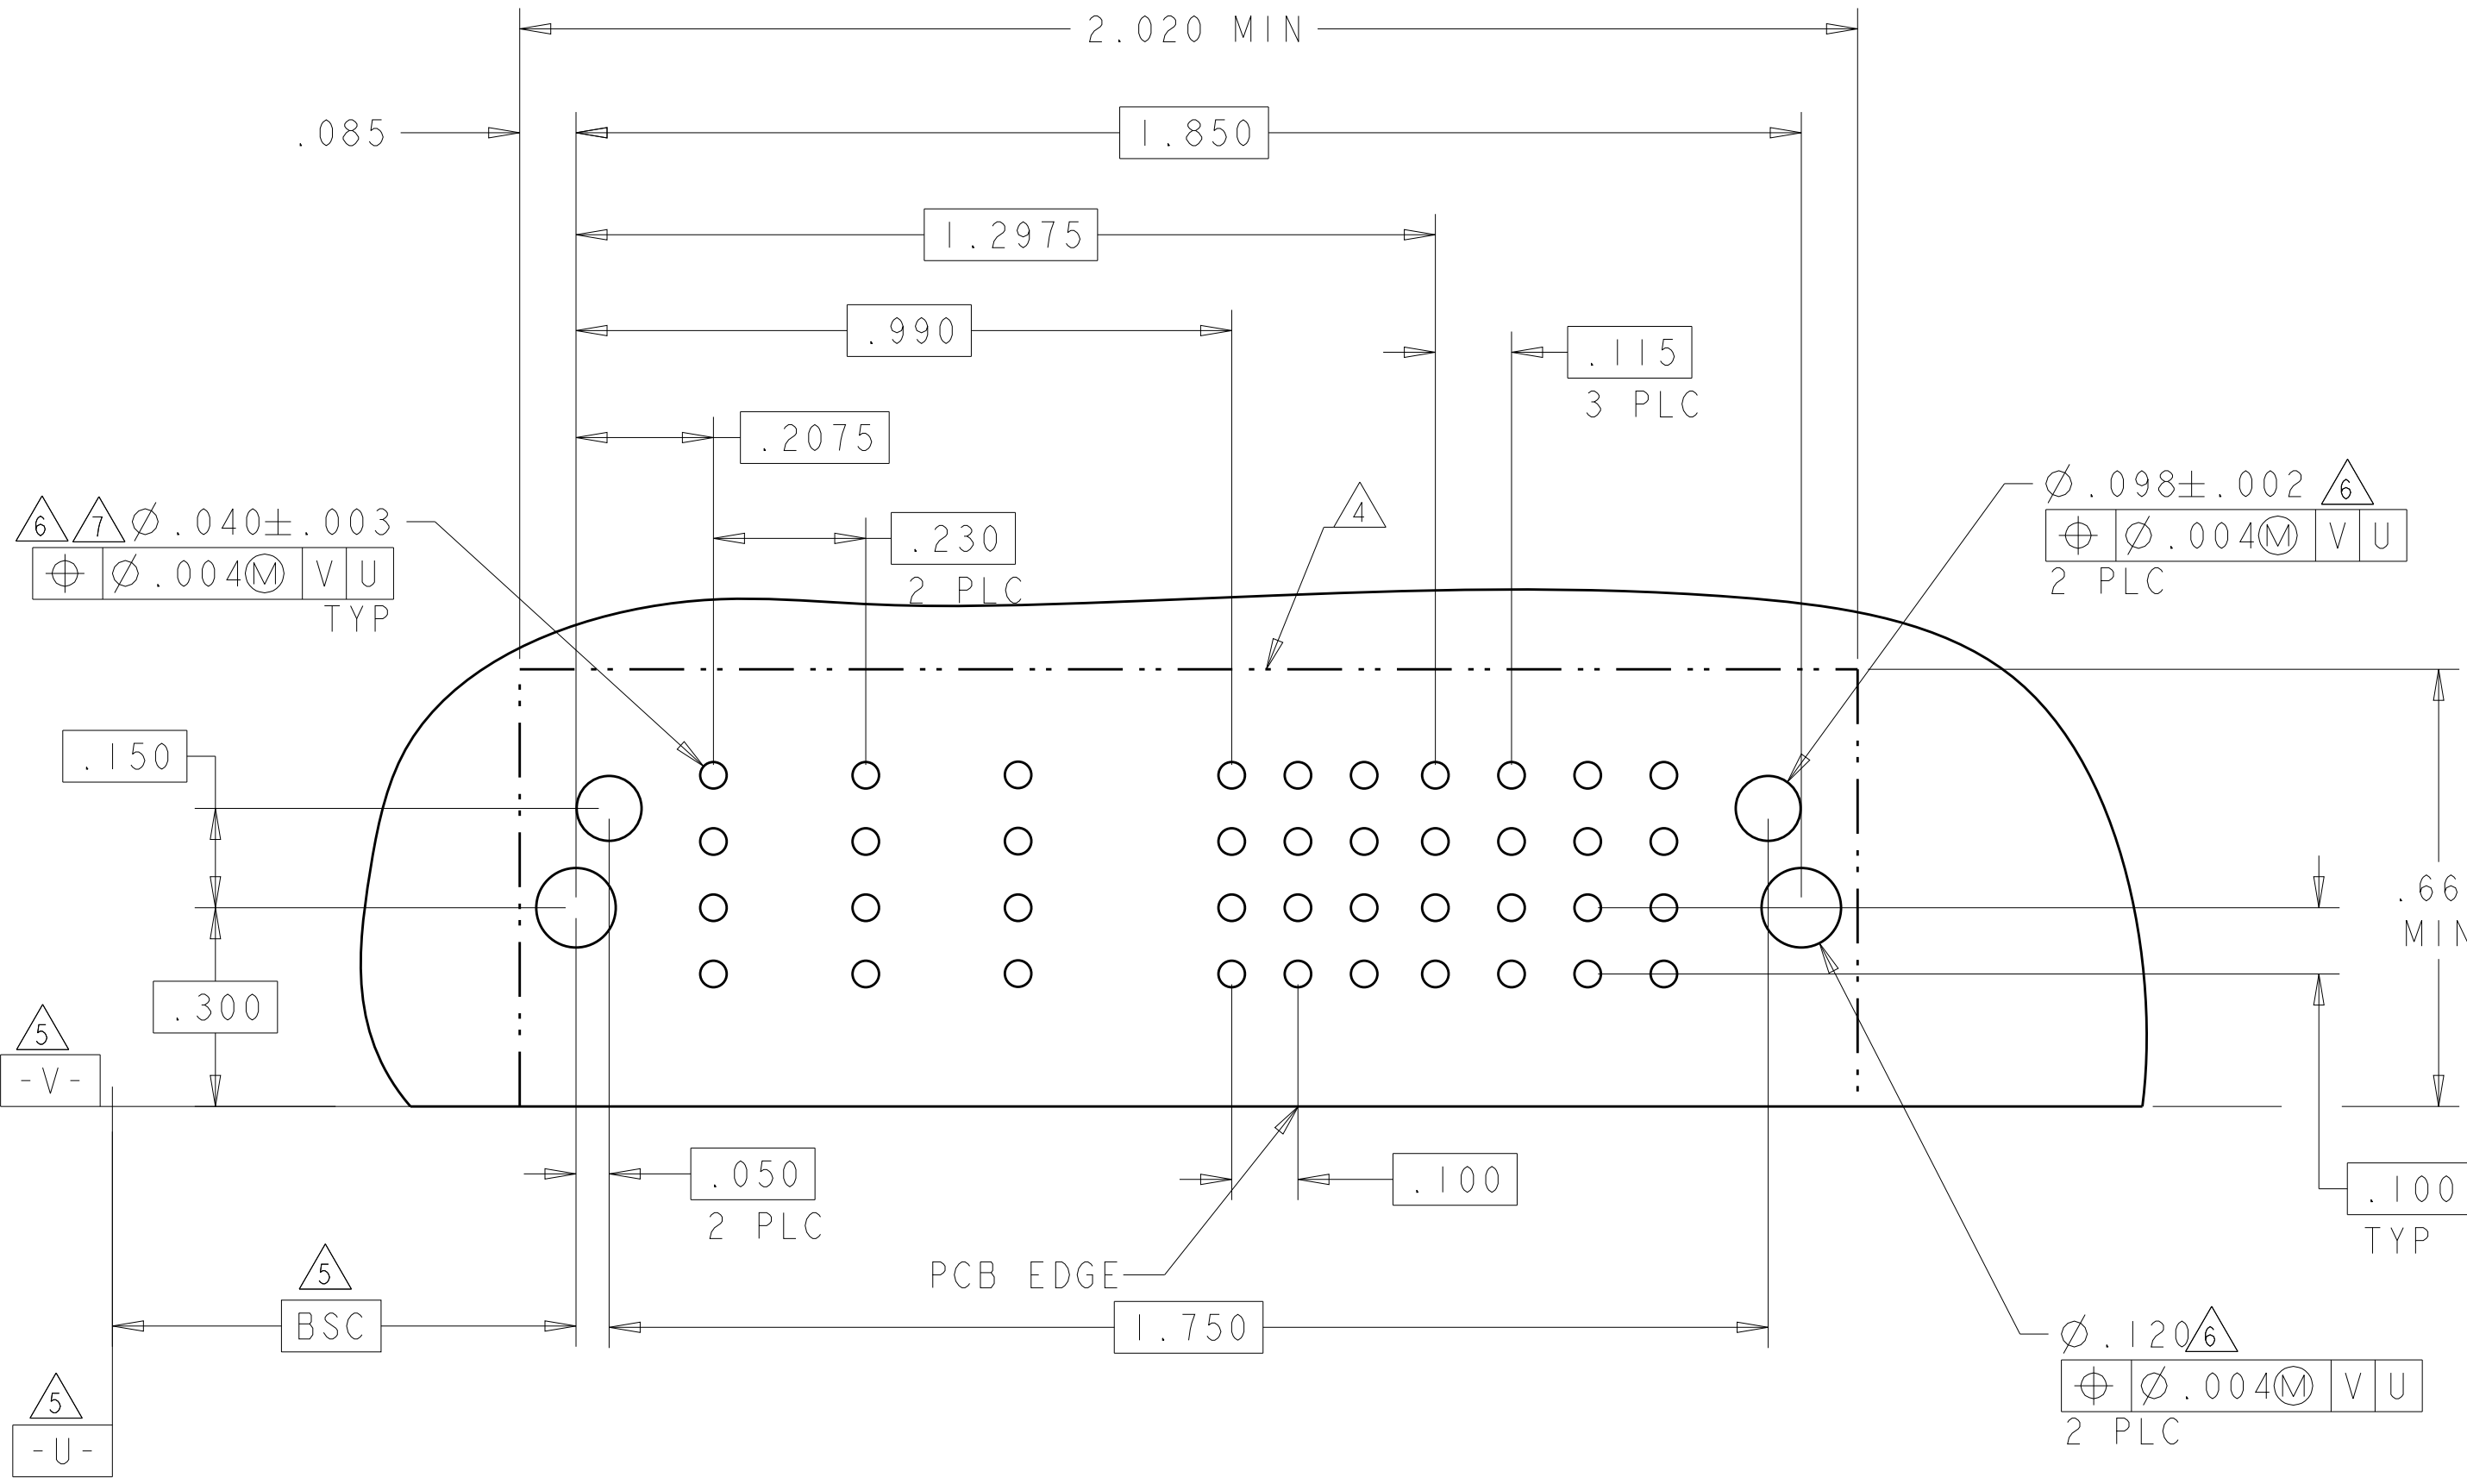

PART NUMBER	ROWS		LOW POWER												SIGNAL															POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	LP10	LP12	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	P1	P2	P3	P4				
7-6450830-8	D		LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	TM	TM	TM	TM				
	K													K	K	K	K	K	K	K	K	K	K	K	K	K	K	K						K	K	
	N													N	N	N	N	N	N	N	N	N	N	N	N	N	N	N						N	N	N
	S													S	S	S	S	S	S	S	S	S	S	S	S	S	S	S						S	S	S
12LP + 60S + 4P			HD																												HD					

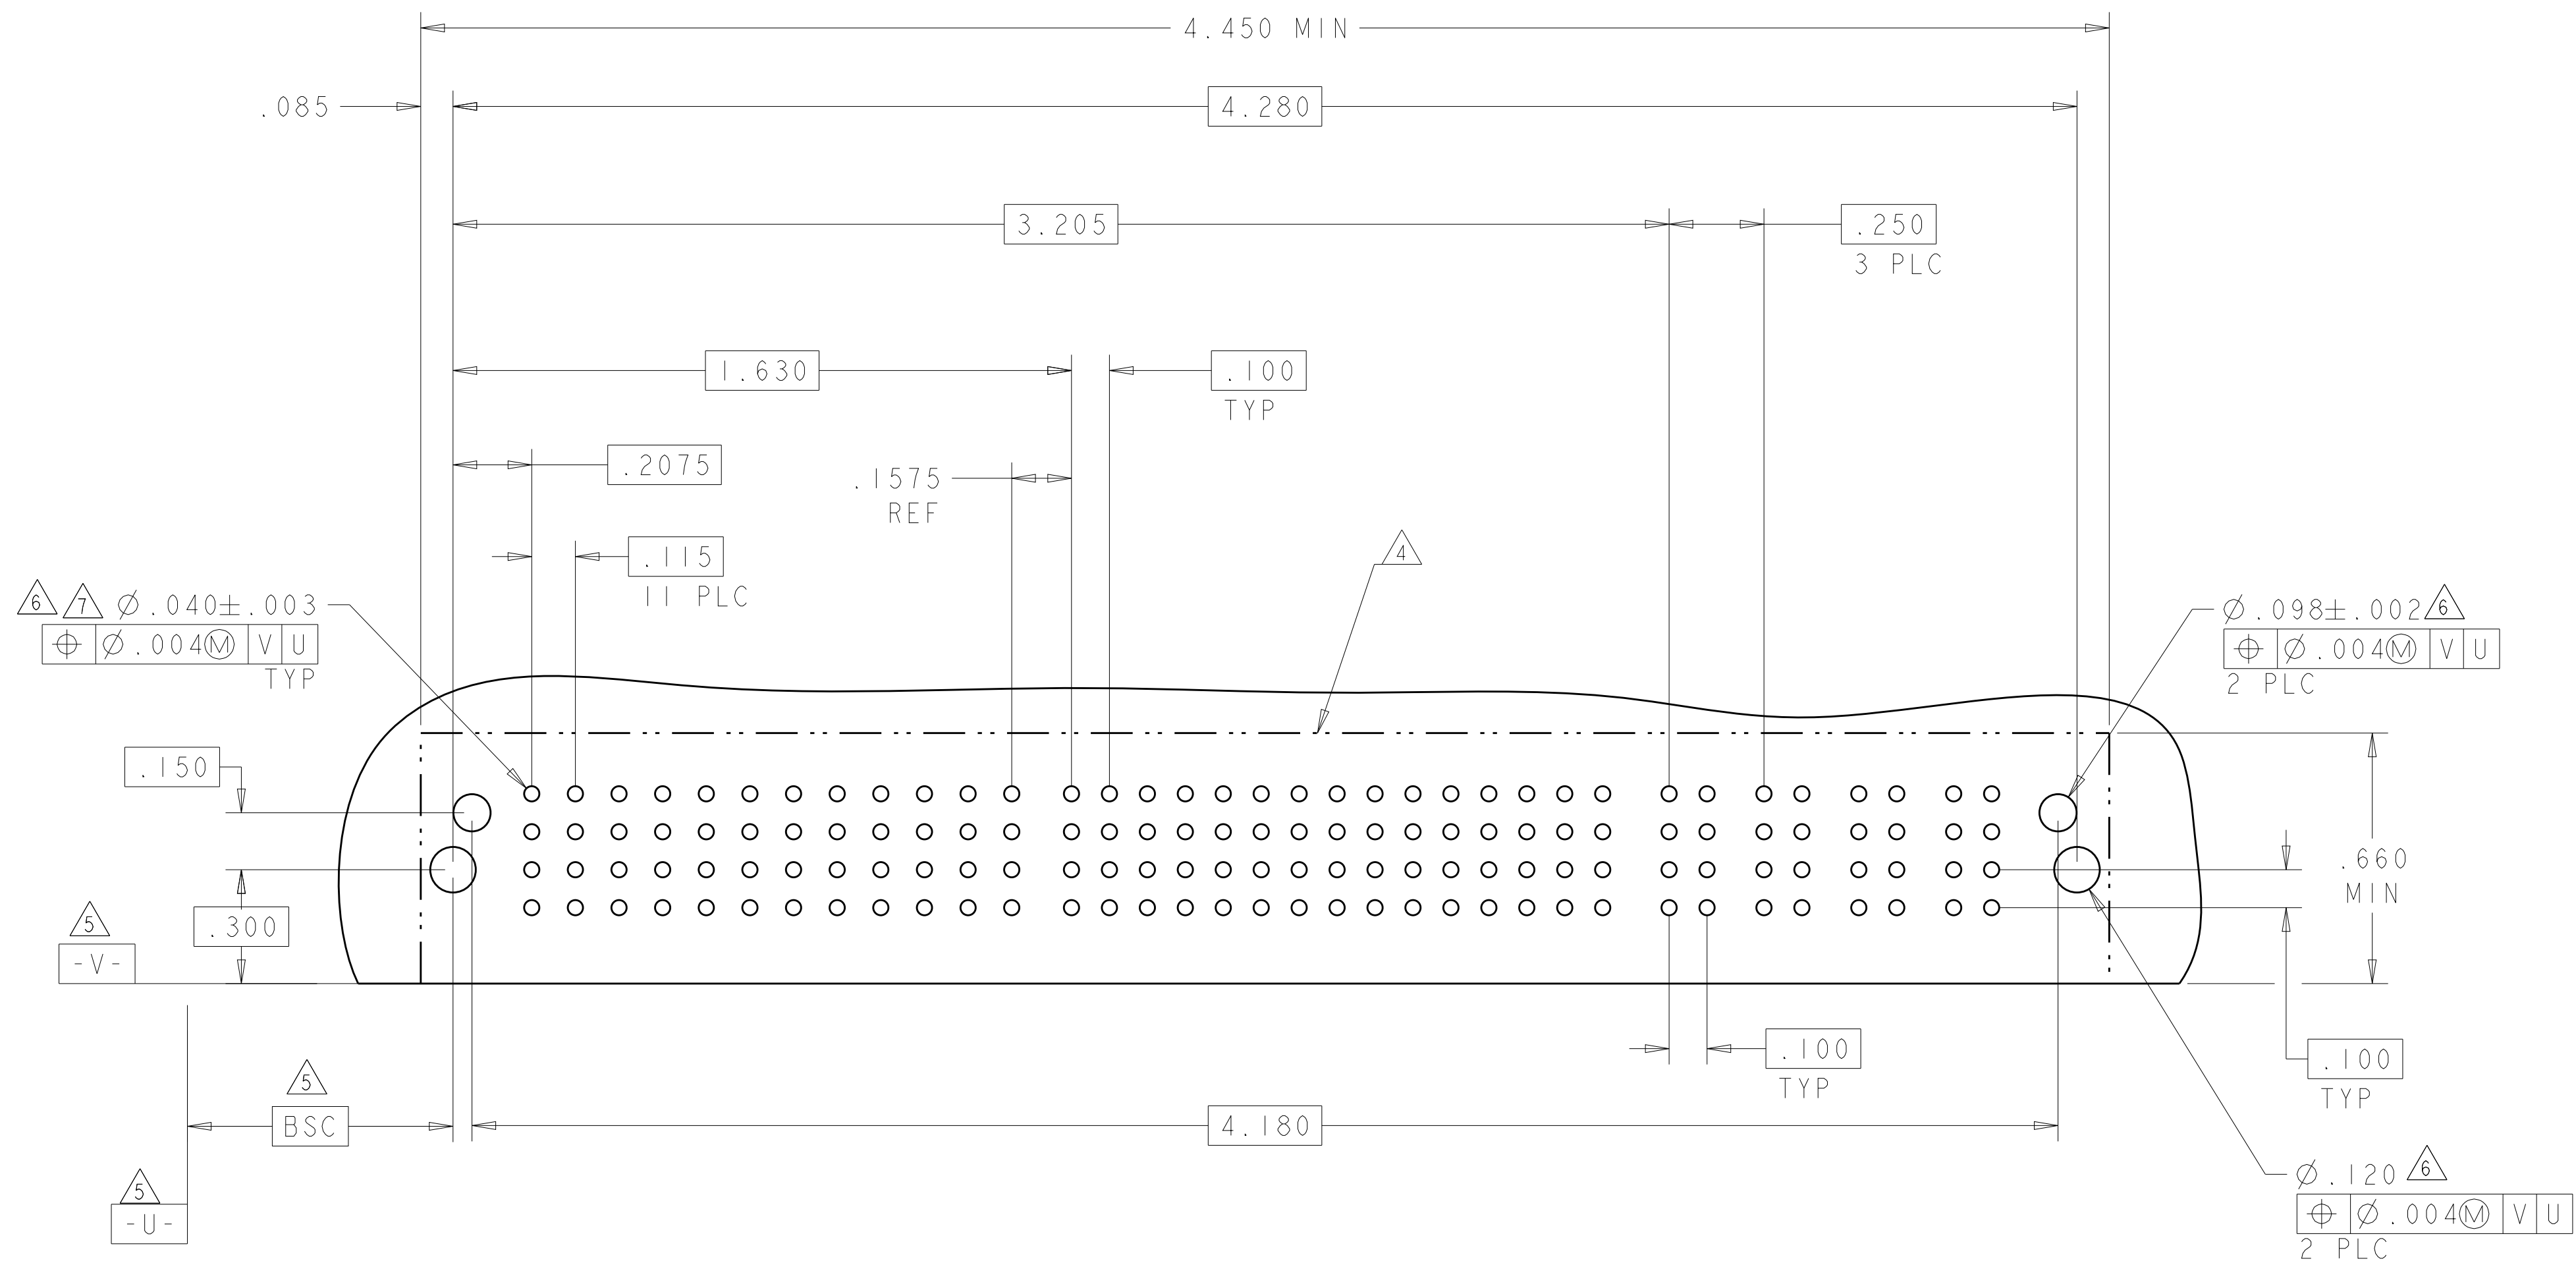

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS:		CHN S_ZHAO 10APR2007			
INCHES		APVD S_ZHAO -			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±?		PRODUCT SPEC 108-2292			
MATERIAL -		APPLICATION SPEC 114-13251			
FINISH -		WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 100779 © 6450830 -	
CUSTOMER DRAWING		SCALE 4:1		SHEET 38 OF 42 REV S2	

4.570 MIN

1.085

4.400

2.575

.250
6 PLC

1.950

.100
TYP

.225

.250
6 PLC

Ø.040±.003
⊕ Ø.004(M) V U
TYP

.150

.300

5
-V-

5
BSC

.050
2 PLC

.100
7 PLC

PCB EDGE

.100
7 PLC

.100
TYP

4

Ø.098±.002
⊕ Ø.004(M) V U
2 PLC

6

Ø.120
⊕ Ø.004(M) V U
2 PLC

.660
MIN

5
-U-


4.300

4805 (3/11)

NO CONTACT LOADED


NO CONTACTS LOADED

NO CONTACTS LOADED

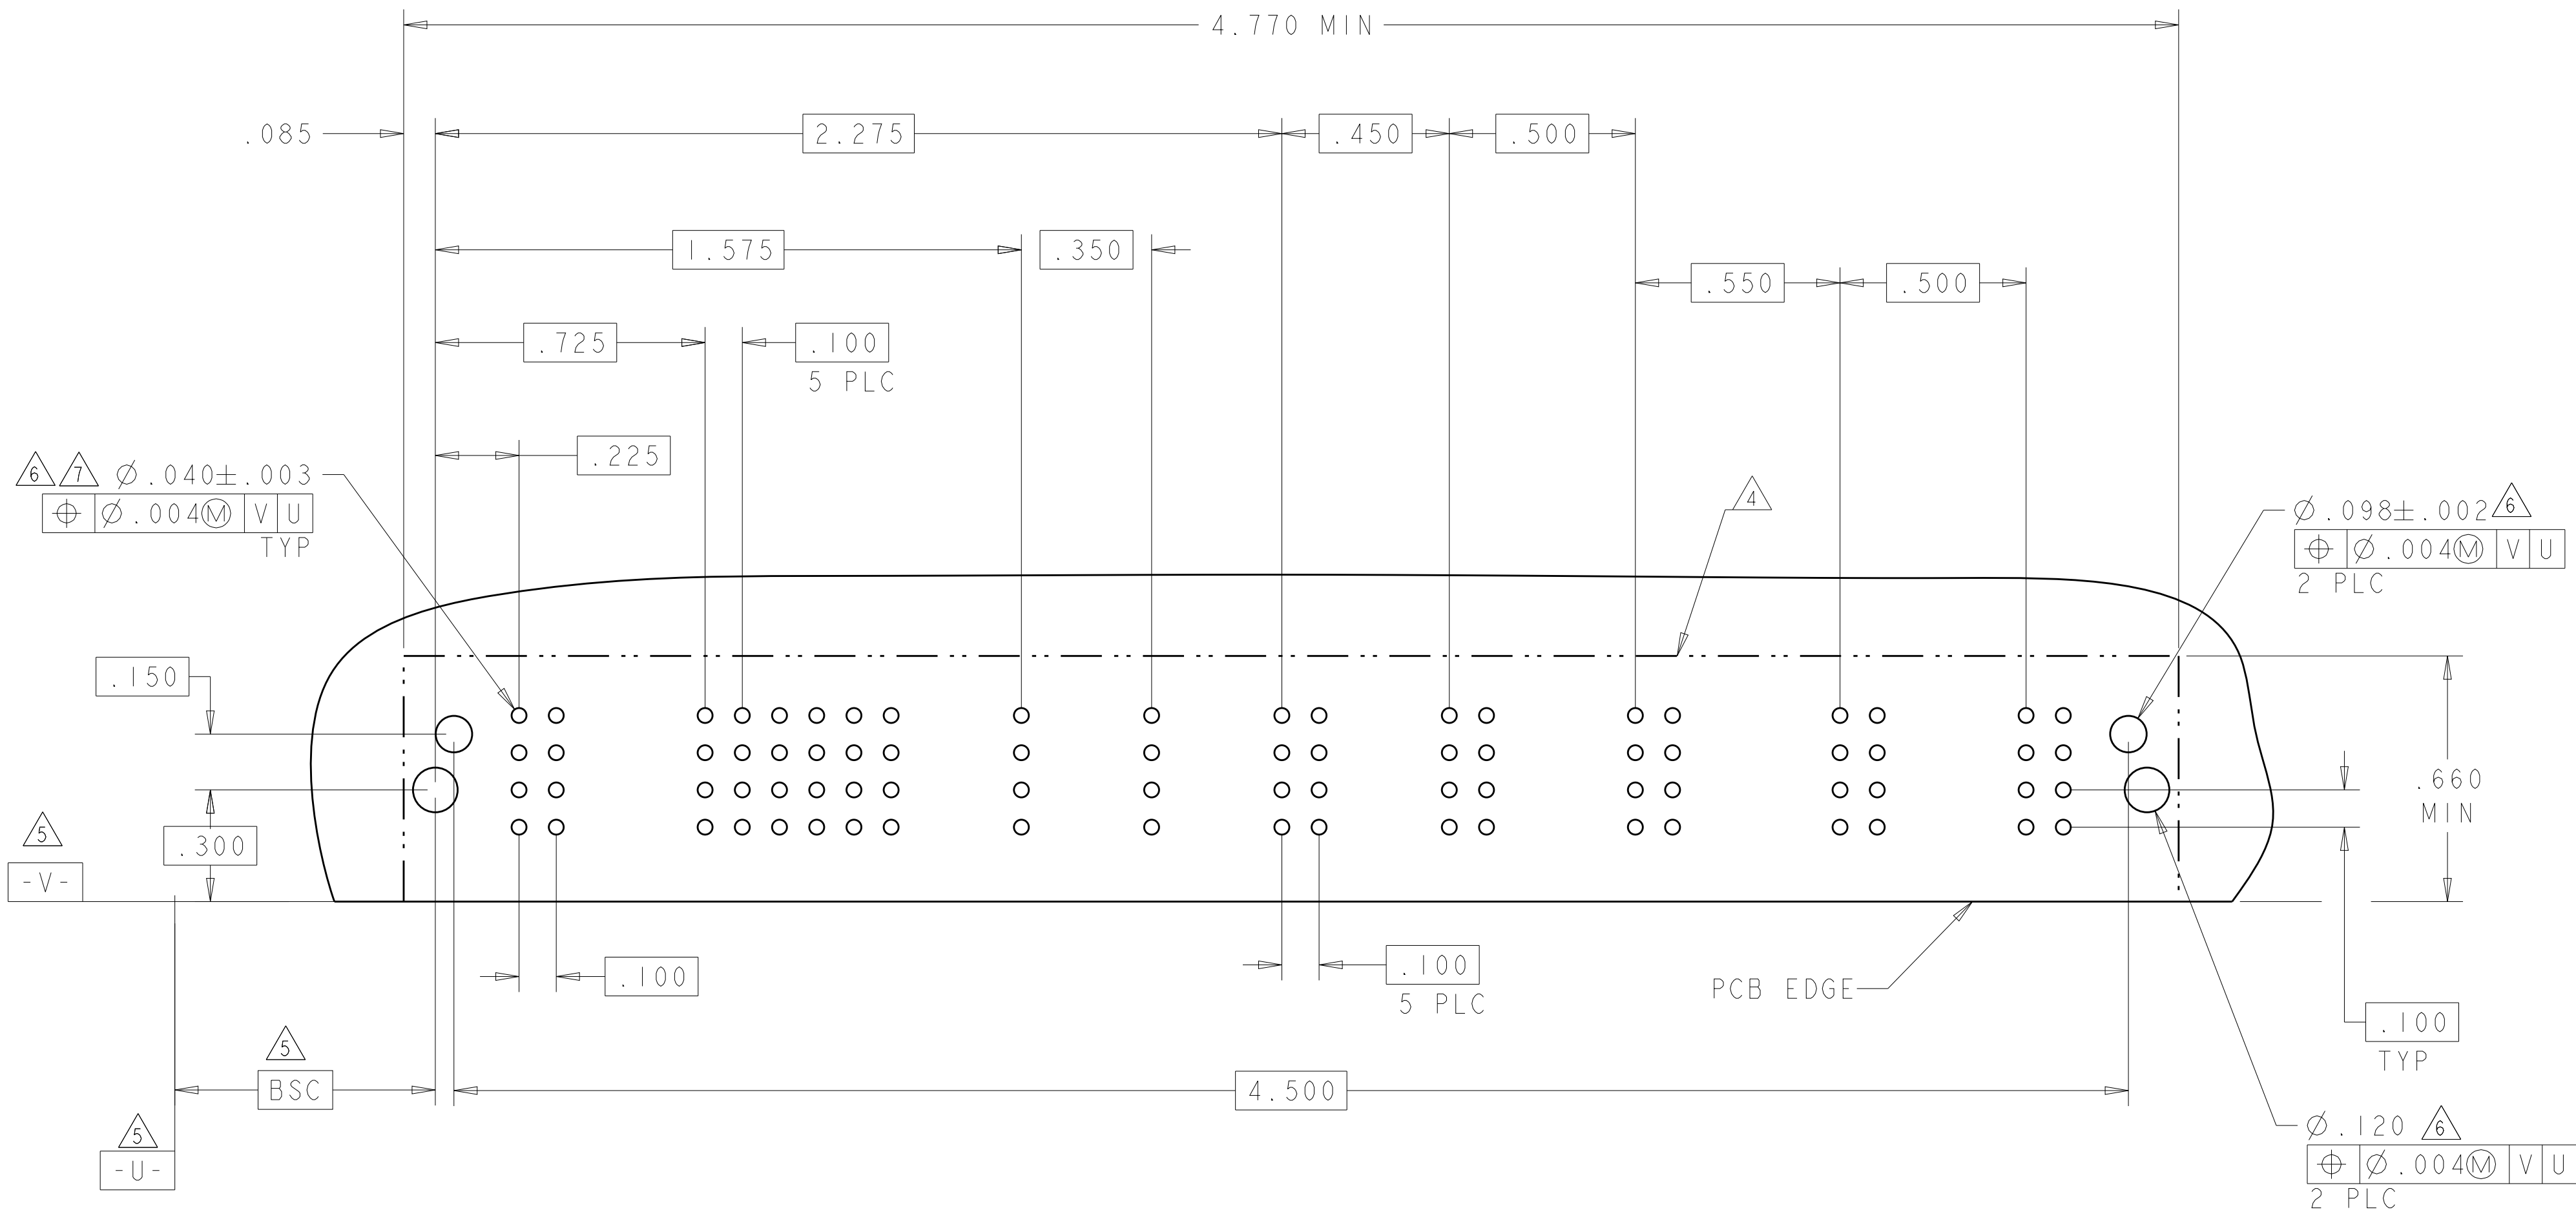4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
8-6450830-0	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					S	S	S					
3ACP + 16S + 3P													

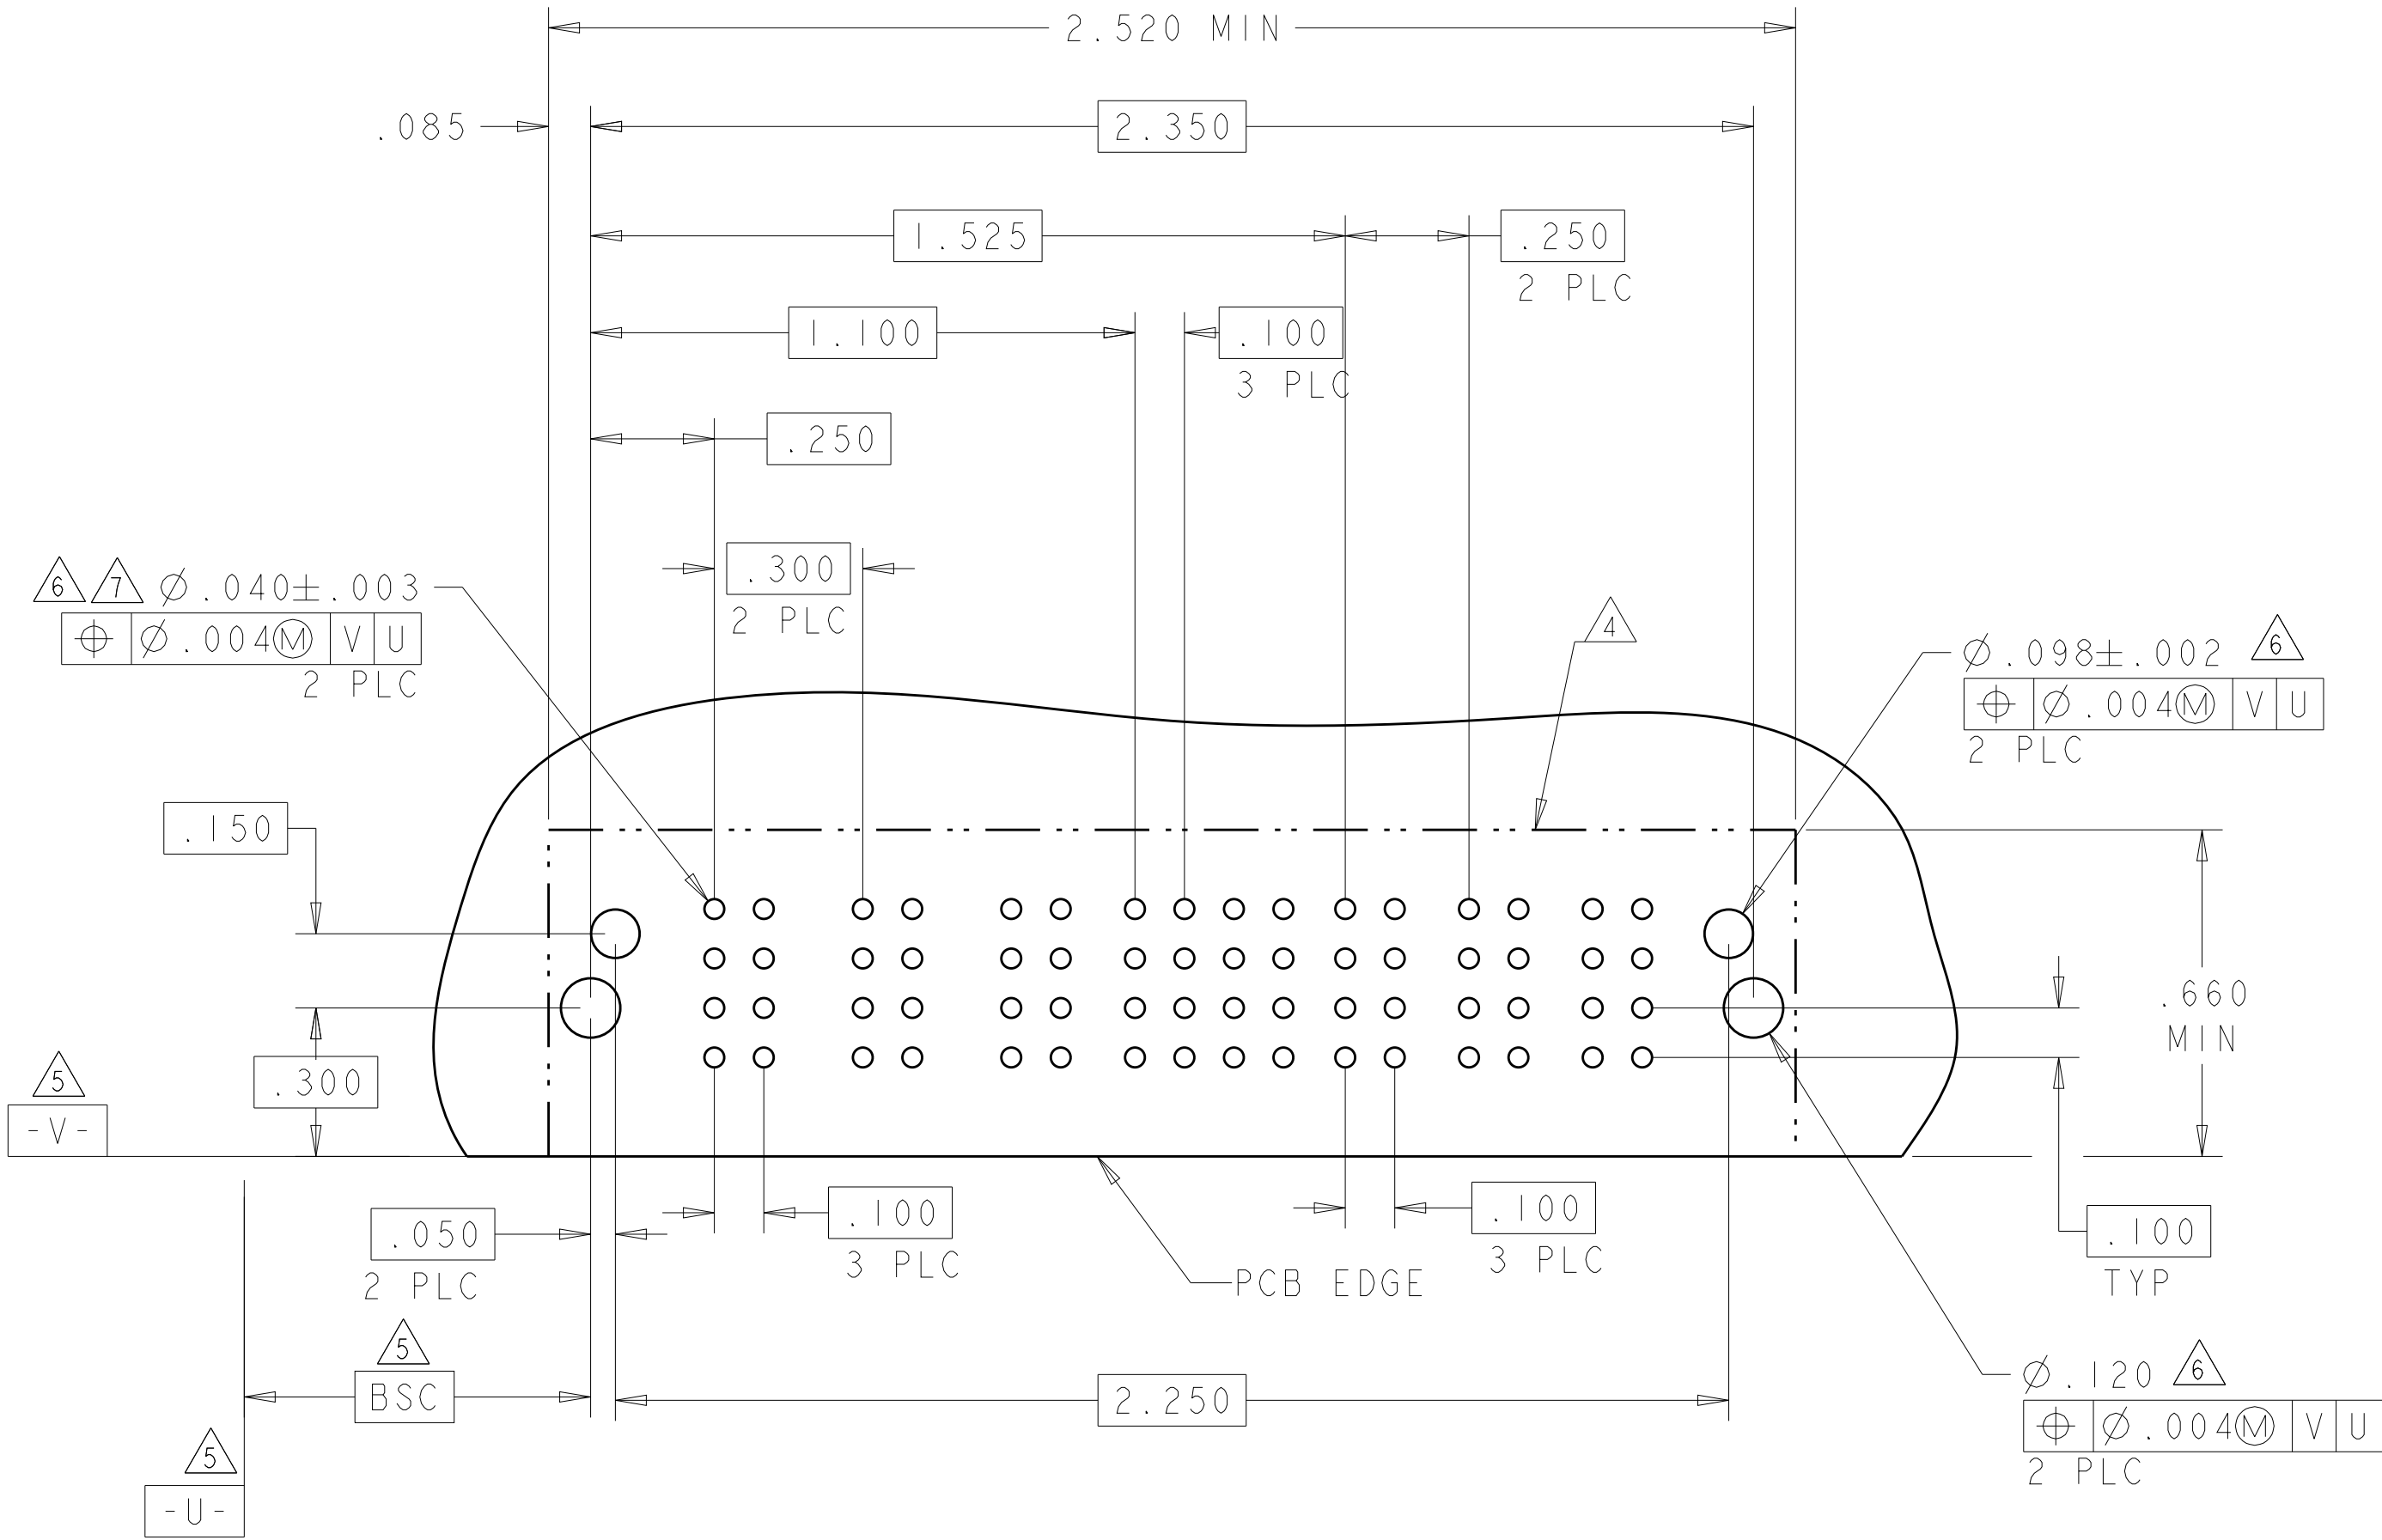


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007		
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		APVD S. ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC $\pm .01$ 1 PLC $\pm .01$ 2 PLC $\pm .01$ 3 PLC $\pm .005$ 4 PLC $\pm .002$ ANGLES $\pm 2^\circ$ FINISH		108-2292	
MATERIAL -		WEIGHT -		APPLICATION SPEC	
				114-13251	
				CUSTOMER DRAWING	
				SCALE 4:1	
				SHEET 41 OF 42	
				REV S2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		LOW POWER									SIGNAL									POWER	LOW POWER																											
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	1	2	3	4	5	6	7	8	9		PI	LP10	LP11	LP12	LP13	LP14	LP15	LP16	LP17	LP18	LP19	LP20	LP21	LP22	LP23	LP24		LP25										
8-6450830-2	D	C										E	E	E	E	E	-	-	E	E	TM																												
	C											F	F	F	F	F	G	-	-	F		F																											
	B		LM	LM	LM	LMF	-	LMF	LM	LM	LM	G	G	G	G	G	-	-	G	G				LML	LML	LML	LML		LML	LML	LML	LML	-	LML	LML	LML	LML												
	A	HD										H	H	H	H	H	-	-	H	H																		HD											
9LP + 36S + 1P + 16LP																																																	

- NO CONTACTS LOADED

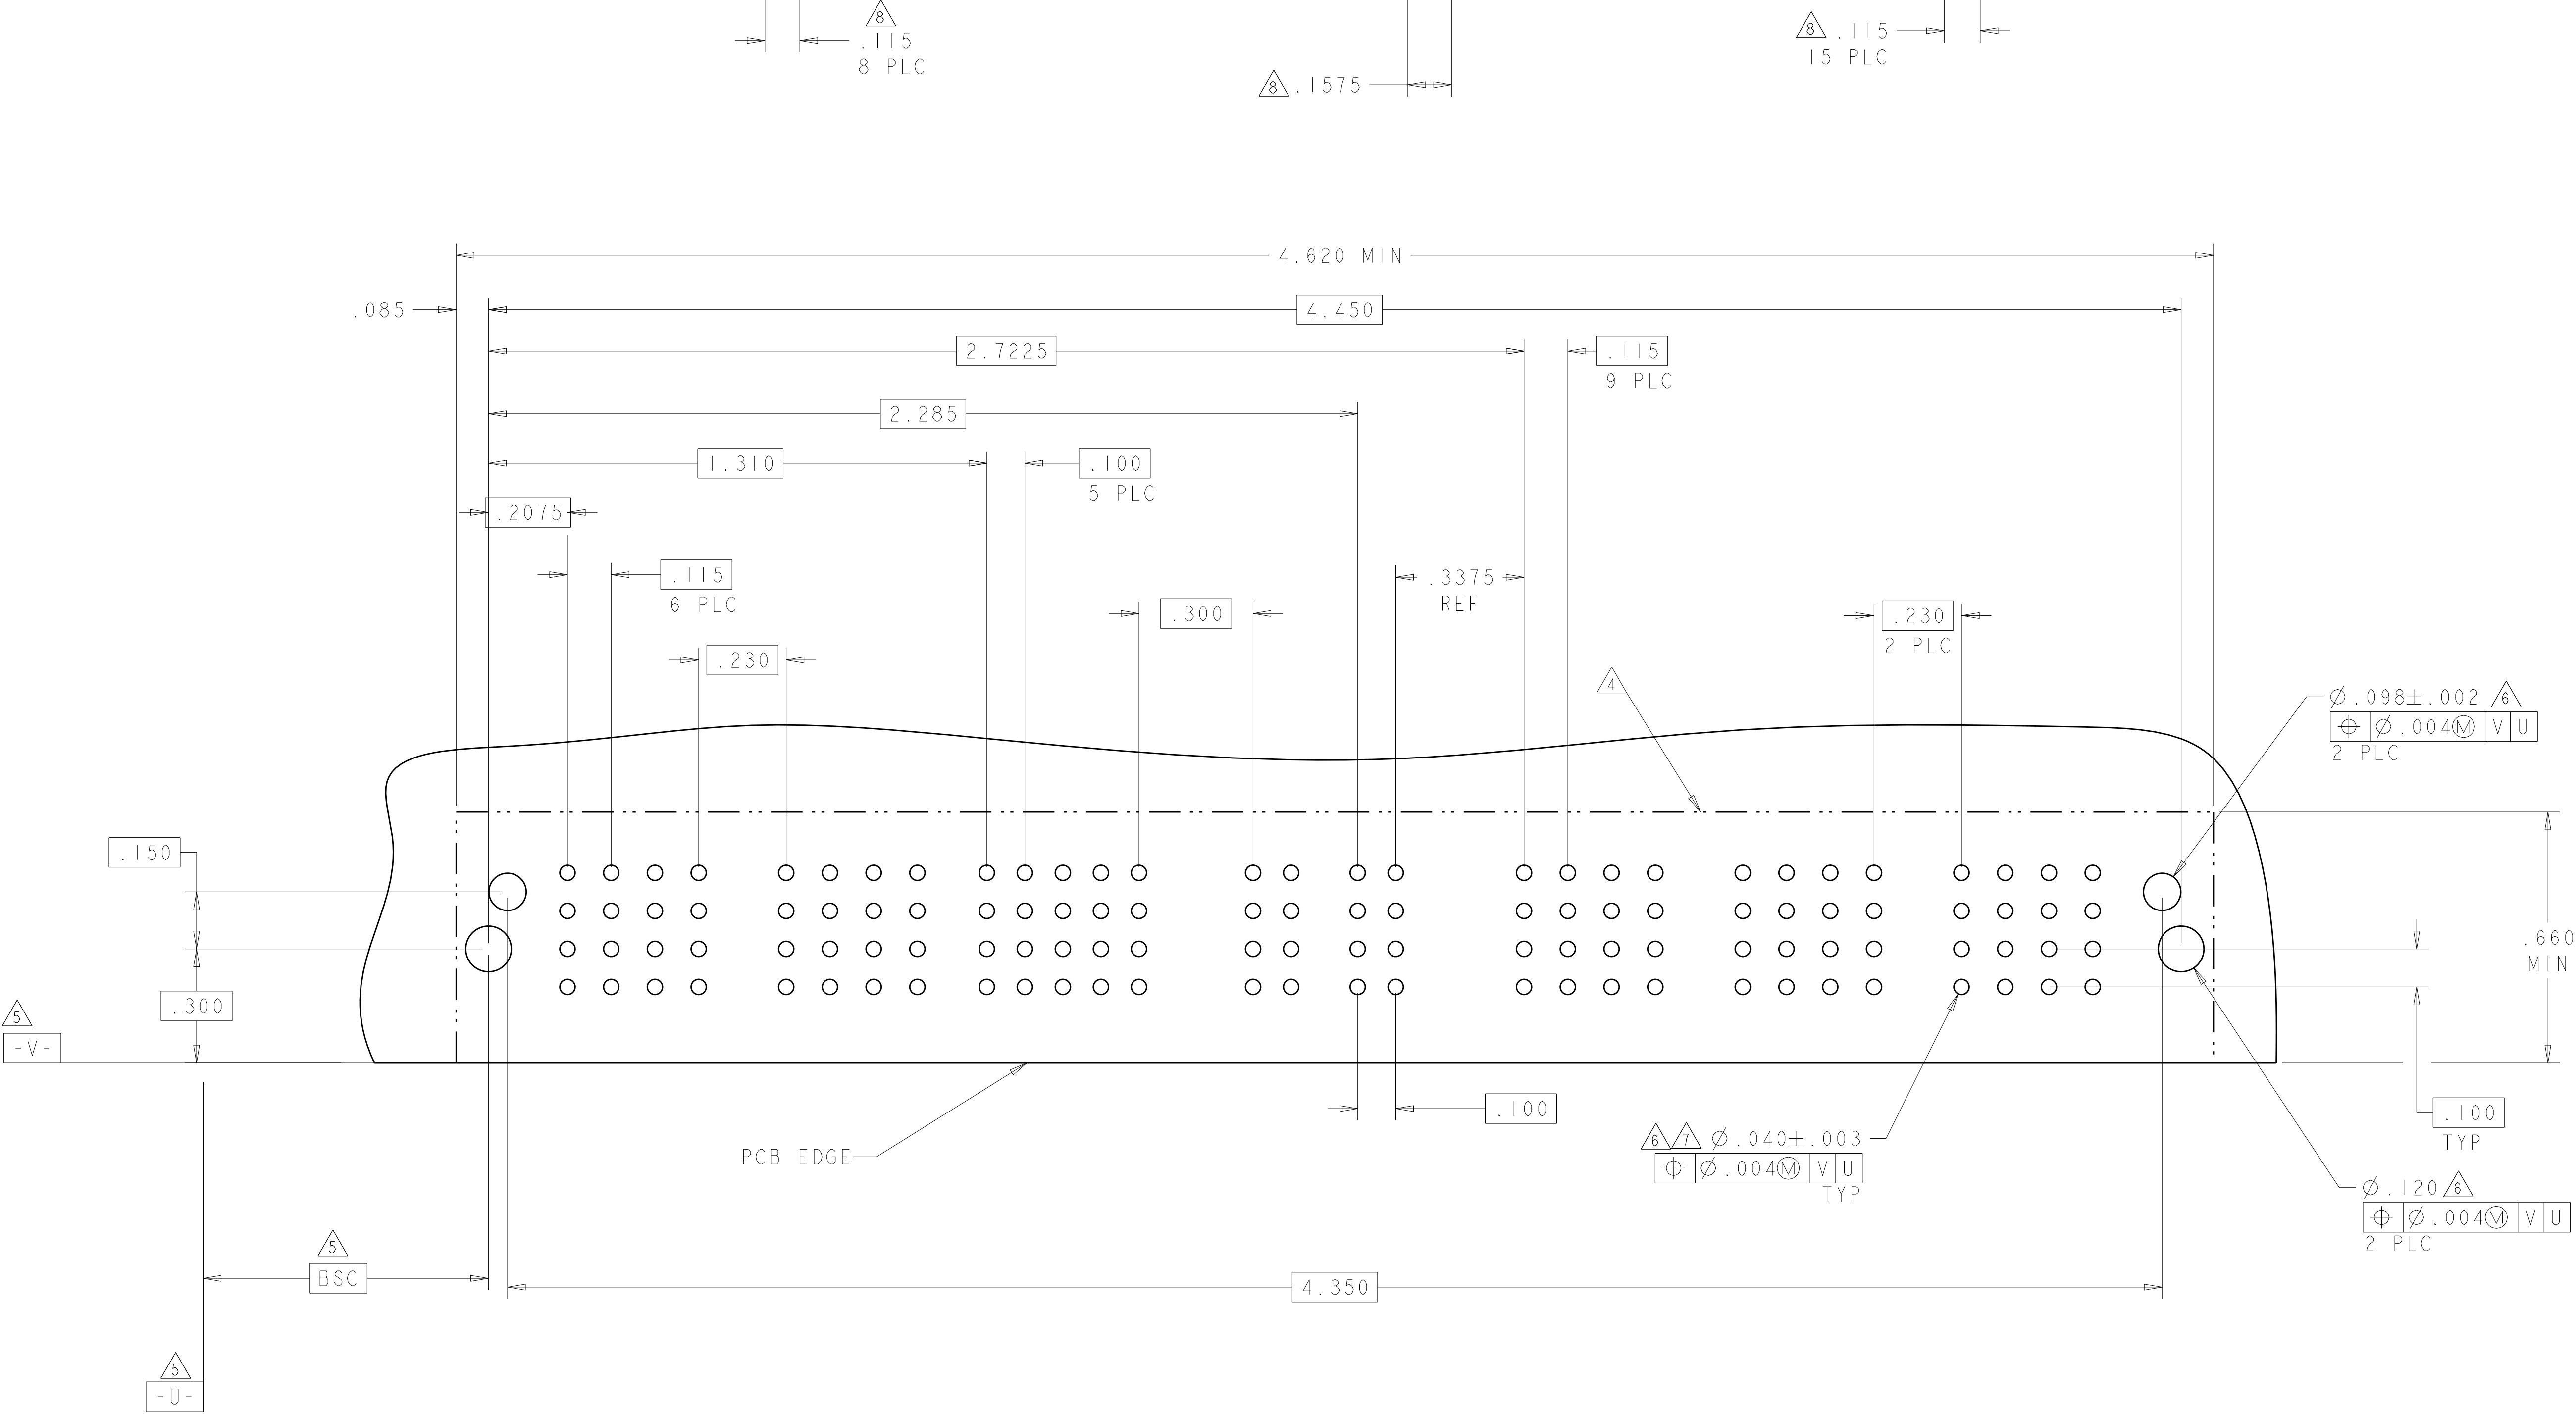

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

NAME

DIMENSIONS:
INCHES

MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH -

PRODUCT SPEC 108-2292
APPLICATION SPEC 114-13251
WEIGHT -

CUSTOMER DRAWING

TE Connectivity

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE A1
CAGE CODE 00779
DRAWING NO C=6450830

RESTRICTED TO -

SCALE 4:1
SHEET 42 OF 42
REV S2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9