



Peng-Bing Fu

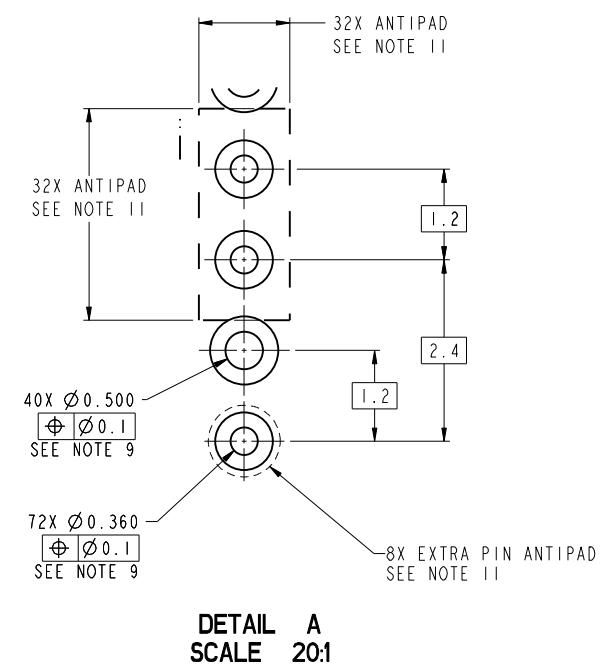
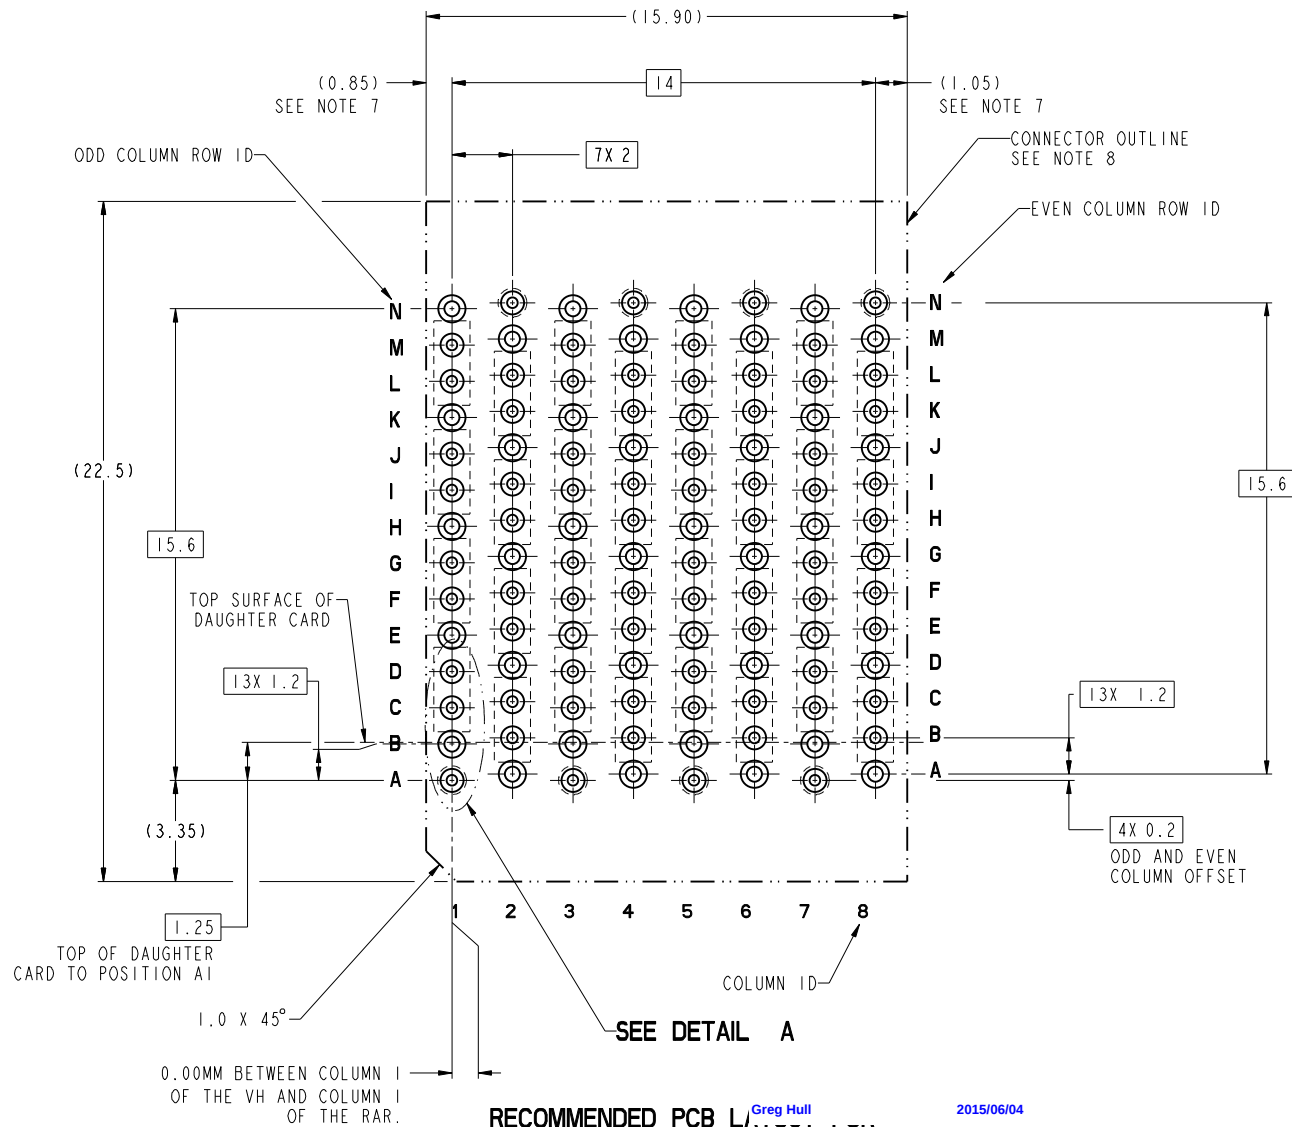
2016/04/06

Preliminary

For information only. This is a preliminary customer document that is subject to change without notice.

Amphenol
FCI

© 2016 APCI




RECOMMENDED PCB LAYER: 10135222-Y01LF COMPO
NOTES 7, 8, 9, 10
Greg Hull 2015/06/04
Peng-Bing Fu 2016/04/06

Preliminary

spec ref	SEE NOTES	dr	G. HULL	2015-07-08	projection	MM	size	A2	2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	G. HULL	2015-07-08	ech no				
ISO 406		chr	G. HULL	2015-07-08	rel level				
ISO 1101		appr			product family	ExaMAX			
surface	linear	0.X	±.3		Amphenol FCI	ExaMAX VERTICAL HEADER ASSY	ang no	10135222	rev
		0.XX	±.10			4 PR, 85 Ohm, 112 POS, 8 IMLA			2
		0.XXX	±.050			cat. no.	SEE TABLE	Product - Customer Drw	sheet 2 of 11
ISO 1302	angular	0°	±°						

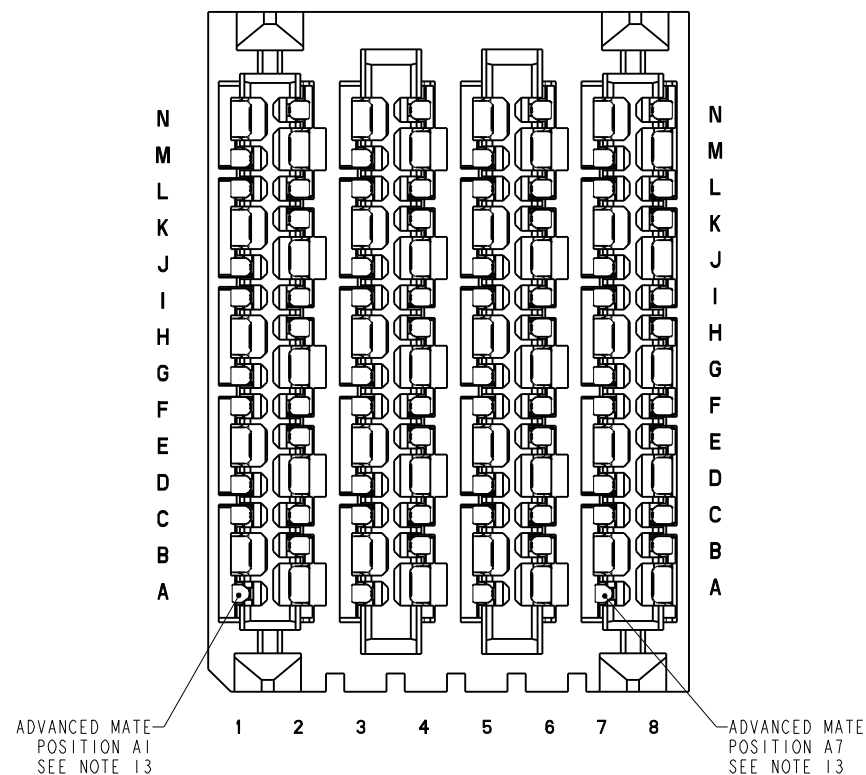For information only. This is a preliminary customer document that is subject to change without notice.




10135222-201LF

ADVANCEMENT OF THE PROJECTS ARE POSTED AT A1 AND A7 ONLY
FC

Preliminary

spec ref	SEE NOTES		dr	G. HULL	2015-07-08			size	A2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	G. HULL	2015-07-08	ecn no						
ISO 406 ISO 1101		chr	G. HULL	2015-07-08	rel level						
		appr			product family	ExaMAX					
surface	linear	0.X ±.3 0.XX ±.10 0.XXX ±.050	Amphenol FCI			ExaMAX VERTICAL HEADER ASSY		dog no	10135222	rev	2
ISO 1302	angular	0° ±°	col. no.			SEE TABLE	Product - Customer Drw	sheet 3 of 11			

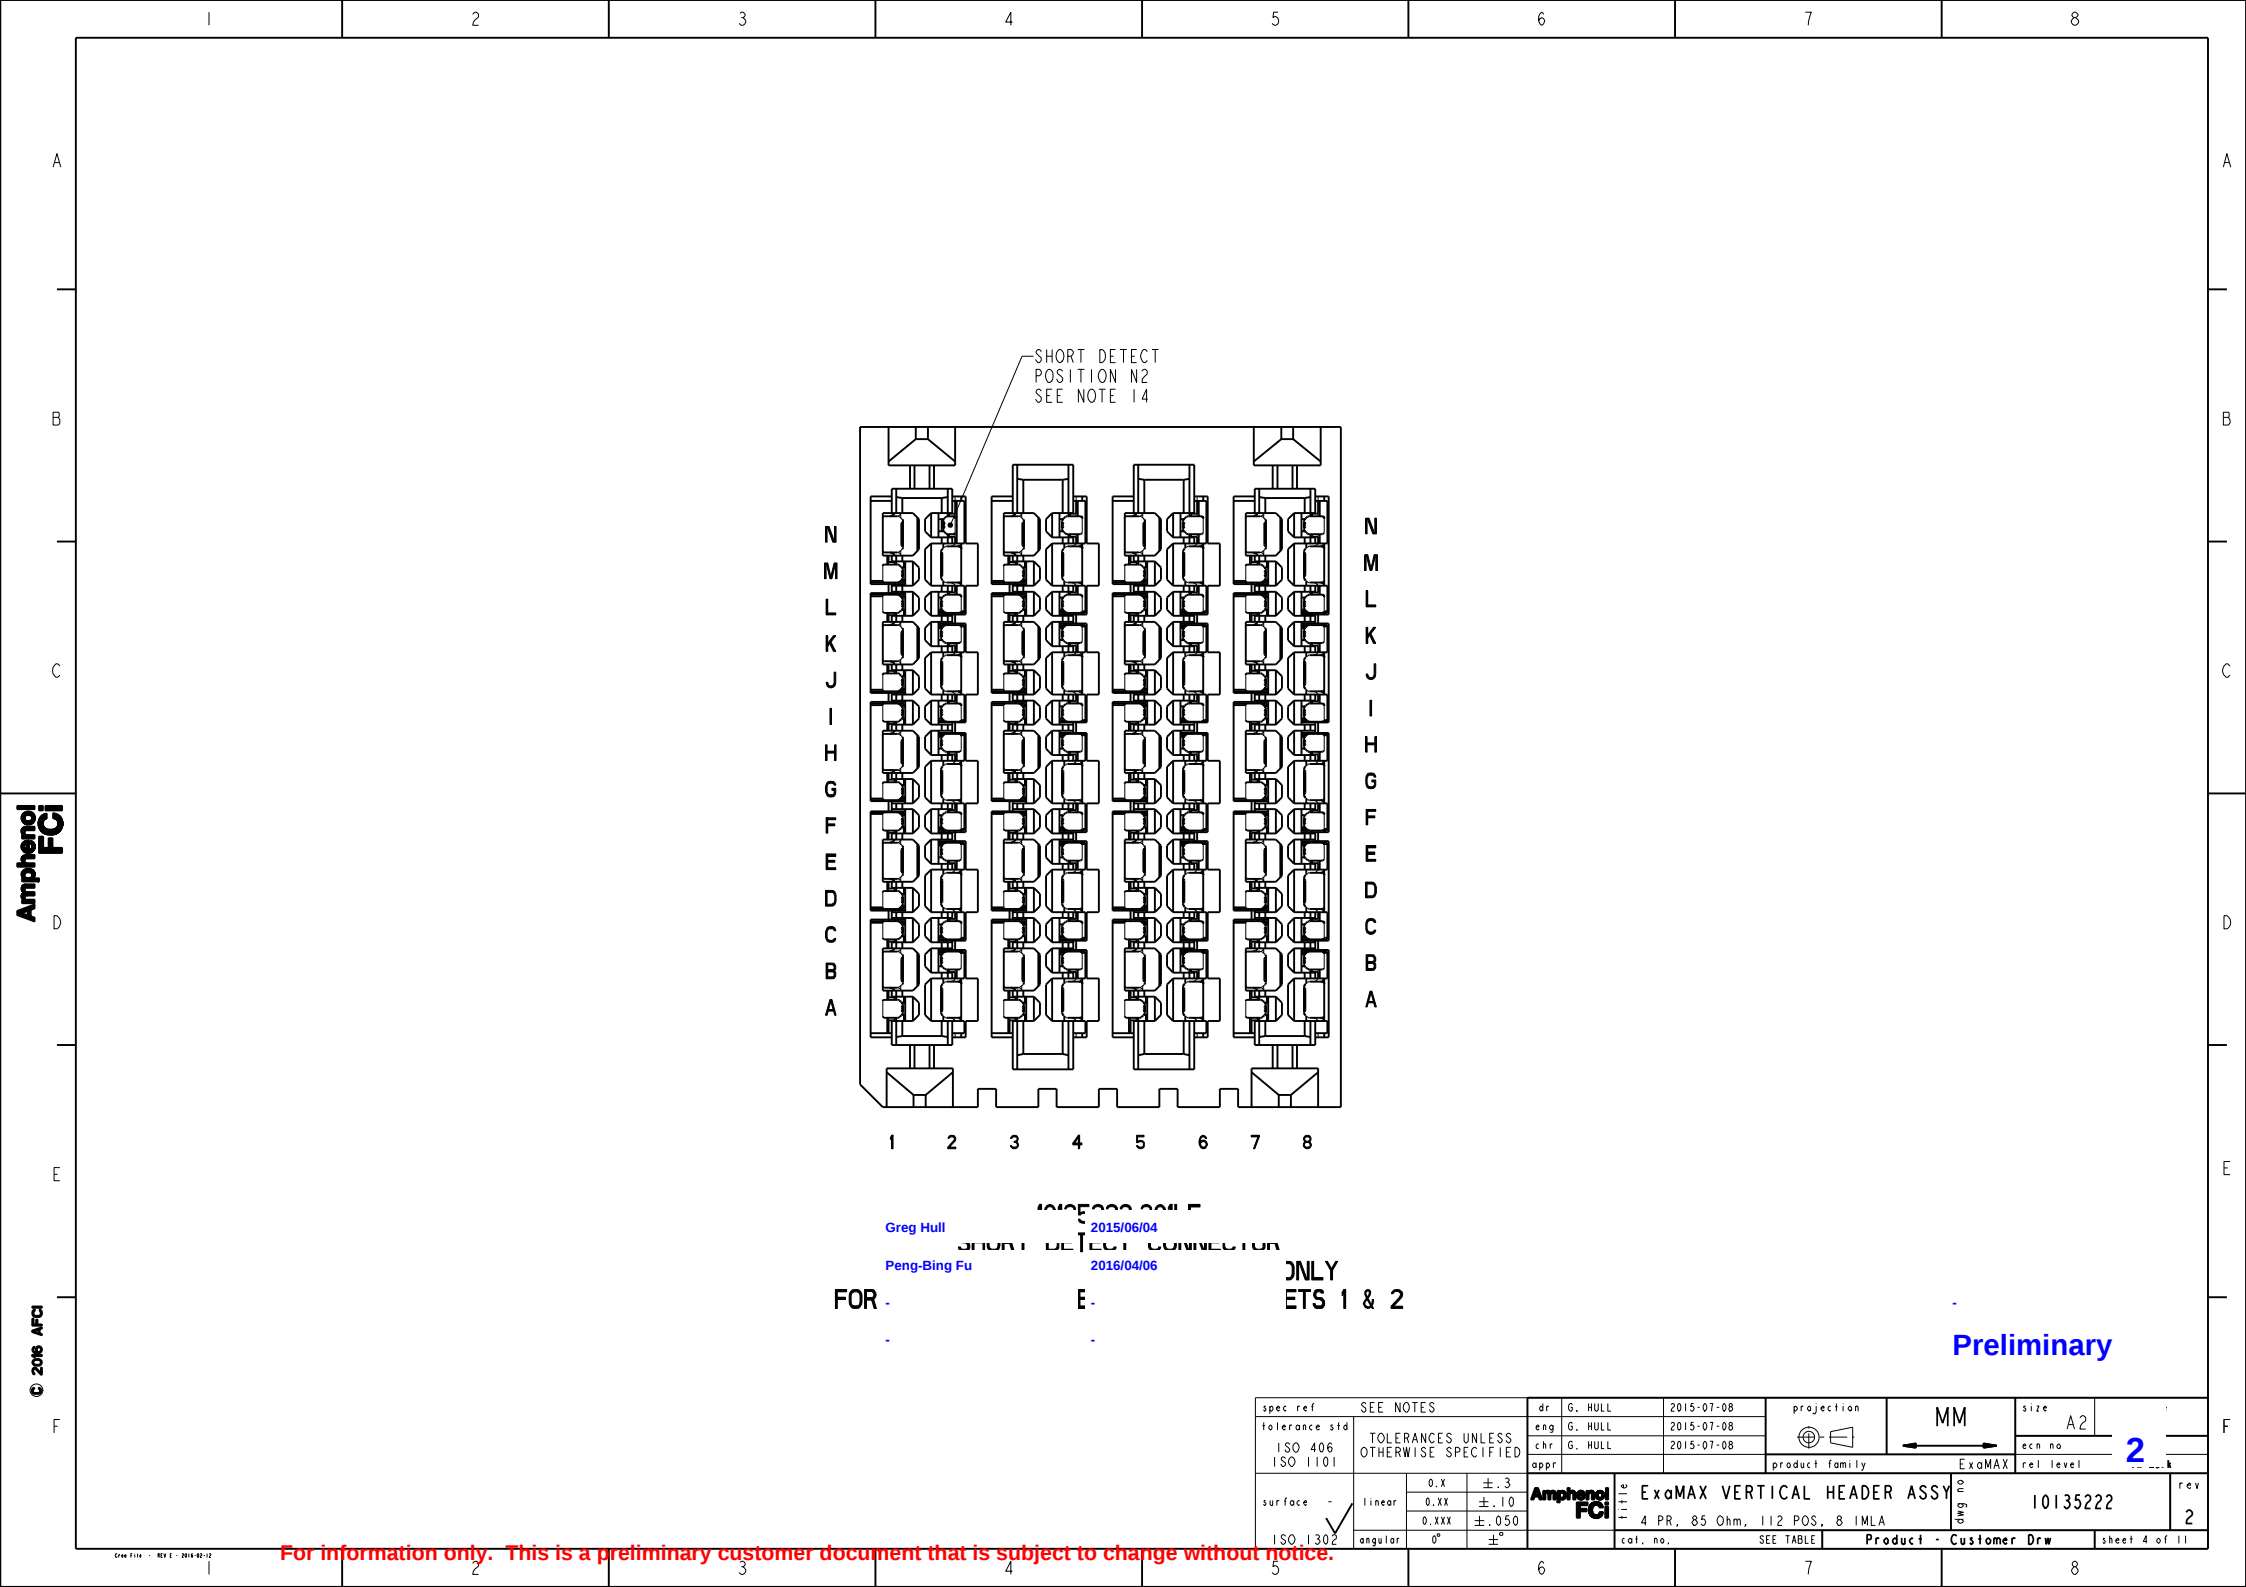

Amphenol
FCI


© 2016 Amphenol FCI

10135222 001 F
SHORT DETECT CONNECTOR
ONLY
ETS 1 & 2

Preliminary

spec ref		SEE NOTES		dr	G. HULL	2015-07-08			MM	size	A2	2
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	G. HULL	2015-07-08				ech no		
ISO 406				chr	G. HULL	2015-07-08						
ISO 1101				appr			product family		ExaMAX	rel level		
surface	linear	0.X	±.3	Amphenol FCI		ExaMAX VERTICAL HEADER ASSY				ang no	10135222	2
		0.XX	±.10									
		0.XXX	±.050									
ISO 1302	angular	0°	±°			cat. no.		SEE TABLE	Product - Customer Drw		sheet 4 of 11	

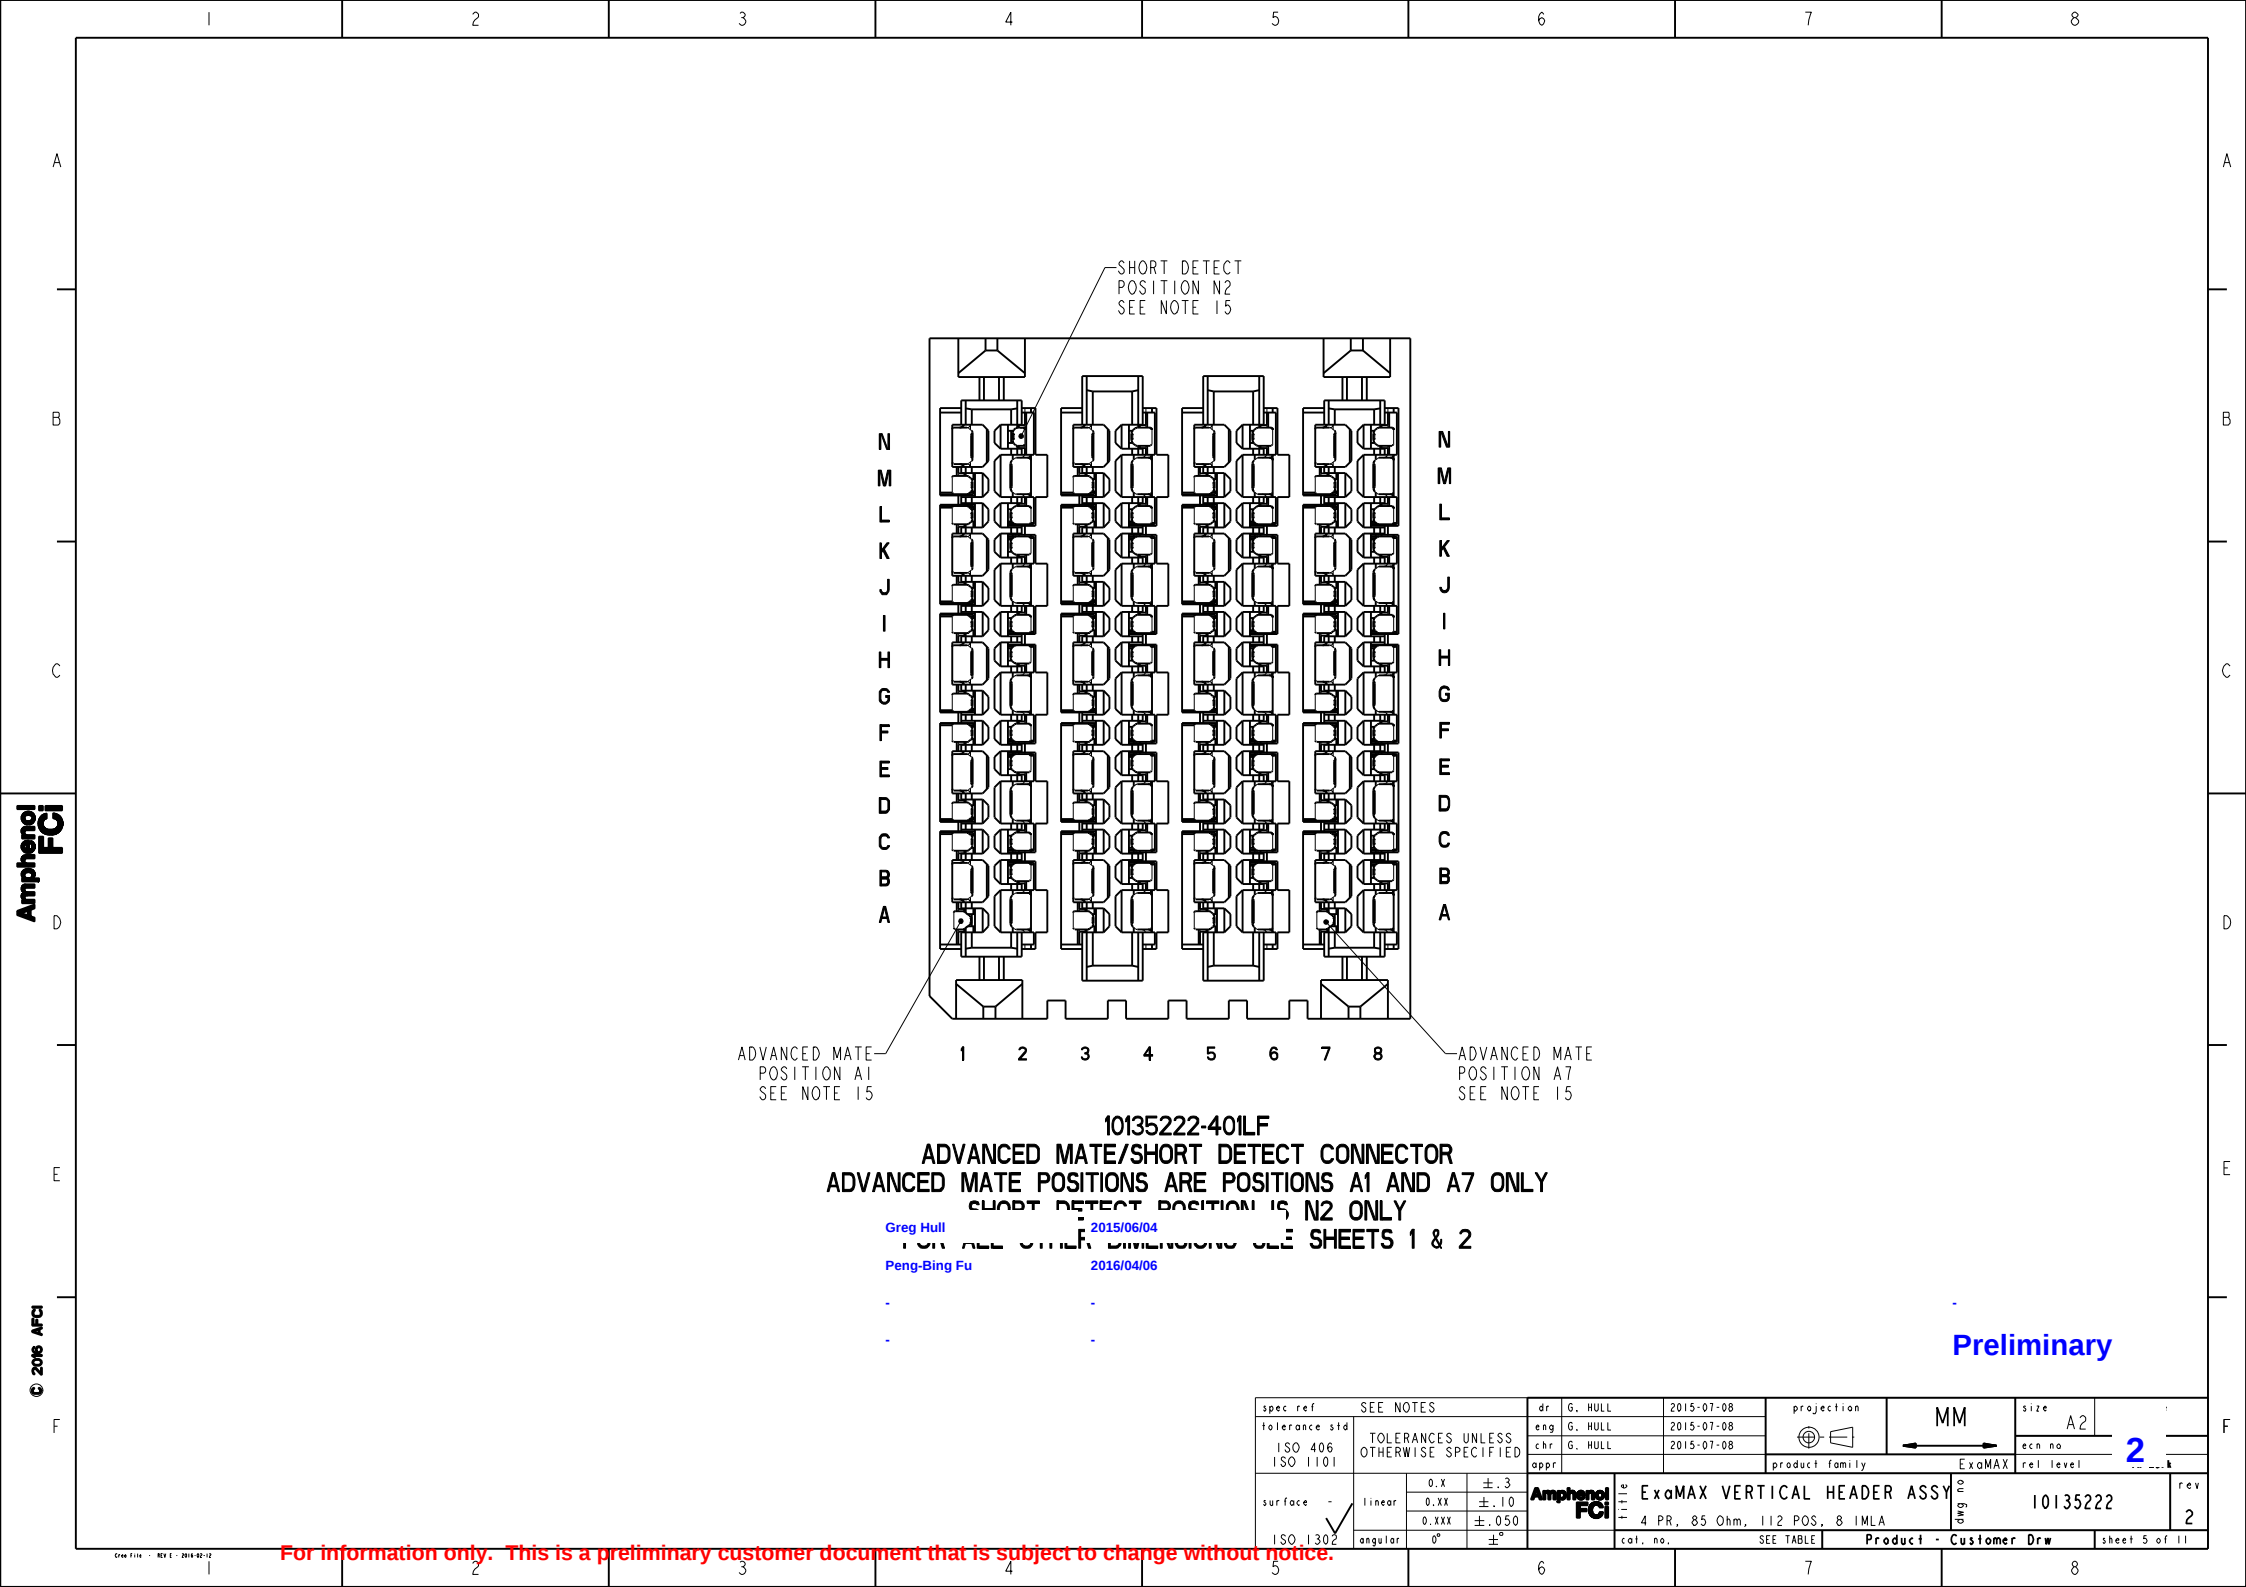For information only. This is a preliminary customer document that is subject to change without notice.




10135222-401LF
ADVANCED MATE/SHORT DETECT CONNECTOR
ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A7 ONLY
SHORT DETECT POSITION IS N2 ONLY
FOR ALL OTHER DIMENSIONS SEE SHEETS 1 & 2

Greg Hull 2015/06/04
Peng-Bing Fu 2016/04/06

Preliminary

spec ref		SEE NOTES			dr	G. HULL	2015-07-08	projection		MM		size	A2	2			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	G. HULL	2015-07-08			ExoMAX		ech no					
ISO 406					chr	G. HULL	2015-07-08					rel level					
ISO 1101					appr												
					product family												
surface		linear	0.X ±.3		Amphenol FCI		Title			ExoMAX VERTICAL HEADER ASSY				10135222		rev	
			0.XX ±.10														
			0.XXX ±.050														
ISO 1302		angular	0° ±°						cat. no.		SEE TABLE		Product - Customer Drw		sheet 5 of 11		

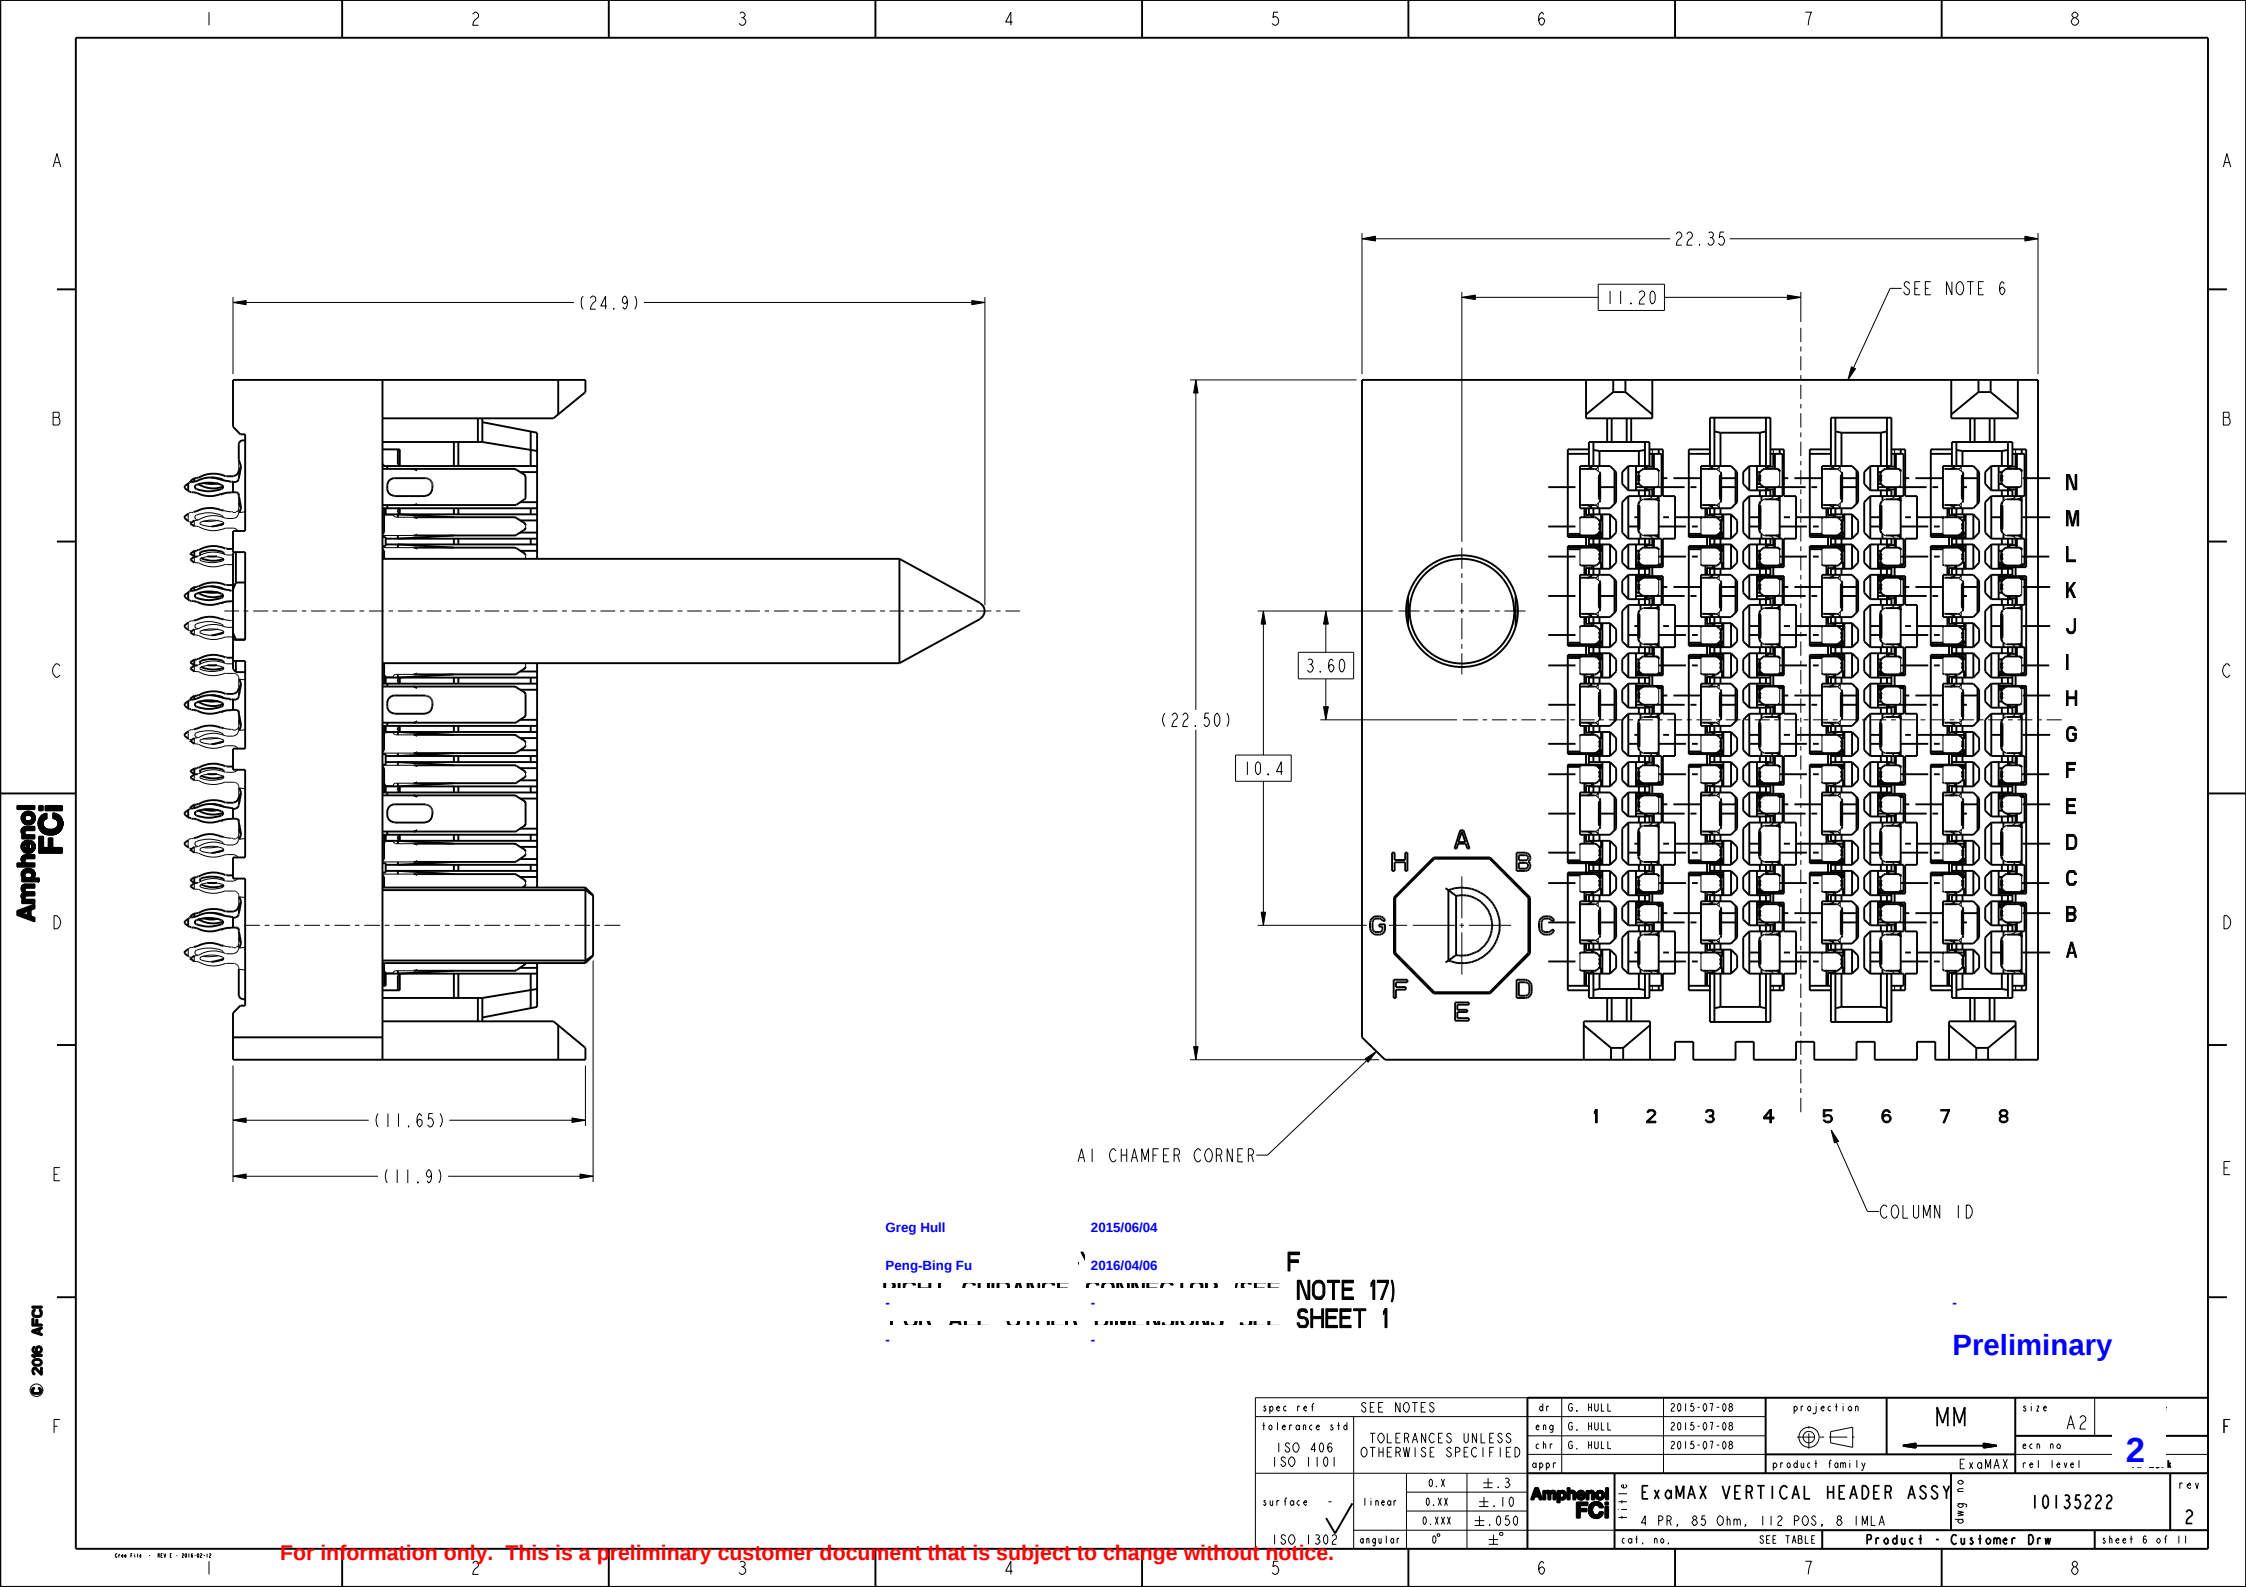

Amphenol
FCI

© 2016 APCI

Greg Hull 2015/06/04

Peng-Bing Fu 2016/04/06

NOTE 17)
SHEET 1



Preliminary

spec ref	SEE NOTES	dr	G. HULL	2015-07-08	projection	MM	size	A2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	G. HULL	2015-07-08	product family	ExaMAX	ech no	2
ISO 406		chr	G. HULL	2015-07-08			rel level	
ISO 1101		appr						
surface	linear	0.X	±.3	Amphenol FCI	ExaMAX VERTICAL HEADER ASSY	eng no	10135222	rev
		0.XX	±.10		4 PR, 85 Ohm, 112 POS, 8 IMLA			2
		0.XXX	±.050		cat. no.	SEE TABLE	Product - Customer Drw	sheet 6 of 11
ISO 1302	angular	0°	±°					

For information only. This is a preliminary customer document that is subject to change without notice.

Amphenol
FCI

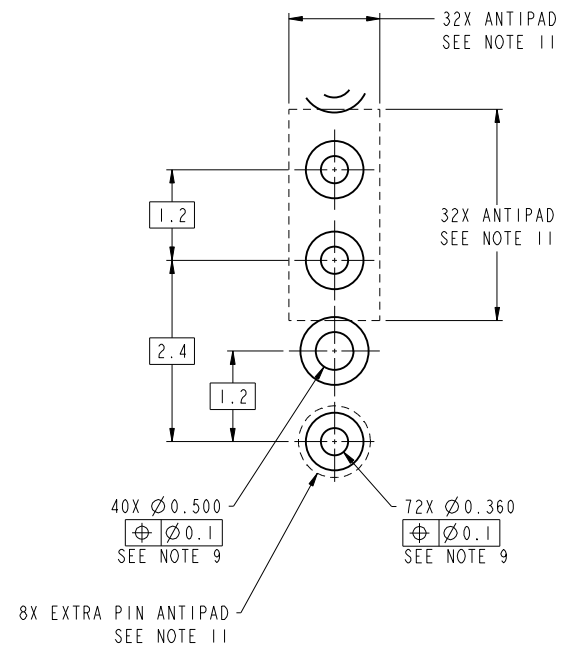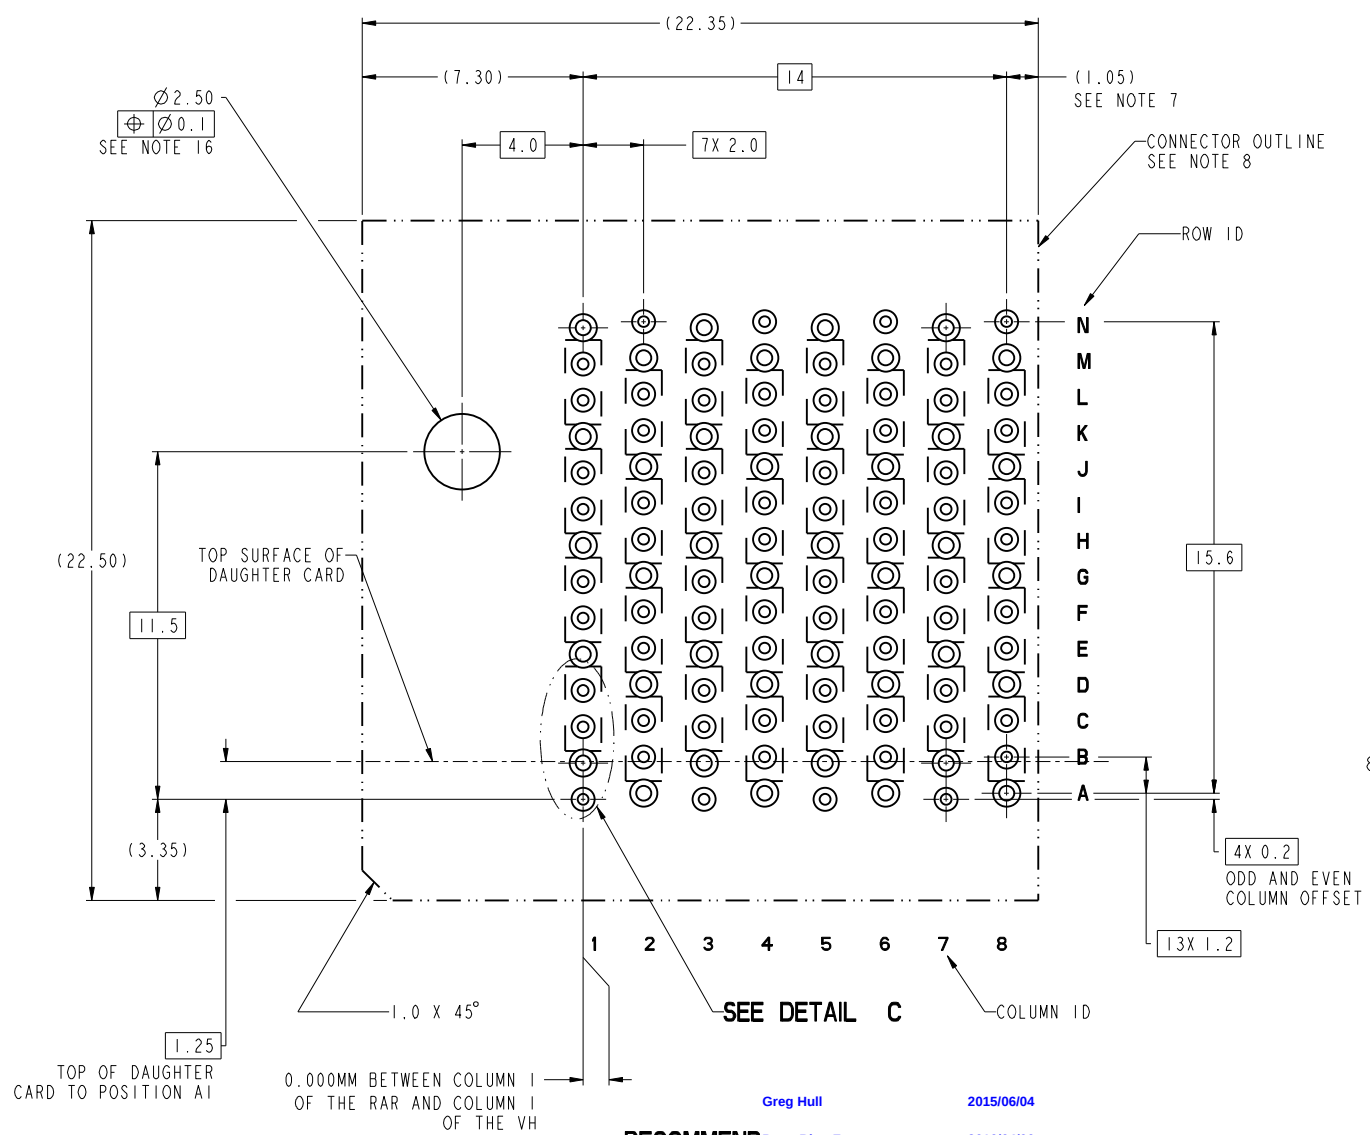© 2016 APCI



Greg Hull 2015/06/04
RECOMMEND Peng-Bing Fu 2016/04/06
10135222-Y1
COM
SEE NOTE



Preliminary

spec ref	SEE NOTES	dr	G. HULL	2015-07-08	projection	MM	size	A2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	G. HULL	2015-07-08			ech no	2
ISO 406		chr	G. HULL	2015-07-08			rel level	
ISO 1101		appr			product family	ExaMAX		
surface	linear	0.X	±.3		Amphenol FCI	ExaMAX VERTICAL HEADER ASSY	eng no	10135222
		0.XX	±.10					
		0.XXX	±.050					
ISO 1302	angular	0°	±°					
					4 PR, 85 Ohm, 112 POS, 8 IMLA			
					cat. no.	SEE TABLE	Product - Customer Drw	sheet 7 of 11

For information only. This is a preliminary customer document that is subject to change without notice.

Amphenol
FCI

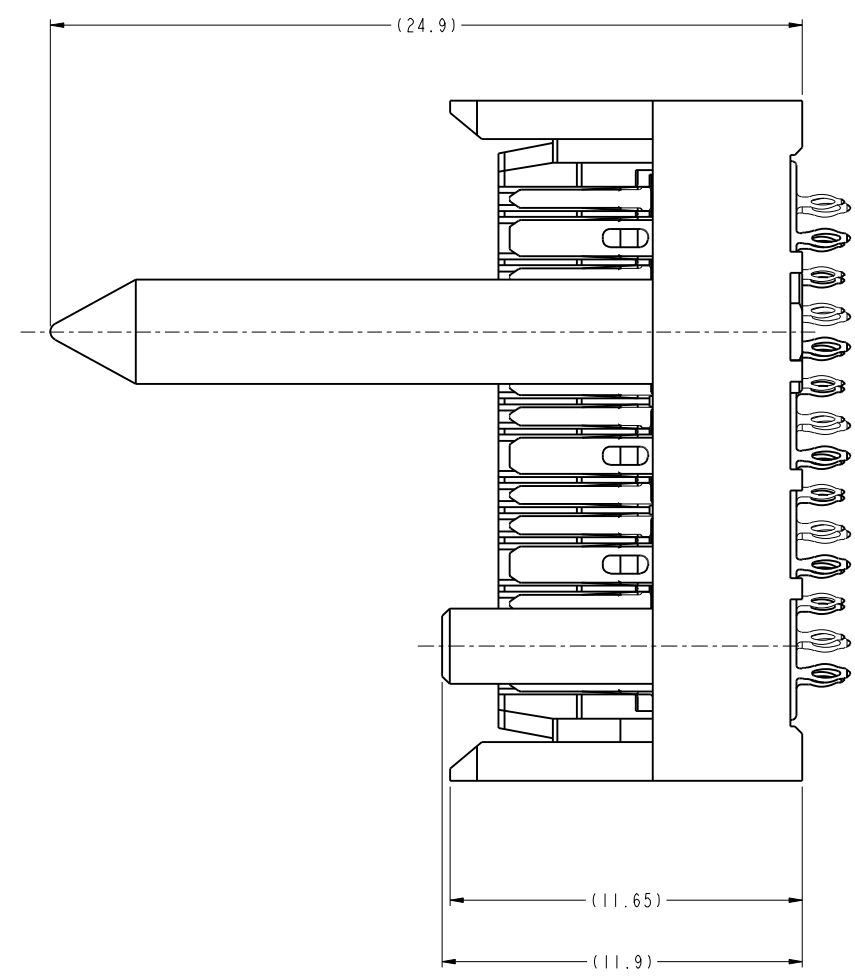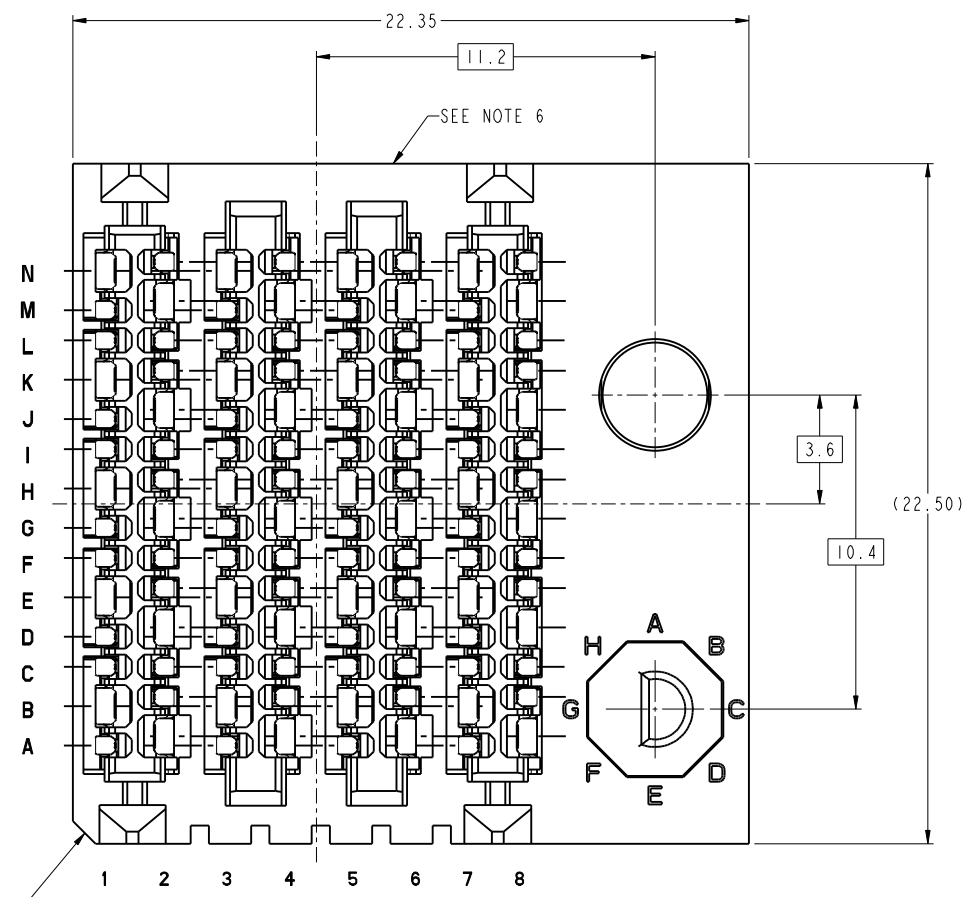© 2016 Amphenol
FCI




Greg Hull 2015/06/04
Peng-Bing Fu 2016/04/06
SEE NOTE 17)
SEE SHEET 1

Preliminary

spec ref	SEE NOTES	dr	G. HULL	2015-07-08	projection	MM	size	A2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	G. HULL	2015-07-08	product family	ExaMAX	rel level	2
ISO 406		chr	G. HULL	2015-07-08				
ISO 1101		appr						
surface	linear	0.X	±.3	Amphenol FCI	ExaMAX VERTICAL HEADER ASSY	ang no	10135222	rev
		0.XX	±.10		4 PR, 85 Ohm, 112 POS, 8 IMLA			2
		0.XXX	±.050		cat. no.	SEE TABLE	Product - Customer Drw	sheet 8 of 11
ISO 1302	angular	0°	±°					

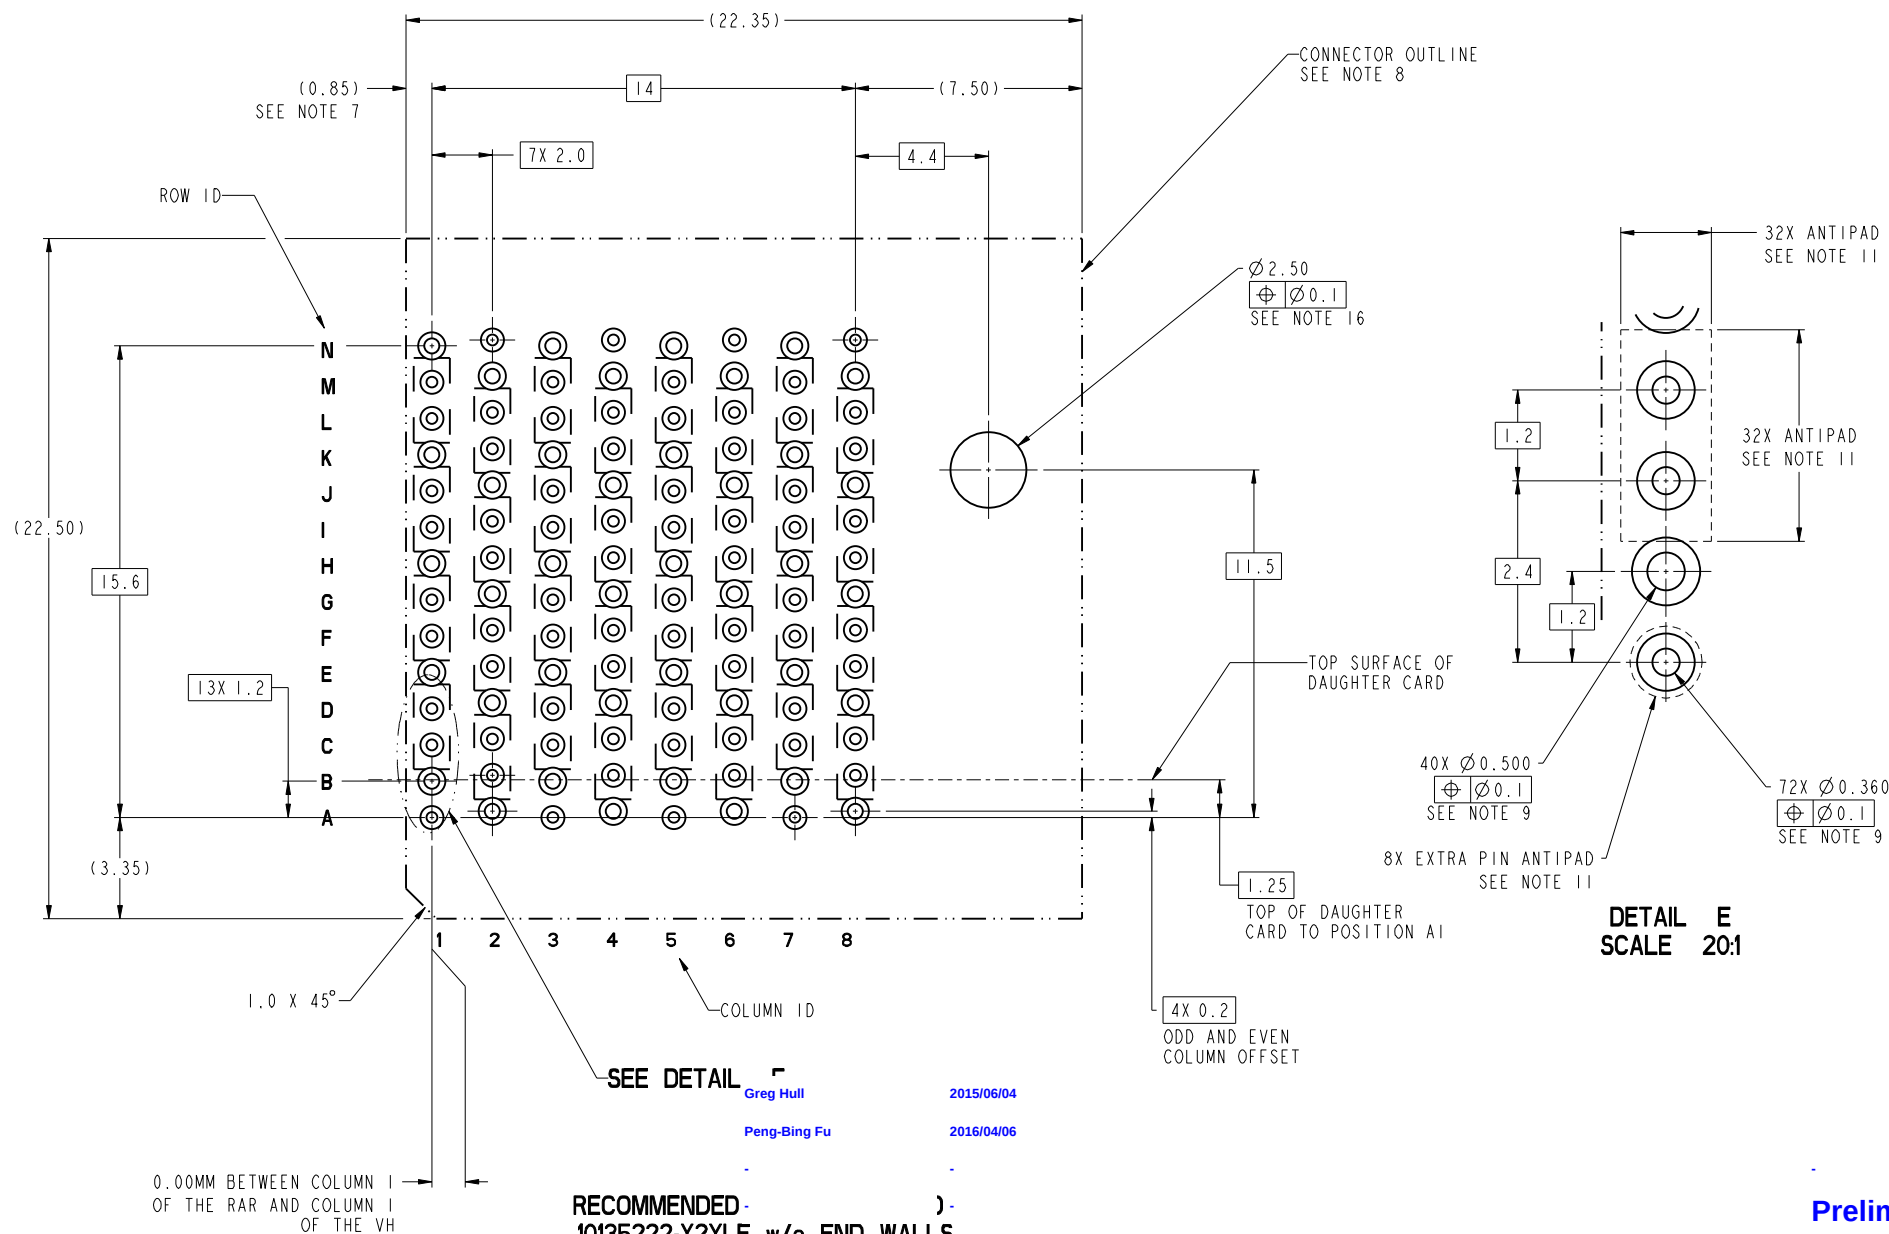For information only. This is a preliminary customer document that is subject to change without notice.



















Preliminary

spec ref	SEE NOTES		dr	G. HULL	2015-07-08	projection 	MM 	size	A2	ecn no 2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	G. HULL	2015-07-08			rel level	2	
ISO 406 ISO 1101			appr	G. HULL	2015-07-08			product family	ExaMAX	
surface	linear	0.X ±.3 0.XX ±.10 0.XXX ±.050	Amphenol FCI			Title ExaMAX VERTICAL HEADER ASSY		deg no	10135222	rel
ISO 1302	angular	0° ±	4 PR, 85 Ohm, 112 POS, 8 IMLA			cat. no.		SEE TABLE	Product - Customer Drw	sheet 9 of 11

10135222 - Y Y Y L F

ASSEMBLY PART NUMBER	DESCRIPTION
10135222-1YYLF	STANDARD MATE
10135222-2YYLF	ADVANCED MATE
10135222-3YYLF	SHORT DETECT
10135222-4YYLF	ADVANCED MATE & SHORT DETECT

MODULE DESCRIPTION	DESIGNATION REPRESENTED IN DASH NUMBER									BASE MODULE
STANDARD NO GUIDANCE (SEE SHEET 1)	01									
RIGHT GUIDANCE MODULE (SEE SHEET 6)	1A	1B	1C	1D	1E	1F	1G	1H	1J (NO KEY)	
										
LEFT GUIDANCE MODULE (SEE SHEET 8)	2A	2B	2C	2D	2E	2F	2G	2H	2J (NO KEY)	
										

Greg Hull 2015/06/04

Peng-Bing Fu 2016/04/06

Preliminary

spec ref	SEE NOTES		dr	G. HULL	2015-07-08			MM	size	A2	2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	G. HULL	2015-07-08				ech no				
ISO 406			chr	G. HULL	2015-07-08				rel level				
ISO 1101			appr			product family		ExaMAX	rel level				
surface	linear	0.X	±.3		ExaMAX VERTICAL HEADER ASSY				part no	10135222		2	
		0.XX	±.10		4 PR. 85 Ohm, 112 POS. 8 IMLA								
		0.XXX	±.050		SEE TABLE								
ISO 1302	angular	0°	±°	cat. no.		SEE TABLE	Product - Customer Drw		sheet 10 of 11				

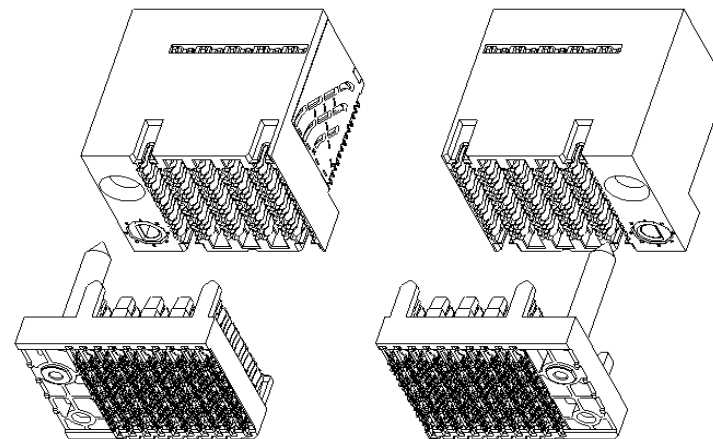
For information only. This is a preliminary customer document that is subject to change without notice.

NOTES

- 1 - CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, NATURAL, UL94-V0
CONTACT: COPPER ALLOY
GUIDE PIN: ZINC ALLOY
POLARIZING PIN: ZINC ALLOY
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
PRESS-FIT TAILS: TIN OVER NICKEL (LEAD FREE)
- 3 - PRODUCT SPECIFICATION: GS-12-1096
- 4 - APPLICATION SPECIFICATION: GS-20-0361
- 5 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- 6 - PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE.
- 7 - THE MINIMUM VIA SPACING BETWEEN STACKED CONNECTORS WILL BE 2.0 mm OR 3.0 mm AS DEFINED BY NOTE 7 ON THE MATING RECEPTACLE CUSTOMER DRAWING. REFER TO THE APPLICATION SPECIFICATION FOR DETAILS.
- 8 - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- 9 - REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 10 - THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
- 11 - REFER TO THE APPLICATION SPECIFICATION FOR TRACE ROUTING EXAMPLES THAT INCLUDE DIMENSIONS FOR ANTIPADS, TRACE WIDTHS, TRACE SPACING, ETC.
- 12 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
- 13 - THE ADVANCED MATE HEADER, 10135222-2YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- 14 - THE SHORT DETECT HEADER, 10135222-3YYLF, WHEN MATED WITH A STANDARD MATE RECEPTACLE WILL PROVIDE 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- 15 - THE ADVANCED MATE/SHORT DETECT HEADER, 10135222-4YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75 MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS AND 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- 16 - FOR CONNECTORS WITH EITHER A RIGHT OR LEFT GUIDE MODULE, ONE PHILLIP SCREW MUST BE USED TO SECURE GUIDE PIN /CONNECTOR TO THE PCB. THE SCREW LENGTH SHALL BE 2.0 - 6.0MM PLUS THE THICKNESS OF THE BOARD. SCREW IS NOT PROVIDED.
- 17 - LEFT / RIGHT INTEGRATED GUIDE ORIENTATION IS DETERMINED BY THE LOCATION OF THE GUIDE FEATURES WHEN LOOKING AT THE MATING FACE OF THE RIGHT ANGLE RECEPTACLE. THE LEFT / RIGHT DESIGNATION OF THE MATING HEADER IS DEFINED BY THE RIGHT ANGLE RECEPTACLE THAT IT MATES WITH (i.e. A RIGHT GUIDE VERTICAL HEADER MATES WITH A RIGHT GUIDE RIGHT ANGLE RECEPTACLE).
- 18 - ALL GROUND CONTACTS WITHIN A COLUMN ARE COMMONED.

Greg Hull 2015/06/04

Peng-Bing Fu 2016/04/06



LEFT GUIDE

RIGHT GUIDE

ExaMAX INTEGRATED GUIDE ORIENTATION
4-PAIR 10-IMLA CONNECTORS SHOWN FOR REFERENCE ONLY
SEE NOTE 17

Preliminary

spec ref	SEE NOTES	dr	G. HULL	2015-07-08	projection	MM	size	A2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	G. HULL	2015-07-08			ech no	2
ISO 406		chr	G. HULL	2015-07-08			rel level	
ISO 1101		appr			product family	ExaMAX		
surface	linear	0.X	±.3	Amphenol FCI	ExaMAX VERTICAL HEADER ASSY	4 PR, 85 Ohm, 112 POS, 8 IMLA	10135222	rev
		0.XX	±.10					2
		0.XXX	±.050					
ISO 1302	angular	0°	±°		cat. no.	SEE TABLE	Product - Customer Drw	sheet 11 of 11

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9