


NEW

features

- Current detecting resistors for power supplies, motor circuits, etc.
- Low resistance (100mΩ or under) and high accuracy ($\pm 1\%$) for current detection
- High reliability and performance with T.C.R. $\pm 100 \times 10^{-6}/K$
- Suitable for flow and reflow solderings
- Products will meet EU RoHS requirements
- AEC-Q200 qualified

dimensions and construction

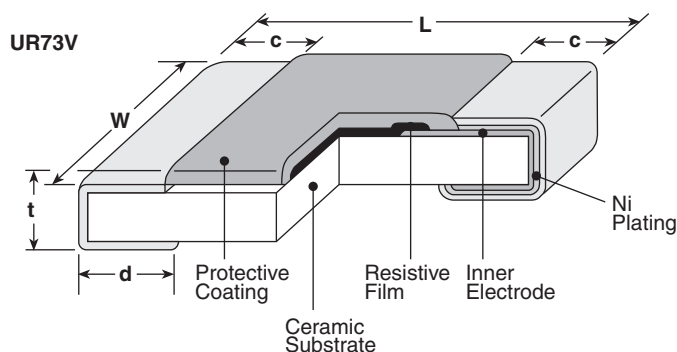

Size Code	Resistance Range (Ω)	Dimensions inches (mm)				
		L	W	c	d	t
UR73VD 2B (1206)	10m~13m	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.063 $\pm$.008 (1.6 $\pm$ 0.2)	.016 $\pm$.012 (0.4 $\pm$ 0.3)	.049 $\pm$.008 (1.25 $\pm$ 0.2)	.024 $\pm$.004 (0.6 $\pm$ 0.1)
	15m~16m				.045 $\pm$.008 (1.15 $\pm$ 0.2)	
	18m~20m				.043 $\pm$.008 (1.1 $\pm$ 0.2)	
	22m~27m				.039 $\pm$.008 (1.0 $\pm$ 0.2)	
UR73V 2B (1206)	30m~33m	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.063 $\pm$.008 (1.6 $\pm$ 0.2)	.039 $\pm$.012 (1.0 $\pm$ 0.3)	.016 $^{+.008}_{-.004}$ (0.4 $^{+.0.2}_{-.0.1}$)	.024 $\pm$.004 (0.6 $\pm$ 0.1)
	36m~39m			.035 $\pm$.012 (0.9 $\pm$ 0.3)		
	43m~100m			.026 $\pm$.012 (0.65 $\pm$ 0.3)		



ordering information

New Part #	UR73V	2B	T	TD	30L0	F
Type	UR73V UR73VD: Face-down	Power Rating	Termination Material	Packaging	Nominal Resistance	Tolerance
		2B: 0.5W	T: Sn	TD: 4mm pitch punch paper	4 characters Ex: 30L0: 30mΩ R100: 100mΩ 10L0: 10mΩ	F: $\pm 1\%$

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/03/15

applications and ratings


Part Designation	Power* Rating	Rated Ambient Temperature	Rated Terminal Temperature	T.C.R. (X10 ⁻⁶ /K)	Resistance Range (Ω) E24 & 25m, 50m	Resistance Tolerance	Operating Temperature Range
UR73V 2B	0.5W	70°C	90°C	±100	30m~100m	F: ±1%	-55°C to +155°C
UR73VD 2B	0.5W			±100	12m~27m		
				0~+250	10m~11m		

* Rated voltage = $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

environmental applications

Derating Curve

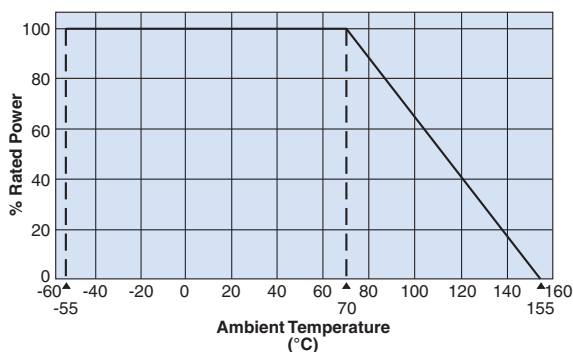

For resistors operated at an ambient temperature of 70°C or above, the power rating shall be derated in accordance with the above derating curve.

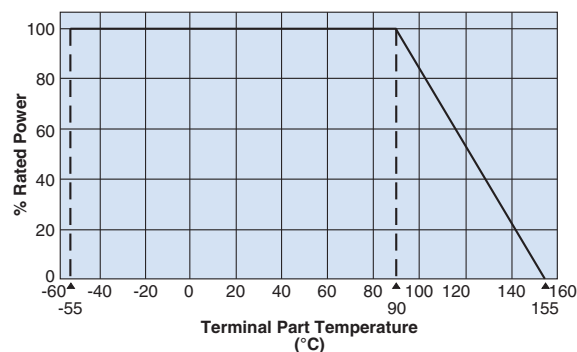

For resistors operated at a terminal part temperature of 90°C or above, the power rating shall be derated in accordance with the above derating curve.
Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog prior use.

Performance Characteristics

Parameter	Requirement $\Delta R \pm (\%+0.005\Omega)$	Limit	Typical	Test Method
Resistance	Within specified tolerance	—	25°C	
T.C.R.	Within specified T.C.R.	—	+25°C/+55°C and +25°C/+125°C	
Overload (Short time)	±2%	±0.5%	Rated voltage x 2.5 for 5 seconds	
Resistance to Solder Heat	±1%	±0.3%	260°C ± 5°C, 10 ± 1 second	
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles	
Moisture Resistance	±2%	±1%	40°C ± 2°C, 90%~95%RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle	
Endurance at 70°C	±2%	±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle	
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9