

Low-Profile Shielded Drum Inductors

SD7030 Series



Description

- 125°C maximum total operating temperature
- Low profile 7.0 x 7.0 x 3.0mm maximum surface mount package
- Ferrite material shielded drum core
- Inductance range from 1.5μH to 680μH
- Current range from 0.21 to 5.5 Amps
- Frequency range up to 1MHz

Applications

- Notebook computers
- TFT LCD Bias supplies
- Handheld instruments
- Battery power, Li-Ion, 2-cell
- White LED driver
- Wireless handsets
- GPS Receivers
- ADSL/DSL/Cable modems
- Digital still camera
- Buck and boost inductor

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

Packaging

- Supplied in tape and reel packaging, 1500 parts per 13" diameter reel

Product Specifications

Part Number ⁵	OC ¹ μH ± 30%	I _{rms} ² Amps	I _{sat} ³ Amps	Typ. DCR mΩ @ 25°C	Max DCR mΩ @ 25°C	K-factor ⁴
SD7030-1R5-R	1.5	5.5	4.5	10	12	32
SD7030-3R3-R	3.3	3.7	3.00	20	24	22
SD7030-3R9-R	4.1	3.4	2.60	22	27	19
SD7030-5R0-R	4.9	3.2	2.40	26	31	17
SD7030-6R0-R	5.8	2.8	2.25	29	35	16
SD7030-7R3-R	7.0	2.3	2.10	45	54	13
SD7030-8R0-R	7.8	2.2	1.85	48	58	12
SD7030-100-R	10.0	2.1	1.70	54	65	11
SD7030-120-R	11.5	1.9	1.55	58	70	10
SD7030-150-R	14.6	1.7	1.40	70	84	9.3
SD7030-180-R	17.3	1.7	1.32	79	95	8.8
SD7030-220-R	21.0	1.4	1.20	107	128	7.6
SD7030-260-R	24.9	1.3	1.05	118	142	6.9
SD7030-300-R	30.0	1.2	0.97	138	165	6.4
SD7030-390-R	39.7	1.1	0.86	175	210	5.7
SD7030-440-R	43.4	1.1	0.80	198	238	5.3
SD7030-560-R	54.4	0.99	0.73	231	277	4.9
SD7030-680-R	66.6	0.85	0.65	253	304	4.3
SD7030-820-R	81.4	0.82	0.60	325	390	4.0
SD7030-101-R	95.5	0.70	0.54	446	535	3.6
SD7030-121-R	115.2	0.67	0.50	629	755	3.3
SD7030-151-R	145	0.57	0.44	715	858	2.9
SD7030-181-R	174	0.54	0.40	805	966	2.7
SD7030-221-R	211	0.51	0.36	1102	1322	2.4
SD7030-271-R	264	0.44	0.33	1259	1475	2.2
SD7030-331-R	317	0.38	0.30	1438	1725	2.0
SD7030-391-R	381	0.36	0.27	1857	2228	1.8
SD7030-471-R	460	0.34	0.25	2150	2581	1.7
SD7030-561-R	561.0	0.29	0.23	2857	3428	1.5
SD7030-681-R	677.2	0.28	0.21	3206	3847	1.4

¹ Open Circuit Inductance Test Parameters: 100kHz, 0.1V, 0.0Aac.


² I_{rms}: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

³ I_{sat}: Amps peak for approximately 35% rolloff (@25°C)

⁴ K-factor: Used to determine B_{p-p} for core loss (see graph). B_{p-p} = K*L*ΔI, B_{p-p}(mT), K: (K factor from table), L: (Inductance in μH), ΔI (Peak-to-peak ripple current in Amps).


⁵ Part Number Definition: SD7030-xxx-R
SD7030 = Product code and size; -xxx = Inductance value in μH;
R = decimal point; If no R is present, third character = # of zeros.
-R suffix = RoHS compliant

Dimensions - mm

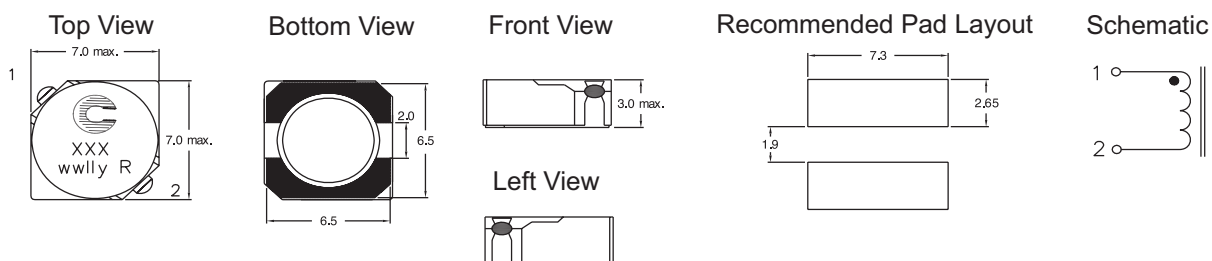


Part Marking: Coiltronics Logo xxx = inductance value in μH . R = decimal point. If no "R" is present, third character = # of zeros. wwlyy or wwlyyy = date code. R = revision level

Packaging Information - mm

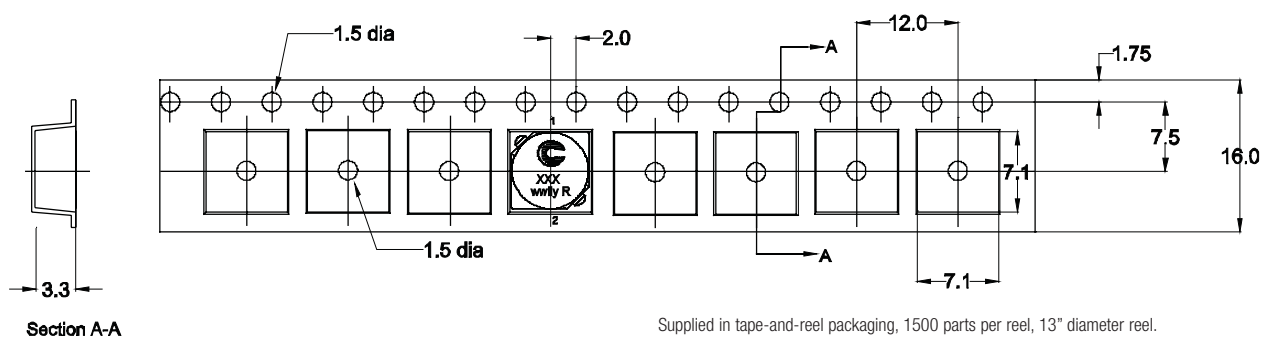


Supplied in tape-and-reel packaging, 1500 parts per reel, 13" diameter reel.

Core Loss

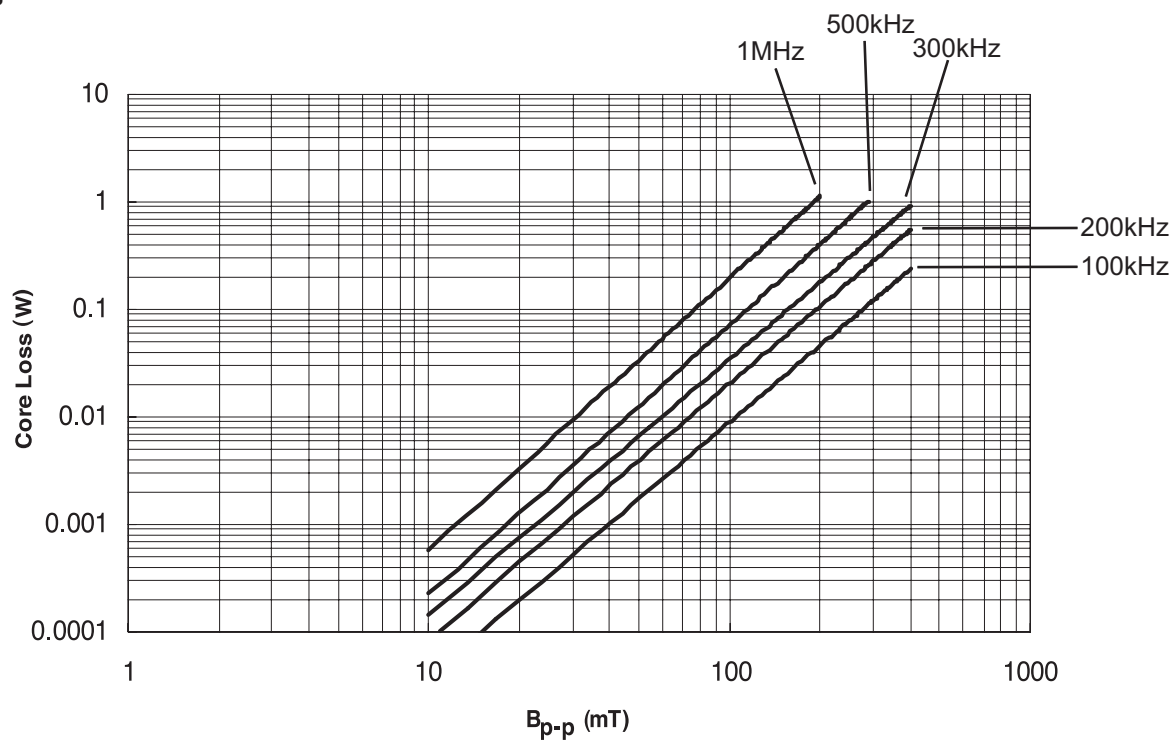


Temperature Rise vs. Loss

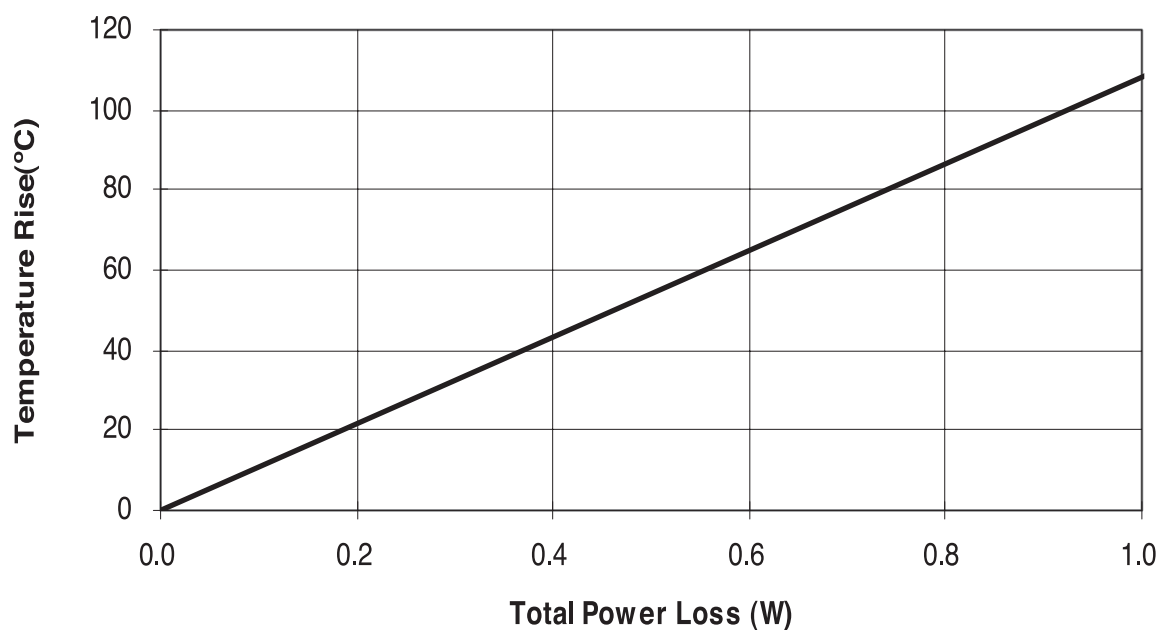

Inductance Characteristics

OCL Vs. I_{sat}

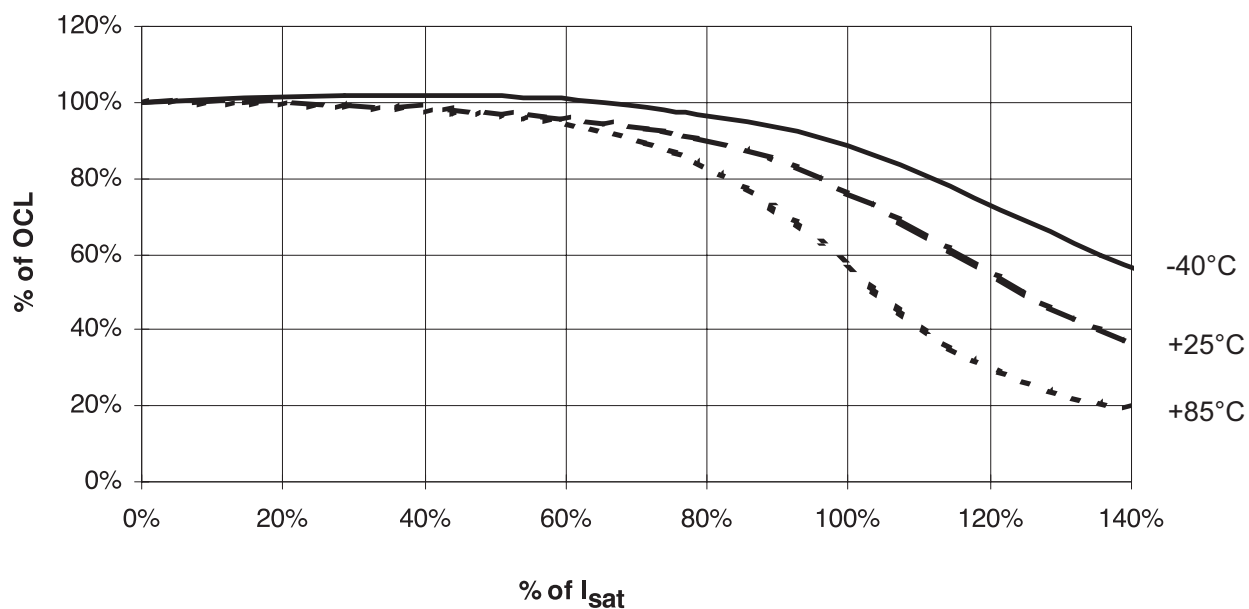

Solder Reflow Profile

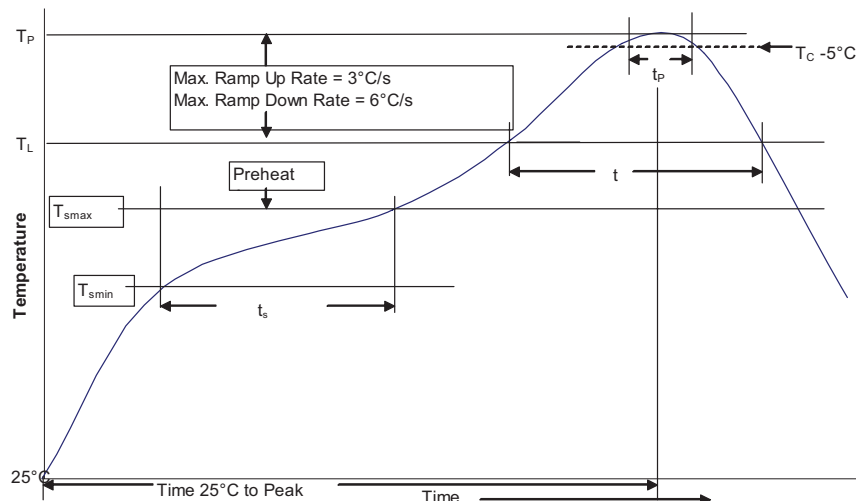


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥ 350
<2.5mm	235°C	220°C
$\geq 2.5\text{mm}$	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Cooper Electronic Technologies
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Cooper Electronic Technologies
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Electronic Technologies
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9