

## SPECIFICATION

### G21 GSM Hercules Gen.II Penta Band Cellular Antenna

Part No.	: <b>G21.B.301111</b>
Product Name	: Hercules Gen.II Penta Band Cellular Antenna Screw-mount (Permanent mount)
Features	: GSM/GPRS/CDMA/EVDO/UMTS/HSPA/WCDMA 850/900/1800/1900/2100MHz Low profile - Height 29mm, diameter 49mm Heavy duty screw mount UV and Vandal resistant PC housing IP67 & IP69K 3M Cable RG174 Standard SMA(M) Connector Standard Cable and Connector are Customizable <b>ROHS Compliant</b>



## 1. INTRODUCTION

The G21 (Generation II) Hercules is a high performance, steel thread-mount, Penta-band cellular antenna for external use on vehicles and outdoor assets worldwide. Omni-directional high gain across all bands ensures constant reception and transmission. The durable UV resistant PC housing is resistant to vandalism and direct attack.

With IP67 and IP69K waterproof rating, the G21 can be screw mounted on vehicles and outdoor/indoor assets via its extra thick thread. The antenna has a compact dimension at only 28.5mm in height and 49mm in diameter. The enclosure is designed to not catch on tree-branches.

Taoglas recommend a minimum cable length of 300mm when used on a ground plane to achieve an efficiency of greater than 30%.

This antenna can be mounted on metal structures. The G21 is an ideal solution for cellular external applications where it can operate with or without the ground plane.

## 2. SPECIFICATION

ELECTRICAL-On 30x30cm Ground Plane					
Standard	AMPS	GSM	DCS	PCS	3G
Band (MHz)	850	900	1800	1900	2100
Frequency (MHz)	824-896	880-960	1710-1880	1850-1990	1920 -2170
Return Loss (dB)					
Cable length (meter)	0.3	-6.0	-5.2	-6.1	-6.2
	1.0	-7.8	-8.7	-11.4	-15.3
	2.0	-8.1	-9.3	-16.5	-20.3
	3.0	-11.0	-12.4	-17.5	-18.3
	5.0	-11.8	-13.6	-17.6	-17.8
Efficiency (%)					
Cable length (meter)	0.3	51.1	41.4	38.0	46.5
	1.0	39.4	40.2	42.2	43.4
	2.0	24.3	27.5	28.4	28.2
	3.0	24.6	27.6	22.0	23.8
	5.0	17.1	16.4	15.7	15.0
Peak Gain (dBi)					
Cable length (meter)	0.3	2.0	1.5	4.0	4.3
	1.0	1.7	2.7	1.8	1.9
	2.0	1.4	2.1	0.8	-0.3
	3.0	1.0	1.0	-0.9	-1.1
	5.0	-0.8	-0.3	-4.2	-3.9
Polarization					
Impedance					
Max Input Power					
VSWR					

<b>ELECTRICAL-On 60x60cm Ground Plane</b>						
<b>Standard</b>	<b>AMPS</b>	<b>GSM</b>	<b>DCS</b>	<b>PCS</b>	<b>3G</b>	
<b>Return Loss (dB)</b>						
Cable length (meter)	0.3	-6.0	-5.6	-8.8	-8.5	-7.8
	1.0	-7.8	-8.2	-13.6	-13.8	-16.3
	2.0	-8.9	-11.1	-16.7	-19.6	-19.5
	3.0	-11.0	-13.6	-17.8	-18.3	-18.6
	5.0	-12.3	-14.8	-19.1	-19.1	-18.2
<b>Efficiency (%)</b>						
Cable length (meter)	0.3	31.0	30.3	47.1	43.6	41.6
	1.0	28.0	29.3	39.2	33.5	31.2
	2.0	26.3	28.5	28.8	29.6	30.7
	3.0	19.2	18.6	21.3	22.1	25.2
	5.0	11.4	12.8	13.7	11.6	12.3
<b>Peak Gain (dBi)</b>						
Cable length (meter)	0.3	2.1	2.3	3.1	3.0	2.8
	1.0	1.0	0.6	1.9	1.6	0.9
	2.0	0.6	0.2	0.8	-0.2	-0.8
	3.0	-0.5	0.1	0.2	-0.1	-1.1
	5.0	-2.3	-2.2	-2.9	-3.4	-3.9
<b>ELECTRICAL-FREE SPACE</b>						
<b>Return Loss (dB)</b>						
Cable length (meter)	0.3	-6.2	-5.3	-5.8	-6.4	-5.6
	1.0	-8.1	-8.3	-10.9	-15.8	-13.2
	2.0	-8.5	-12.3	-15.8	-17.6	-17.2
	3.0	-11.6	-12.9	-16.9	-17.9	-18.3
	5.0	-11.8	-15.6	-18.6	-18.4	-18.8
<b>Efficiency (%)</b>						
Cable length (meter)	0.3	53.2	51.3	42.8	43.6	46.7
	1.0	24.3	32.6	32.8	40.2	27.8
	2.0	24.1	25.8	27.8	31.2	26.2
	3.0	23.3	24.2	23.4	22.8	23.6
	5.0	13.6	20.8	12.1	11.8	10.3
<b>Peak Gain (dBi)</b>						
Cable length (meter)	0.3	0.4	0.9	2.4	2.5	2.2
	1.0	0.2	0.2	0.9	0.9	1.8
	2.0	-1.7	-1.3	1.1	-0.4	-1.5
	3.0	-1.8	-1.1	-1.2	-1.8	-1.9
	5.0	-3.3	-2.3	-4.1	-4.6	-4.7

MECHANICAL	
<b>Dimensions</b>	Height = 29 mm and Diameter = 49mm
<b>Cable</b>	3M RG174 – Fully Customizable
<b>Connector</b>	SMA-Male – Fully Customizable
<b>Casing</b>	UV Resistant PC
<b>Base and Thread</b>	Nickel plated steel
<b>Thread Diameter</b>	18 mm
<b>Weather proof gasket</b>	CR4305 foam with 3M9448B double-side adhesive
<b>Sealant</b>	Rubber Stopper
ENVIRONMENTAL	
<b>Protection</b>	IP67 & IP69K
<b>Corrosion</b>	5% NaCl for 48hrs - Nickel plated steel base and thread
<b>Temperature Range</b>	-40°C to +85°C
<b>Thermal Shock</b>	100 cycles -40°C to +85°C
<b>Humidity</b>	Non-condensing 65°C 95% RH
<b>Shock (Drop Test)</b>	1m drop on concrete 6 axes
<b>Cable Pull</b>	8 Kgf
<b>Recommended Mounting Torque</b>	24.5N·m
<b>Maximum Mounting Torque</b>	29.5N·m
<b>Weight</b>	150g


### 3. TEST SETUP




**Figure 1.** G21 Antenna test set up in free space, 30x30 cm metal plate, and 60x60 cm metal plate, R&SZVL6 VNA (left) and R&S4100 CTIA 3D Chamber (Right).

## 4. ANTENNA PARAMETERS


### 4.1 Return Loss

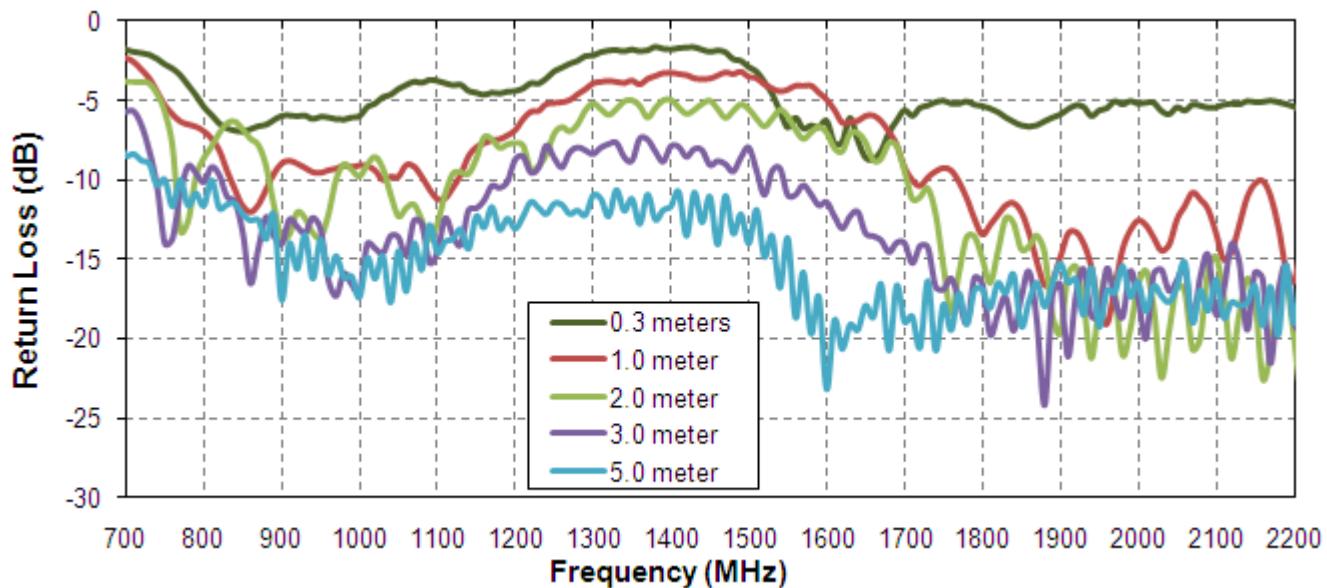

**Figure 2.** Return Loss of G21 Hercules antenna in free space.

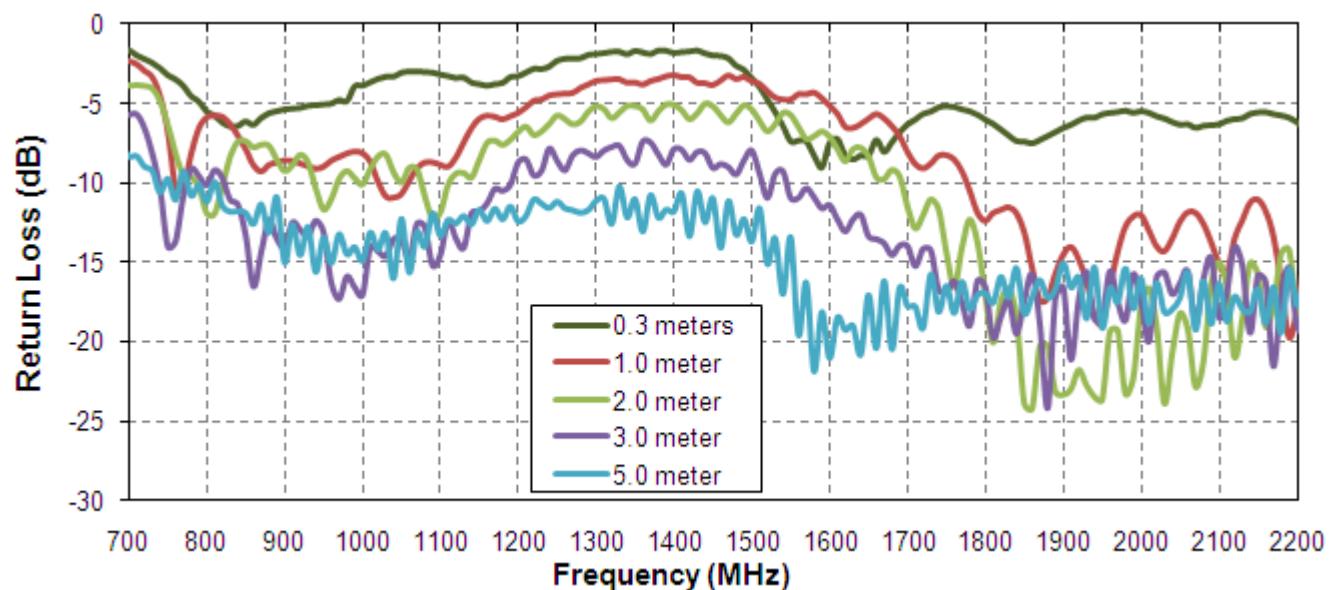


**Figure 3.** Return loss of G21 Hercules antenna on 30 cm metal plate.

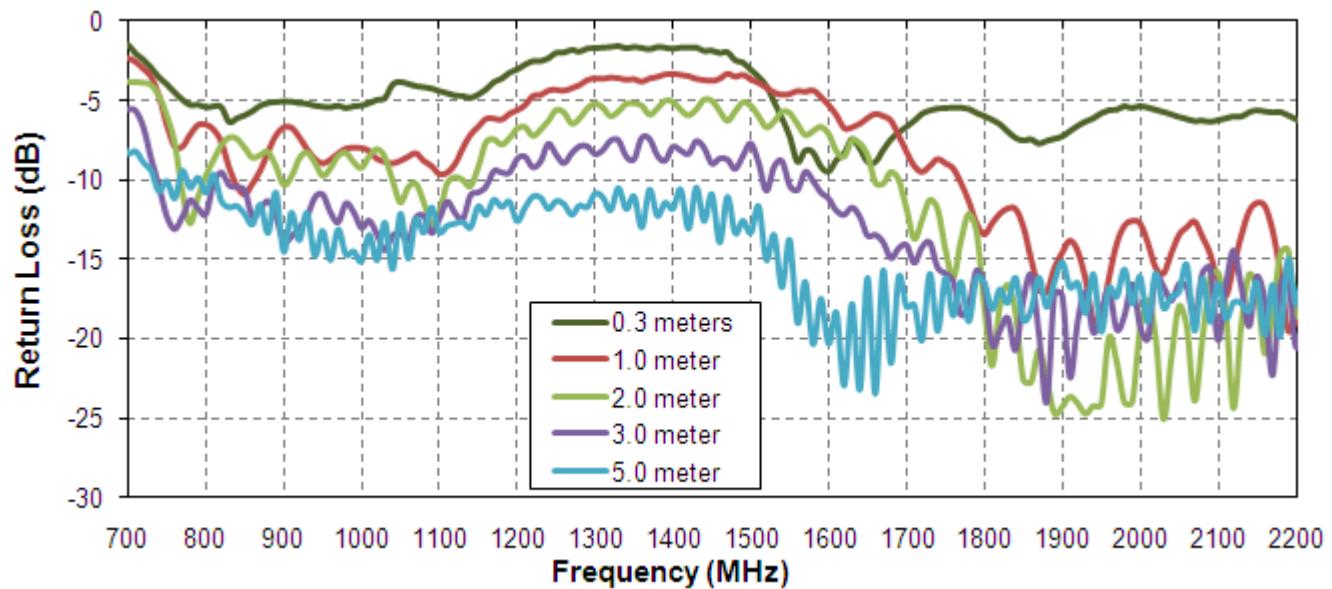


**Figure 4.** Return loss of G21 Hercules antenna on 60 cm metal plate.


## 4.2 Efficiency

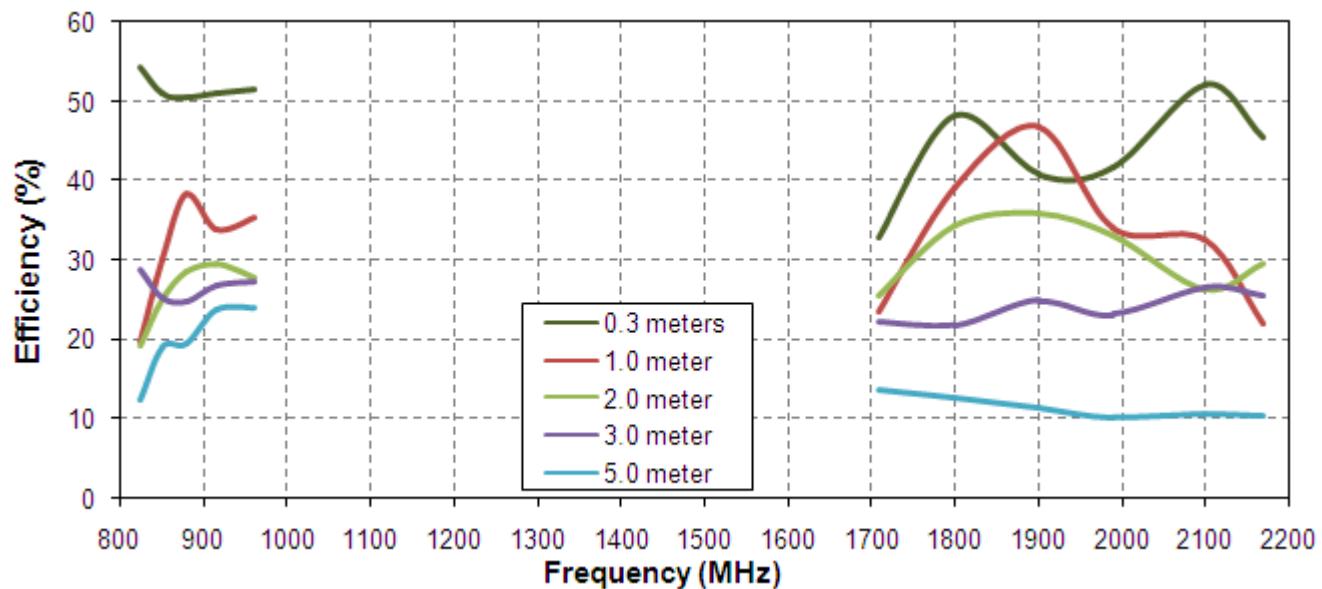

**Figure 5.** Efficiency of G21 Hercules antenna in free space.

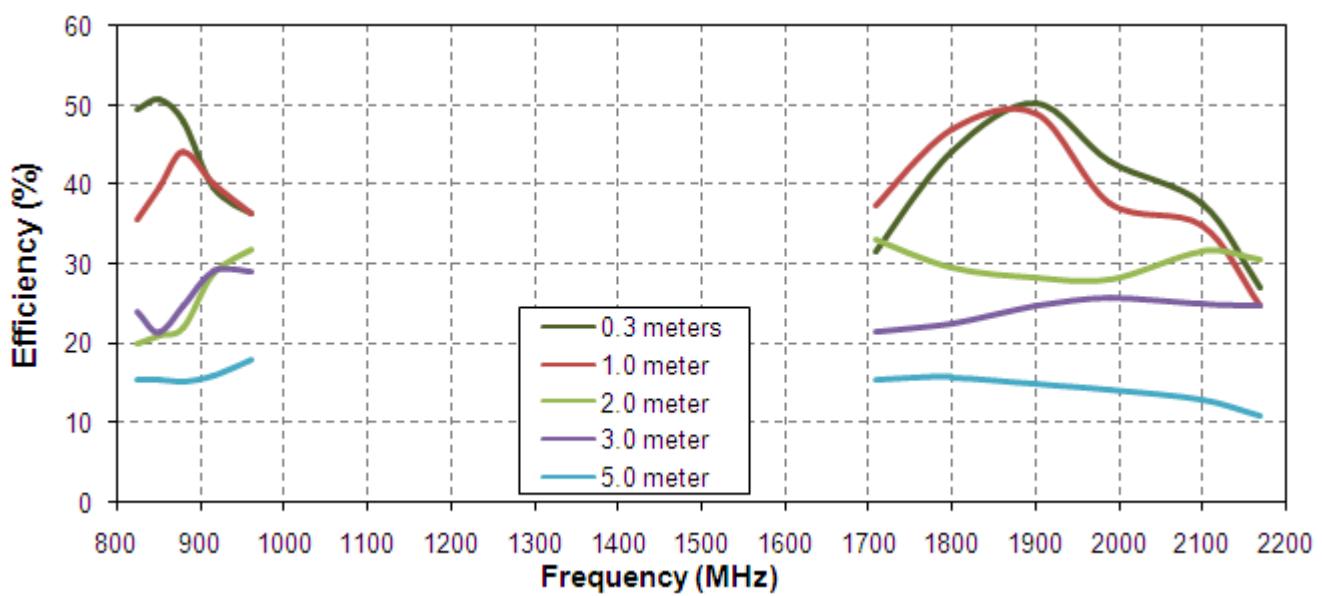


**Figure 6.** Efficiency of G21 Hercules antenna on 30 cm metal plate.

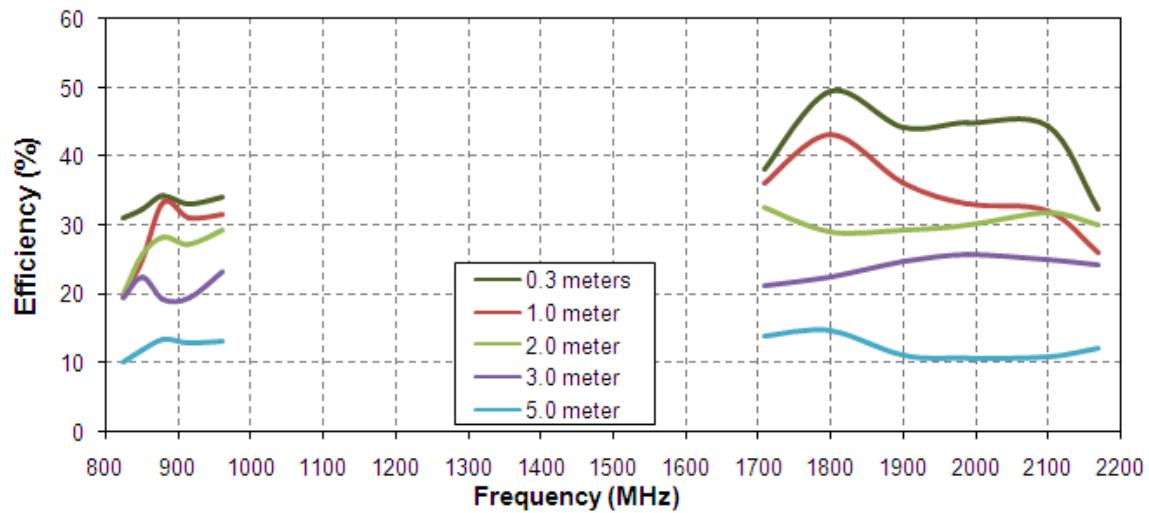


**Figure 7.** Efficiency of G21 Hercules antenna on 60 cm metal plate.


### 4.3 Peak Gain

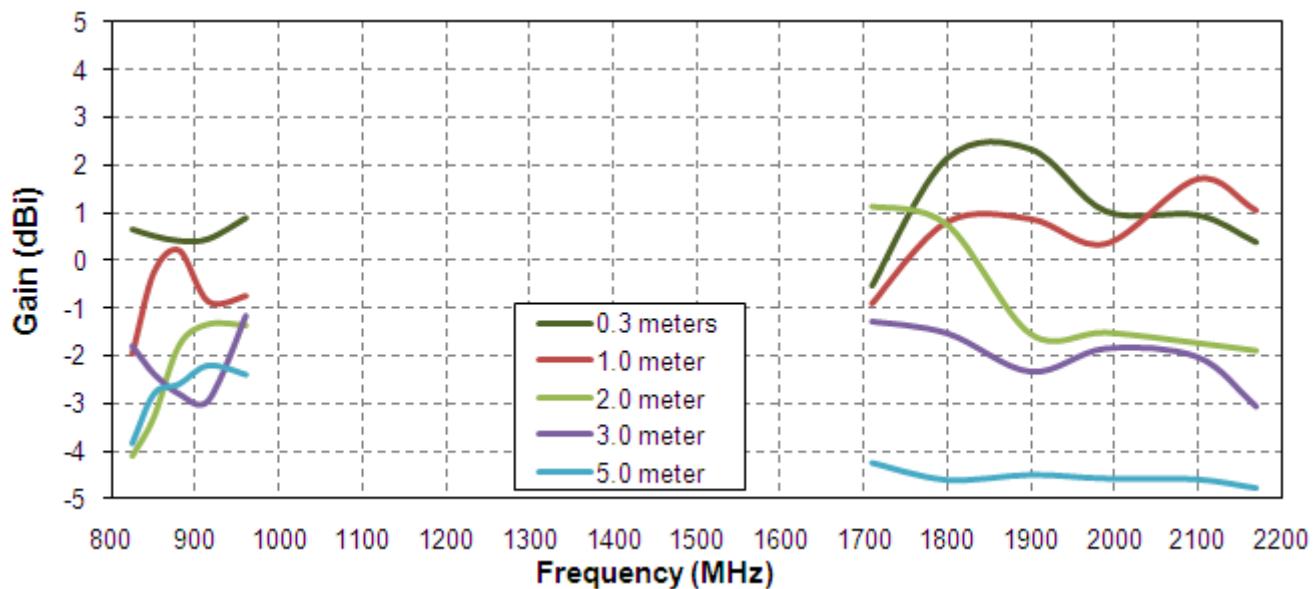

**Figure 8.** Peak Gain of G21 Hercules antenna in free space.

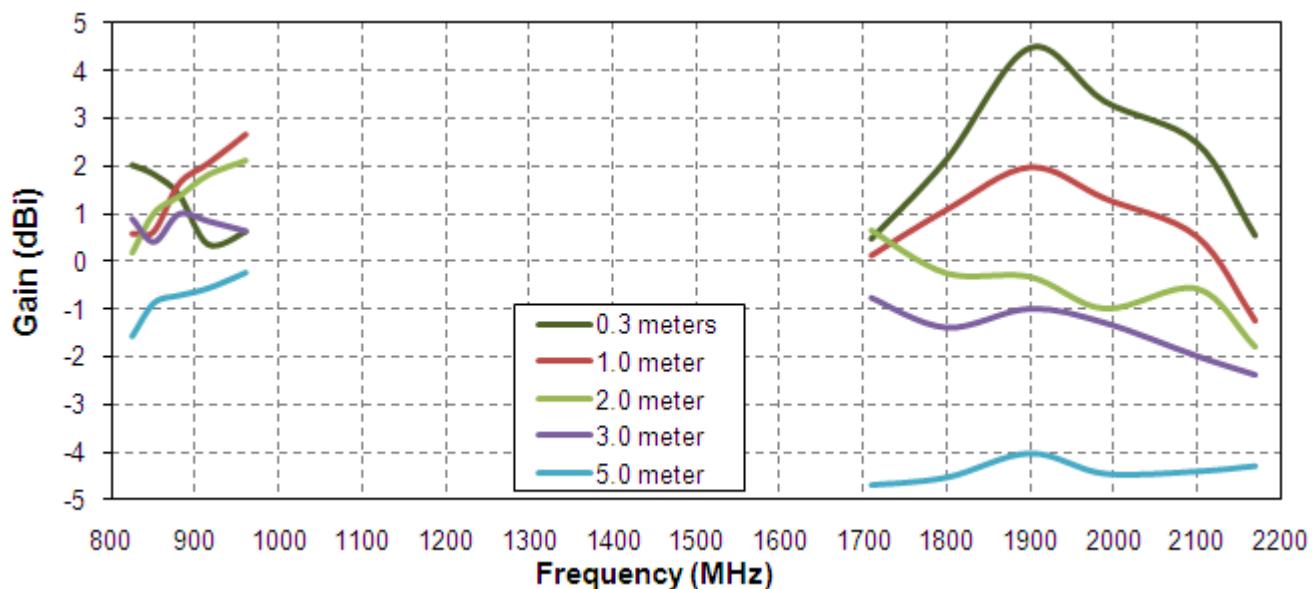


**Figure 9.** Peak Gain of G21 Hercules antenna on 30 cm metal plate.

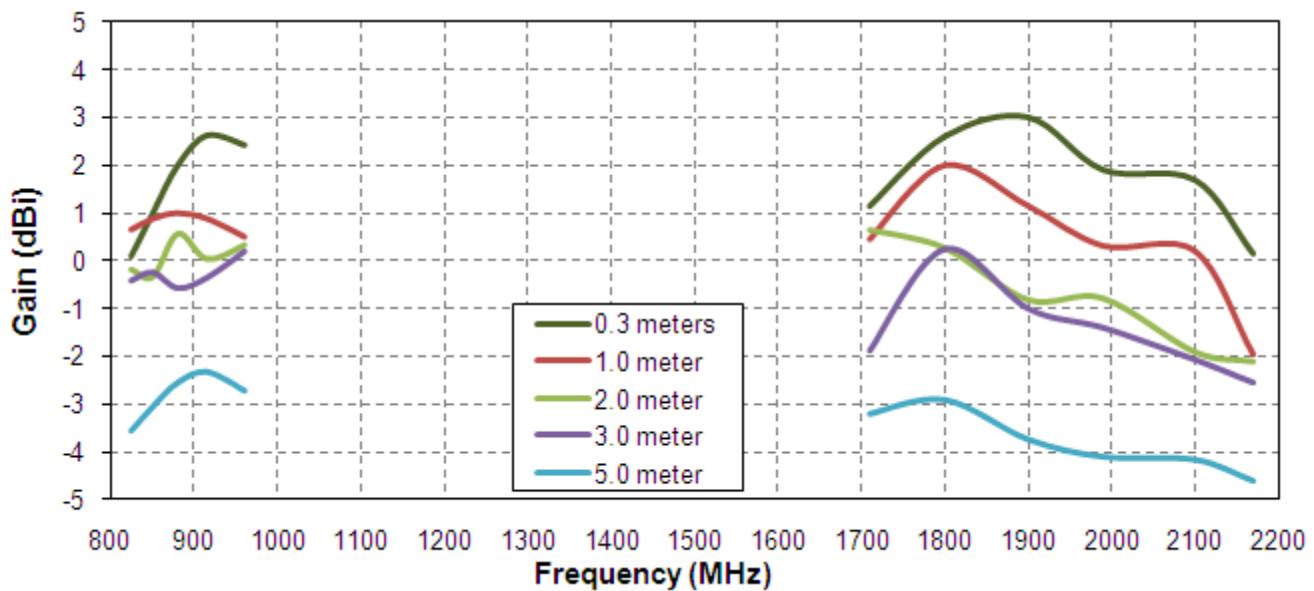


**Figure 10.** Peak Gain of G21 Hercules antenna on 60 cm metal plate.

## 5. Radiation Patterns


### 5.1 Radiation Patterns (Free Space)

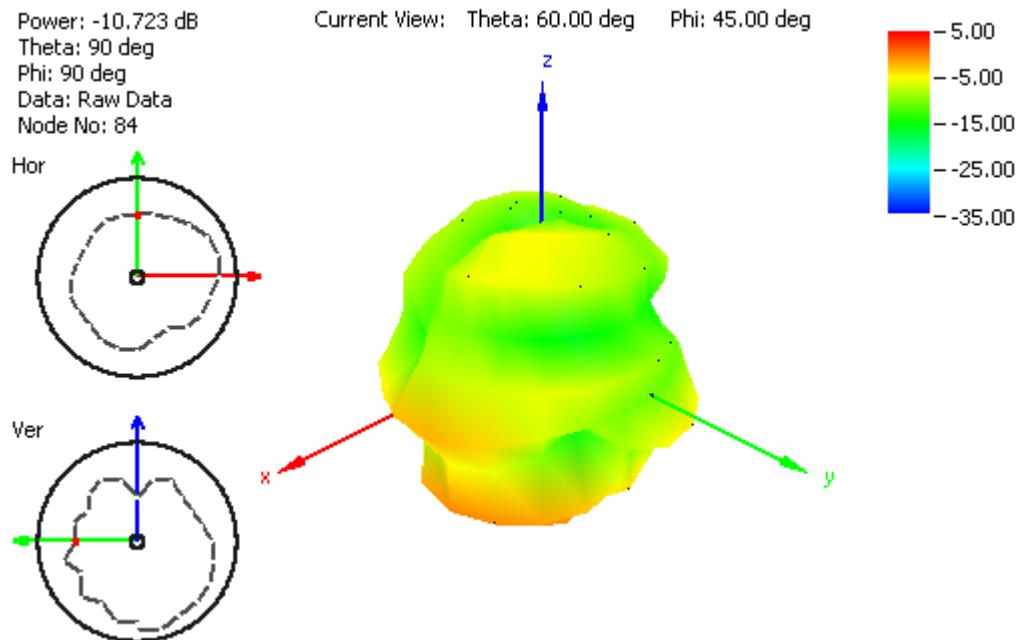


**Figure 11.** Radiation pattern at 849 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space

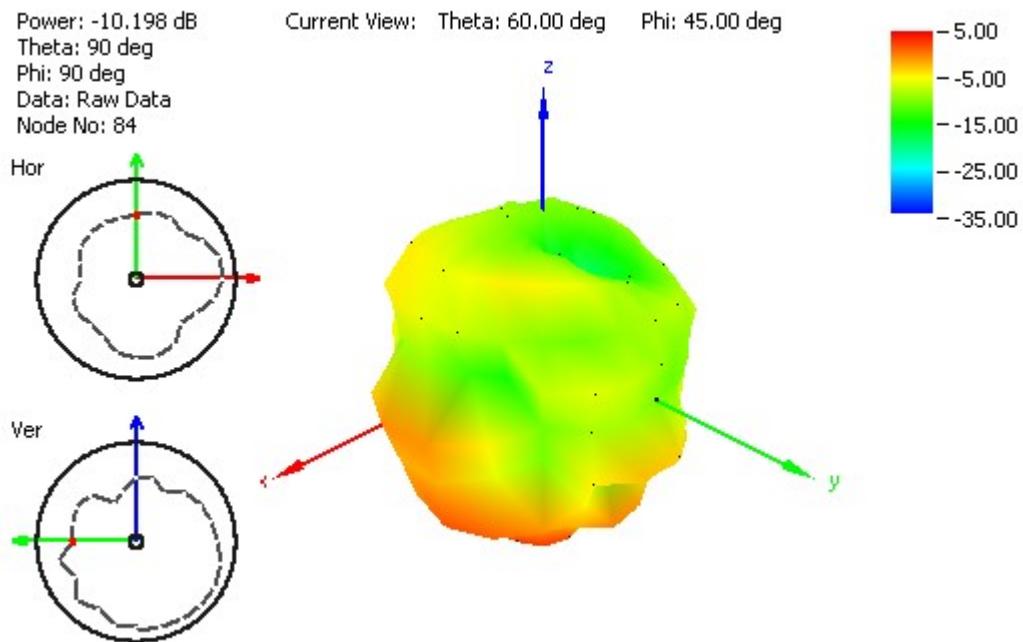


**Figure 12.** Radiation pattern at 915 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

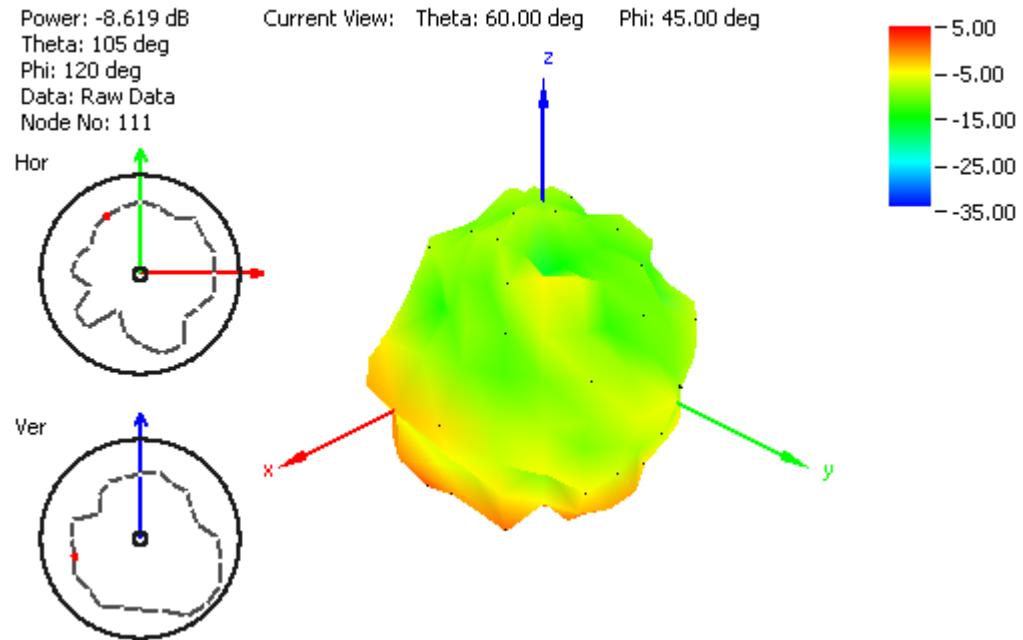

**Figure 13.** Radiation pattern at 1805 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

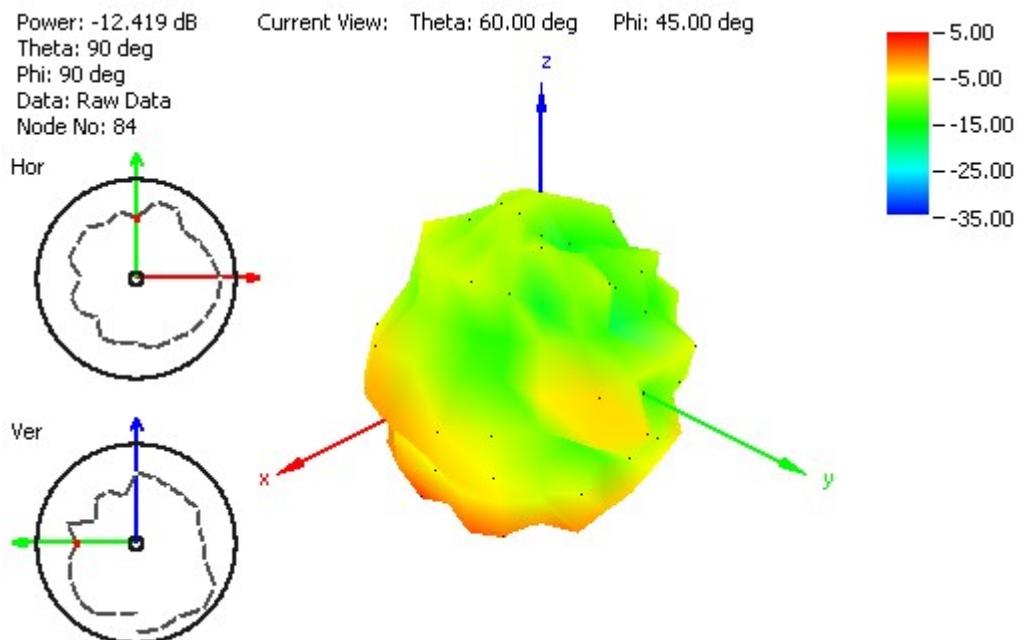


**Figure 14.** Radiation pattern at 1910 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

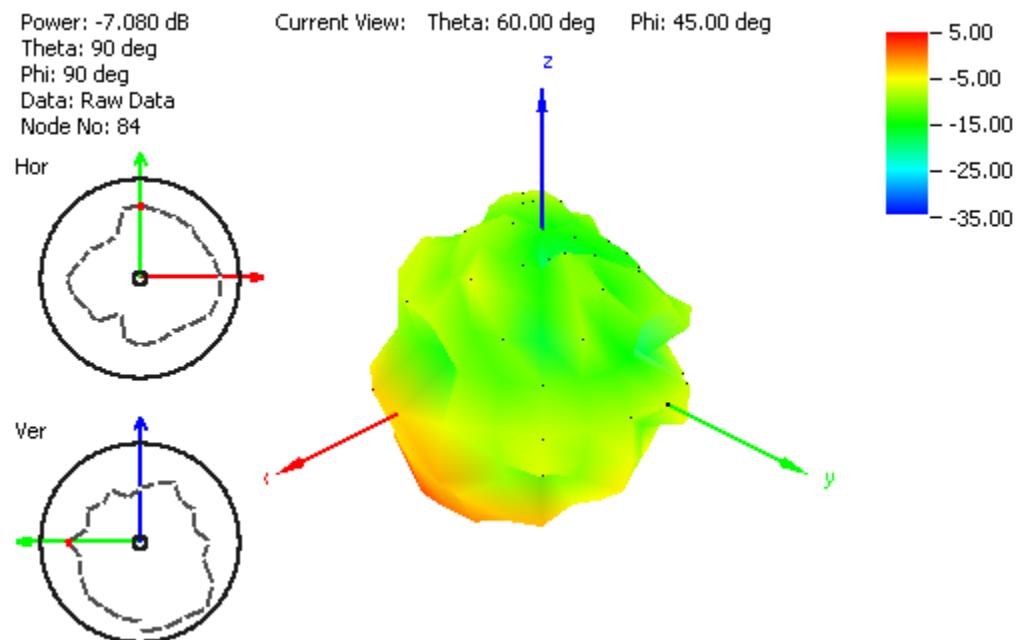


**Figure 15.** Radiation pattern at 2110 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.


## 5.2 Radiation Patterns (30\*30cm Ground Plane)

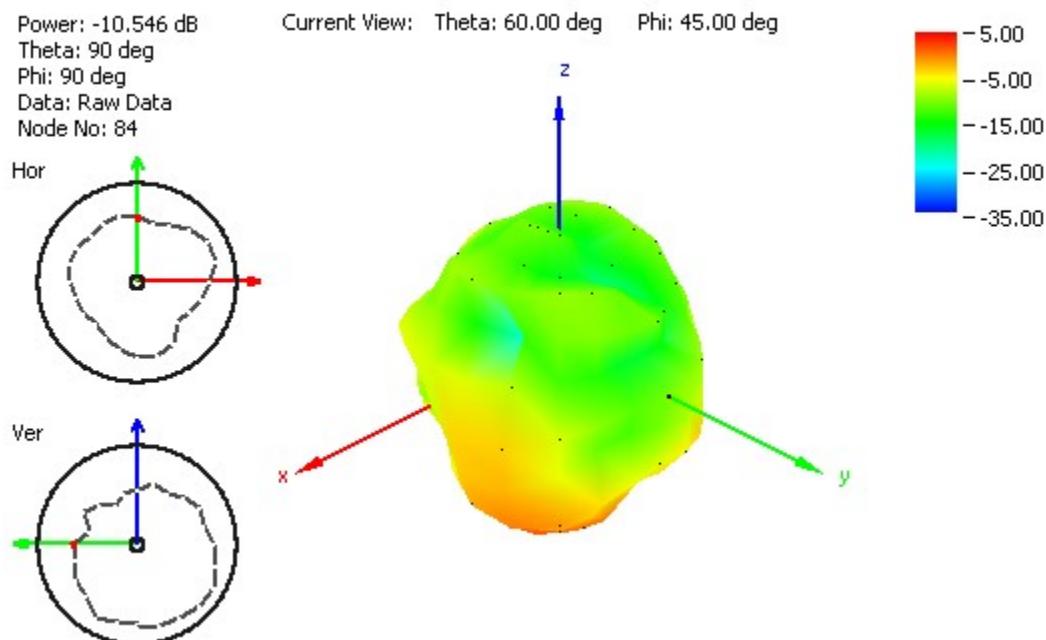


**Figure 16.** Radiation pattern at 849 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

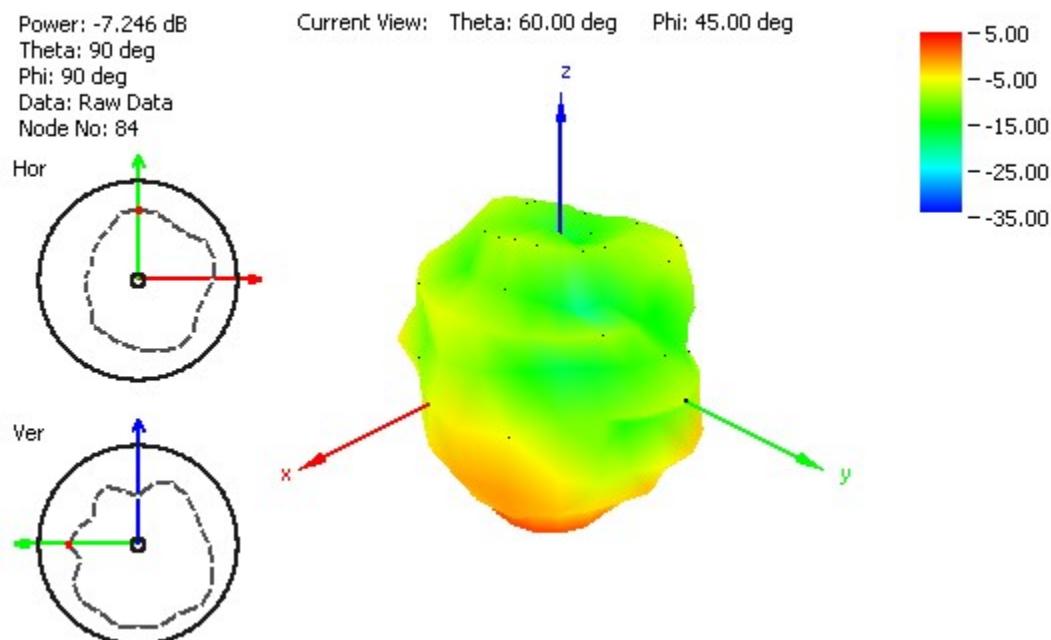


**Figure 17.** Radiation pattern at 915 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

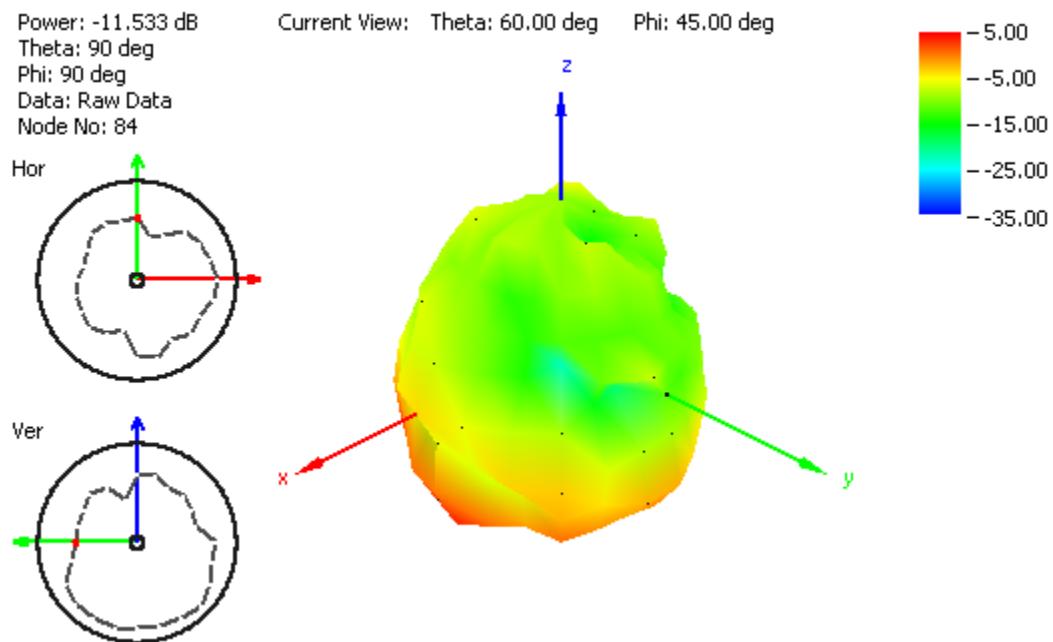

**Figure 18.** Radiation pattern at 1805 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

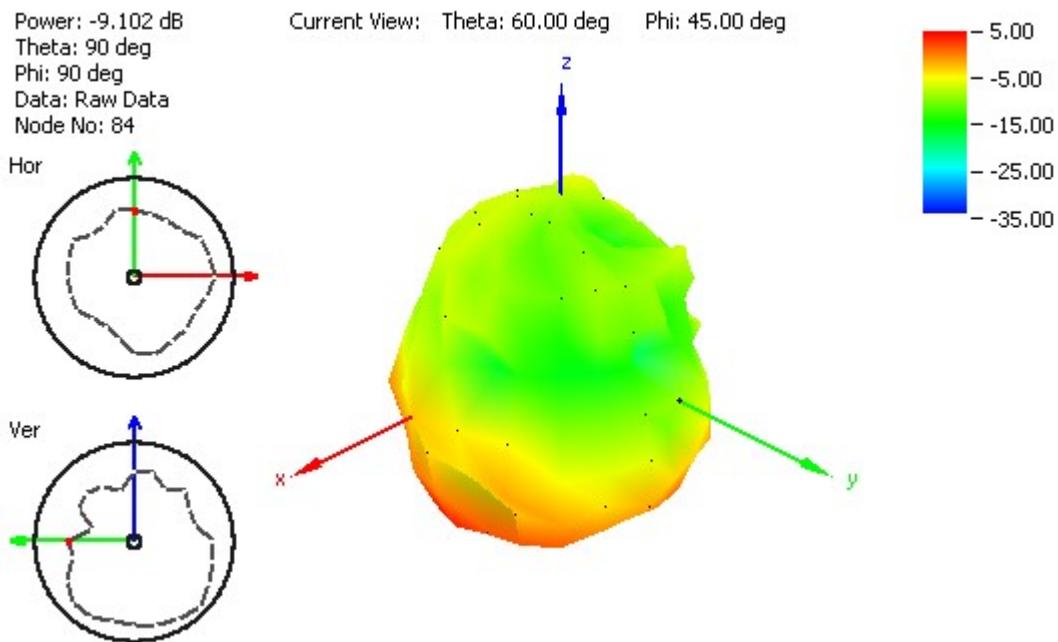


**Figure 19.** Radiation pattern at 1910 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

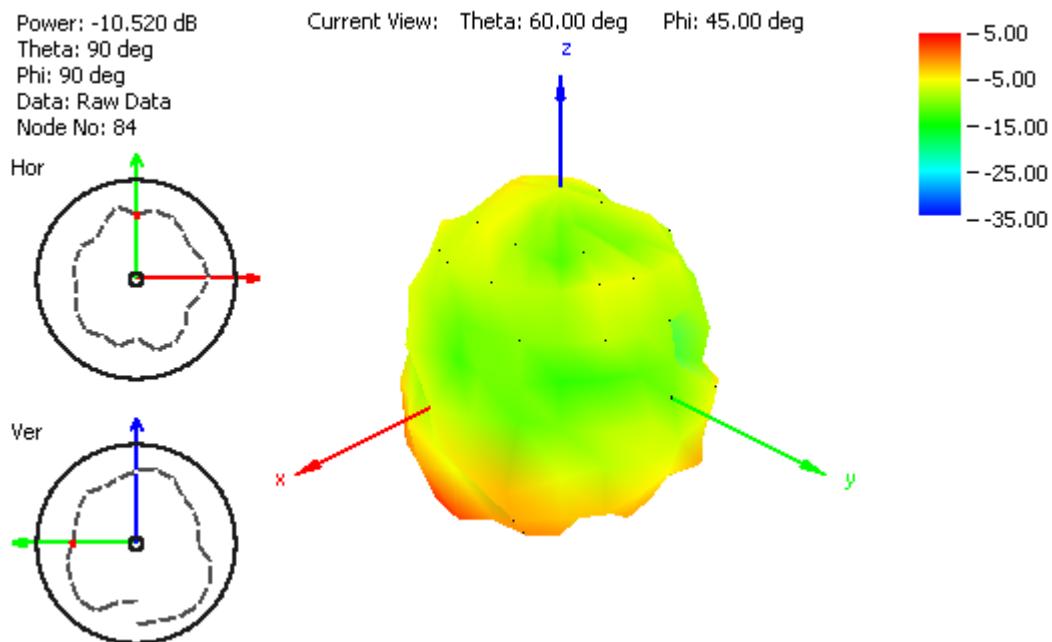


**Figure 20.** Radiation pattern at 2110 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.


### 5.3 Radiation Patterns (60\*60cm Ground Plane)

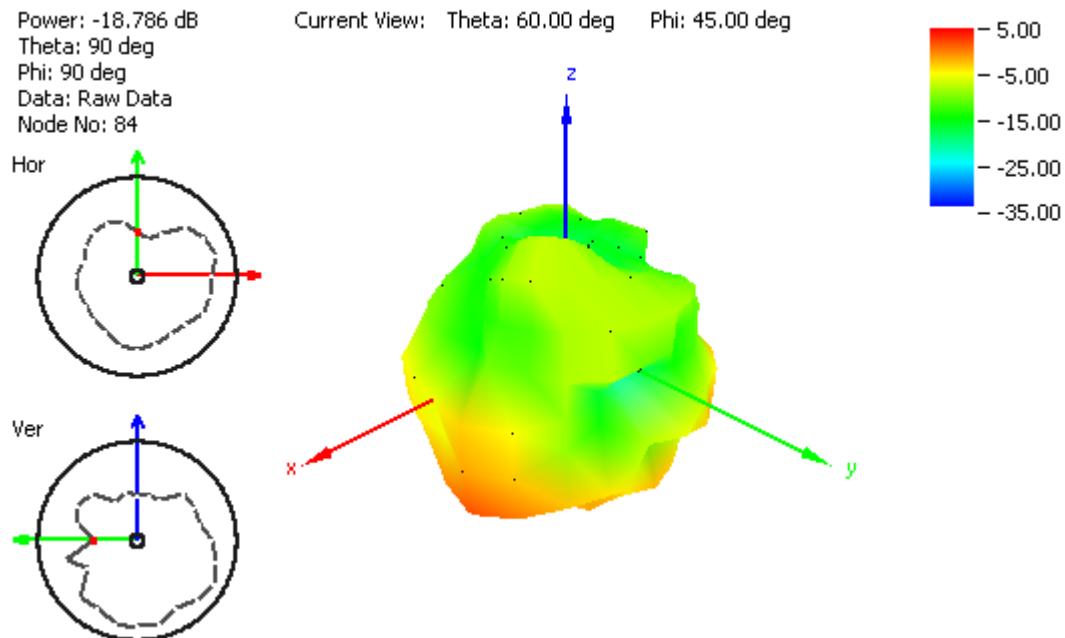


**Figure 21.** Radiation pattern at 849 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

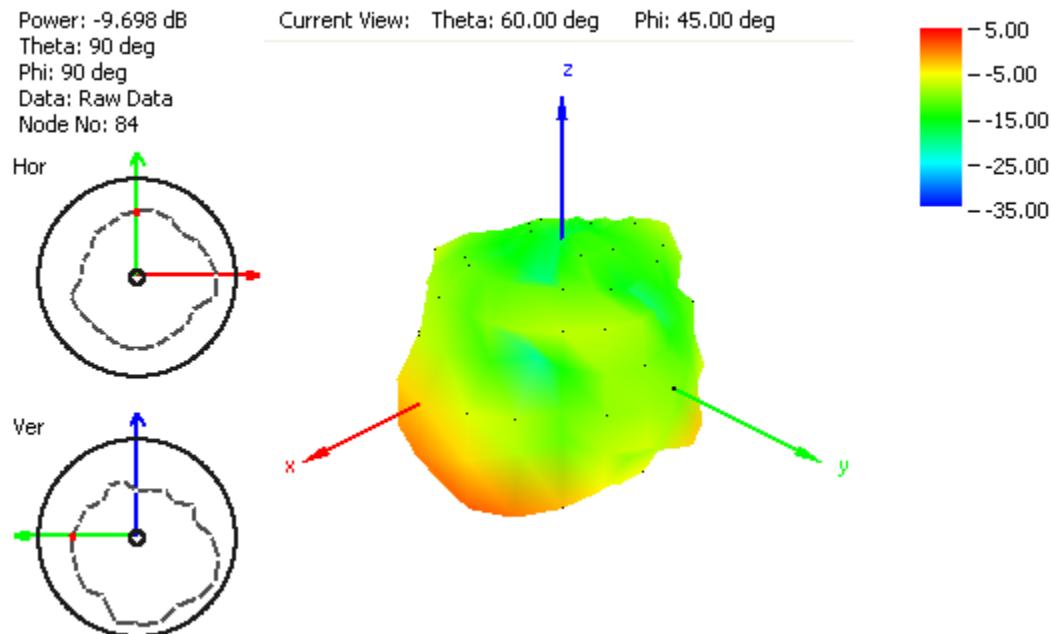


**Figure 22.** Radiation pattern at 915 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

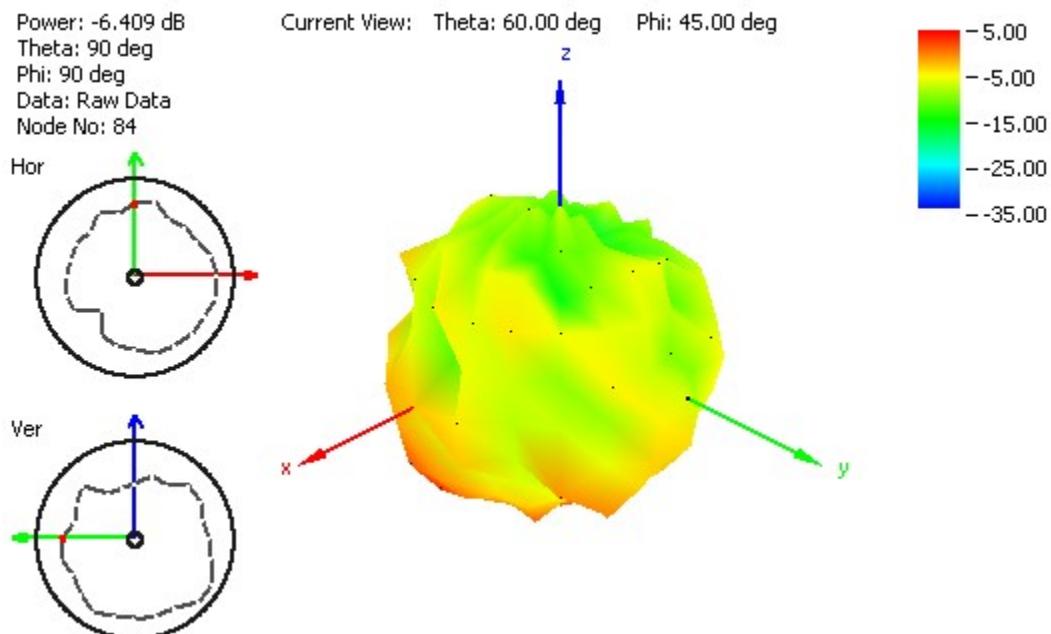

**Figure 23.** Radiation pattern at 1805 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

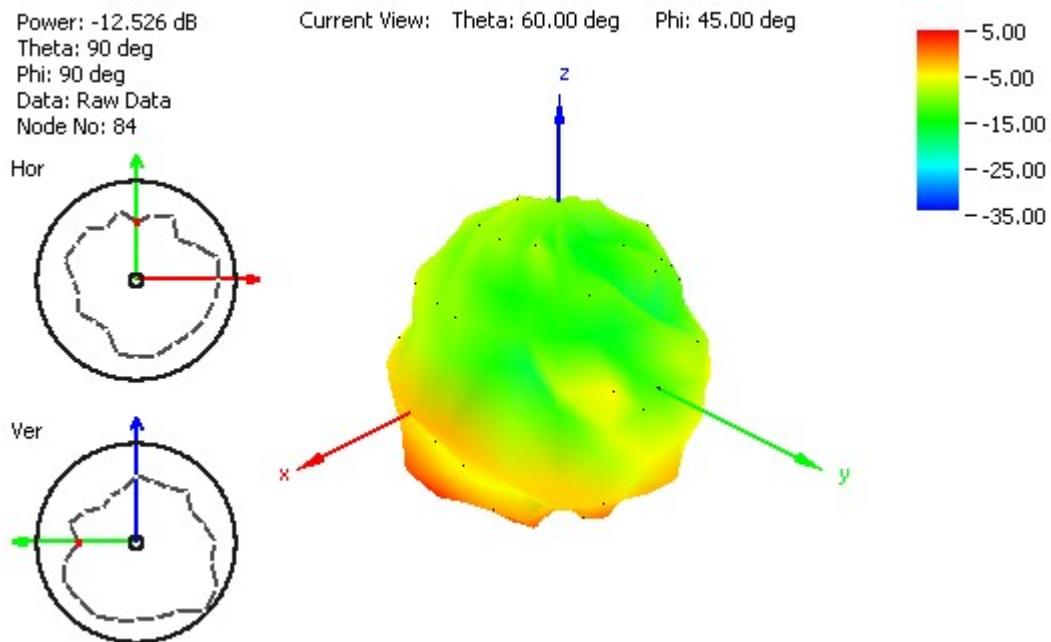


**Figure 24.** Radiation pattern at 1910 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

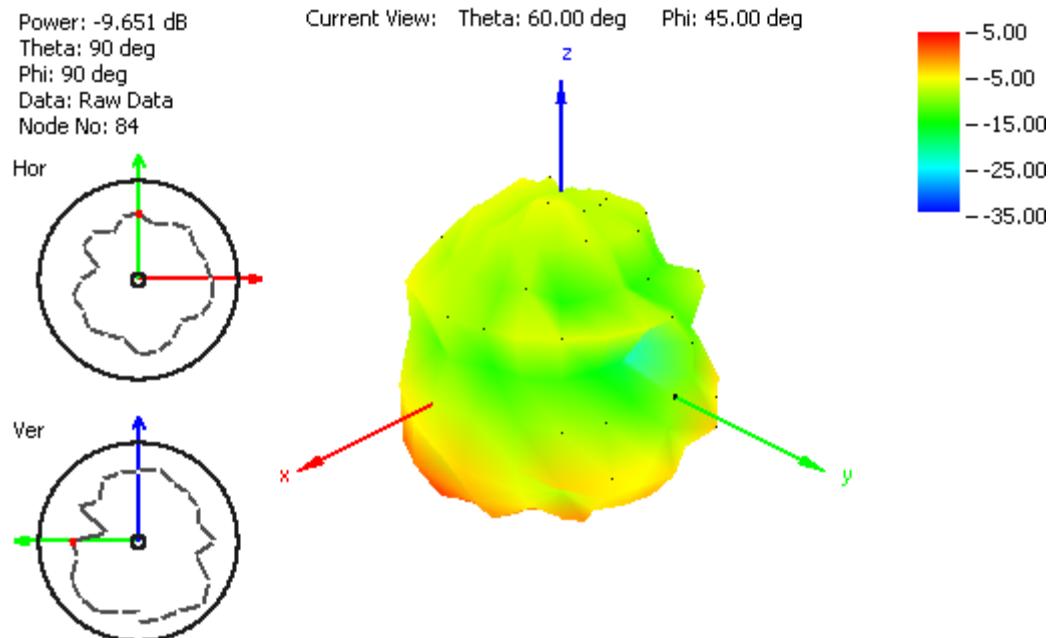


**Figure 25.** Radiation pattern at 2110 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.



## 6. MECHANICAL DRAWINGS

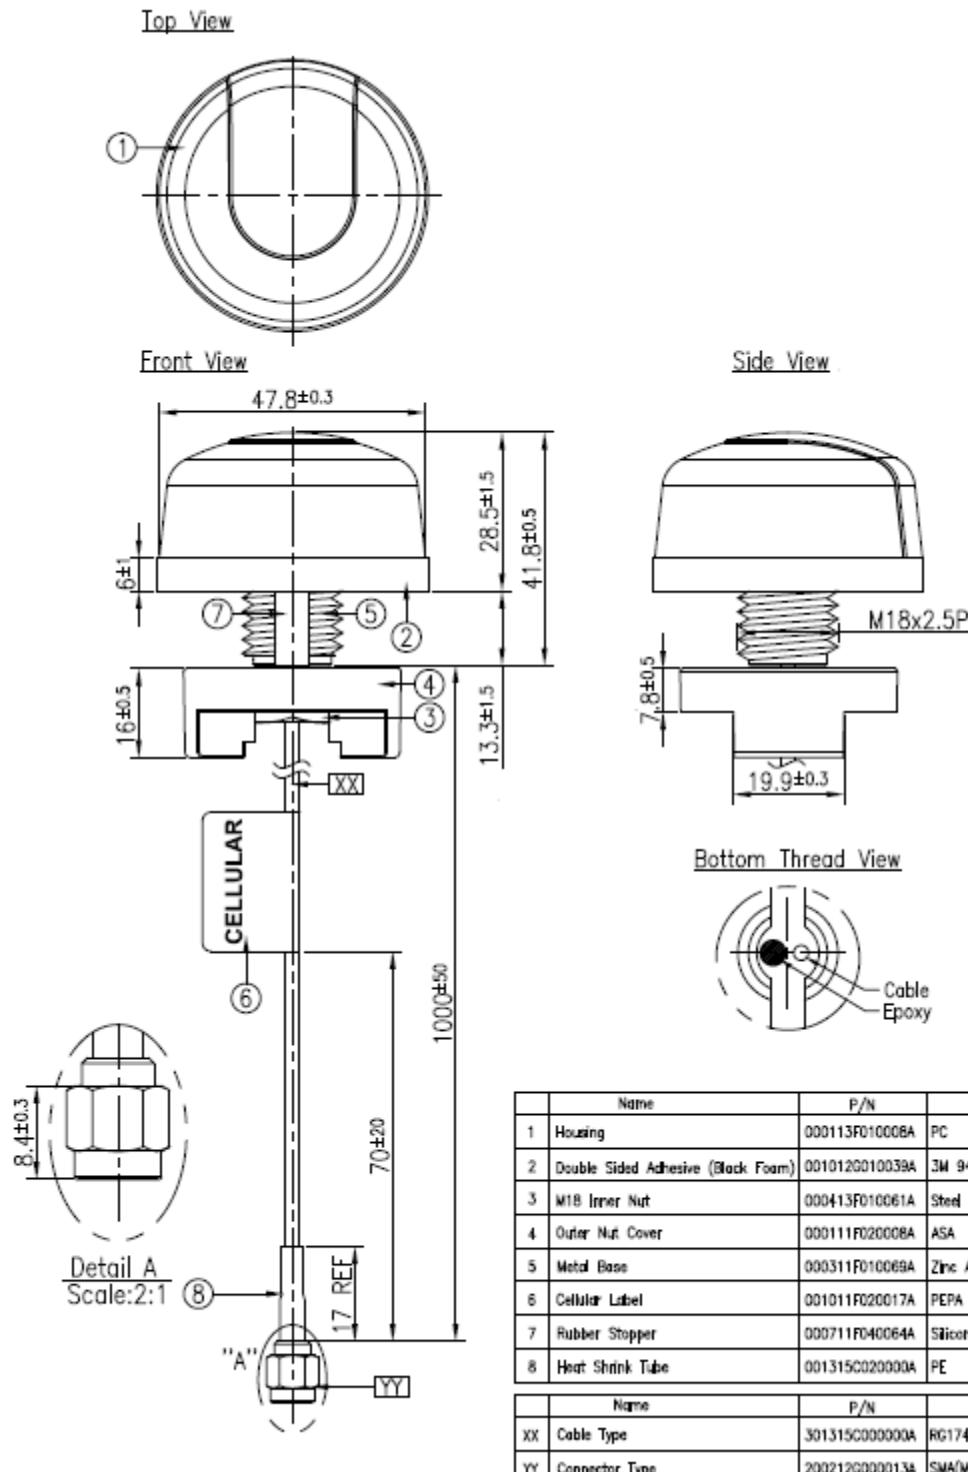

## 7. Installation

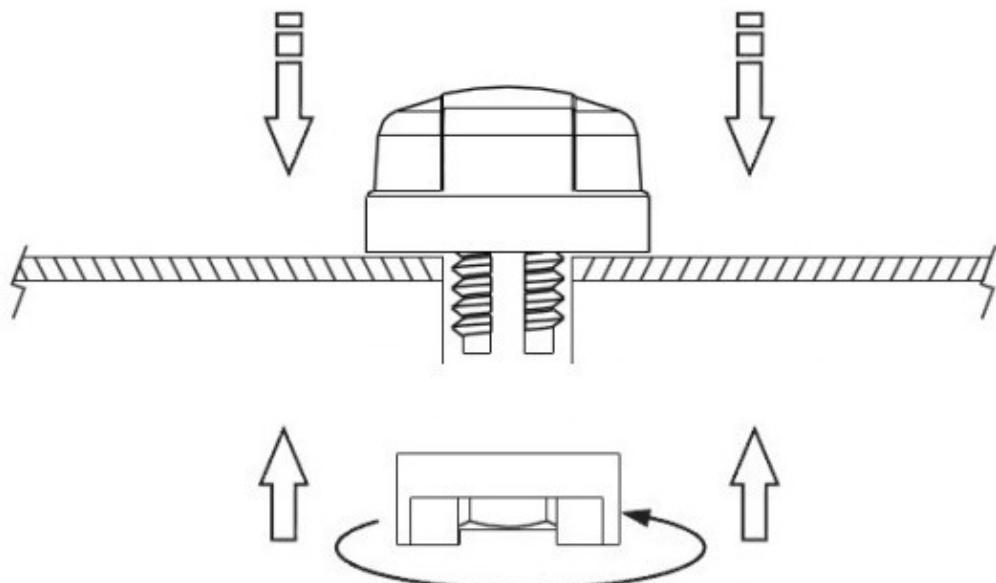

Recommended torque for Mounting is  $24.5\text{N}\cdot\text{m}$   
Maximum torque for mounting is  $29.4\text{ N}\cdot\text{m}$




## 8. Packaging


1 G21.B.301111 per PE bag  
 Small bag dimensions -300\*100mm  
 10 pcs per big bag  
 Big bag dimesions 280\*450mm



100 PE bags per carton  
 Carton Dimensions - 320\*250\*230mm

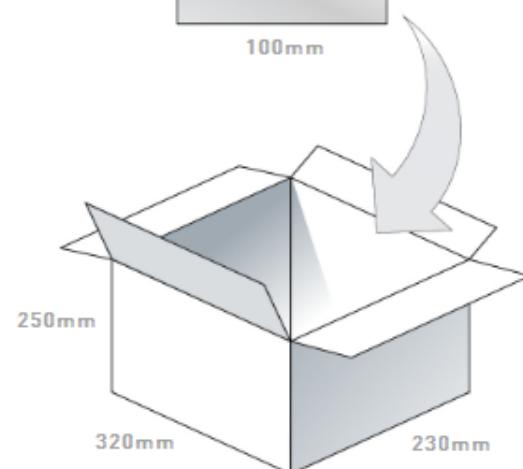

Pallet Dimensions 1200\*1200\*1500mm  
 60 Cartons per pallet  
 12 Cartons per layer  
 5 Layers

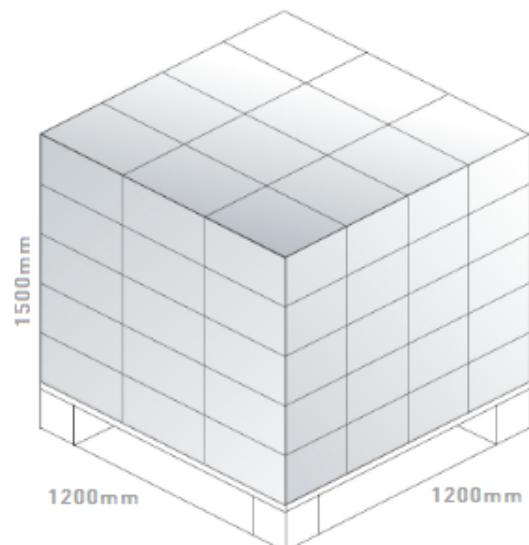

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9