


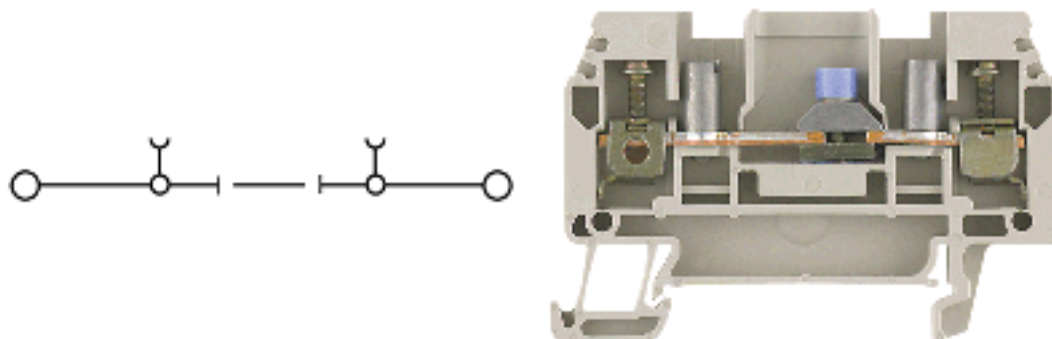

General ordering data

Order No.	1754970000
Part designation	WTL 4/STB
Version	Disconnect and modular disconnect terminal, 4 mm ² , Screw connection, Wemid, dark beige, TS 35
EAN	4032248054534
Qty.	50 pc(s).

Product notes

Note, technical data	Usage as disconnect terminal with 400 V.
Product description	Different current transformer circuits, e.g. for replacing measuring instruments or electricity meters, can be realised.
Function	With socket

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Solid, min.	0.5 mm ²
Solid, max.	1.5 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	1.5 mm ²
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	1.5 mm ²

Additional technical data

Colour of insulating material	dark beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1

Additional technical data

No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Test-disconnect terminals

CSA rating data

Voltage (CSA)	300 V
CSA current	28 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 10

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	4 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	10 mm
Clamping screw	M 2.5
Blade size	0.6 x 3.5 mm
Tightening torque range	0.4...0.7 Nm
Torque level with DMS electric screwdriver	1
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm ²
Solid, max.	6 mm ²
Stranded, min.	1.5 mm ²
Stranded, max.	4 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	4 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	4 mm ²
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm ²
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	4 mm ²
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 10
AWG conductor size, min.	0.13 mm ²
AWG conductor size, max.	5.26 mm ²

Dimensions

Width	6.1 mm
Height of lowest version	40.7 mm
Length	61.3 mm
Weight	99 g
TS 35 offset	30 mm

Disconnect terminals

Cross-disconnect	sliding
Integral test socket	Yes
Slitting	sliding
Tightening torque range	0.4...0.7 Nm
Torque level with DMS electric screwdriver	1

Rating data

Rated cross-section	4 mm ²
Rated voltage	500 V
Rated impulse voltage	6 kV
Rated current	32 A
Standards	IEC 60947-7-1
Current with max. conductor	41 A
Pollution severity	3

UL rating data

Voltage (UL)	300 V
Current (UL)	28 A
Min. cross-section (UL)	AWG 26
Max. cross-section (UL)	AWG 10

Approvals

Approvals institutes



Downloads

STEP	1754970000_28771_WTL_4-STB_STP.stp
------	------------------------------------

Classifications

ETIM 2.0	EC000902
ETIM 3.0	EC000902
eClass 4.1	27-14-11-26
eClass 5.0	27-14-11-26
eClass 5.1	27-14-11-26

Similar products

Order No.	Part designation	Version
-----------	------------------	---------



1754960000 WTL 4

Disconnect and modular disconnect terminal, 4 mm², Screw connection, Wemid, dark beige, TS 35

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9