

# Reference Only

Spec. No. JEFL243C-9121-01

P 1/10

## Wire Wound Chip Common Mode Choke Coil

**DLW5ATH□□□TQ2□ Murata Standard Reference Specification [AEC-Q200]**

### 1. Scope

This reference specification applies to Wire Wound Chip Common Mode Choke Coil DLW5ATH\_TQ Series for Automotive Electronics based on AEC-Q200.

### 2. Part Numbering


(ex.) DL W 5A T H 111 T Q 2 L  
(1) (2) (3) (4) (5) (6) (7) (8) (9) (10)

- |                                  |                                               |
|----------------------------------|-----------------------------------------------|
| (1) Chip Common Mode Choke Coil  | (6) Impedance (Typ. at 100MHz)                |
| (2) Structure (W : Winding Type) | (7) Circuit                                   |
| (3) Dimension (L × W)            | (8) Features                                  |
| (4) Type                         | (9) Number of Line                            |
| (5) Category                     | (10) Packaging Code L : Taping (φ 180mm/reel) |
|                                  | K : Taping (φ 330mm/reel)                     |
|                                  | B : Bulk                                      |

### 3. Rating

| Customer<br>Part Number | MURATA<br>Part Number | Impedance<br>at 10MHz,<br>Under Standard<br>Testing Conditions<br>(Ω +/-25%) | Impedance<br>at 100MHz,<br>Under Standard<br>Testing Conditions<br>(Ω Typ.) | Rated<br>Voltage<br>V(DC) | Withstanding<br>Voltage<br>V(DC) | Rated<br>Current(*) (A) |             | DC<br>Resistance<br>(Rdc)<br>(Ω max.) | Insulation<br>Resistance<br>(MΩ min.) | ESD<br>Rank<br>2.2kV |
|-------------------------|-----------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------|----------------------------------|-------------------------|-------------|---------------------------------------|---------------------------------------|----------------------|
|                         |                       |                                                                              |                                                                             |                           |                                  | at<br>105°C             | at<br>125°C |                                       |                                       |                      |
|                         | DLW5ATH450TQ2L        | 4.7                                                                          | 45                                                                          | 50                        | 125                              | 4.0                     | 2.5         | 0.013                                 | 10                                    | 2                    |
|                         | DLW5ATH450TQ2K        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH450TQ2B        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH111TQ2L        | 12                                                                           | 110                                                                         |                           |                                  | 3.0                     | 2.0         | 0.020                                 |                                       |                      |
|                         | DLW5ATH111TQ2K        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH111TQ2B        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH231TQ2L        | 22                                                                           | 230                                                                         |                           |                                  | 2.5                     | 1.5         | 0.027                                 |                                       |                      |
|                         | DLW5ATH231TQ2K        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH231TQ2B        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH401TQ2L        | 35                                                                           | 400                                                                         |                           |                                  | 2.0                     | 1.2         | 0.034                                 |                                       |                      |
|                         | DLW5ATH401TQ2K        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH401TQ2B        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH501TQ2L        | 55                                                                           | 500                                                                         |                           |                                  | 1.5                     | 1.0         | 0.056                                 |                                       |                      |
|                         | DLW5ATH501TQ2K        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |
|                         | DLW5ATH501TQ2B        |                                                                              |                                                                             |                           |                                  |                         |             |                                       |                                       |                      |

(\*)As for DLW5ATH\_TQ type Rated Current is derated as following figure depending on the operating temperature.

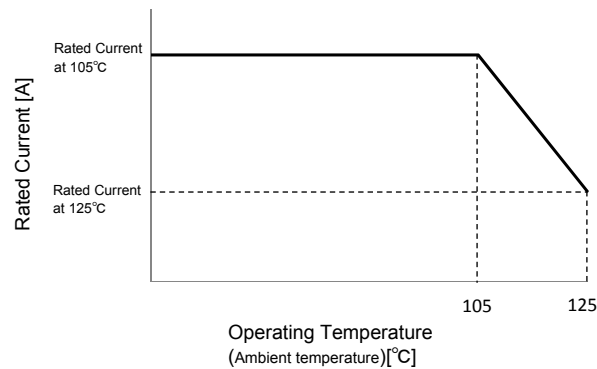

• Operating Temperature : - 40 °C to + 125 °C      • Storage Temperature : - 40 °C to + 125 °C

MURATA MFG CO., LTD.

## 4. Standard Testing Conditions

< Unless otherwise specified >

Temperature : Ordinary Temp. 15 °C to 35 °C

Humidity : Ordinary Humidity 25 %(RH) to 85 %(RH)


< In case of doubt >

Temperature : 20 °C ± 2 °C


Humidity : 60 %(RH) to 70 %(RH)

Atmospheric pressure : 86 kPa to 106 kPa

## 5. Style and Dimensions

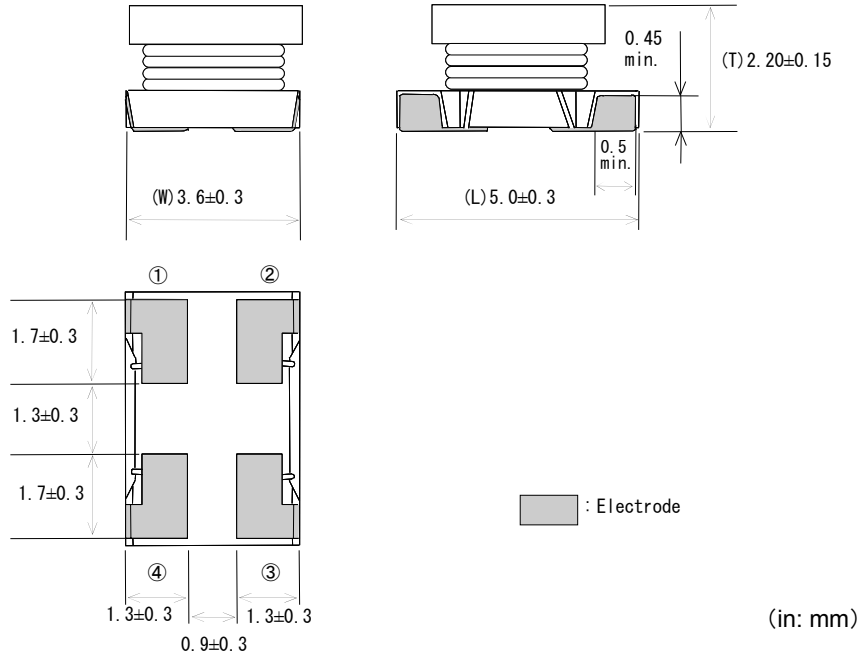

### Equivalent Circuits



No polarity

### Unit Mass (Typical value)

0.14g

## 6. Marking

No marking.

## 7. Electrical Performance

| No. | Item                               | Specifications | Test Method                                                                                                                                   |
|-----|------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 7.1 | Impedance<br>( Z ) (at 10MHz)      | Meet item 3.   | Measuring Equipment : KEYSIGHT 4191A or the equivalents.<br>Measuring Frequency : 10MHz (ref. Item 9.)                                        |
| 7.2 | Insulation<br>Resistance<br>(I.R.) |                | Measuring Equipment : R8340A or the equivalents.<br>Measuring voltage : Rated Voltage<br>Time : within 60 s (ref. Item 9.)                    |
| 7.3 | DC Resistance<br>(Rdc)             |                | Measuring Current : 100 mA max. (ref. Item 9.)<br>(In case of doubt in the above mentioned standard condition, measure by 4 terminal method.) |
| 7.4 | Withstanding<br>Voltage            |                | Test Voltage : 2.5 times for Rated Voltage<br>Time : 1 to 5 seconds<br>Charge Current : 1 mA max. (ref. Item 9.)                              |

# Reference Only

Spec. No. JEFL243C-9121-01

P 3/10

## 8. Q200 Requirement

### 7-1. Performance (based on Table 13 for Ferrite EMI SUPPRESSORS/FILTERS)

**AEC-Q200 Rev.D issued June 1. 2010**

| AEC-Q200                    |                               |                                                                                                                            | Murata Specification / Deviation                                                                                                                                                                                                                                                  |            |             |                             |              |      |           |                      |             |
|-----------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|-----------------------------|--------------|------|-----------|----------------------|-------------|
| No.                         | Stress                        | Test Method                                                                                                                |                                                                                                                                                                                                                                                                                   |            |             |                             |              |      |           |                      |             |
| 3                           | High Temperature Exposure     | 1000hours at 125 deg C<br>Set for 24hours at room temperature, then measured.                                              | Meet Table A after testing.<br><u>Table A</u> <table><tr><td>Appearance</td><td>No damaged.</td></tr><tr><td>Impedance change (at 10MHz)</td><td>within ± 20%</td></tr><tr><td>I.R.</td><td>10MΩ min.</td></tr><tr><td>Withstanding Voltage</td><td>No damaged.</td></tr></table> | Appearance | No damaged. | Impedance change (at 10MHz) | within ± 20% | I.R. | 10MΩ min. | Withstanding Voltage | No damaged. |
| Appearance                  | No damaged.                   |                                                                                                                            |                                                                                                                                                                                                                                                                                   |            |             |                             |              |      |           |                      |             |
| Impedance change (at 10MHz) | within ± 20%                  |                                                                                                                            |                                                                                                                                                                                                                                                                                   |            |             |                             |              |      |           |                      |             |
| I.R.                        | 10MΩ min.                     |                                                                                                                            |                                                                                                                                                                                                                                                                                   |            |             |                             |              |      |           |                      |             |
| Withstanding Voltage        | No damaged.                   |                                                                                                                            |                                                                                                                                                                                                                                                                                   |            |             |                             |              |      |           |                      |             |
| 4                           | Temperature Cycling           | 1000cycles<br>-40 deg C to +125 deg C<br>Set for 24hours at room temperature, then measured.                               | Meet Table A after testing.                                                                                                                                                                                                                                                       |            |             |                             |              |      |           |                      |             |
| 5                           | Destructive Physical Analysis | Per EIA469<br>No electrical tests                                                                                          | Not Applicable                                                                                                                                                                                                                                                                    |            |             |                             |              |      |           |                      |             |
| 7                           | Biased Humidity               | 1000hours at 85 deg C, 85%RH<br>Apply max rated voltage and current.                                                       | Meet Table A after testing.<br>Apply rated voltage.<br><div>(ref.item 9)</div>                                                                                                                                                                                                    |            |             |                             |              |      |           |                      |             |
| 8                           | Operational Life              | Apply 125 deg C<br>1000hours<br>Set for 24hours at room temperature, then measured                                         | Meet Table A after testing.<br>Apply derating of rated current.<br><div>(ref.item 9)</div>                                                                                                                                                                                        |            |             |                             |              |      |           |                      |             |
| 9                           | External Visual               | Visual inspection                                                                                                          | No abnormalities                                                                                                                                                                                                                                                                  |            |             |                             |              |      |           |                      |             |
| 10                          | Physical Dimension            | Meet ITEM 5<br>(Style and Dimensions)                                                                                      | No defects                                                                                                                                                                                                                                                                        |            |             |                             |              |      |           |                      |             |
| 12                          | Resistance to Solvents        | Per MIL-STD-202 Method 215                                                                                                 | Not Applicable                                                                                                                                                                                                                                                                    |            |             |                             |              |      |           |                      |             |
| 13                          | Mechanical Shock              | Per MIL-STD-202 Method 213<br>Conditon F:<br>1500g's(14.7N)/0.5ms/<br>Half sine                                            | Meet Table A after testing.                                                                                                                                                                                                                                                       |            |             |                             |              |      |           |                      |             |
| 14                          | Vibration                     | 5g's(0.049N) for 20 minutes, 12cycles<br>each of 3 orientations<br>Test from 10-2000Hz.<br>12cycles each of 3 orientations | Meet Table A after testing.                                                                                                                                                                                                                                                       |            |             |                             |              |      |           |                      |             |
| 15                          | Resistance to Soldering Heat  | No-heating<br>Solder temperature<br>260C+/-5 deg C<br>Immersion time 10s                                                   | Pre-heating : 150 C / 60s min.<br>Meet Table A after testing.                                                                                                                                                                                                                     |            |             |                             |              |      |           |                      |             |
| 17                          | ESD                           | Per AEC-Q200-002                                                                                                           | Meet Table A after testing.<br>ESD Rank: Refer to Item 3. Rating.                                                                                                                                                                                                                 |            |             |                             |              |      |           |                      |             |
| 18                          | Solderbility                  | Per J-STD-002                                                                                                              | Method b : Not Applicable<br>90% of the terminations is to be soldered.<br>(except partly-exposed wire)<br>Flux:Ethanol solution of rosin,25(wt)% includes activator<br>equivalent to 0.06 to 0.10(wt)% chlorine                                                                  |            |             |                             |              |      |           |                      |             |
| 19                          | Electrical Characterization   | Measured : Impedance                                                                                                       | No defects                                                                                                                                                                                                                                                                        |            |             |                             |              |      |           |                      |             |




# Reference Only

Spec. No. JEFL243C-9121-01


P 4/10

| AEC-Q200 |                                       |                                                                        | Murata Specification / Deviation                           |
|----------|---------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------|
| No.      | Stress                                | Test Method                                                            |                                                            |
| 20       | Flammability                          | Per UL-94                                                              | Not Applicable                                             |
| 21       | Board Flex                            | Epoxy-PCB(1.6mm)<br>Deflection 2mm(min)<br>60 sec minimum holding time | Meet Table A after testing.<br>30 sec minimum holding time |
| 22       | Terminal Strength                     | Per AEC-Q200-006<br>A force of 17.7N<br>for 60sec                      | No defects                                                 |
| 30       | Electrical<br>Transient<br>Conduction | Per ISO-7637-2                                                         | Not Applicable                                             |

**9. Terminal to be Tested** When measuring and supplying the voltage, the following terminal is applied.

| No. | Item                                                   | Terminal to be Tested                                                               |
|-----|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| 9.1 | Impedance ( Z )<br>(Measurement Terminal)              |   |
| 9.2 | DC Resistance (Rdc)<br>(Measurement Terminal)          |                                                                                     |
| 9.3 | Insulation Resistance (I.R.)<br>(Measurement Terminal) |   |
| 9.4 | Withstanding Voltage<br>(Measurement Terminal)         |                                                                                     |
| 9.5 | Biased Humidity (Supply Terminal)                      |  |
| 9.6 | Operational Life (Supply Terminal)                     |                                                                                     |

## 10. Impedance Frequency Characteristics (Typical)

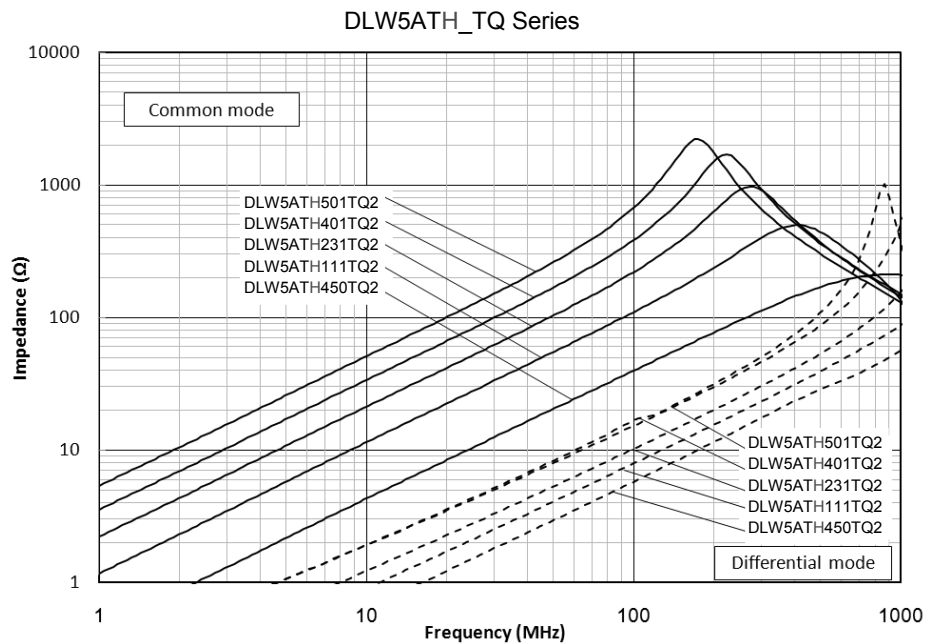


## 11. P.C.B., Flux, Solder and Soldering condition

Test shall be done using P.C.B., Flux, Solder and Soldering condition which are specified in item 14 except the case of being specified special condition.

## 12. Specification of Packaging

### 12.1 Appearance and Dimensions

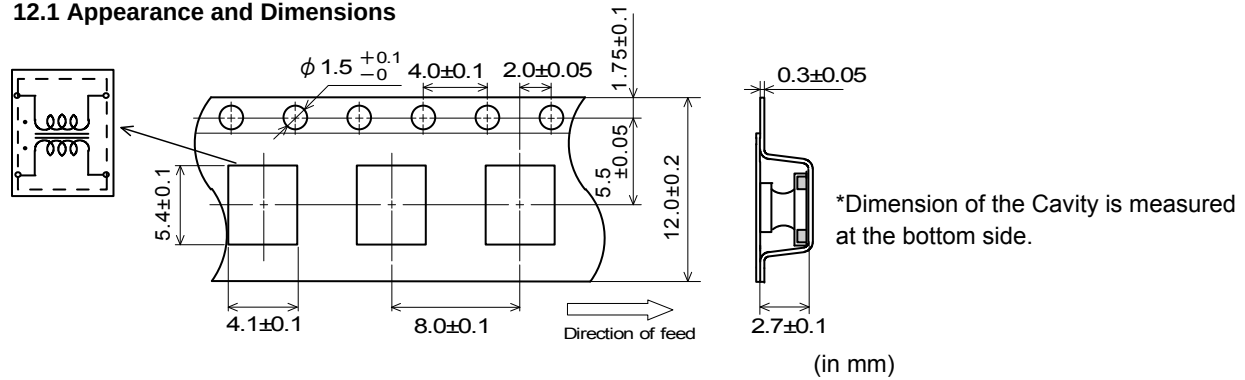

### 12.2 Specification of Taping


- (1) Packing quantity (Standard quantity)  $\phi$  180 mm reel : 700 pcs. / reel  $\phi$  330 mm reel : 2500 pcs. / reel
- (2) Packing Method  
Products shall be packaged in each embossed cavity of plastic tape and sealed with cover tape.
- (3) Sprocket Hole  
The sprocket holes are to the right as the tape is pulled toward the user.
- (4) Spliced point  
The cover tape have no spliced point.
- (5) Missing components number  
Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous. The specified quantity per reel is kept.

### 12.3 Pull Strength of Plastic Tape

|              |           |
|--------------|-----------|
| Plastic Tape | 5 N min.  |
| Cover Tape   | 10 N min. |

### 12.4 Peeling off force of Cover Tape


0.2N to 0.7N (minimum value is typical.)  
Speed of Peeling off : 300 mm / min

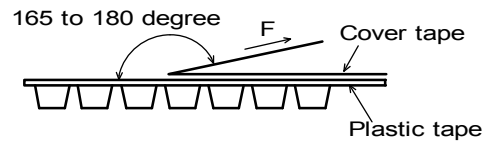


### 12.5 Dimensions of Leader-tape, Trailer and Reel

There shall be leader-tape (cover tape only and empty tape) and trailer-tape (empty tape) as follows.

« Packaging Code : L ( $\phi$  180mm reel) »

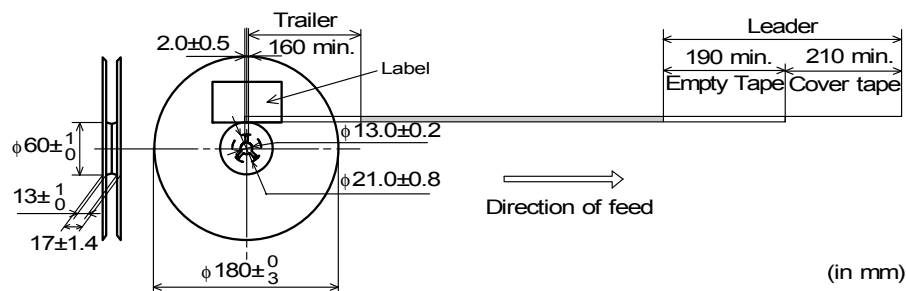

« Packaging Code : K ( $\phi$  330mm reel) »

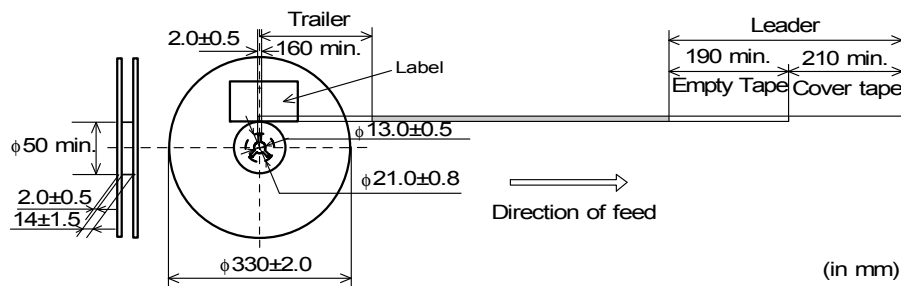

## 12.6 Marking for reel

Customer part number, MURATA part number, Inspection number(\*1), RoHS marking(\*2), Quantity, etc

\*1) « Expression of Inspection No. »

□□    OOOO    XXX  
 (1)                      (2)                      (3)

(1) Factory Code

(2) Date

First digit : Year / Last digit of year

Second digit : Month / Jan. to Sep. → 1 to 9, Oct. to Dec. → O,N,D

Third, Fourth digit : Day

(3) Serial No.

\*2) « Expression of RoHS marking »

ROHS – Y (△)

(1) (2)


(1) RoHS regulation conformity parts.

(2) MURATA classification number

## 12.7 Marking for Outside package

Customer name Purchasing Order Number, Customer Part Number, MURATA part number, RoHS marking(\*2), Quantity, etc

## 12.8 Specification of Outer Case

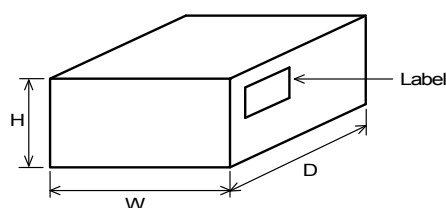

| Reel    | Outer Case Dimensions (mm) |     |    | Standard Reel Quantity in Outer Case (Reel) |
|---------|----------------------------|-----|----|---------------------------------------------|
|         | W                          | D   | H  |                                             |
| φ 180mm | 186                        | 186 | 93 | 4                                           |
| φ 330mm | 340                        | 340 | 85 | 4                                           |


\* Above Outer Case size is typical. It depends on a quantity of an order.

## 13. ⚠ Caution

### 13.1 Mounting Direction

Mount products in right direction.

Wrong direction which is 90 ° rotated from right direction cause not open or short circuit but also flames or other serious trouble.

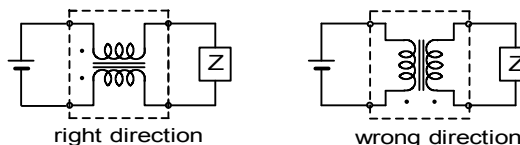

### 13.2 Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

- |                                                                                                                                           |                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (1) Aircraft equipment<br>(2) Aerospace equipment<br>(3) Undersea equipment<br>(4) Power plant control equipment<br>(5) Medical equipment | (6) Transportation equipment (trains, ships, etc.)<br>(7) Traffic signal equipment<br>(8) Disaster prevention / crime prevention equipment<br>(9) Data-processing equipment<br>(10) Applications of similar complexity and / or reliability requirements to the applications listed in the above. |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 13.3 Caution(Rating)

Do not exceed maximum rated current of the product. Thermal stress may be transmitted to the product and short/open circuit of the product or falling off the product may be occurred.

### 13.4 Fail-safe

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

## 14. Notice

This product is designed for solder mounting.

Please consult us in advance for applying other mounting method such as conductive adhesive.

### 14.1 Flux and Solder

|        |                                                                                                                                                                                                              |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flux   | Use rosin-based flux,(with converting chlorine content 0.06 to 0.1(wt)% ), but not highly acidic flux<br>(with Halogen content exceeding 0.2(wt)% conversion to chlorine).<br>Do not use water-soluble flux. |
| Solder | Use Sn-3.0Ag-0.5Cu solder                                                                                                                                                                                    |

### 14.2 Assembling

< Exclusive use of Reflow soldering >

Flow soldering may cause deterioration in insulation resistance.

So,reflow soldering shall be applied for this product.

< Thermal Shock >

Pre-heating should be in such a way that the temperature difference between solder and ceramic surface is limited to 100°C max. Also cooling into solvent after soldering

should be in such a way that the temperature difference is limited to 100°C max.

Not enough preheating may cause deterioration in insulation resistance and / or crack or ceramic body.

### 14.3 Cleaning Conditions

Do not clean after soldering. If cleaning, please contact us.

### 14.4 Resin coating


The impedance value may change due to high cure-stress of resin to be used for coating/molding products. An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resin contains some impurities or chloride possible to generate chlorine by hydrolysis under some operating condition may cause corrosion of wire of coil, leading to open circuit. So, please pay your careful attention when you select resin in case of coating/molding the products with the resin. Prior to use the coating resin, please make sure no reliability issue is observed by evaluating products mounted on your board.

### 14.5 Attention regarding P.C.B. bending

The following shall be considered when designing and laying out P.C.B.'s.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress due to warping the board.

[Products direction]

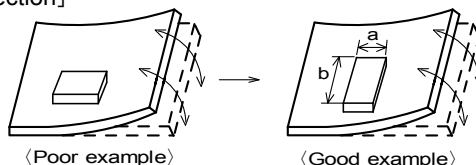


Products shall be location the sideways direction (Length:a<b) to the mechanical stress.

(2) Components location on P.C.B. separation.

It is effective to implement the following measures, to reduce stress in separating the board.

It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.


| Contents of Measures                                                                       | Stress Level |
|--------------------------------------------------------------------------------------------|--------------|
| (1) Turn the mounting direction of the component parallel to the board separation surface. | A > D *1     |
| (2) Add slits in the board separation part.                                                | A > B        |
| (3) Keep the mounting position of the component away from the board separation surface.    | A > C        |

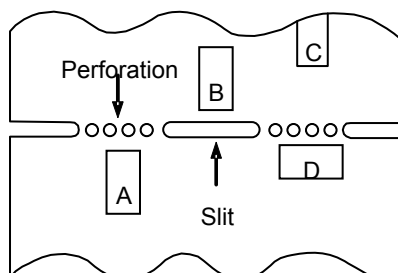

\*1 A > D is valid when stress is added vertically to the perforation as with Hand Separation. If a Cutting Disc is used, stress will be diagonal to the PCB, therefore A > D is invalid.

### (3) Mounting Components Near Screw Holes

When a component is mounted near a screw hole, it may be affected by the board deflection that occurs during the tightening of the screw. Mount the component in a position as far away from the screw holes as possible.

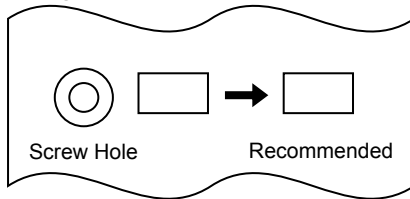

## 14.6 Attention Regarding P.C.B. Design

### < The Arrangement of Products >


- P.C.B. shall be designed so that products are far from the portion of perforation.
- The portion of perforation shall be designed as narrow as possible, and shall be designed so as not to be applied the stress in the case of P.C.B. separation.
- Products shall not be arranged on the line of a series of holes when there are big holes in P.C.B.  
(Because the stress concentrate on the line of holes.)

### < Products Placing >


- Support pins shall be set under P.C.B. to prevent causing a warp to P.C.B. during placing the products on the other side of P.C.B..

### < P.C.B. Separation >

- P.C.B. shall not be separated with hand.  
P.C.B. shall be separated with the fixture so as not to cause P.C.B. bending.

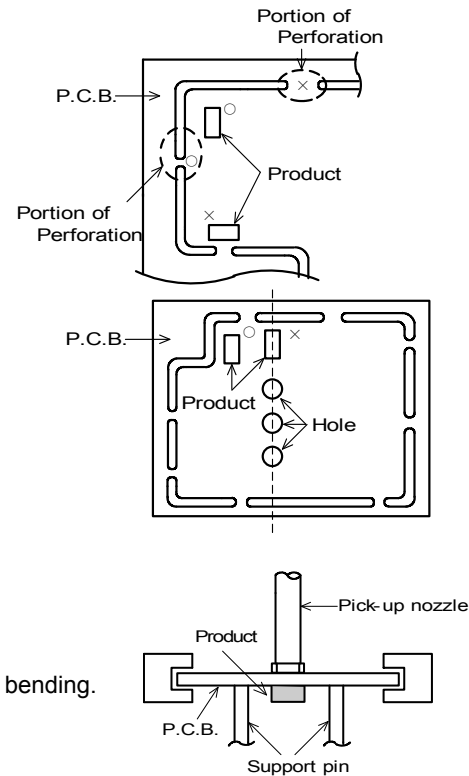

## 14.7 Standard Land Dimensions

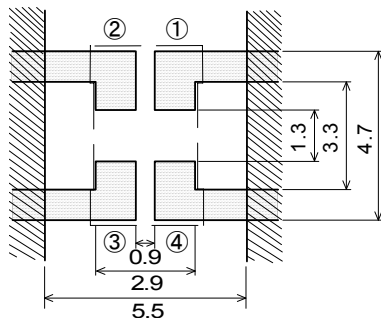

\*①②③④ indicates terminal number.


- Resist
- Copper foil pattern
- No pattern

(in mm)

## 14.8 Reflow Soldering

### (1) Standard printing pattern of solder paste

- Standard thickness of solder paste should be 150 to 200μm.  
Solderability is subject to reflow condition and thermal conductivity.  
Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- Use the solder paste printing pattern of the right pattern.
- For the resist and copper foil pattern, use standard land dimensions.
- Use the Solder Sn-3.0Ag-0.5Cu for pattern printing.

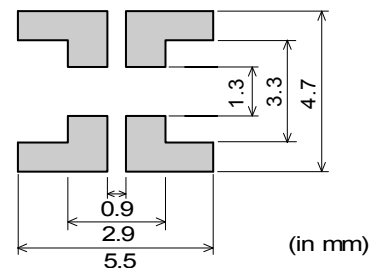


(in mm)



## (2) Soldering Conditions

Standard soldering profile and the limit soldering profile is as follows.

The excessive soldering conditions may cause leaching of the electrode and/or resulting in the deterioration of product quality.

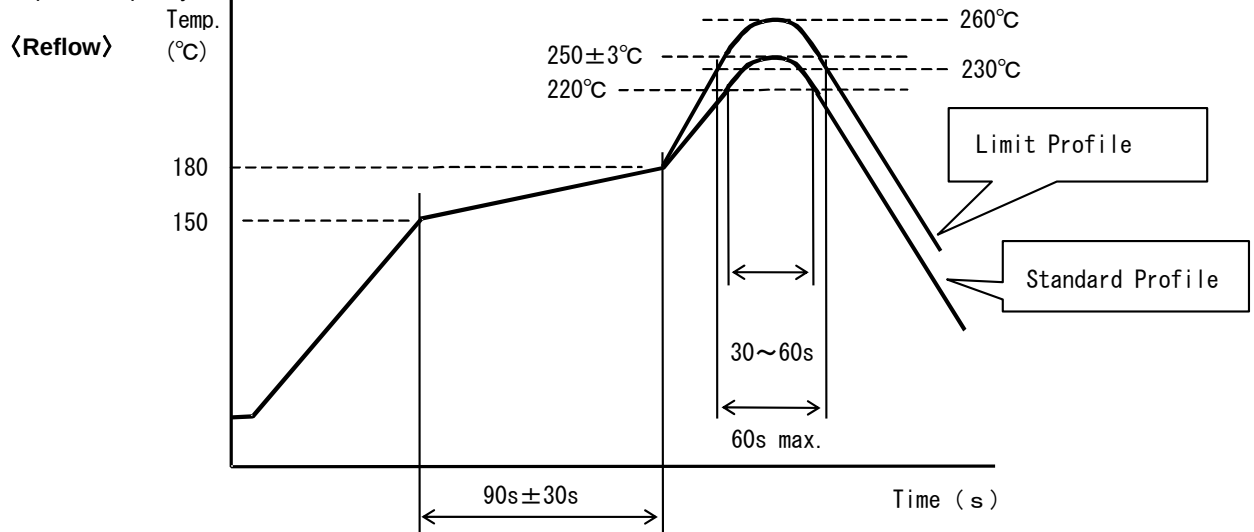

|                  | Standard Profile    | Limit Profile        |
|------------------|---------------------|----------------------|
| Pre-heating      | 150~180°C、90s±30s   |                      |
| Heating          | above 220°C、30s~60s | above 230°C、60s max. |
| Peak temperature | 250±3°C             | 260°C、10s            |
| Cycle of reflow  | 2 times             | 2 times              |

### 14.9 Reworking with Soldering iron

The following conditions must be strictly followed when using a soldering iron after being mounted by reflow soldering.


- Pre-heating: 150°C, 1 min
- Tip temperature: 350°C max.
- Soldering time : 3(+1,-0) seconds.
- Soldering iron output: 30W max.
- Tip diameter: φ3mm max.
- Times : 2times max.

Notes: Do not touch the products directly with the soldering iron.

### 14.10 Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.



### 14.11 Brushing of neighborhood of products

When you clean the neighborhood of products such as connector pins, bristles of cleaning brush shall not be touched to the winding portion to prevent the breaking of wire.

### 14.12 Operating Environment

Do not use this product under the following environmental conditions, on deterioration of the performance, such as insulation resistance may result from the use.

- (1) in corrosive gases (acidic gases, alkaline gases, chlorine, sulfur gases, organic gases and etc.)
- (2) in the atmosphere where liquid such as organic solvent, may splash on the products.

## 14.13 Storage condition

### (1) Storage period

Use the products within 12 months after delivered.

Solderability should be checked if this period is exceeded.

### (2) Storage environment conditions

- Products should be stored in the warehouse on the following conditions.

Temperature : -10 °C to +40 °C

Humidity : 15 % to 85% relative humidity No rapid change on temperature and humidity.

- Products should not be stored in corrosive gases, such as sulfurous, acid gases, alkaline gases, to prevent the following deterioration.

Poor solderability due to the oxidized electrode.

- Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

- Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

- Products should not be stored under the air tight packaged condition.

### (3) Delivery

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

## 15. Note

(1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.

(2) You are requested not to use our product deviating from the reference specifications.

(3) The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9