- Low profile
- 4.0 x 2.5 mm Footprint
- Extended Temp Range Option
- RoHS Compliant

ECX-42
SMD QUARTZ CRYSTAL

The miniature ECX-42 is a compact SMD Crystal. The 4.0 x 2.5 x 0.8 mm ceramic package is ideal for today's SMD manufacturing environment.

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECX-42			UNITS
		MIN	TYP	MAX	
Frequency Range		12.000		50.000	MHz
Frequency Tolerance	at +25°C			± 30 *	ppm
Frequency Stability	-10 to +70°C			± 50 *	ppm
Shunt Capacitance				5	pF
Load Capacitance	Specify in P/N		12		pF
Drive Level				300	µW
Operating Temperature		-10		+70	°C
Storage Temperature		-55		+125	°C
Aging (Per Year)	@ +25°C ±3°C			±5	ppm

EQUIVALENT SERIES RESISTANCE/MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω	FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω
12.00 ~ 15.999	Fundamental	80	20.000 ~ 23.999	Fundamental	50
16.000 ~ 19.999	Fundamental	60	24.000 ~ 50.000	Fundamental	40

DIMENSIONS (mm)

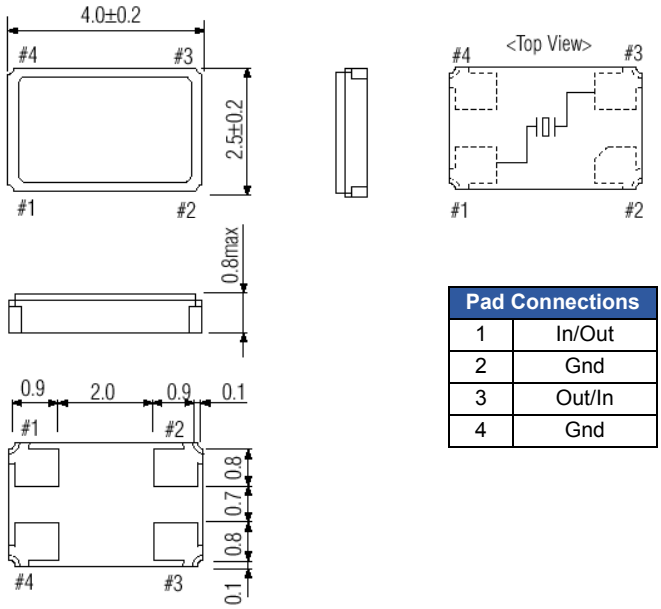

Figure 1) Top, Side, Bottom and End views

Pad Connections	
1	In/Out
2	Gnd
3	Out/In
4	Gnd

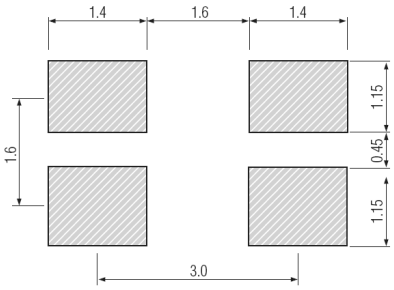

Figure 2) Suggested Land Pattern

PART NUMBERING GUIDE: Example ECS-200-20-42-TR

ECS - Frequency Abbreviation - Load Capacitance - Package

- Frequency Abbreviation: 200 = 20.000 MHz, See P/N Guide
- Load Capacitance: 20 =20 pF, S=Series
- Package: 42 = ECX-42

Custom Options

- Tolerance: Blank = Std; A = ± 25 ppm; J = ± 20 ppm; R = ± 15 ppm; C = ± 10 ppm
- * Stability: Blank = Std; D = ± 100 ppm; E = ± 50 ppm; G = ± 30 ppm; H = ± 25 ppm; T = ± 20 ppm; W = ± 15 ppm; K = ± 10 ppm
- Temp Range: Blank = Std; M = -20 ~ +70°C; N = -40 ~ +85°C; P = -40 ~ +105°C; S = -40 ~ +125°C; U = -55 ~ +125°C

*Consult Factory for available stability options over extended temp range.

- Packaging: TR= Tape & Reel 1K/Reel

Rev. 11/11

1105 South Ridgeview Road • Olathe, KS 66062 • Phone: 913.782.7787 • Fax: 913.782.6991 • www.ecsxtal.com

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9