



[illegible]


SIDE ROTARY CAM TRACKING

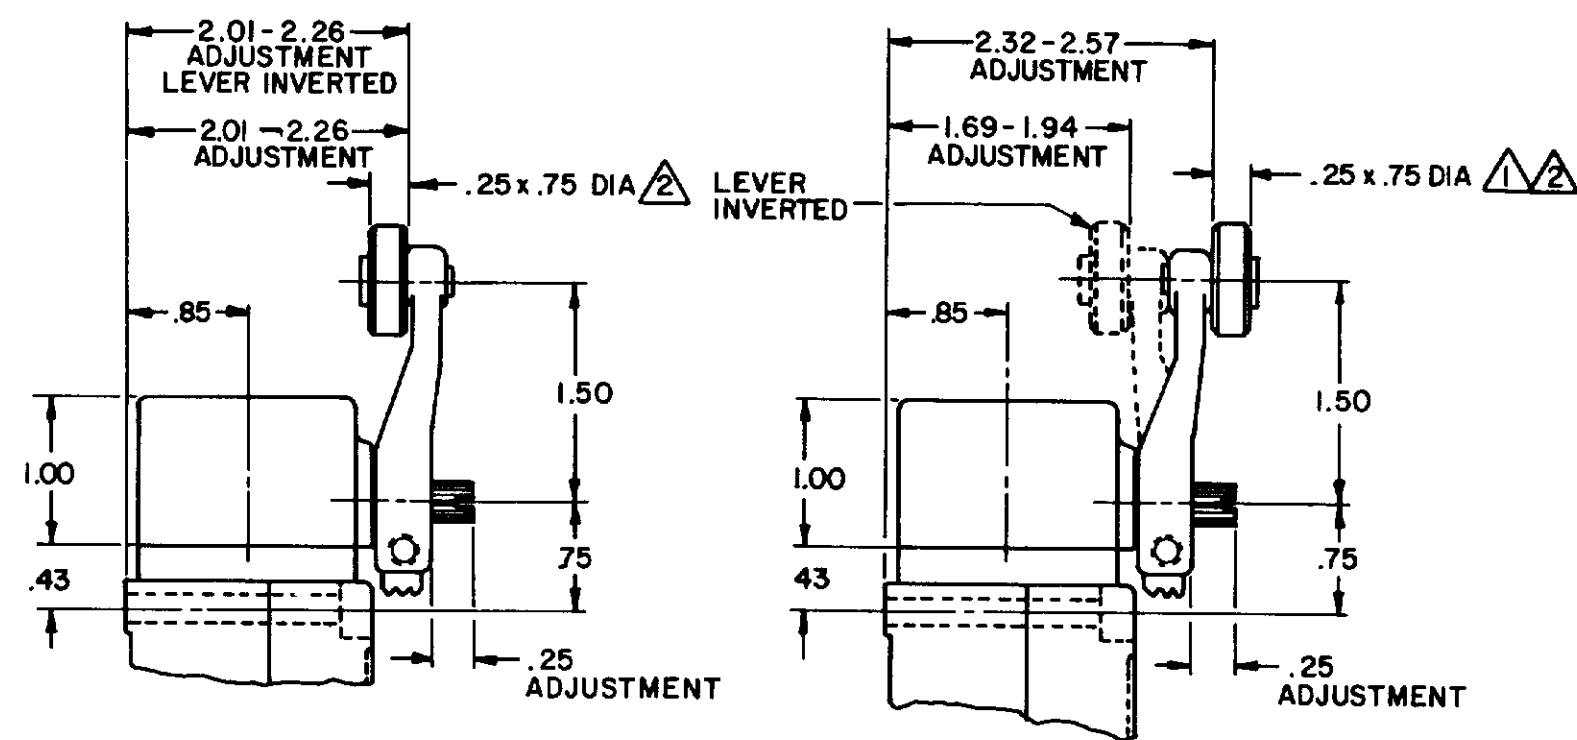


LSZ51 TYPE LEVERS

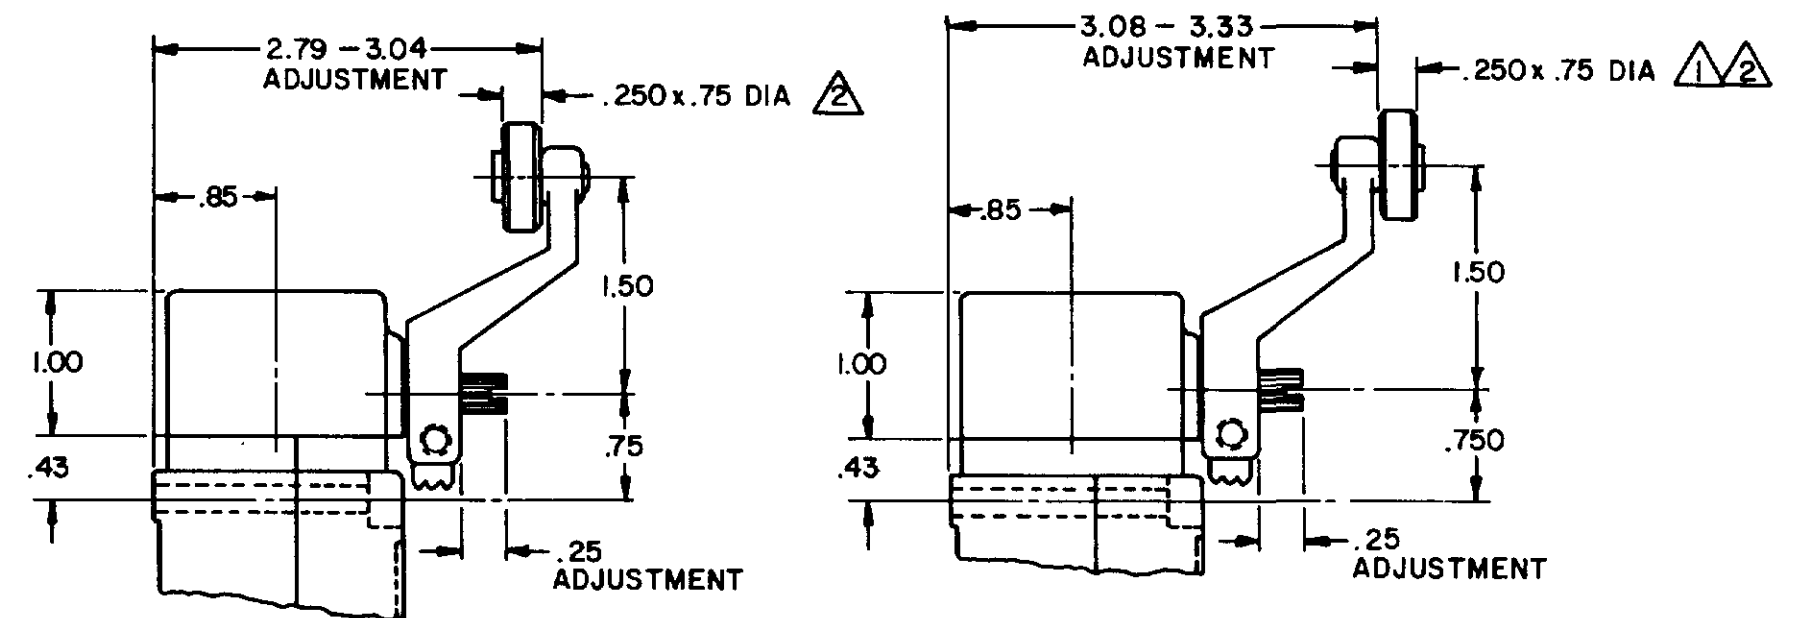


LSZ55 TYPE LEVERS

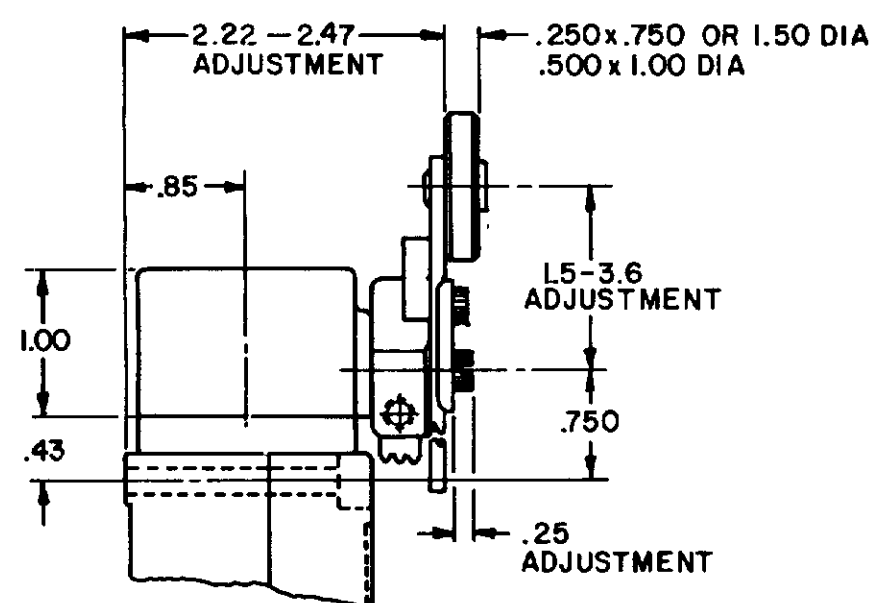


LSZ52 TYPE LEVER

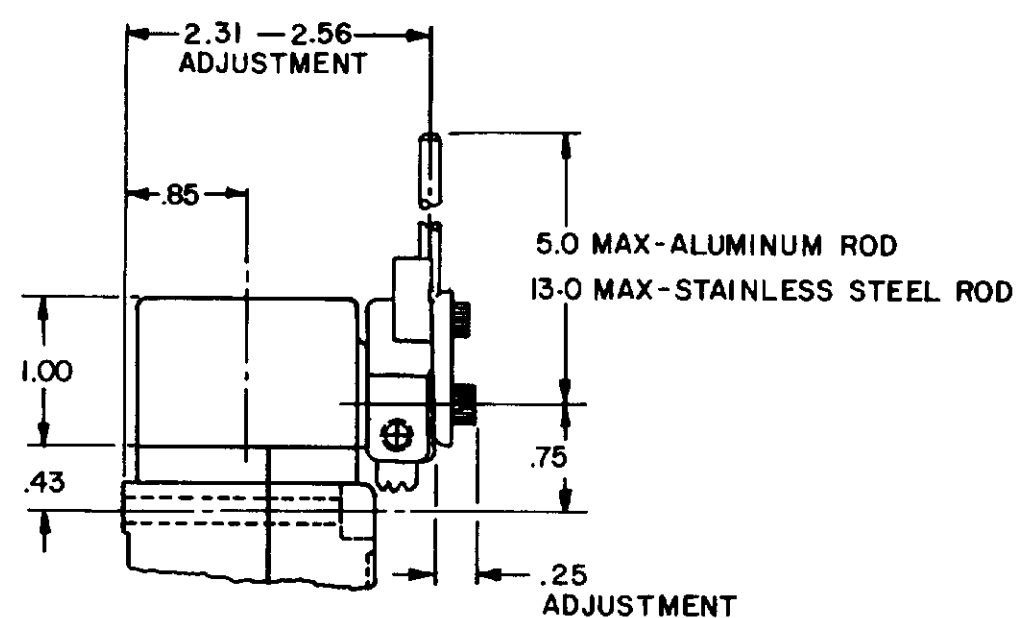

LSZ54 TYPE LEVER

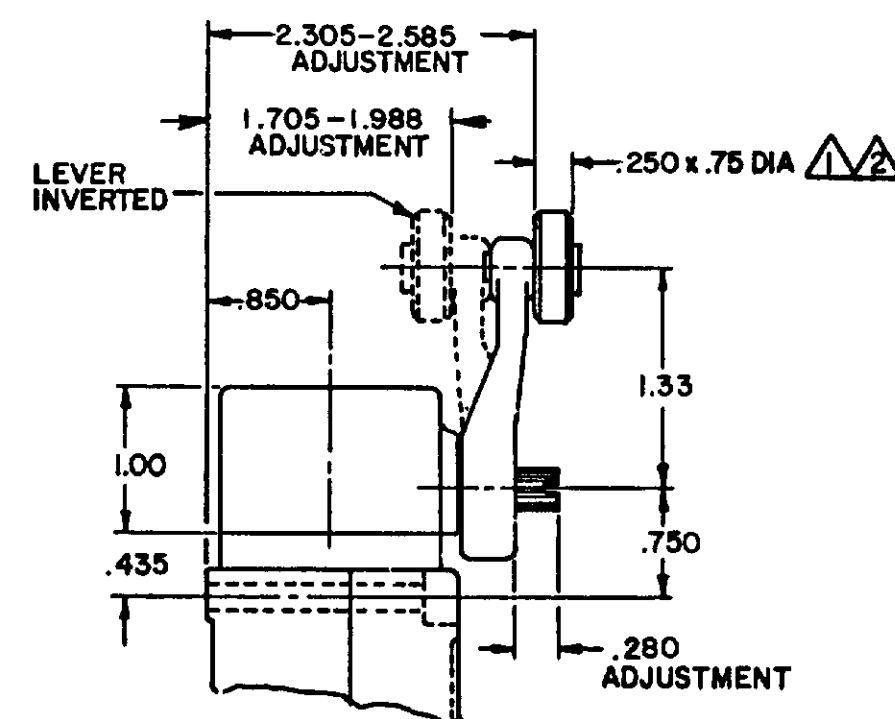

OPEN MOUNTED ROLLER

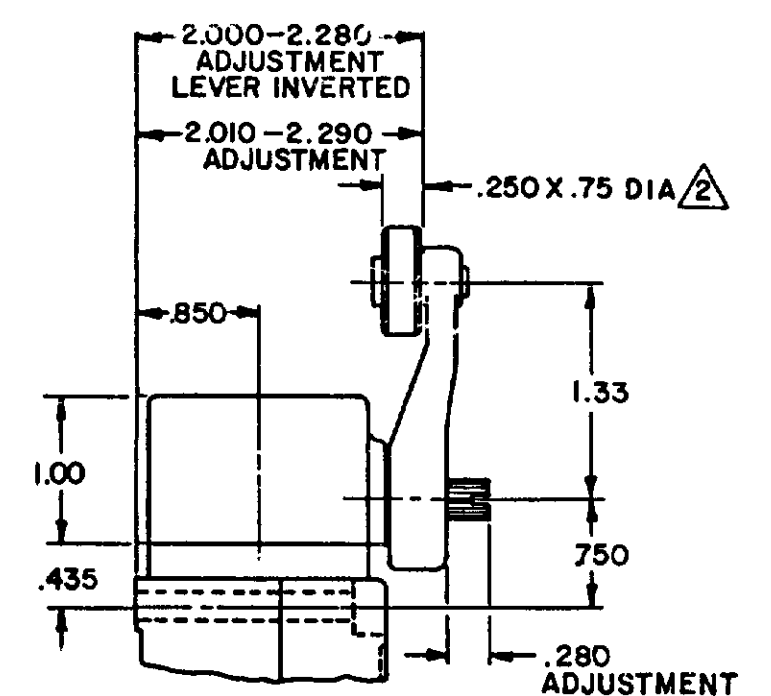


CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- NOTES
- ① ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT
LEVER CANNOT BE INVERTED
- ② FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS
REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER
TO LSZ CHART 1 "M" DRAWING

THIRD ANGLE PROJECTION



SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (0) $\pm .030$

TWO PLACES (00) ±.015

THREE PLACES (1.000) $\pm .005$

WEIGHT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

PAGE 2 OF 10

A-LSW SERIES
CHART 1

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED


CATALOG LISTING

A-LSW SERIES
CHART 1[illegible]

TOP ROTARY

SINGLE POLE

DOUBLE POLE

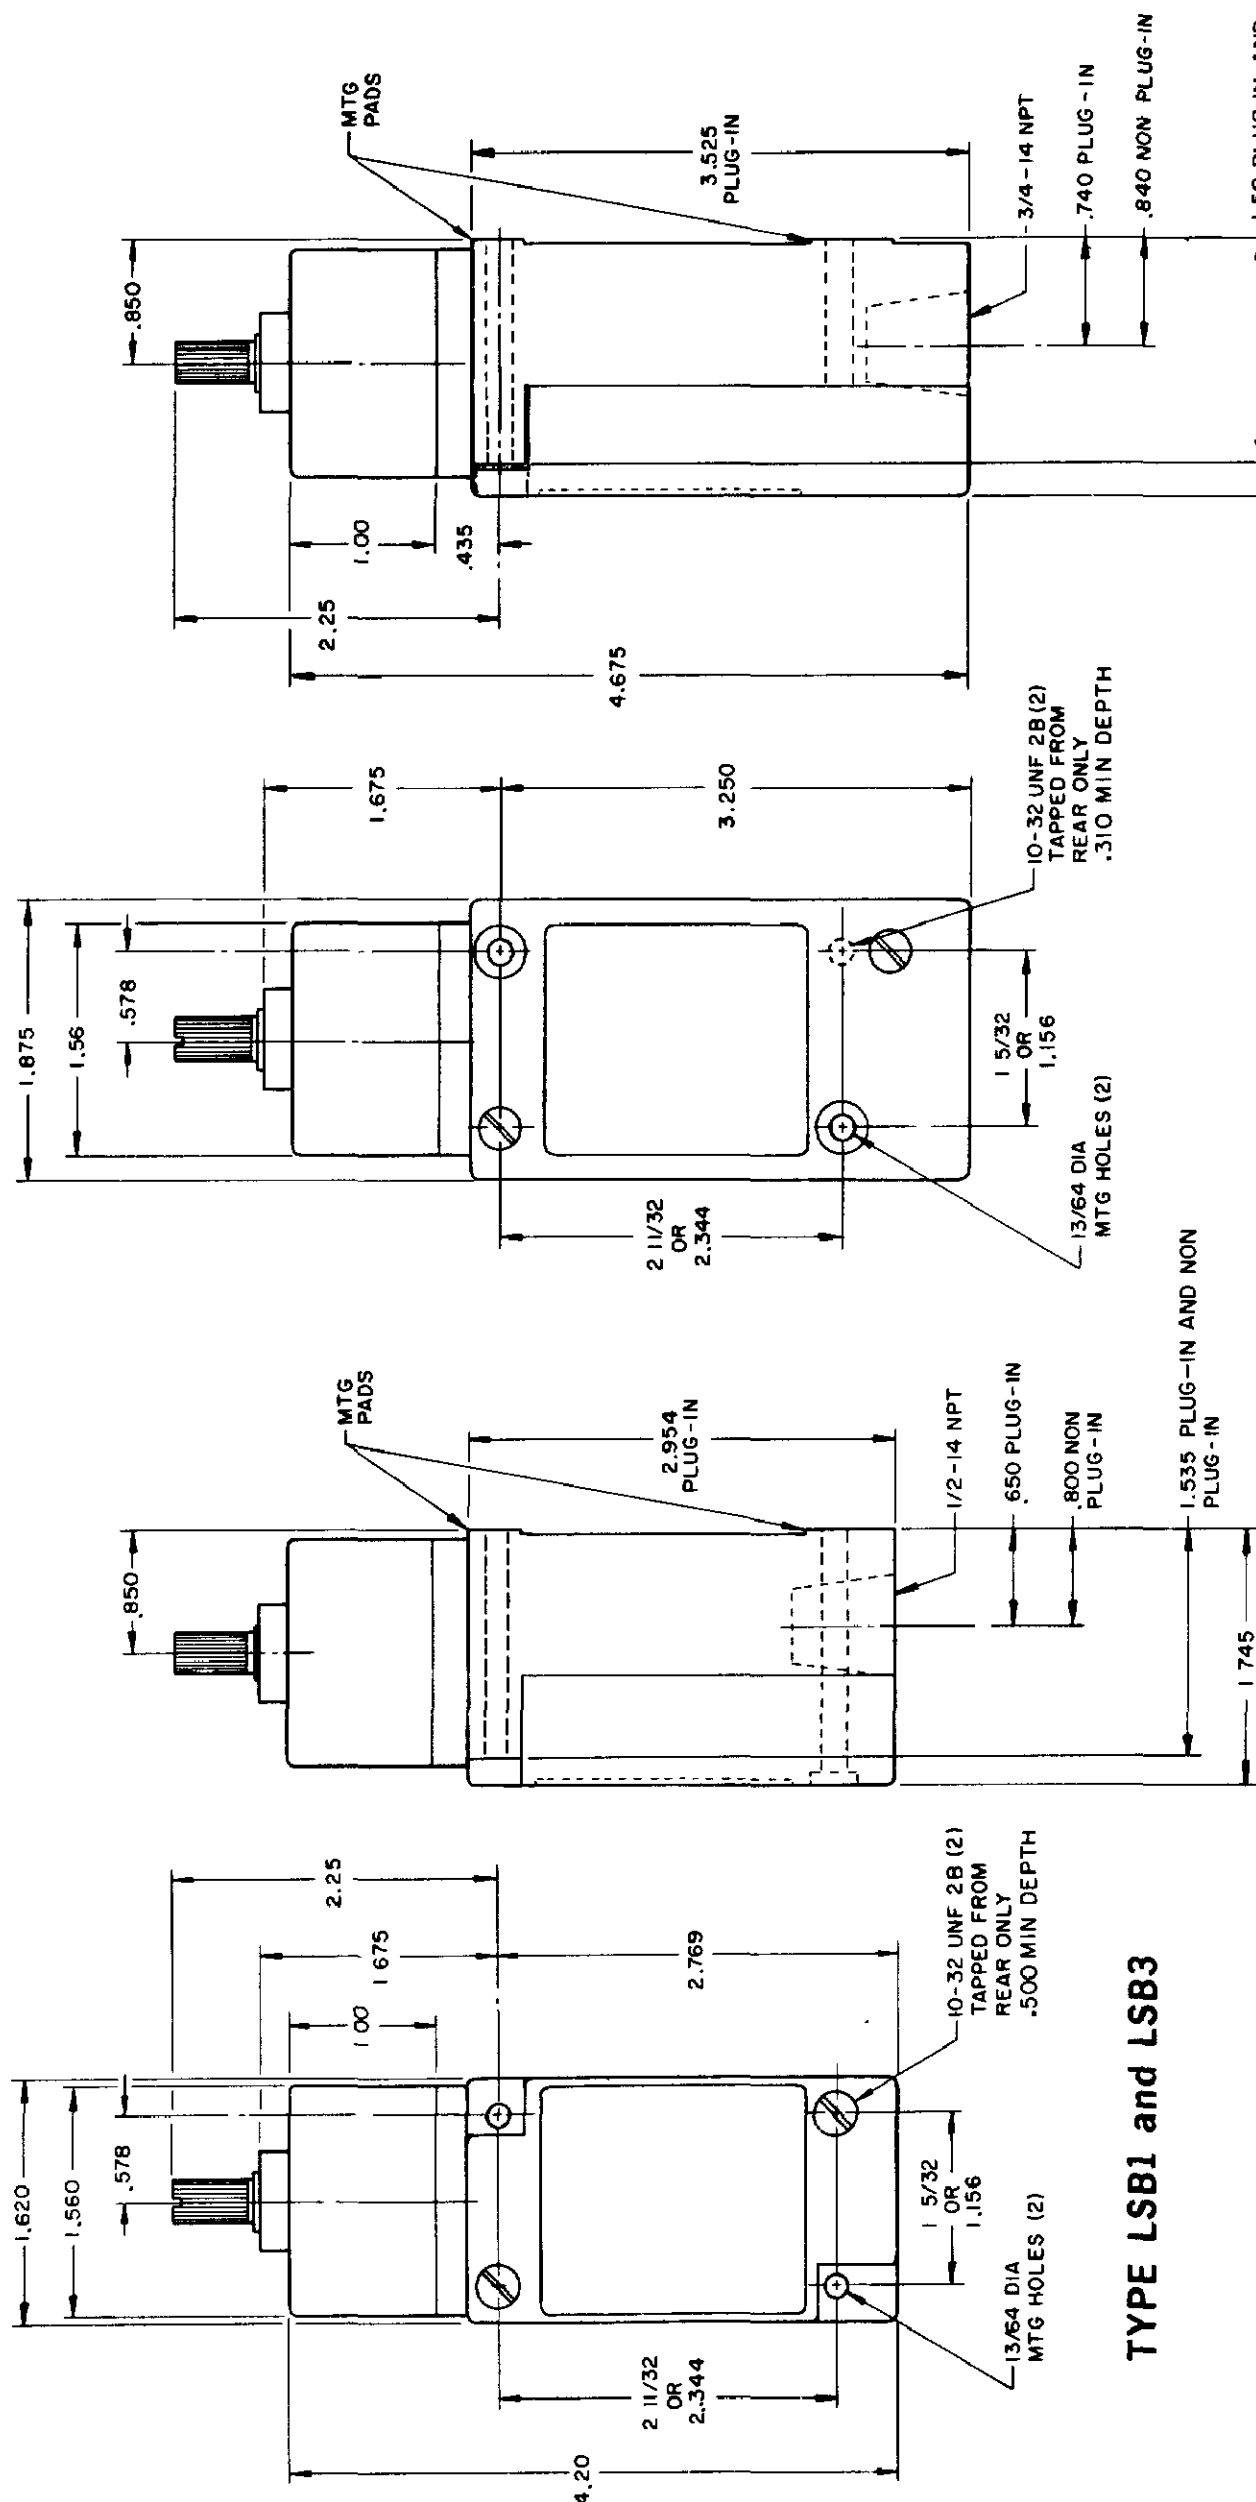

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2 - 14 NPT
CONDUIT HOLE

	SINGLE POLE	DOUBLE POLE
PRETRAVEL MAX	25°	25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT 35 POWER FACTOR	SINGLE POLE		DOUBLE POLE	
		MAKE	BREAK	MAKE	BREAK
120		60	6	30	3
240		30	3	15	1.5
480		15	1.5	7.5	7.5
600		12	1.2	6	6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE		RESISTIVE
120	0.25	0.80	
240	0.15	0.40	

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT

VOLTAGE		30 WATT
5 AC OR DC MIN		
600 AC		
240 DC		


DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS		RESISTIVE
	INDUCTIVE	RESISTIVE	
30	4.2	4.2	
120	1.1	1.1	
240	.55	.55	

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)


DOUBLE POLE

SINGLE POLE

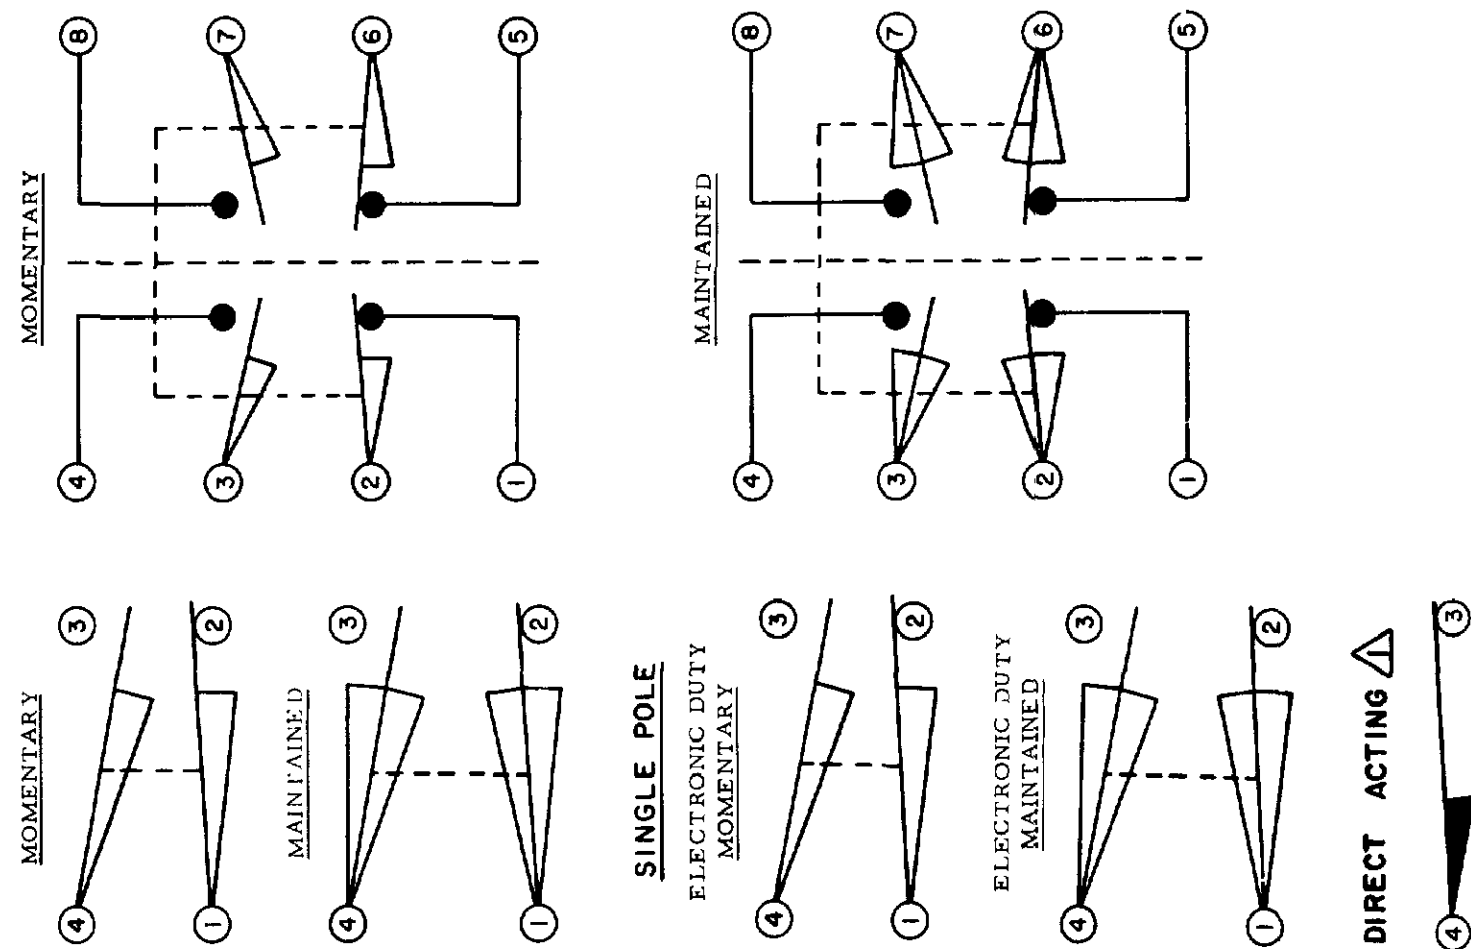


NOTES
Δ DIFFERENTIAL TRAVEL ON ALL OPERATING
CHARACTERISTICS NOT APPLICABLE

SINGLE POLE DOUBLE POLE



**120 LAMP VOLTAGE .
TYPE LSC5, LSD5 or LSV5**

240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8



PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING



LSA-LSW SERIES

CHART 1

SCALE NON8

NO-MON-SCALE PRINT

SINGLE POLE DOUBLE POLE

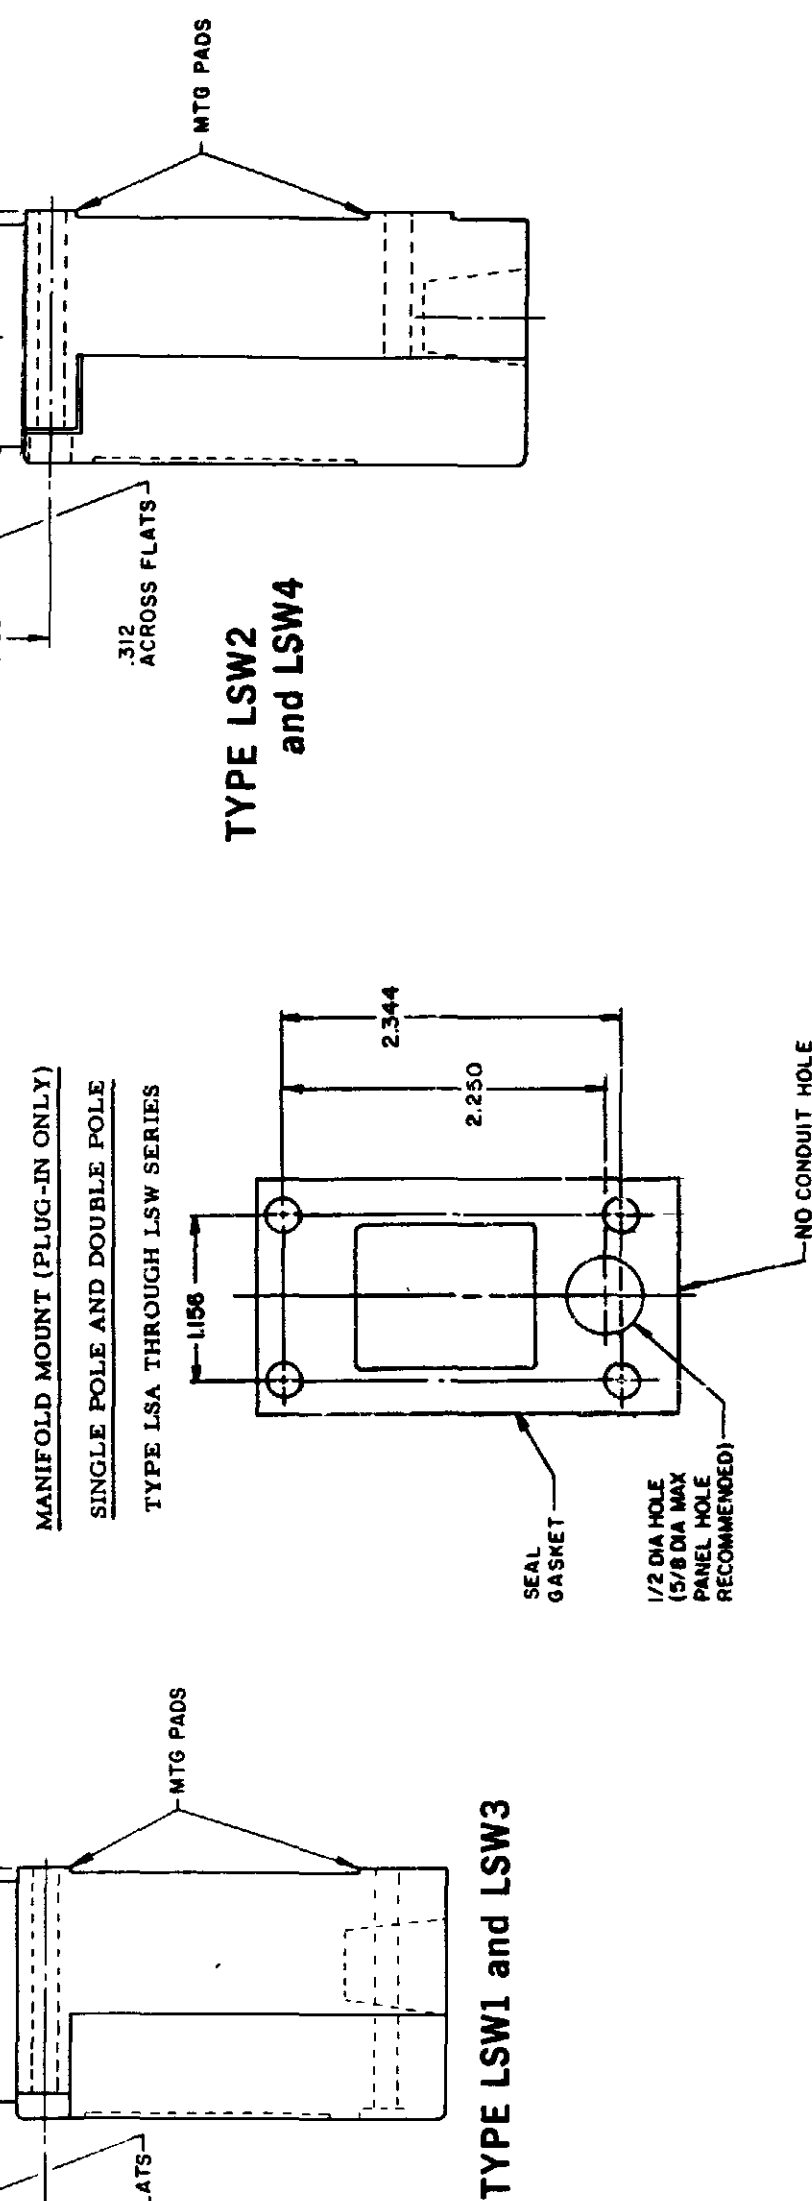

FED MFG CODE 91928

CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

DO NOT SCALE PRINT



TYPE LSG1 and LSG3

INITIAL POSITION —
(FREE POSITION) }
OPERATING POINT }
FULL TRAVEL —

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

SIDE PLUNGER TYPES

PAGE 6 OF 10

SWITCH - ENCLOSED


CATALOG LISTING
LSA-LSW SERIES
CHART 1

SCALE		NONE	
DO NOT SCALE PRINT			
UNLESS			
DIMENSIONS ARE IN			
TOLERANCES			
ONE PLACE	(0)	+	01
TWO PLACE	(.00)	+	00
THREE PLACE	(.000)	+	000
ANGLES		+	
WEIGHT			

WOBBLE STICK

SINGLE POLE

DOUBLE POLE

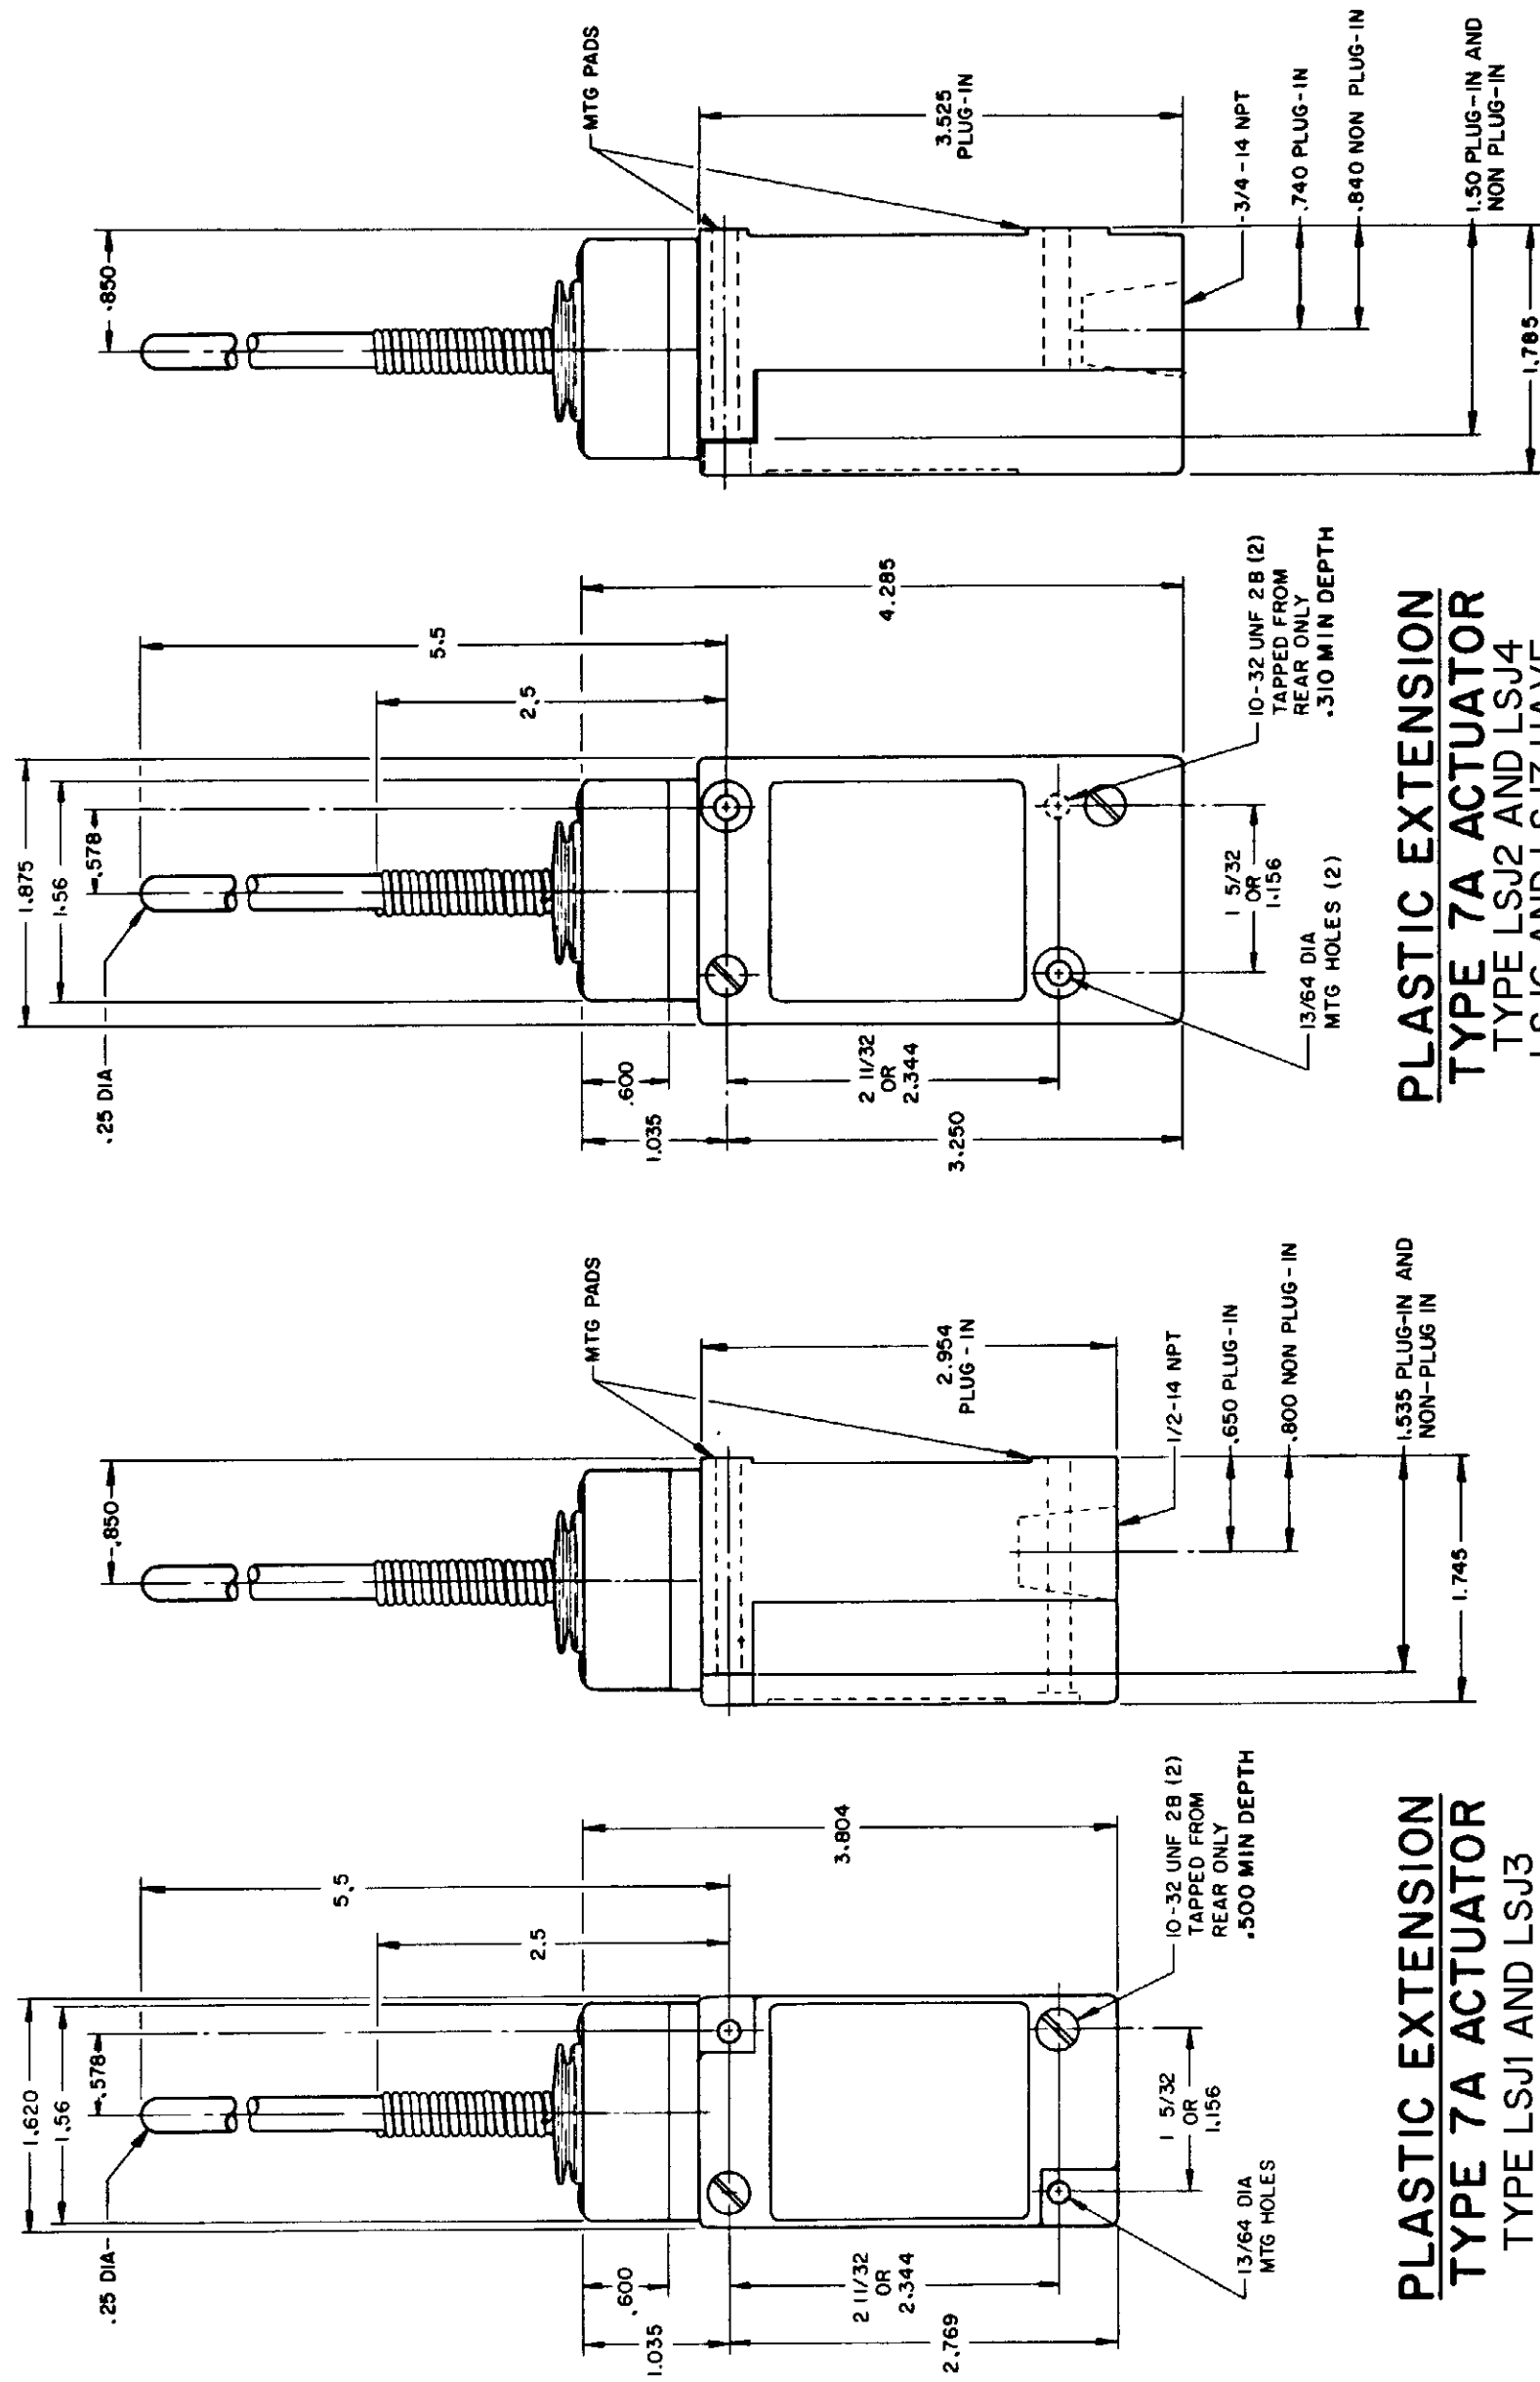

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division
FED MFG CODE 91929

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


SWITCH - ENCLOSED

LSA-LSW SERIES
CHART 1


PAGE 7 OF 10

SCALE NONE
DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

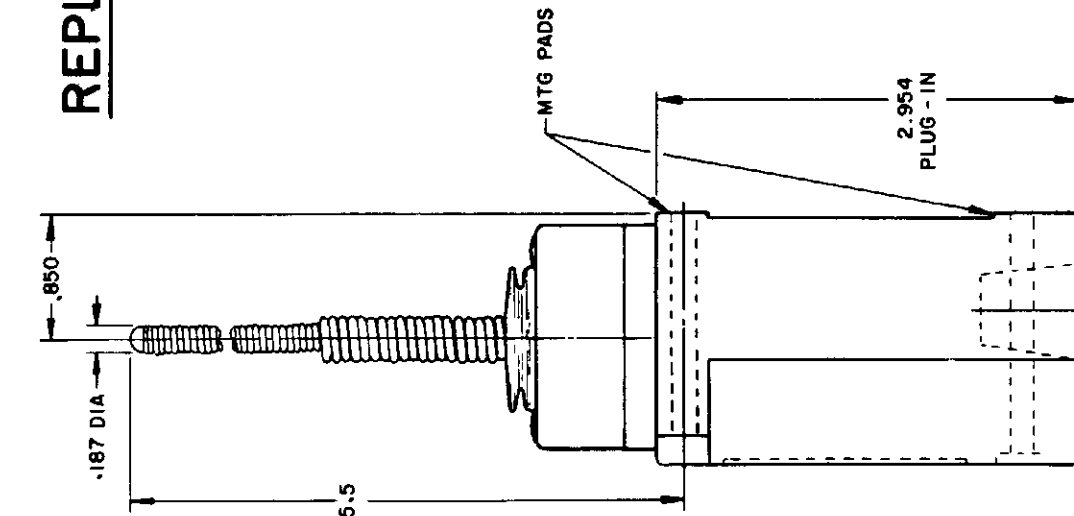

CABLE EXTENSION
TYPE 7N ACTUATOR

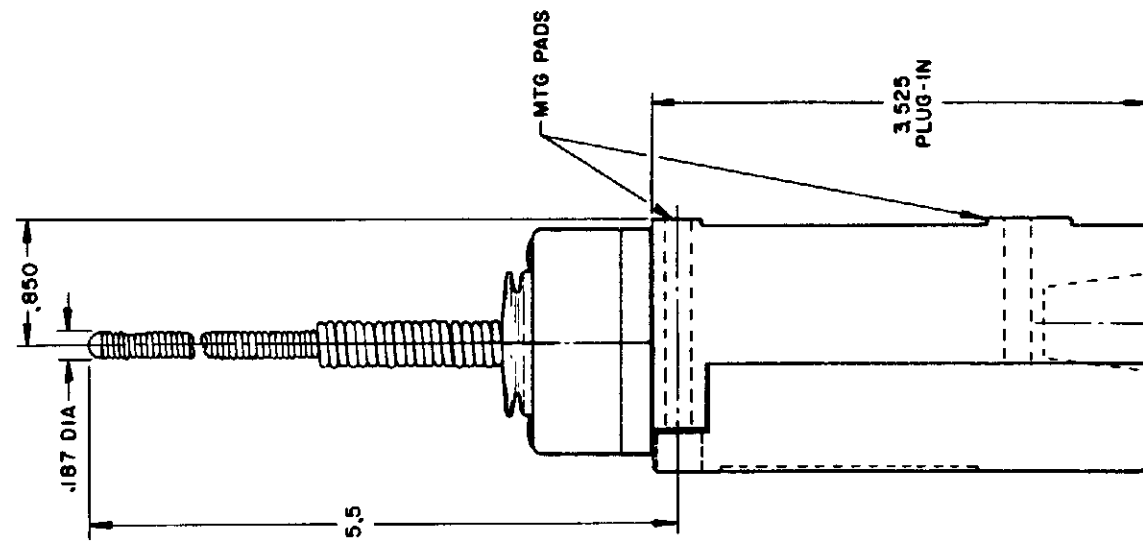

CABLE EXTENSION
TYPE 7 N ACTUATOR

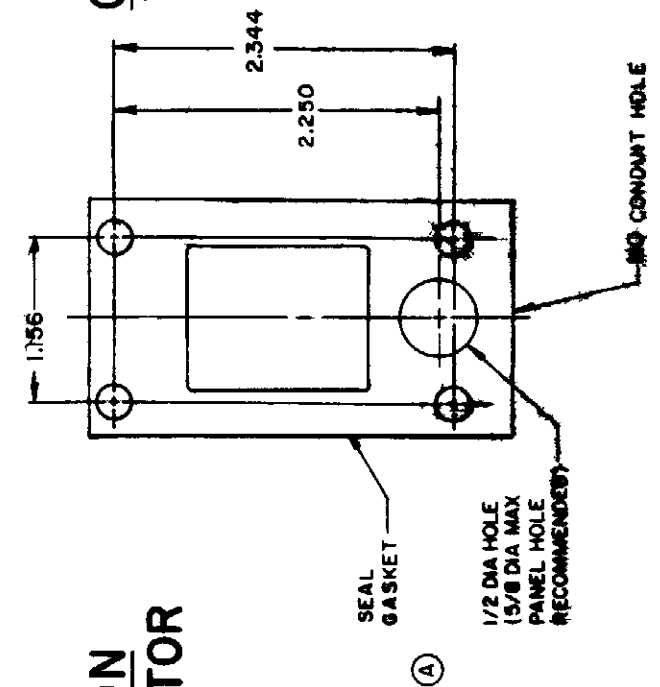


REPLACEMENT ACTUATOR
LSZ-40II


120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

-.180 X 400 LENS
(FLUSH WITH
HOUSING)

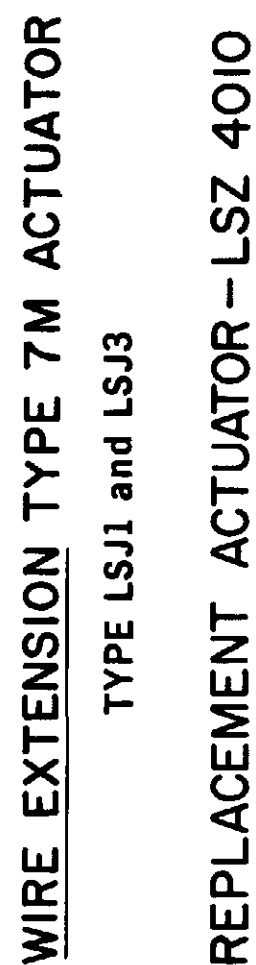

SINGLE POLE

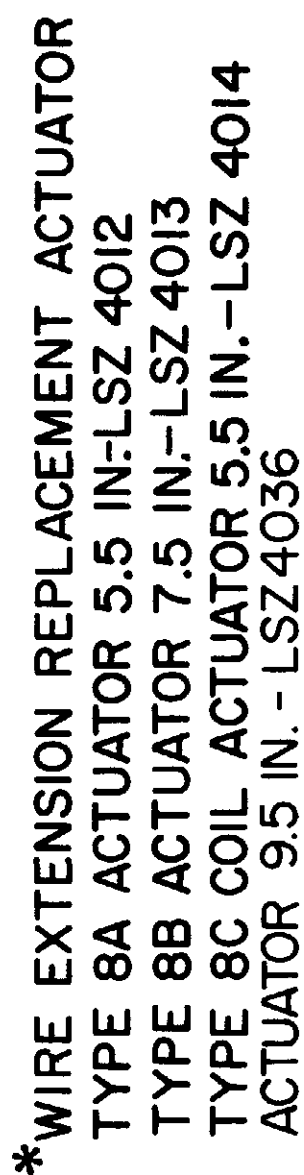


	CAT. WHISKER		WOBBLE STICK		
	5 1/2" COIL WIRE	7 1/2" WIRE	ROD	CABLE	WIRE
PRETRAVEL (APPROX) IN. RADIUS	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0
					5.0

CONVERSION BASES


SINGLE POLE (SIDE ROTARY) LSZ 4003

**DOUBLE POLE
(SIDE ROTARY)
LSZ4004**

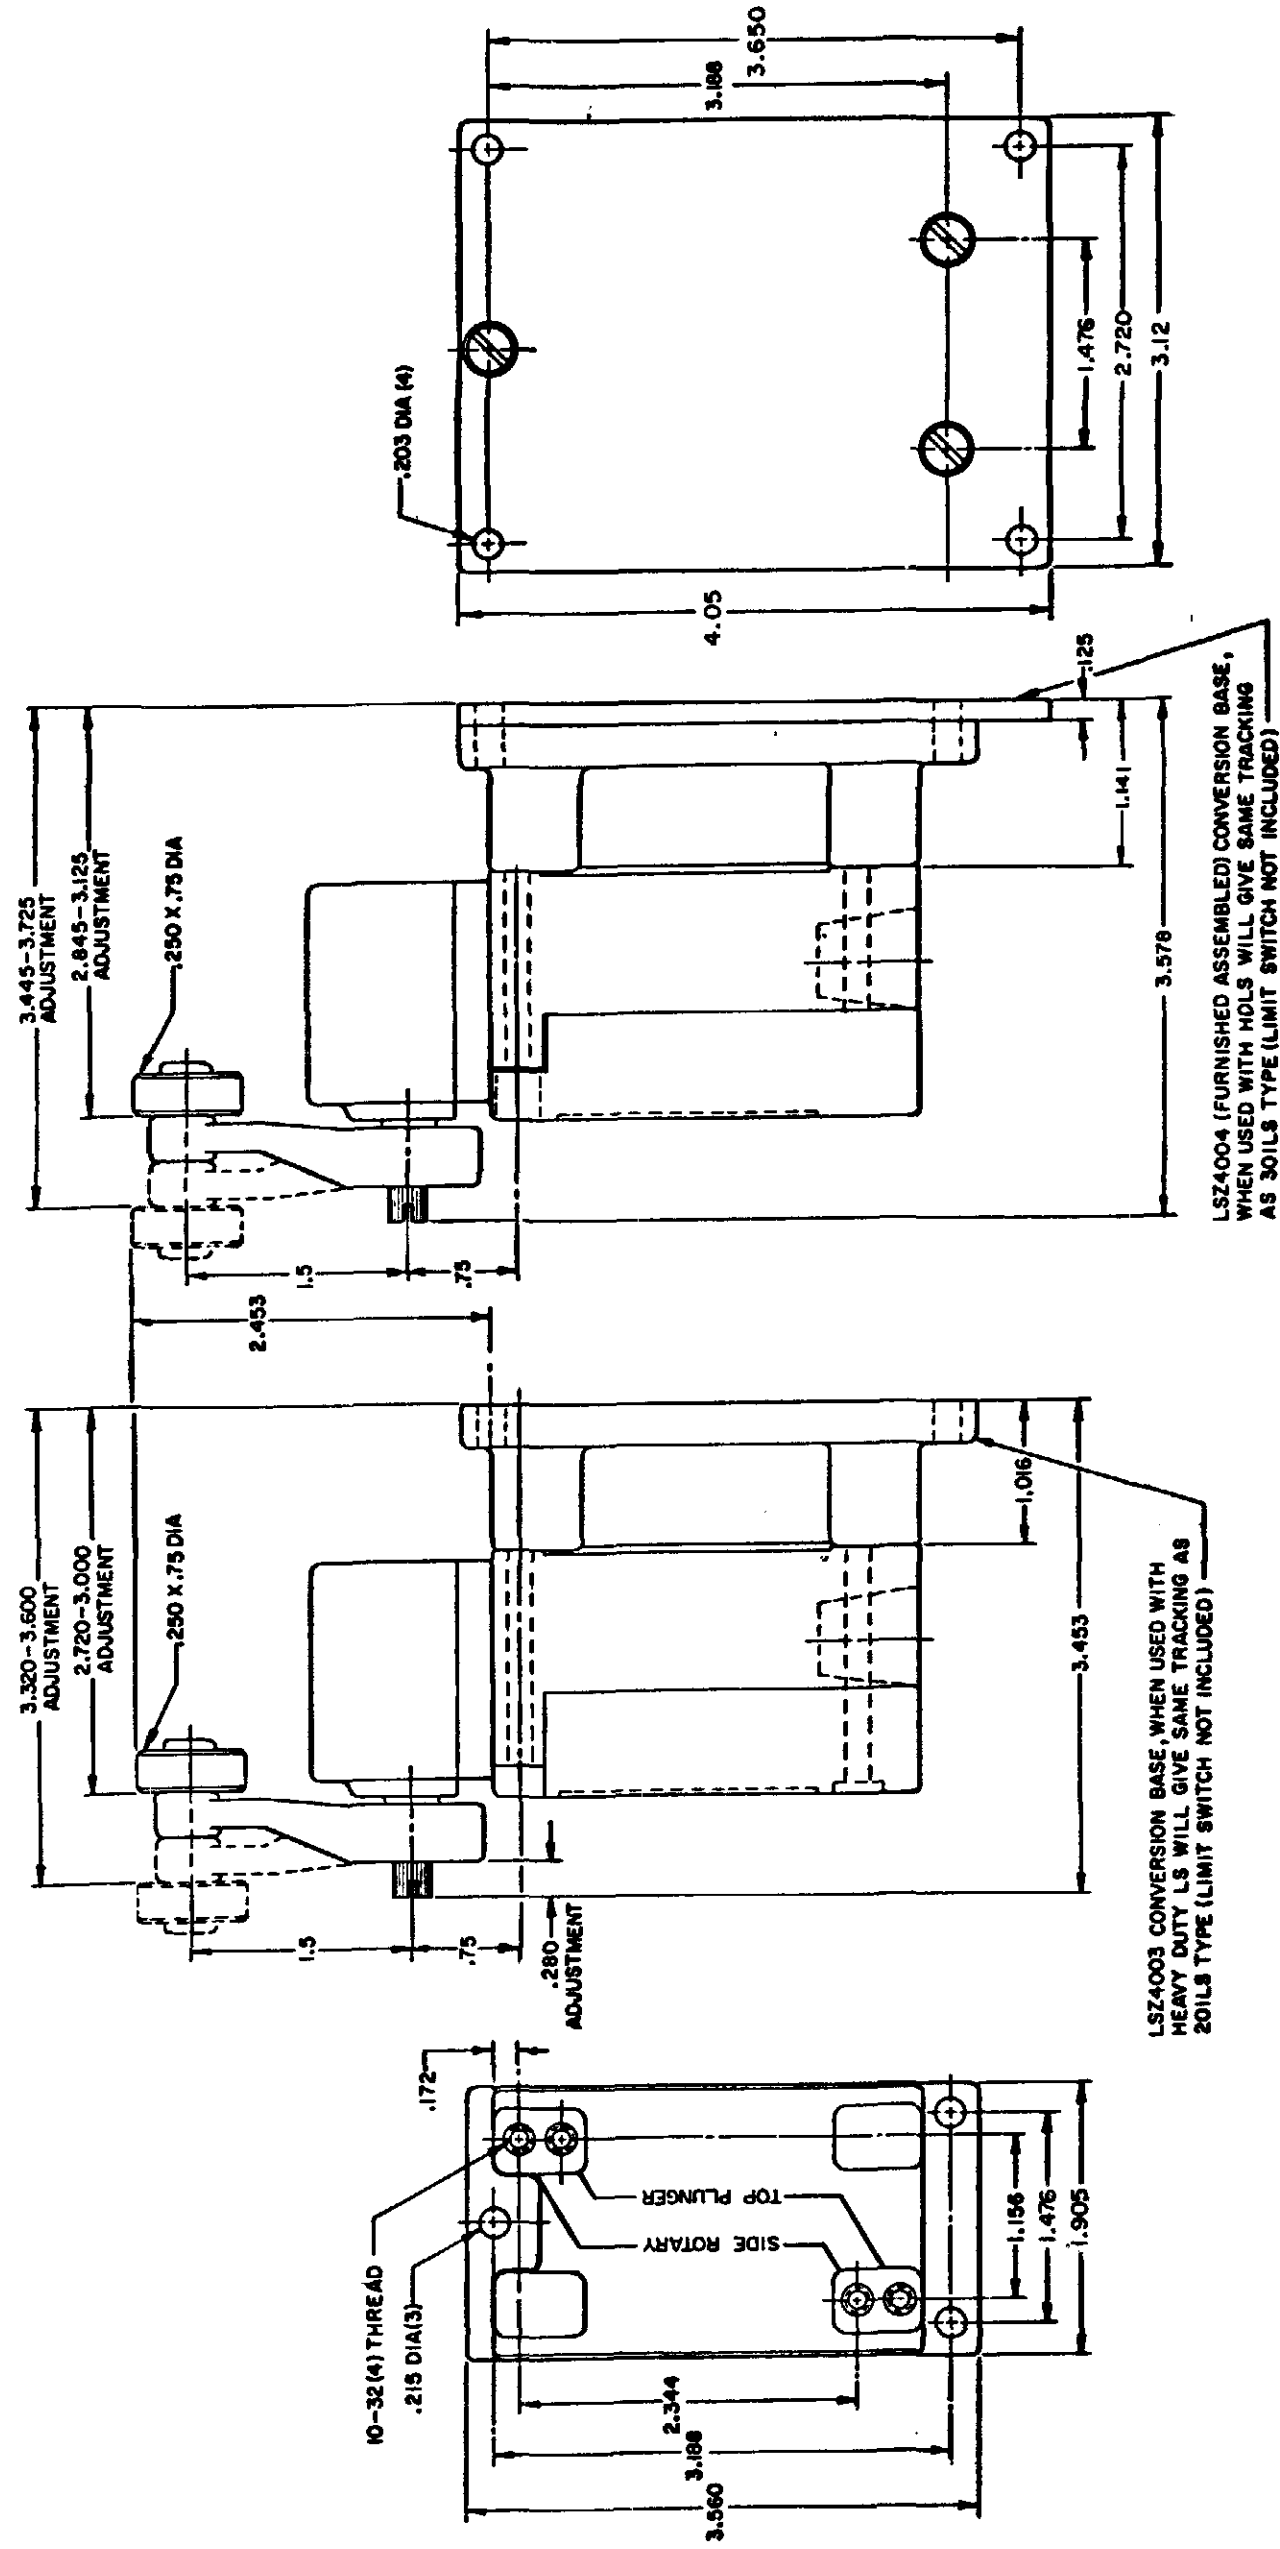

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER LSZ4003

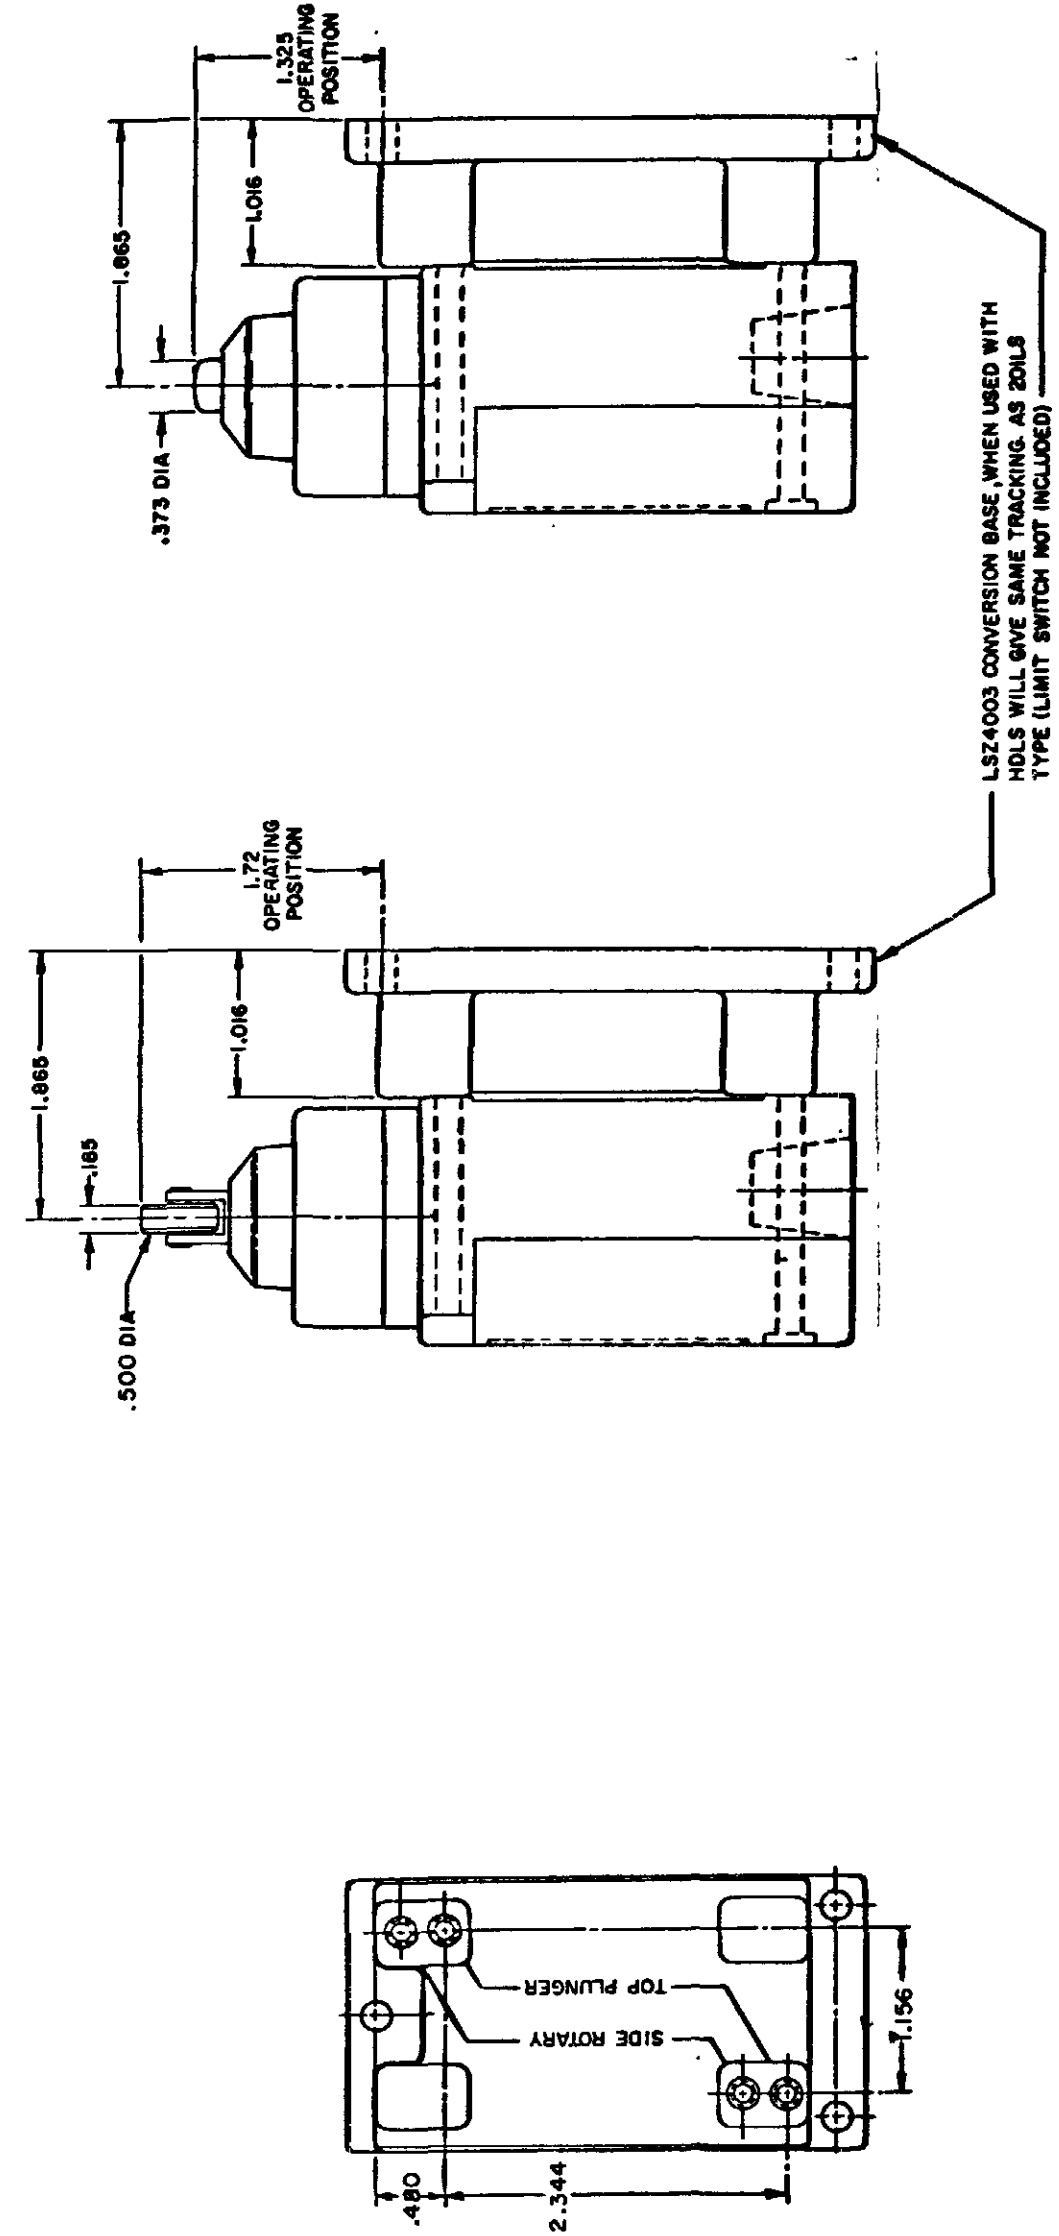

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

CATALOG LISTING
M LSA-LSW SERIES CHART 1
PAGE 10 OF 10
ISSUE 12
PSR 10JUL07
CHECK 11AUG04
AK 11JUL94
MAM 15 JUN 94
DRAWN

REVISIONS
L 0031956
BS 10JUL07
B 201004
CSL 10 AUG 00
C 201748
CSL 17 NOV 00
D 202198
CSL 23 JAN 01
E 204871
GLW FEB 02
F 206581
GCH 14 OCT 02
G 206783
CSL 31 OCT 02
H 207179
GLH 14 JAN 03
J 207474
TSM 18 FEB 03
K 0006871
KR 11AUG04

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	MINERAL OIL 1055	PETROL OIL 1120	SILICON OIL CRUDE	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETROL BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS
LSA	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSB	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSC	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSD	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSE	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSF	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	2	4	4	2	2	2	
LSG	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSH	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSJ	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSK	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSL	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSM	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSN	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSP	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSR	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSV	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2	
LSW	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	2	4	4	2	2	2	
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9