

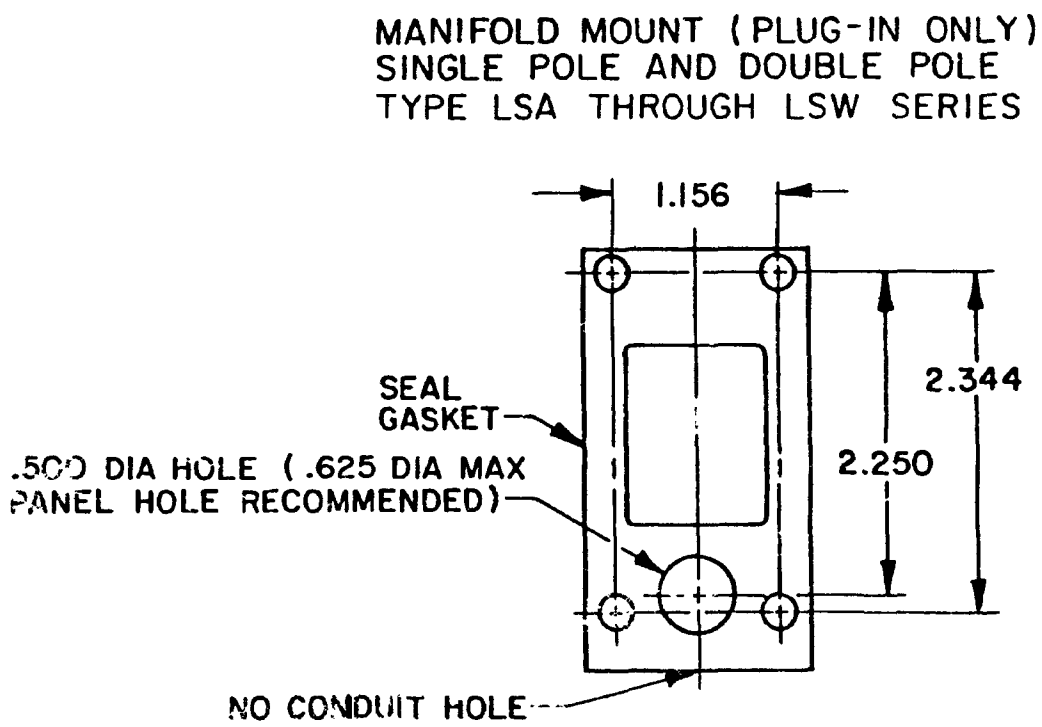

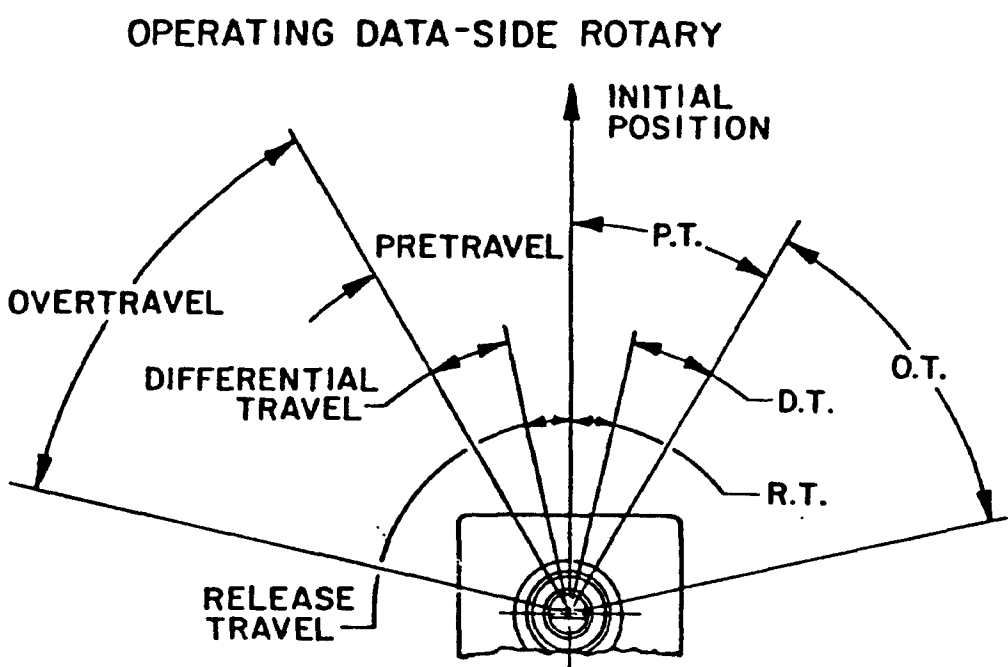
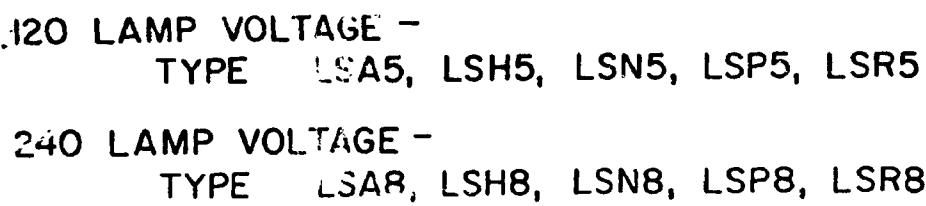


[illegible]


DOUBLE POLE




SIDE ROTARY CAM TRACKING

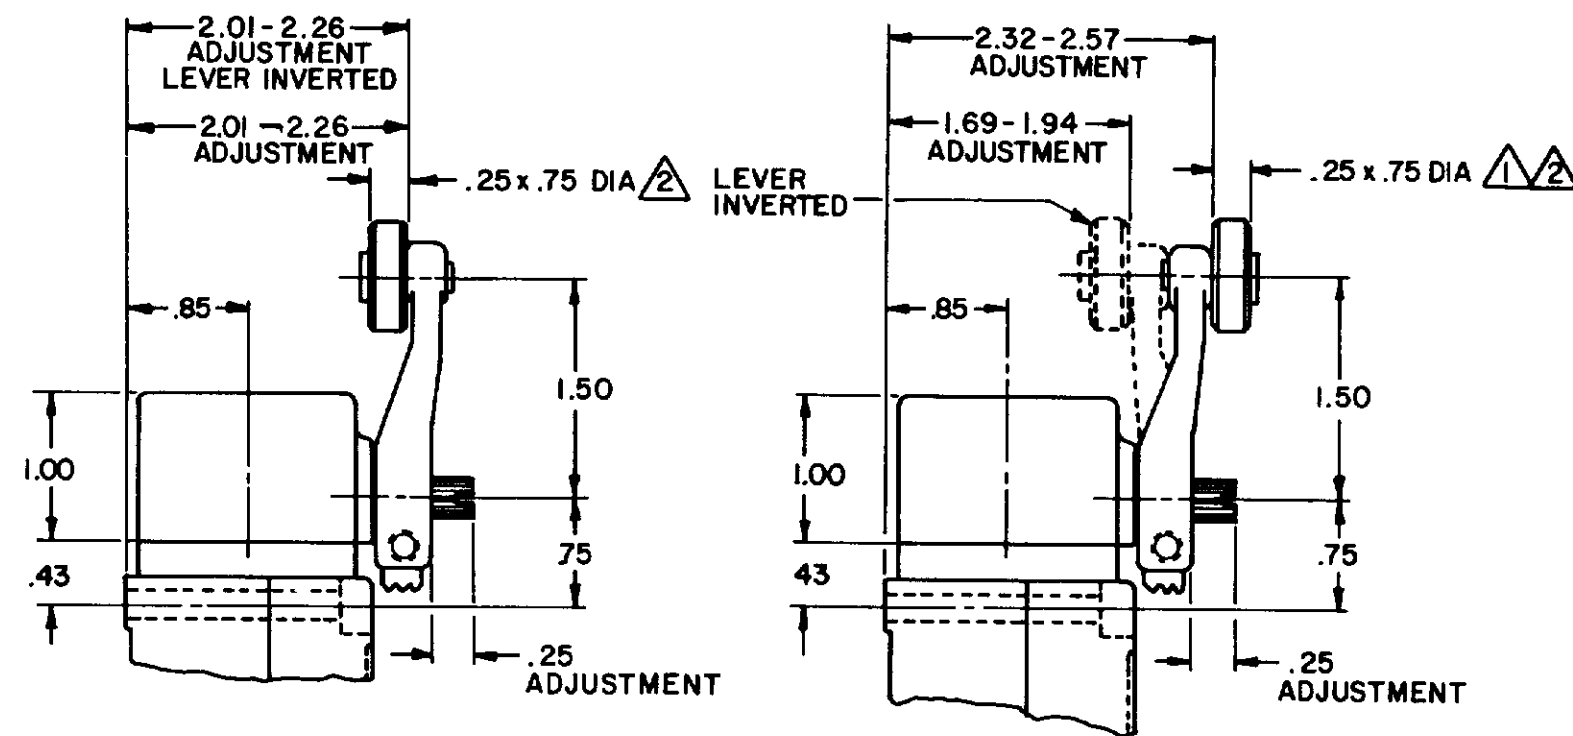


LSZ51 TYPE LEVERS

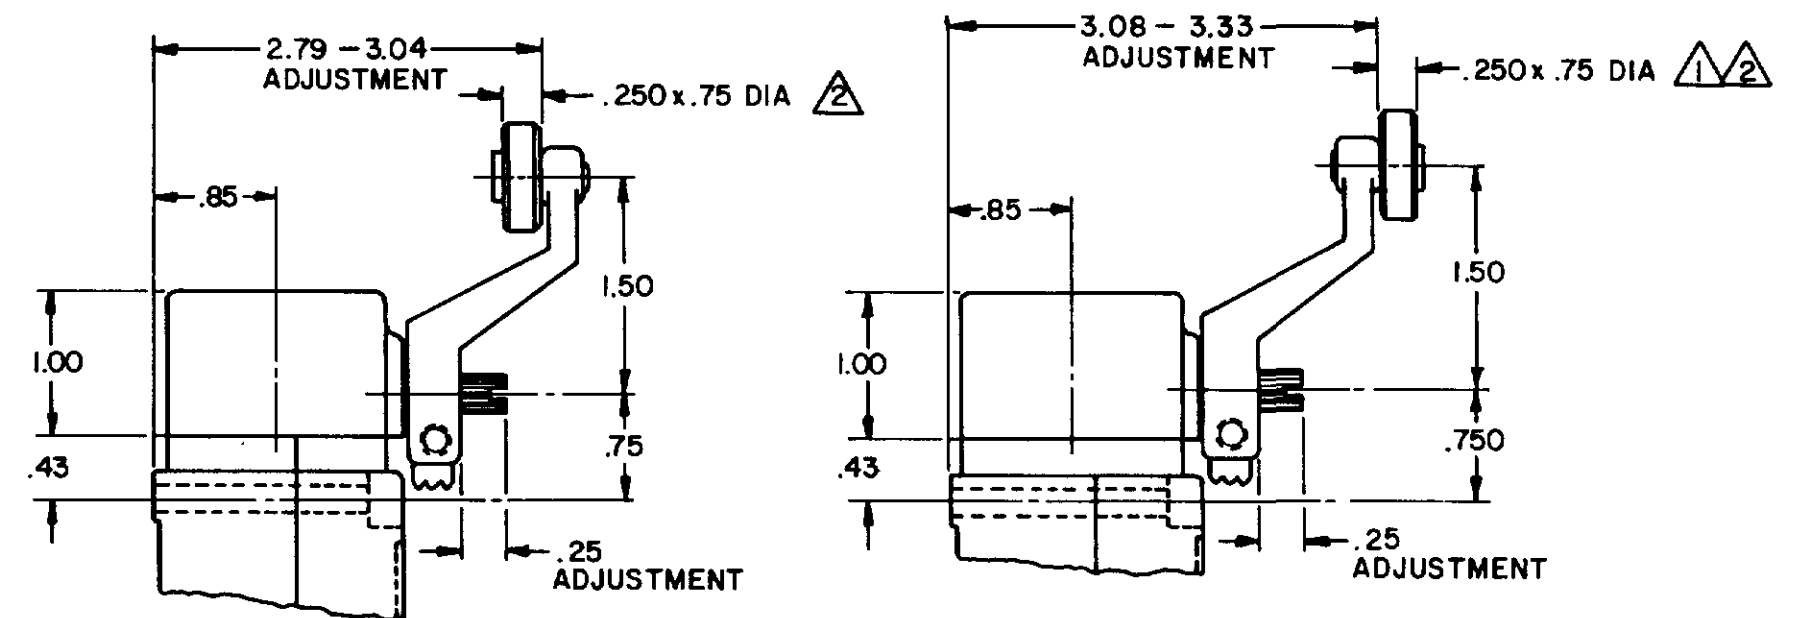


LSZ55 TYPE LEVERS

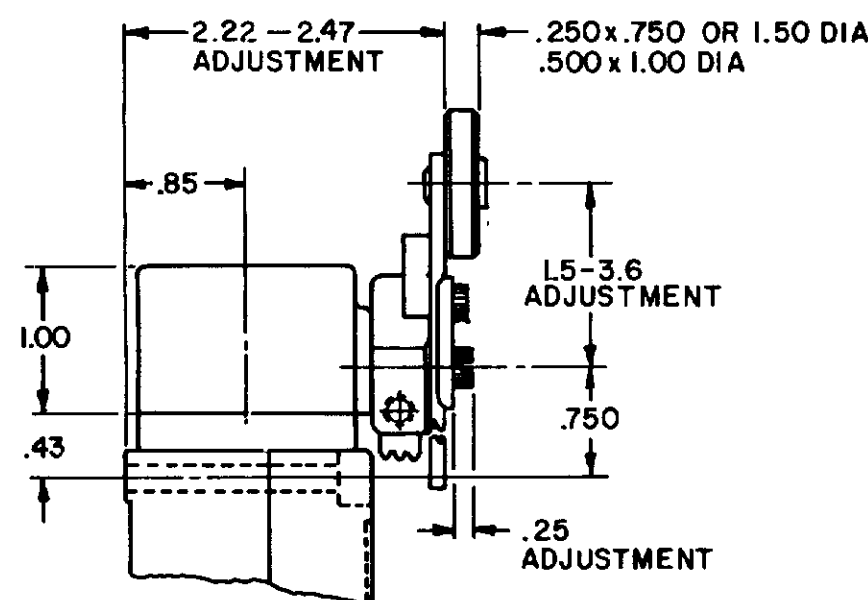


LSZ52 TYPE LEVER

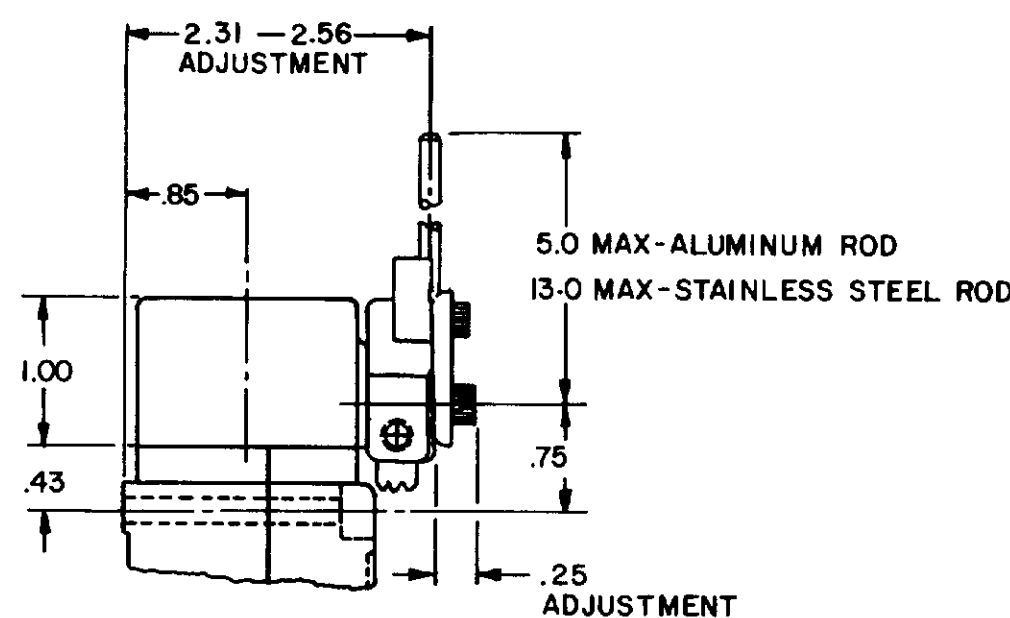

LSZ54 TYPE LEVER

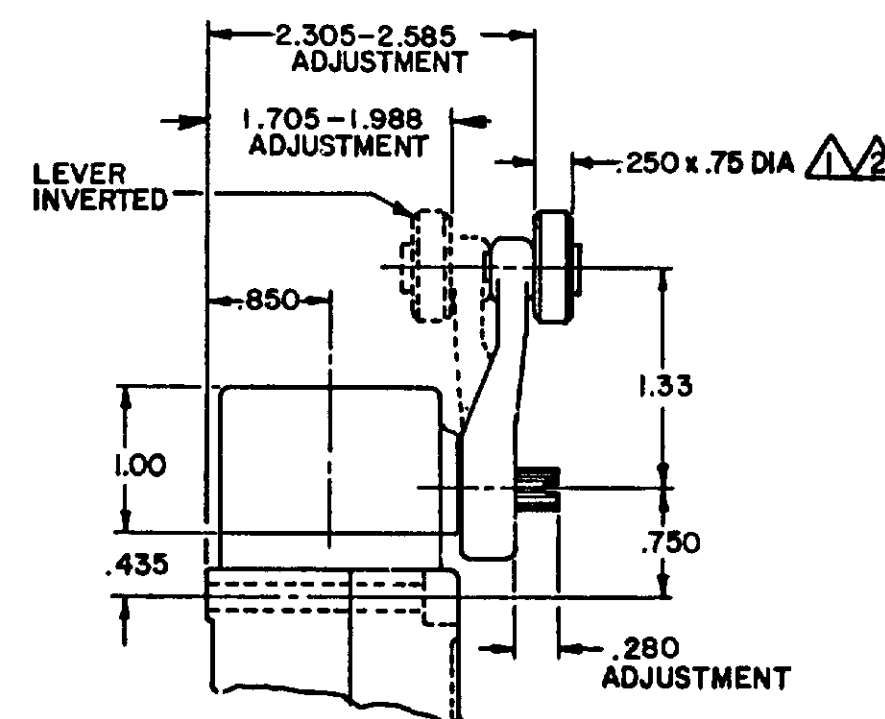

OPEN MOUNTED ROLLER

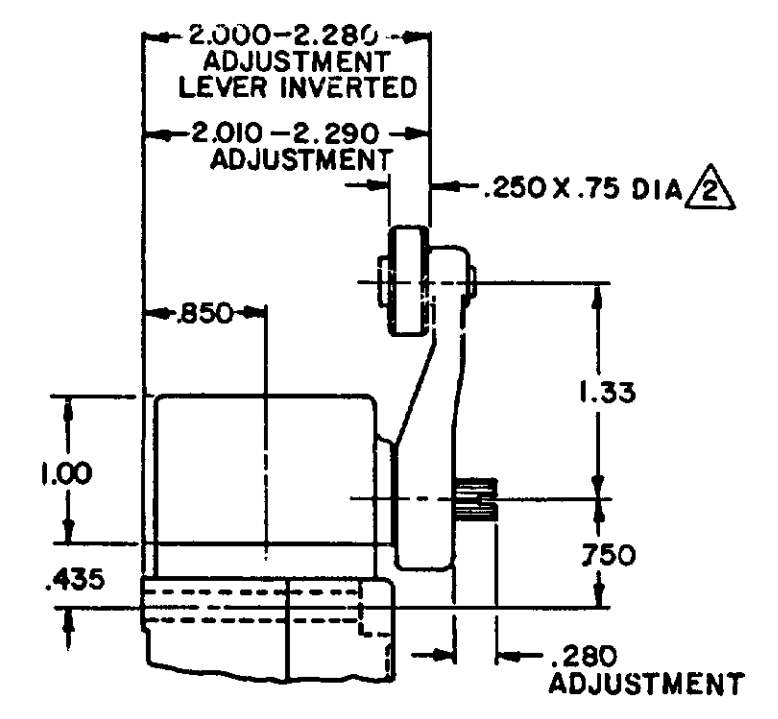

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING


CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
15JUN94
JAF
15JUN94
MAM

REVISIONS
L 0031956
BS 10JUL07
B 201004
C SL 10AUG00
C 201748
C SL 17NOV00
D 202198
20JAN01
E 204871
F 206581
GLH 14OCT02
G 206783
C SL 31OCT02
H 207178
GLH 14JAN03
J 207474
18FEB03
K 0006871
RR 11NOV04

TOP ROTARY

SINGLE POLE

DOUBLE POLE

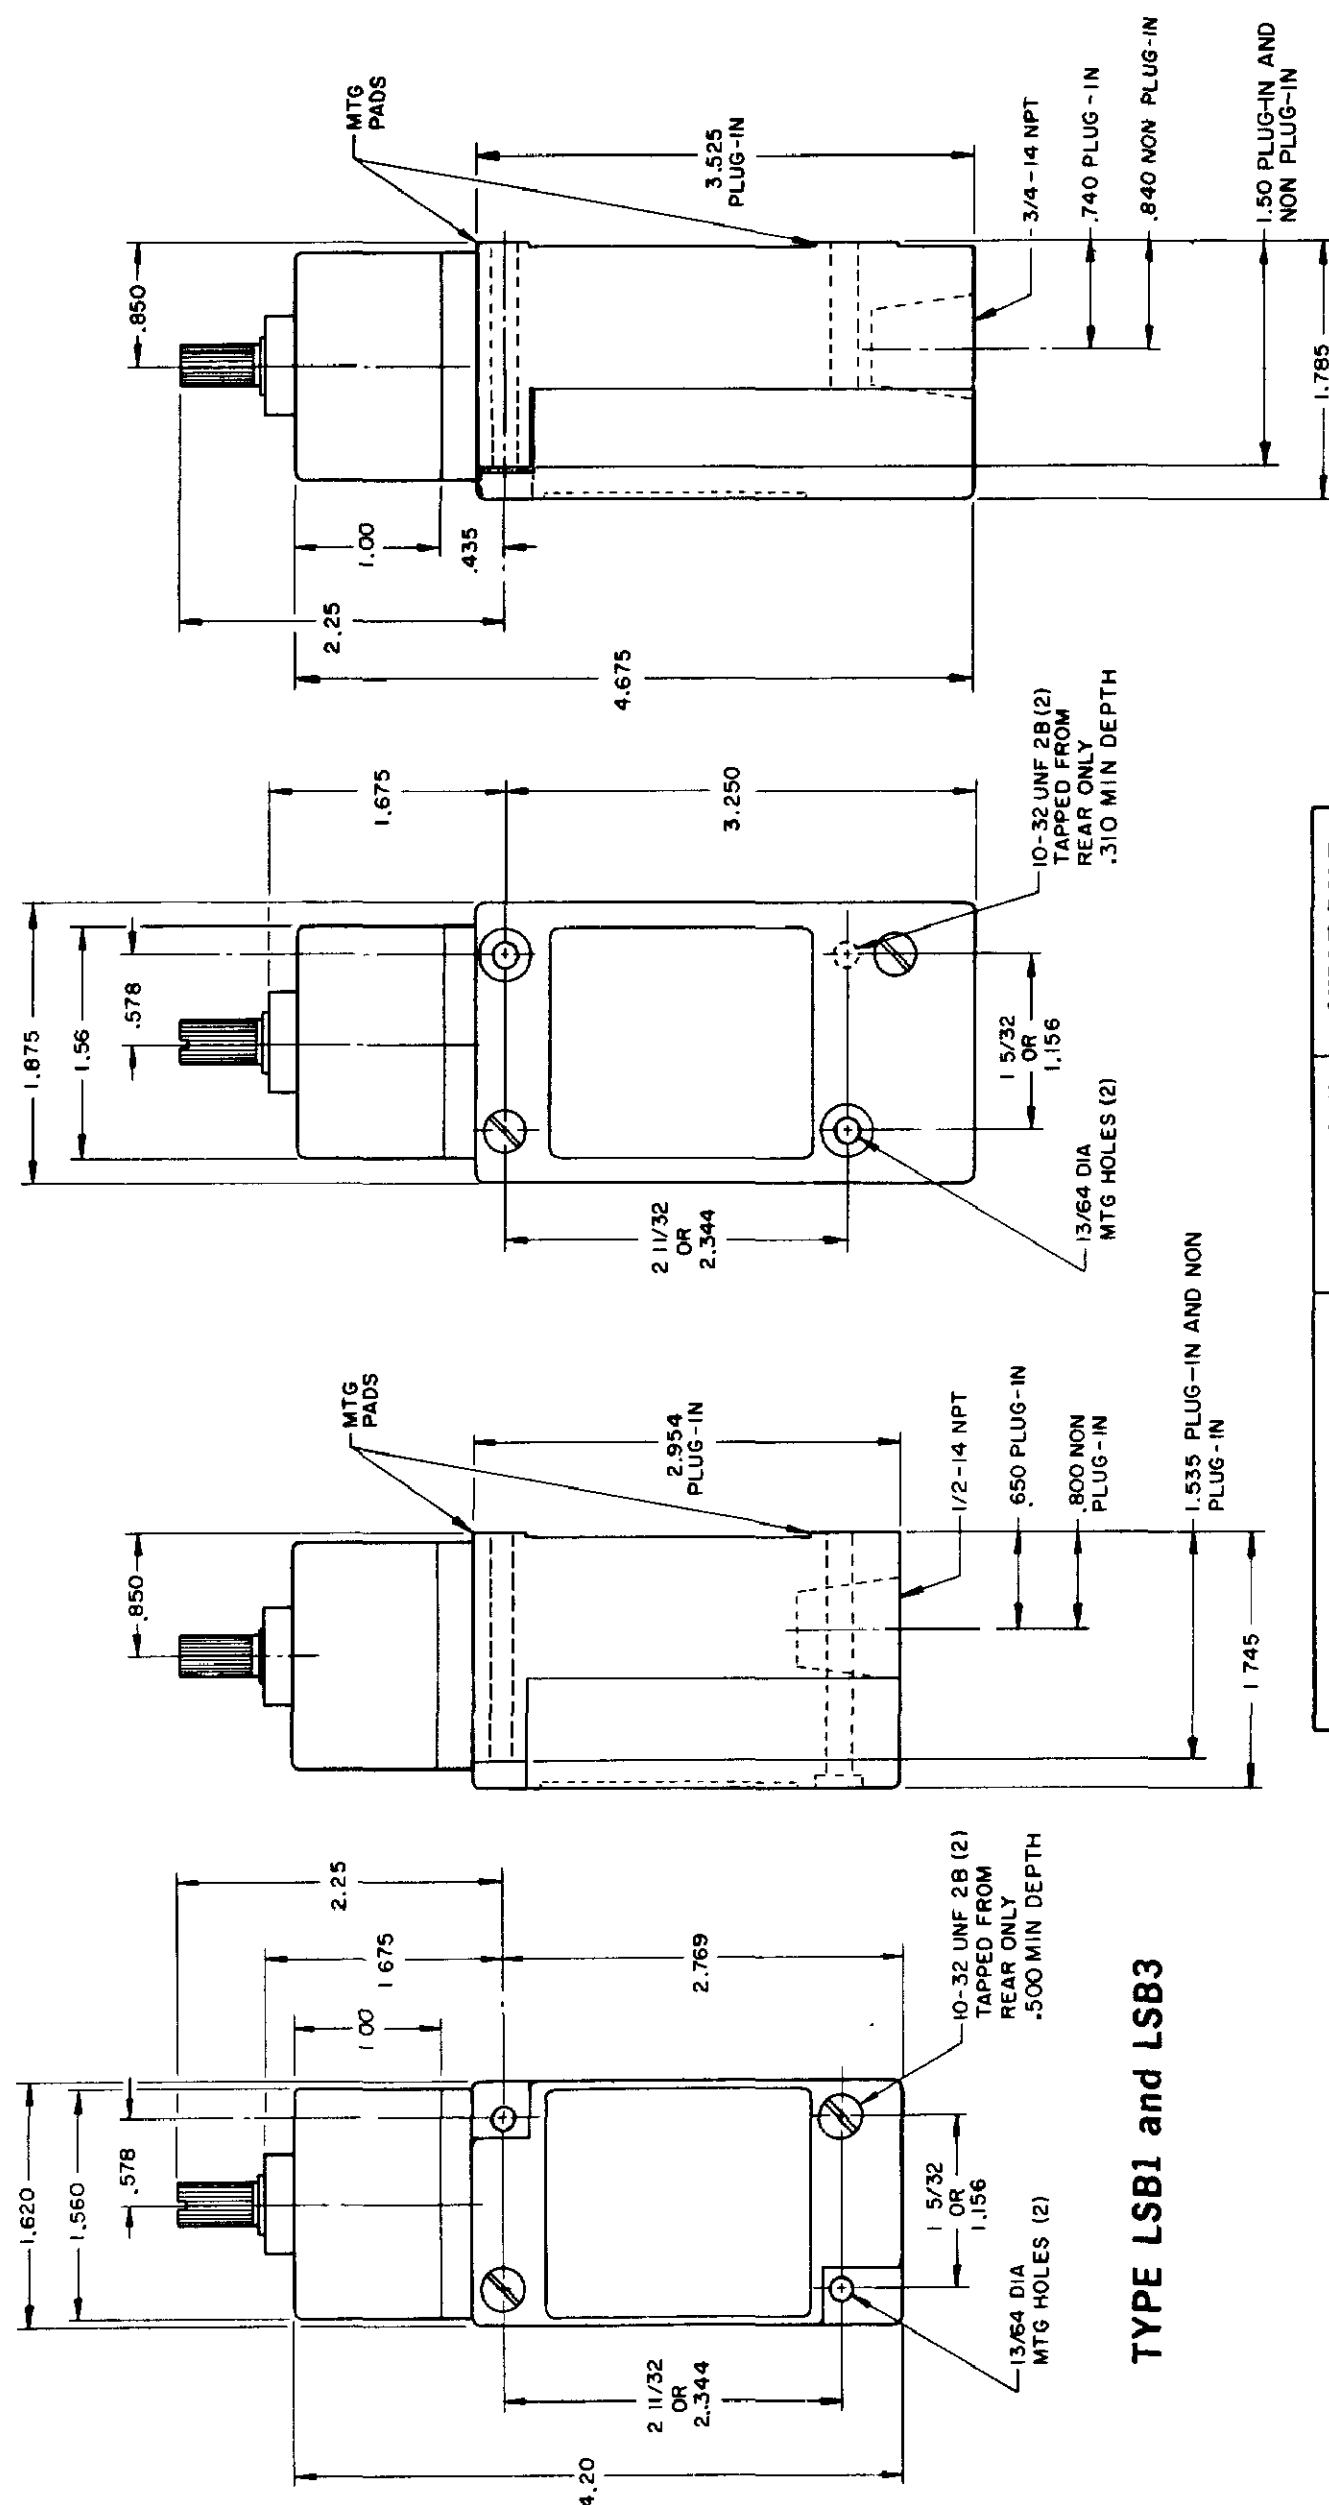

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR					
		SINGL POLE		DOUBLE POLE		BREAK	
		MAKE	BREAK	MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3		
	240	30	3	15	1.5		
	480	15	1.5	7.5	75		
	600	12	1.2	6	6		

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE

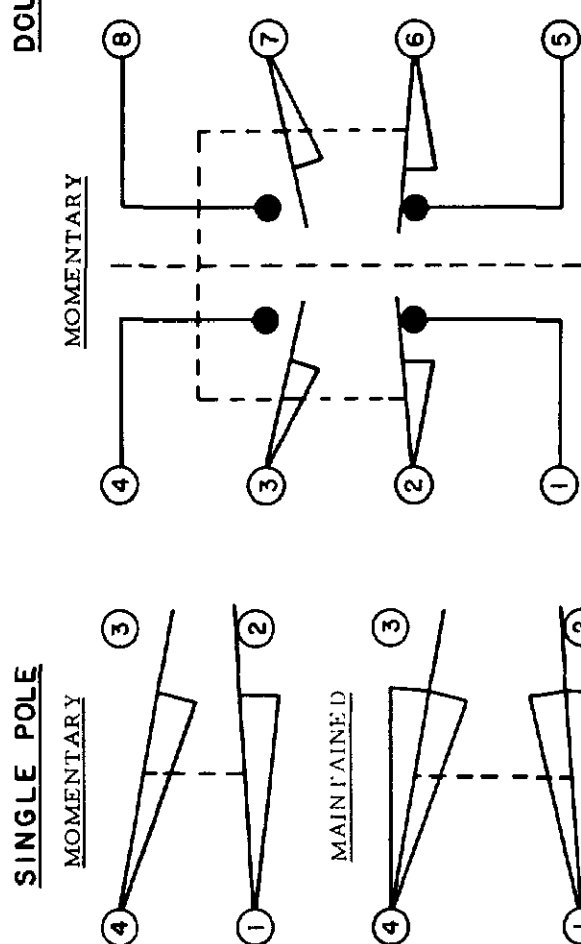


SINGLE POLE

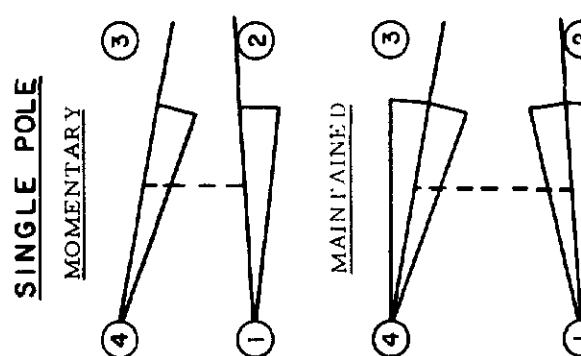

SINGLE POLE

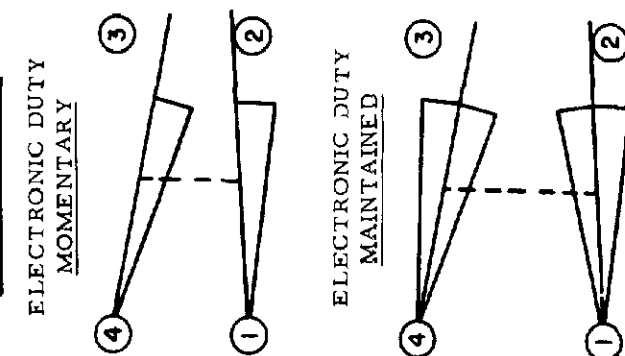


ELECTRONIC DUTY

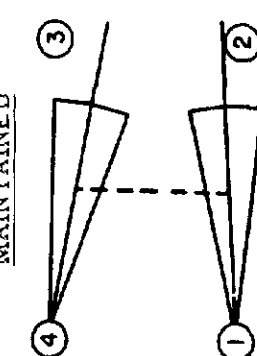

DIRECT ACTING




SINGLE POLE

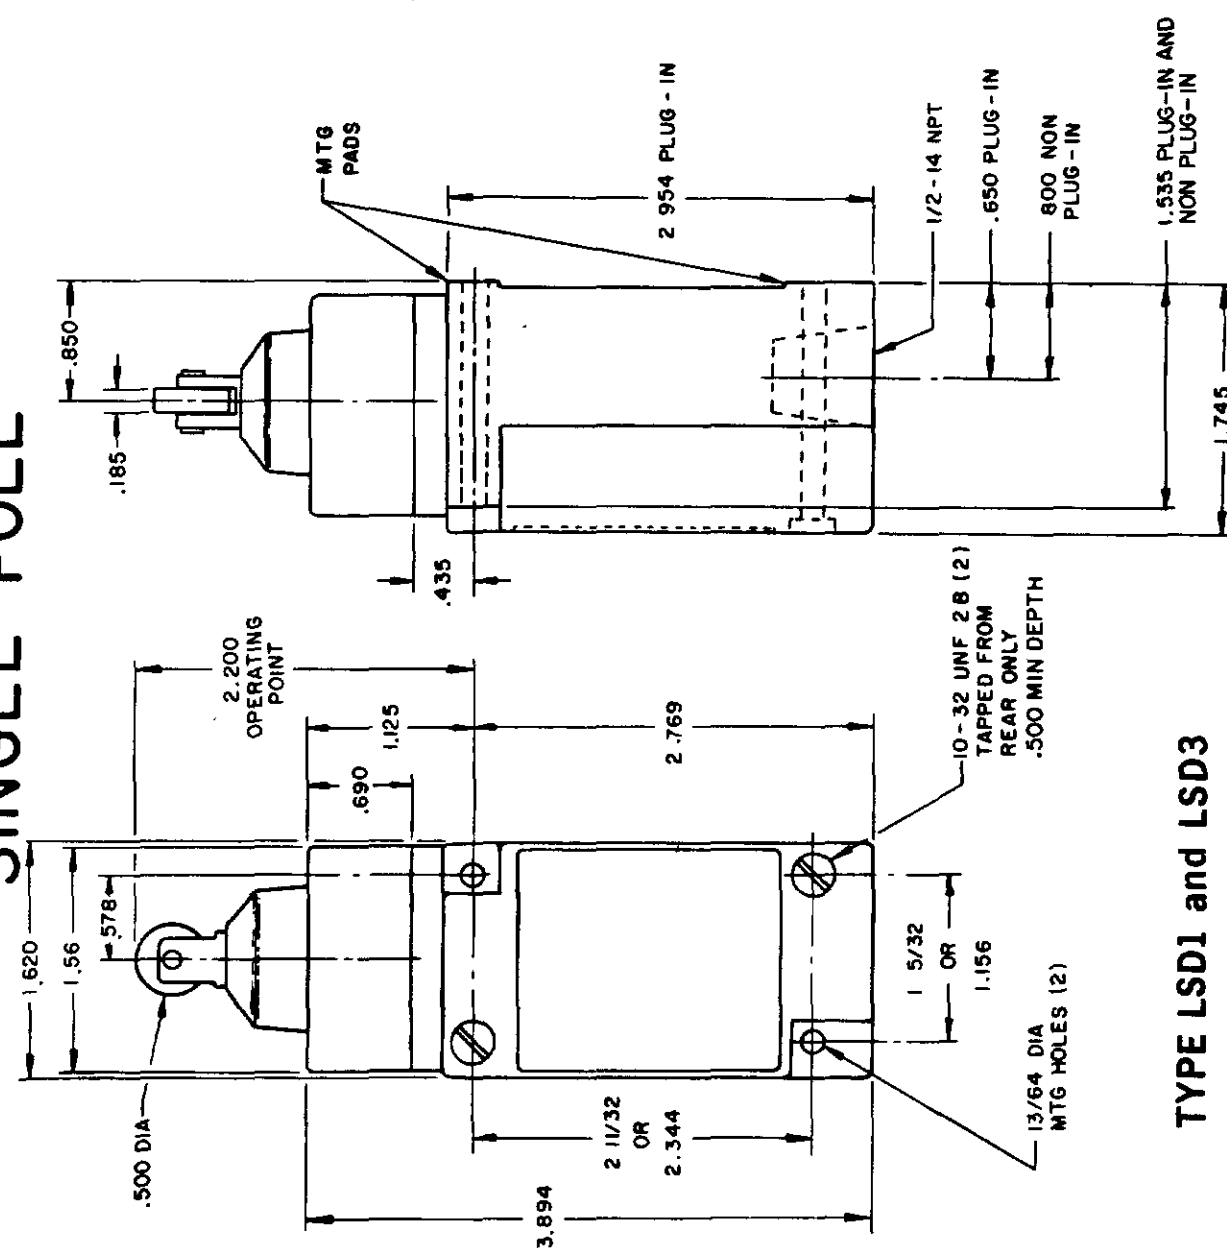


TYPE LSD1 and LSD3

DOUBLE POLE

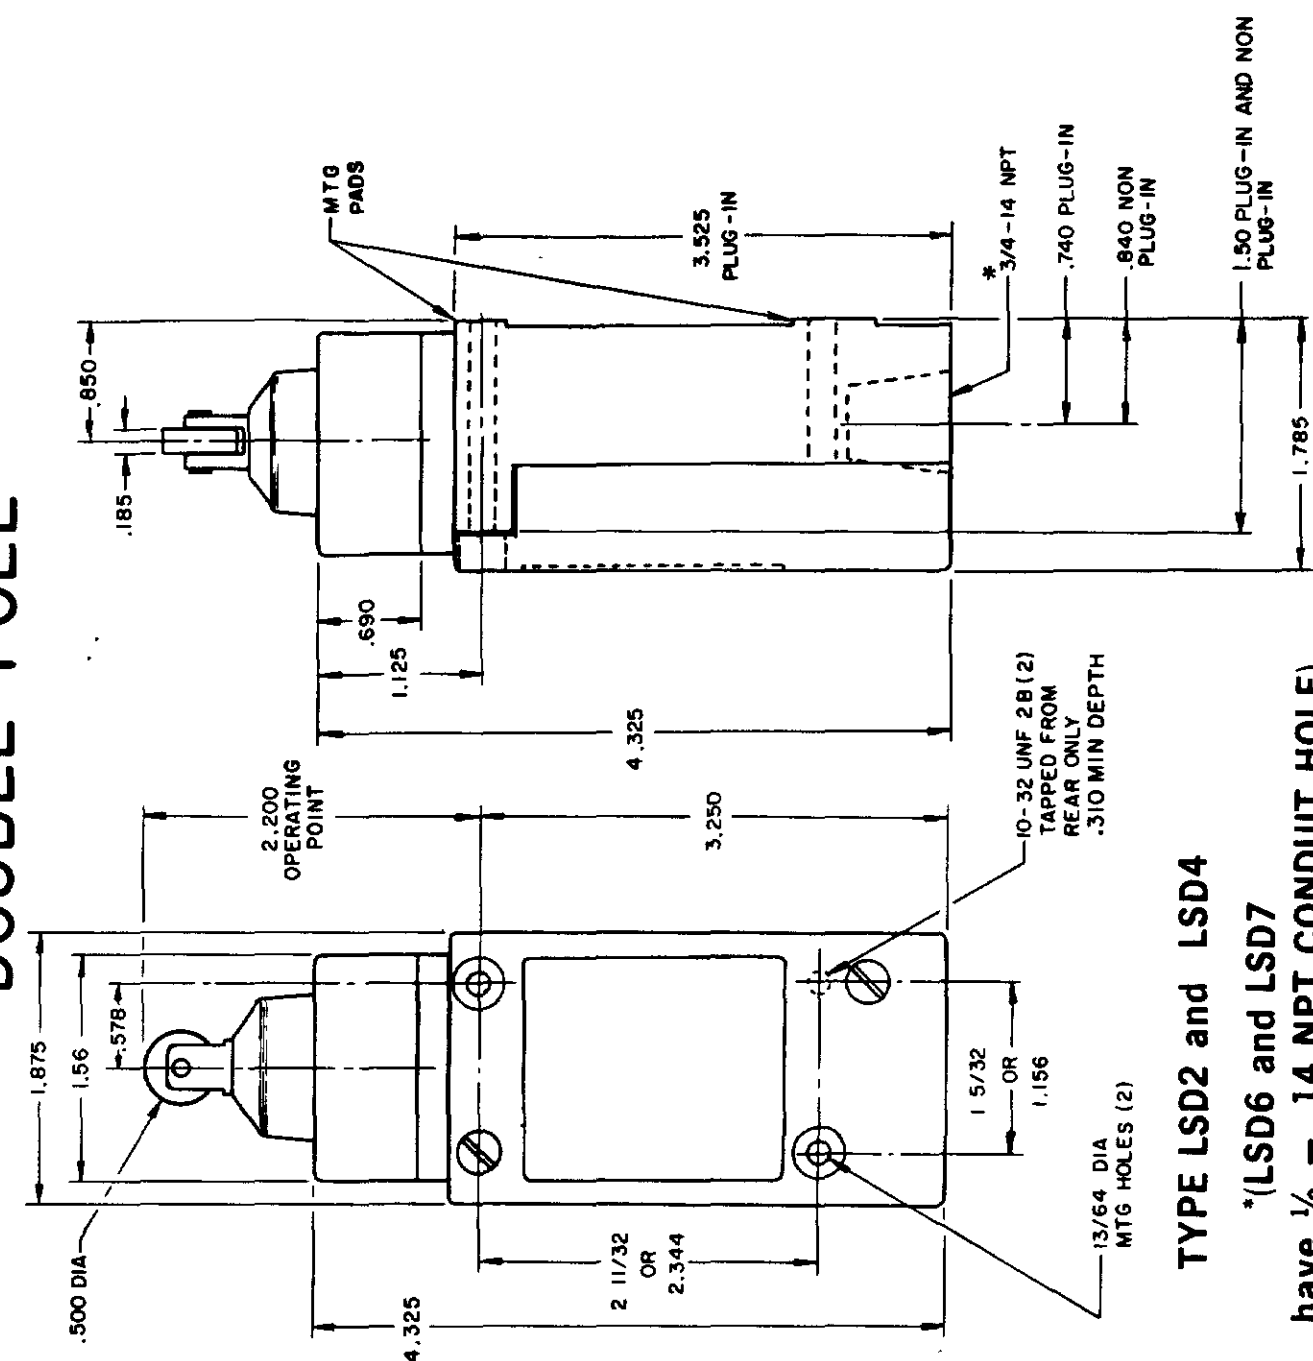


TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

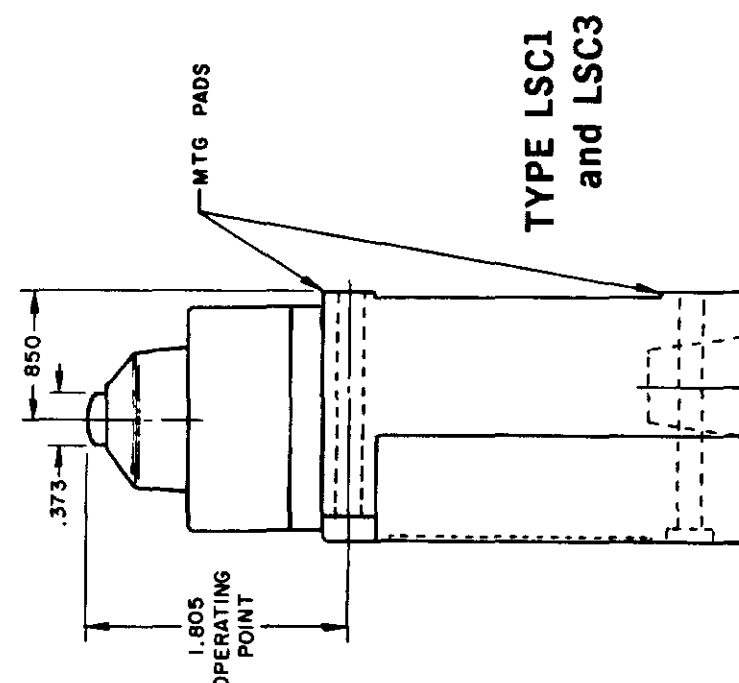


**TYPE LSC1
and LSC3**

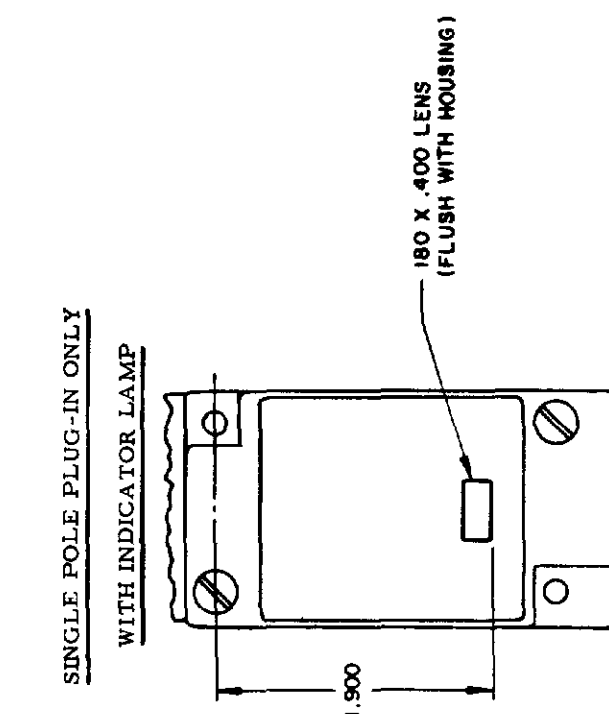



**TYPE LSC2
and LSC4**

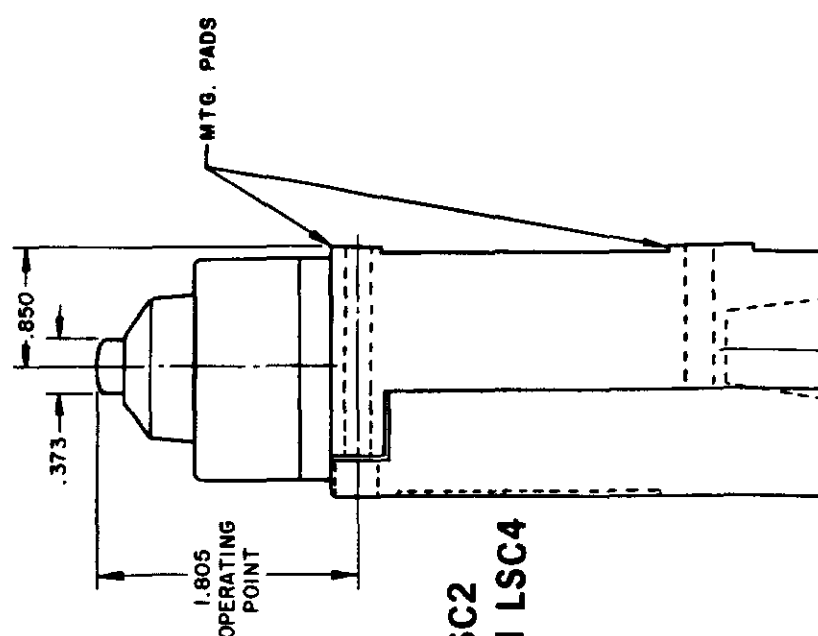

**TYPE LSV1
and LSV3**

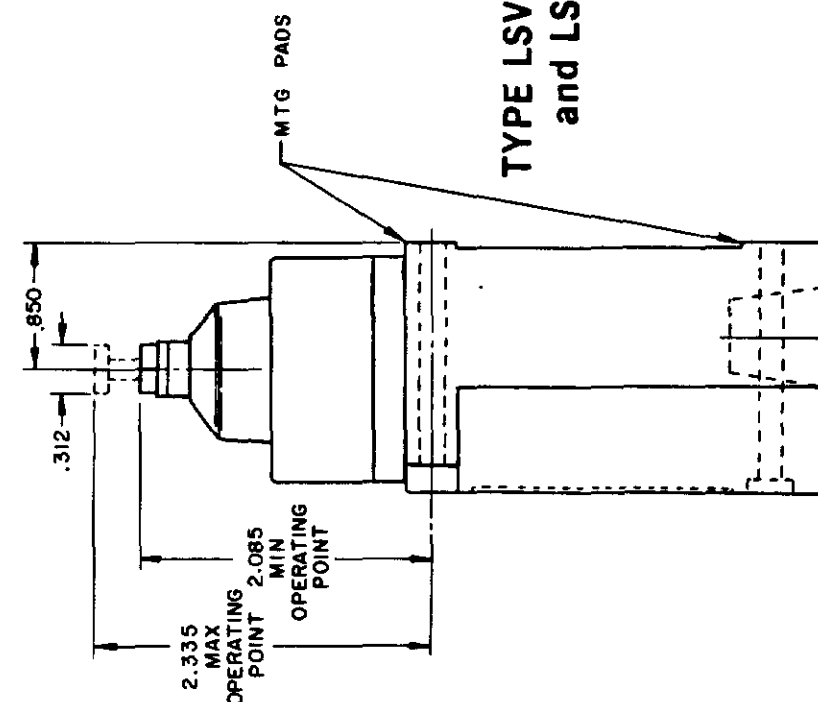

**TYPE LSV2
and LSV4**

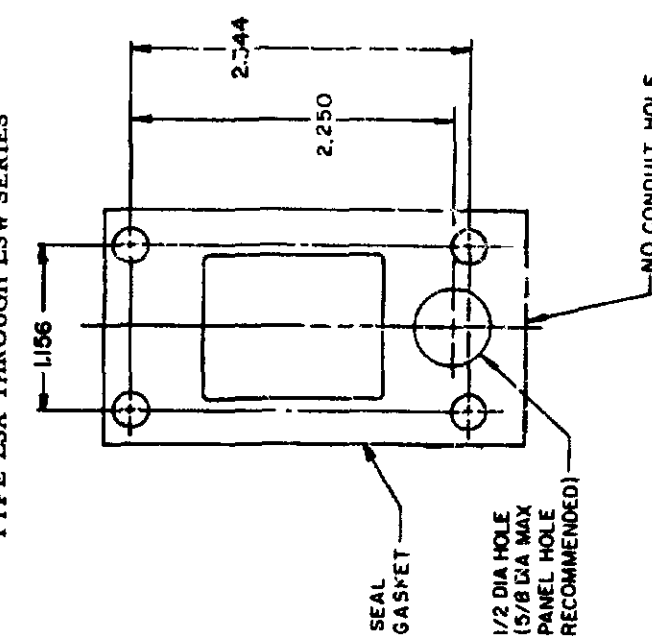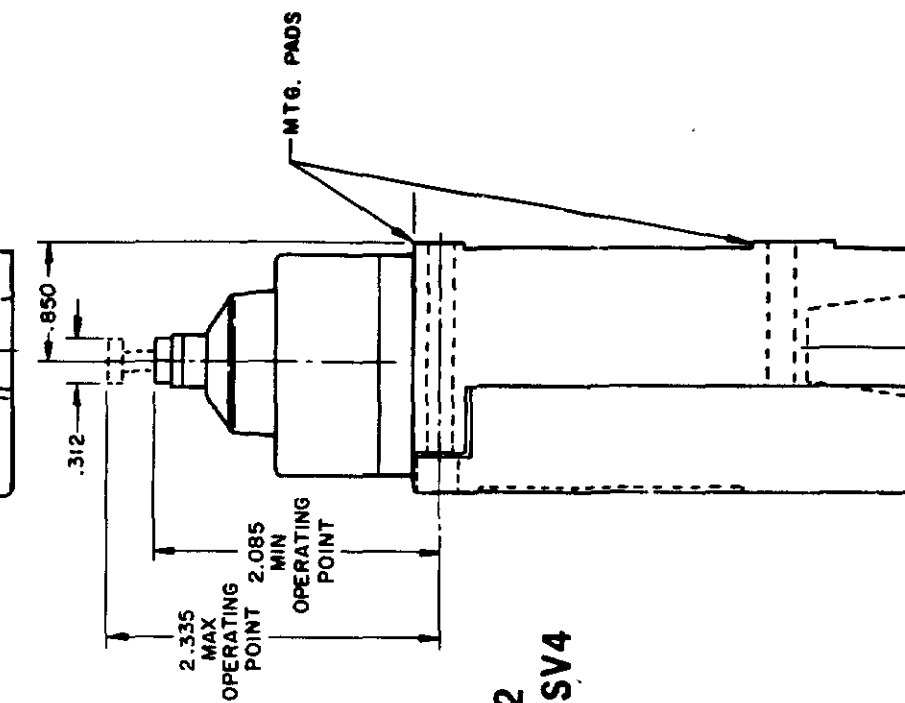

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF
HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES

CHART 1

PAGE 4 OF 10

SCALE NONE

DO NOT SCALE PRINT

REV	DATE	BY	CHK	APP
L	0031956			
B	10 JUL 97			
C	10 AUG 00			
D	201748			
E	17 NOV 00			
F	202198			
G	204871			
H	206581			
I	207179			
J	207474			
K	0006871			
L	11 AUG 04			



ISSUE	CATALOG LISTING	REPLACES	CO-78498	LSA-LSW SERIES
12	LSA-LSW SERIES CHART 1			
12	PAGE 5 OF 10			
PSR	10JUL07			
CHECK	11AUG04			
AK	11 JUL 94			
AF	15 JUN 94			

RASTER
DRAWN
MAM



SIDE PLUNGER TYPE

SINGLE POLE

DOUBLE POLE

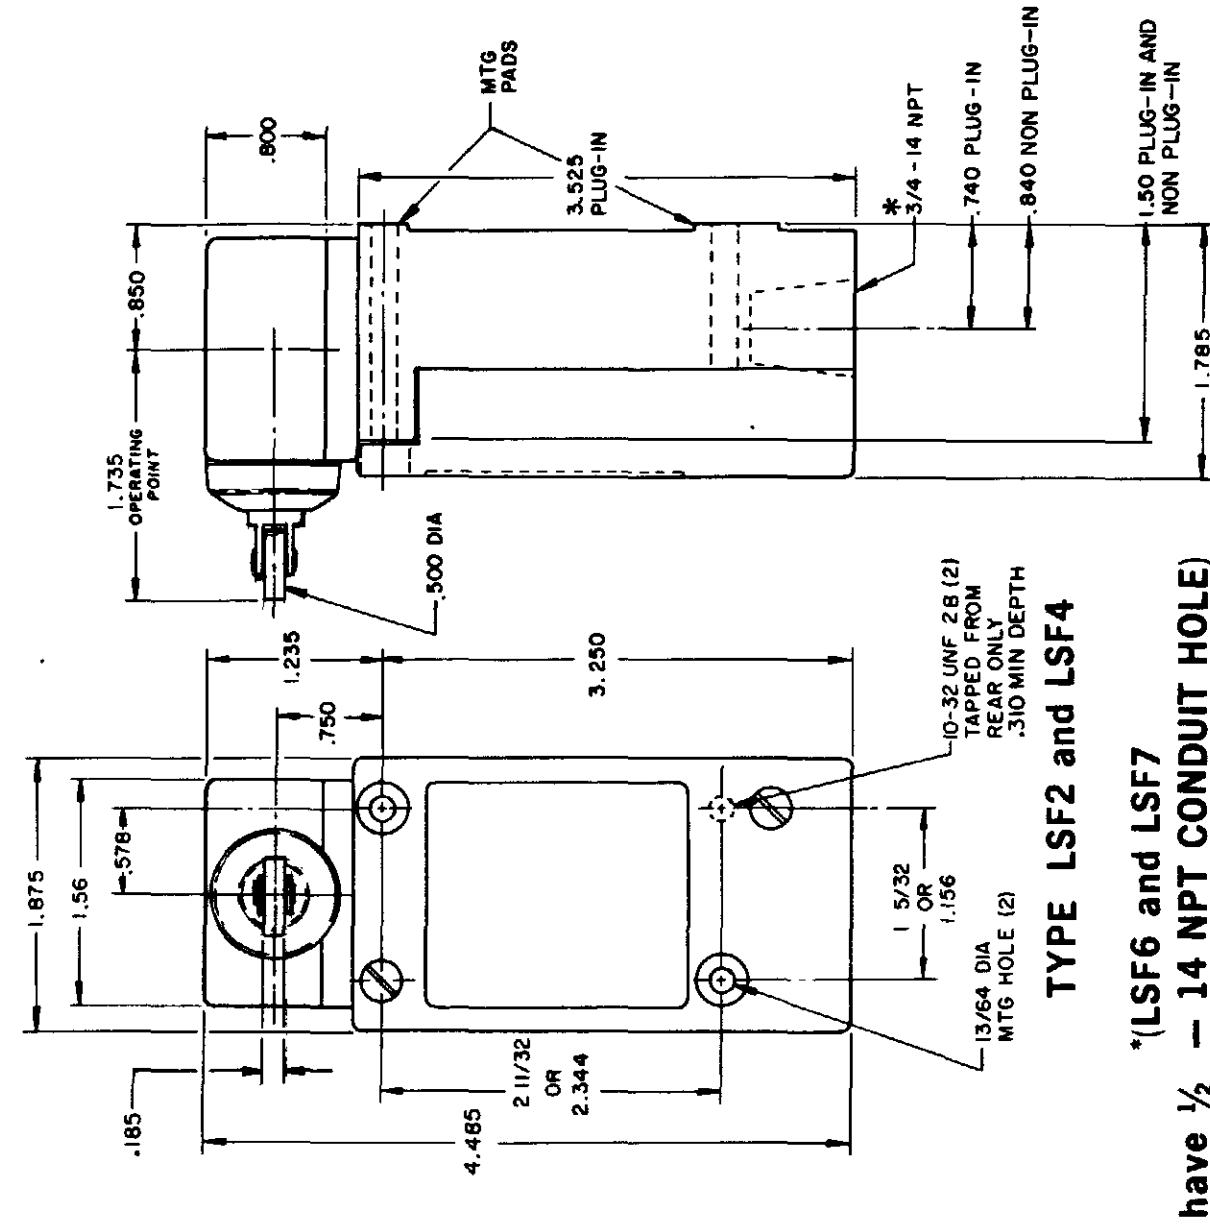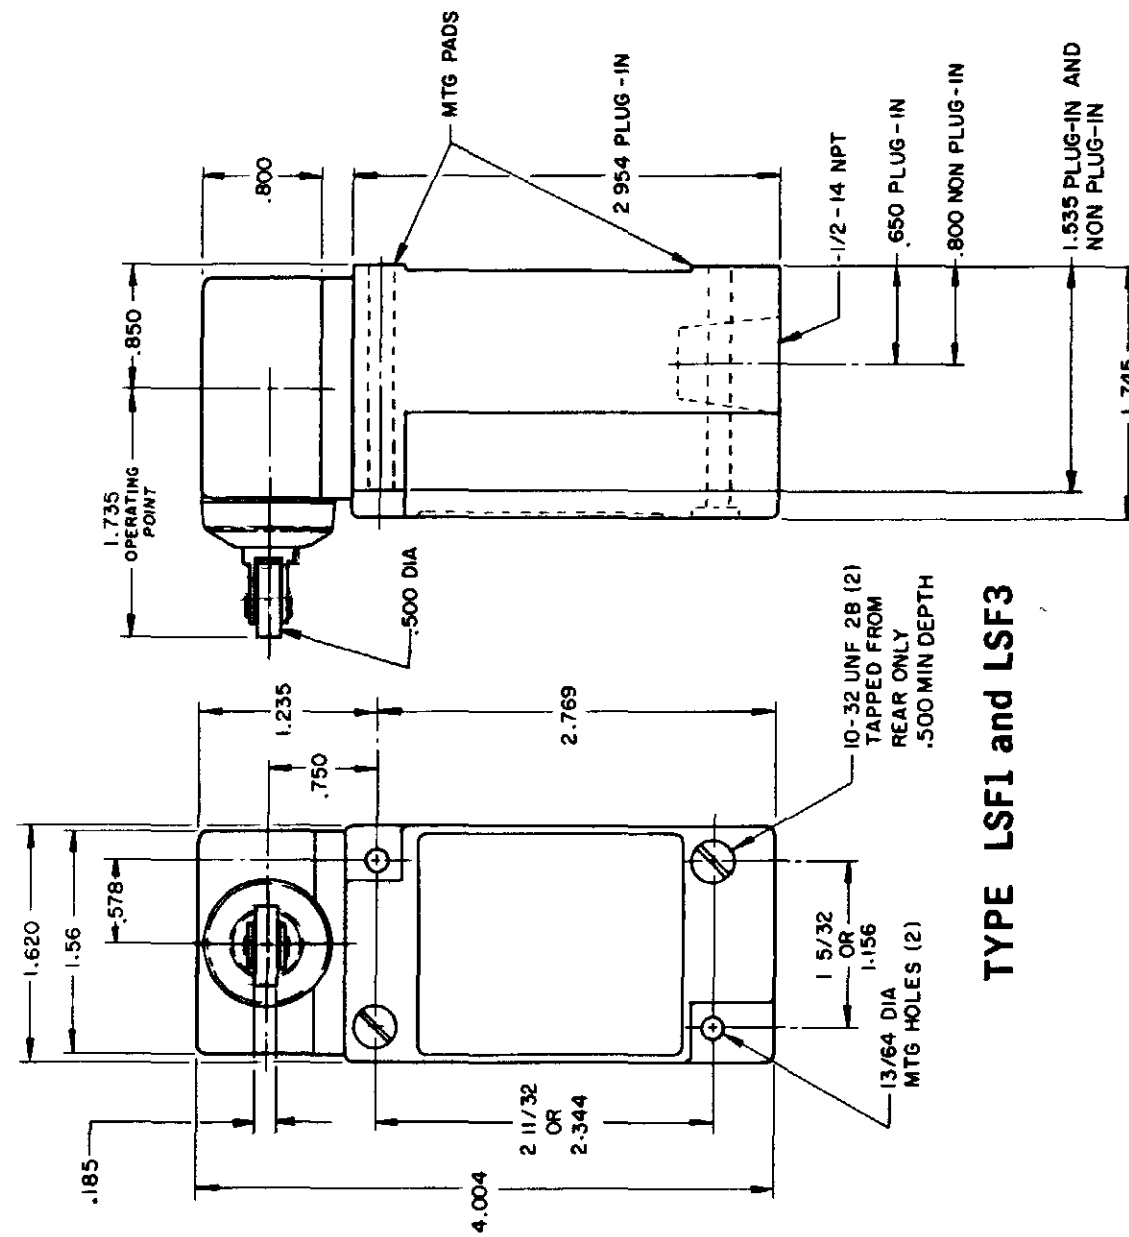



*(LSF6 and LSF7 have 1/2 - 14 NPT CONDUIT HOLE)

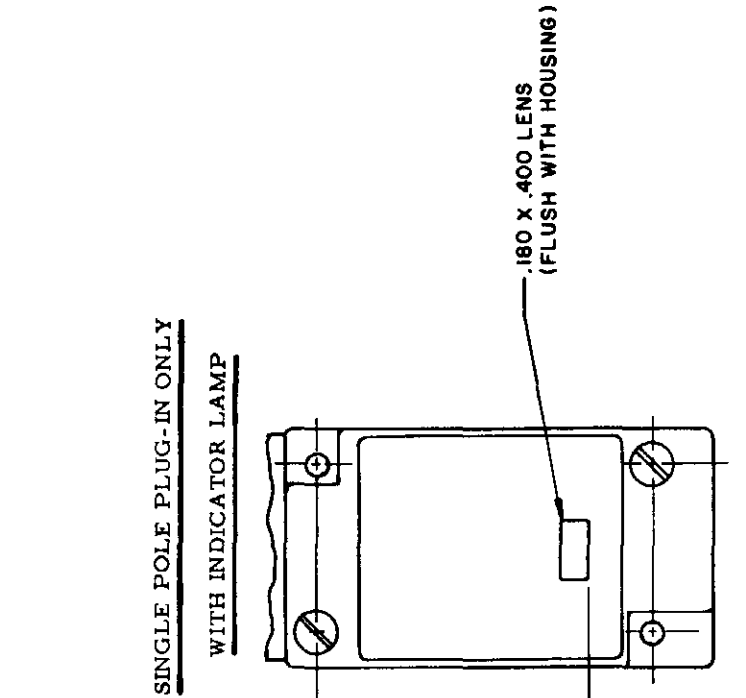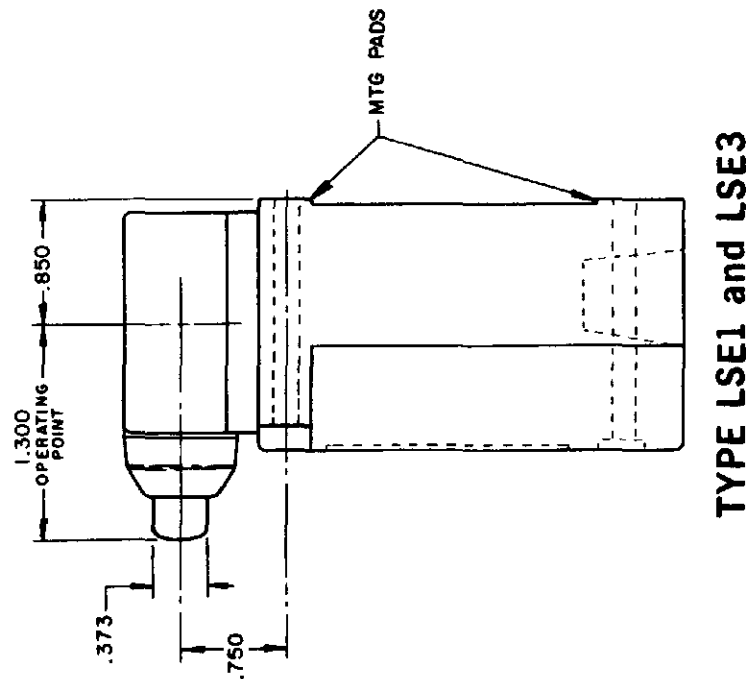


TYPE LSE1 and LSE3

120 LAMP VOLTAGE -
TYPE LSF5, LSE5 and LSW5

240 LAMP VOLTAGE -
TYPE LSF8, LSE8 and LSW8

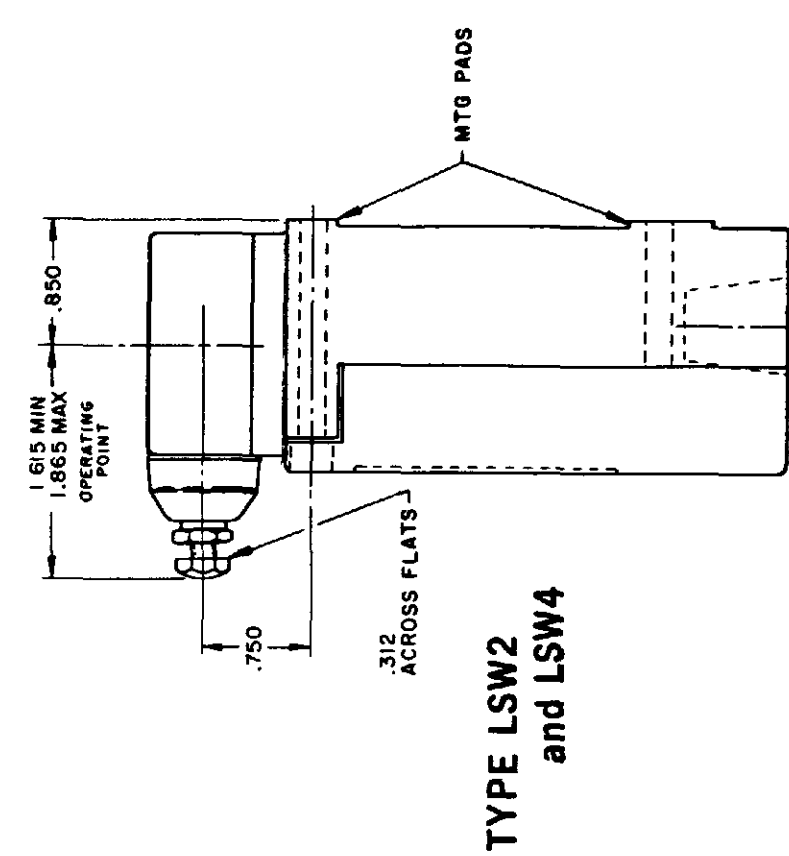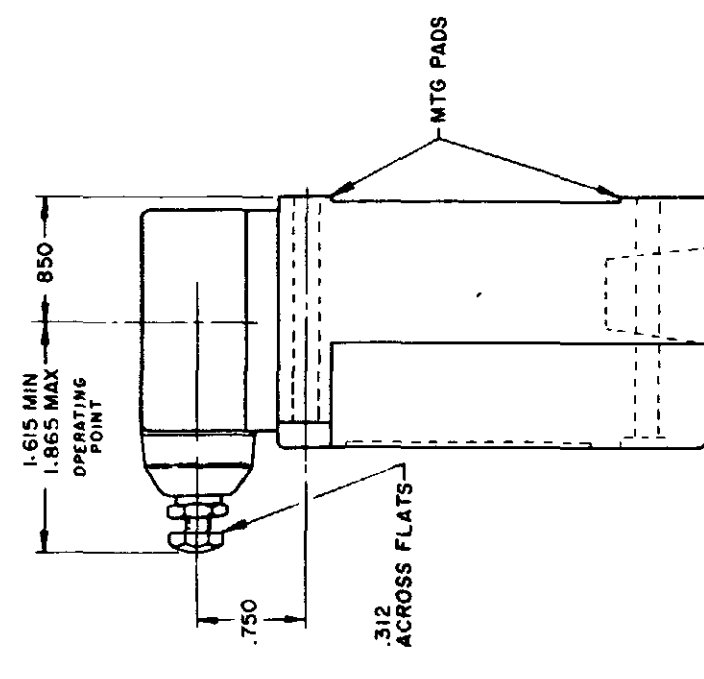

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

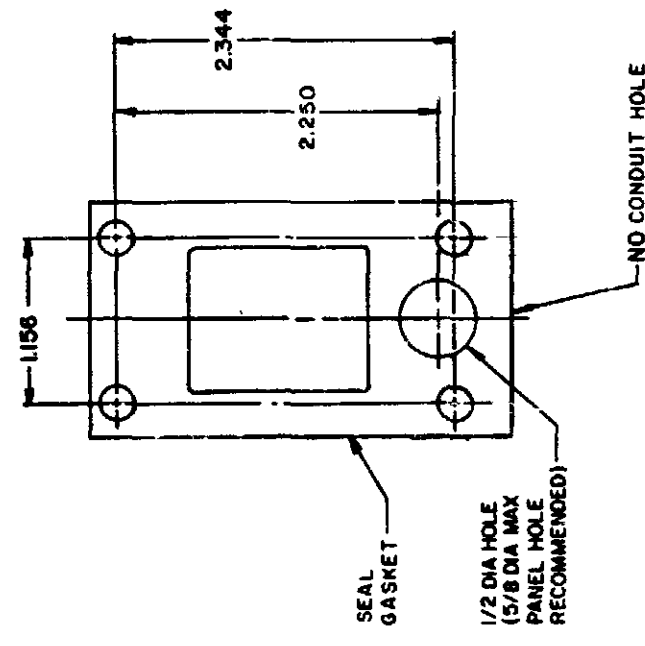

TYPE LSW1 and LSW3

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


MICRO SWITCH
a Honeywell Division
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

PAGE 5 OF 10

SCALE NONE
DO NOT SCALE PRINT



TYPE LSG1 and LSG3

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
DIFFERENTIAL TRAVEL
OPERATING POINT } OVERTRAVEL
FULL TRAVEL —

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

SIDE	PLUNGER	TYPES
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19
20	20	20
21	21	21
22	22	22
23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32
33	33	33
34	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39
40	40	40
41	41	41
42	42	42
43	43	43
44	44	44
45	45	45
46	46	46
47	47	47
48	48	48
49	49	49
50	50	50
51	51	51
52	52	52
53	53	53
54	54	54
55	55	55
56	56	56
57	57	57
58	58	58
59	59	59
60	60	60
61	61	61
62	62	62
63	63	63
64	64	64
65	65	65
66	66	66
67	67	67
68	68	68
69	69	69
70	70	70
71	71	71
72	72	72
73	73	73
74	74	74
75	75	75
76	76	76
77	77	77
78	78	78
79	79	79
80	80	80
81	81	81
82	82	82
83	83	83
84	84	84
85	85	85
86	86	86
87	87	87
88	88	88
89	89	89
90	90	90
91	91	91
92	92	92
93	93	93
94	94	94
95	95	95
96	96	96
97	97	97
98	98	98
99	99	99
100	100	100

PAGE 6 OF 10

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES


CHART 1

SCALE		NONE	
DO NOT SCALE PRINT			
UNLESS			
DIMENSIONS ARE NOTED			
TOLERANCES			
ONE PLACE	(.0)	±	
TWO PLACE	(.00)	±	
THREE PLACE	(.000)	±	
ANGLES		±	
WEIGHT			

WOBBLE STICK

SINGLE POLE

DOUBLE POLE

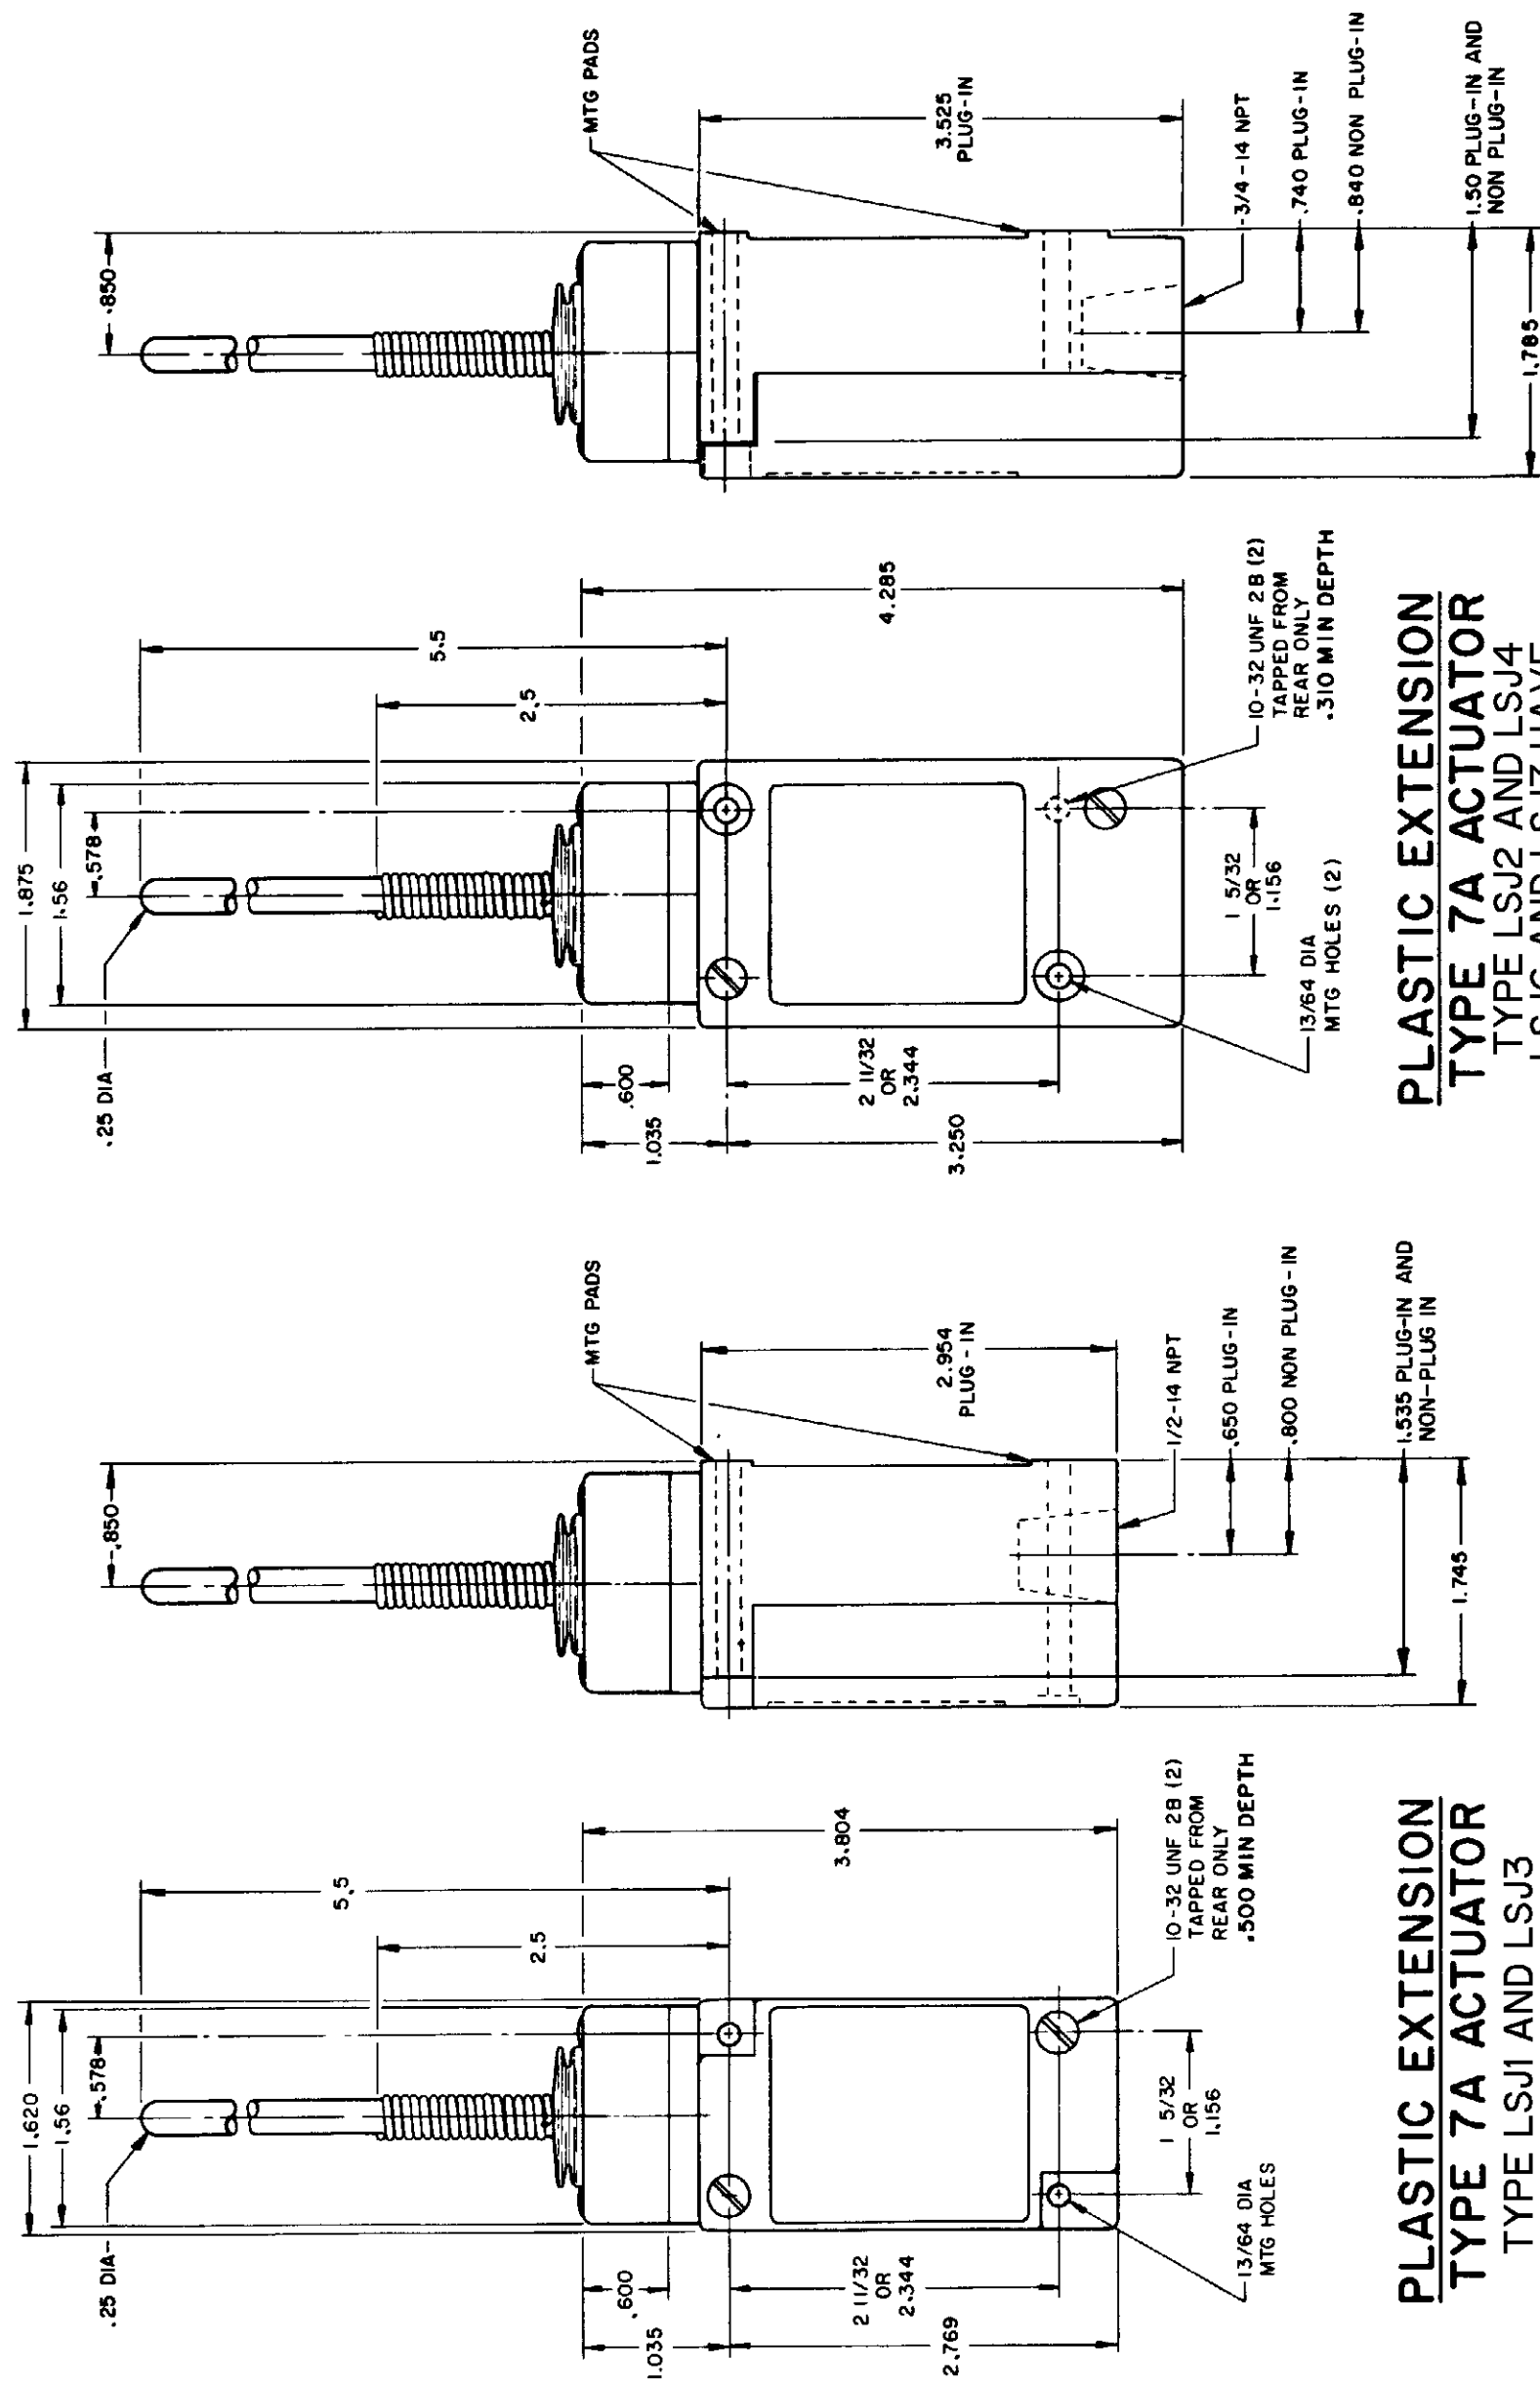

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED


LSA-LSW SERIES CHART 1

CATALOG LISTING


PAGE 7 OF 10

SCALE NONE
DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

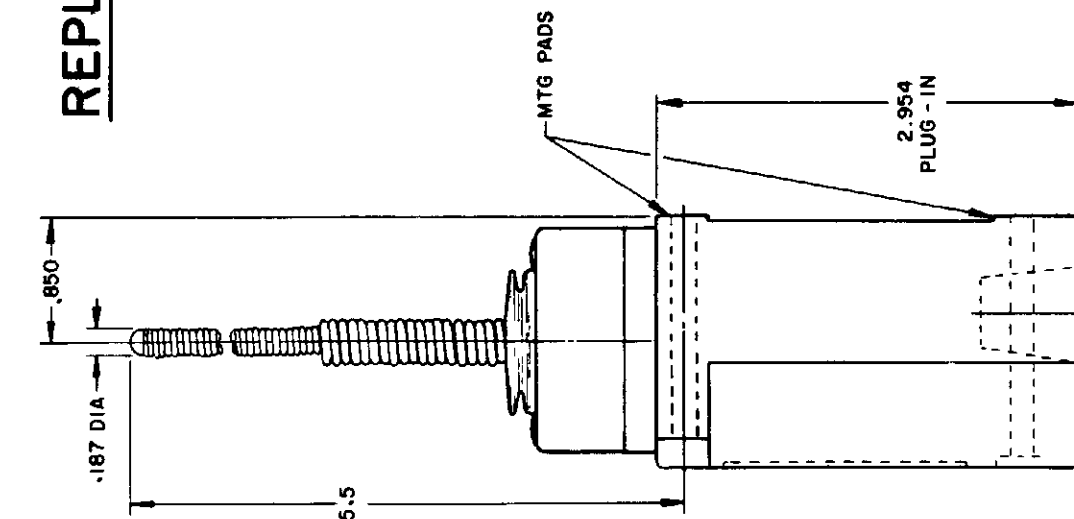

CABLE EXTENSION
TYPE 7N ACTUATOR

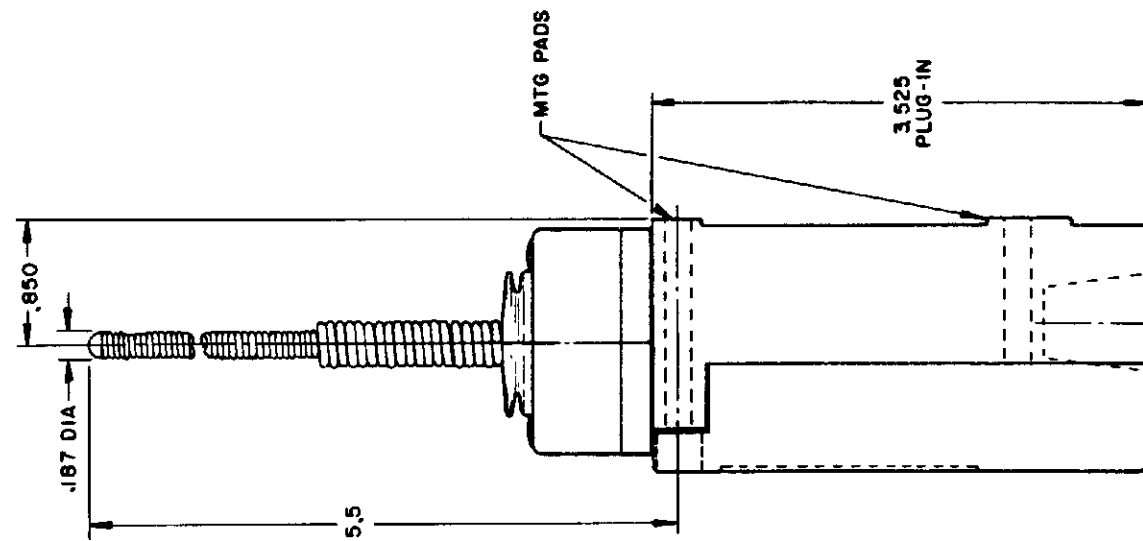

CABLE EXTENSION
TYPE 7 N ACTUATOR

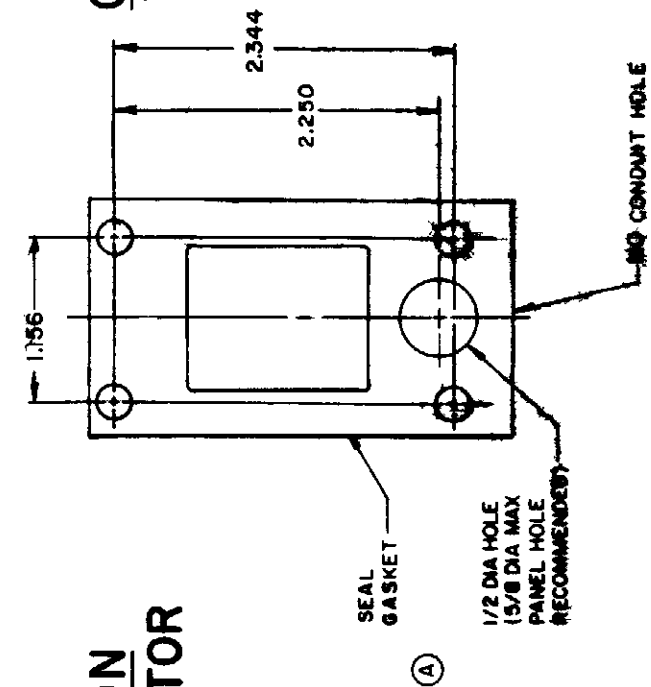


REPLACEMENT ACTUATOR
LSZ-40II

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

**-.180 X 400 LENS
(FLUSH WITH
HOUSING)**

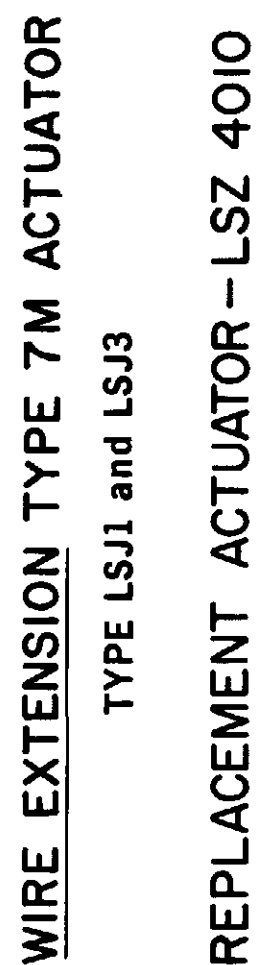

SINGLE POLE




	CAT. WHISKER	WOBBLE STICK					
	5 1/2" COIL	5 1/2" WIRE	1/4" WIRE	RDD.	CABLE	WIRE	
PRETRAVEL (APPROX) IN. RADIUS	2	2	4.5	1.0	1.5	4.0	
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0	

CONVERSION BASES


SINGLE POLE (SIDE ROTARY) LSZ 4003

**DOUBLE POLE
(SIDE ROTARY)
LSZ4004**

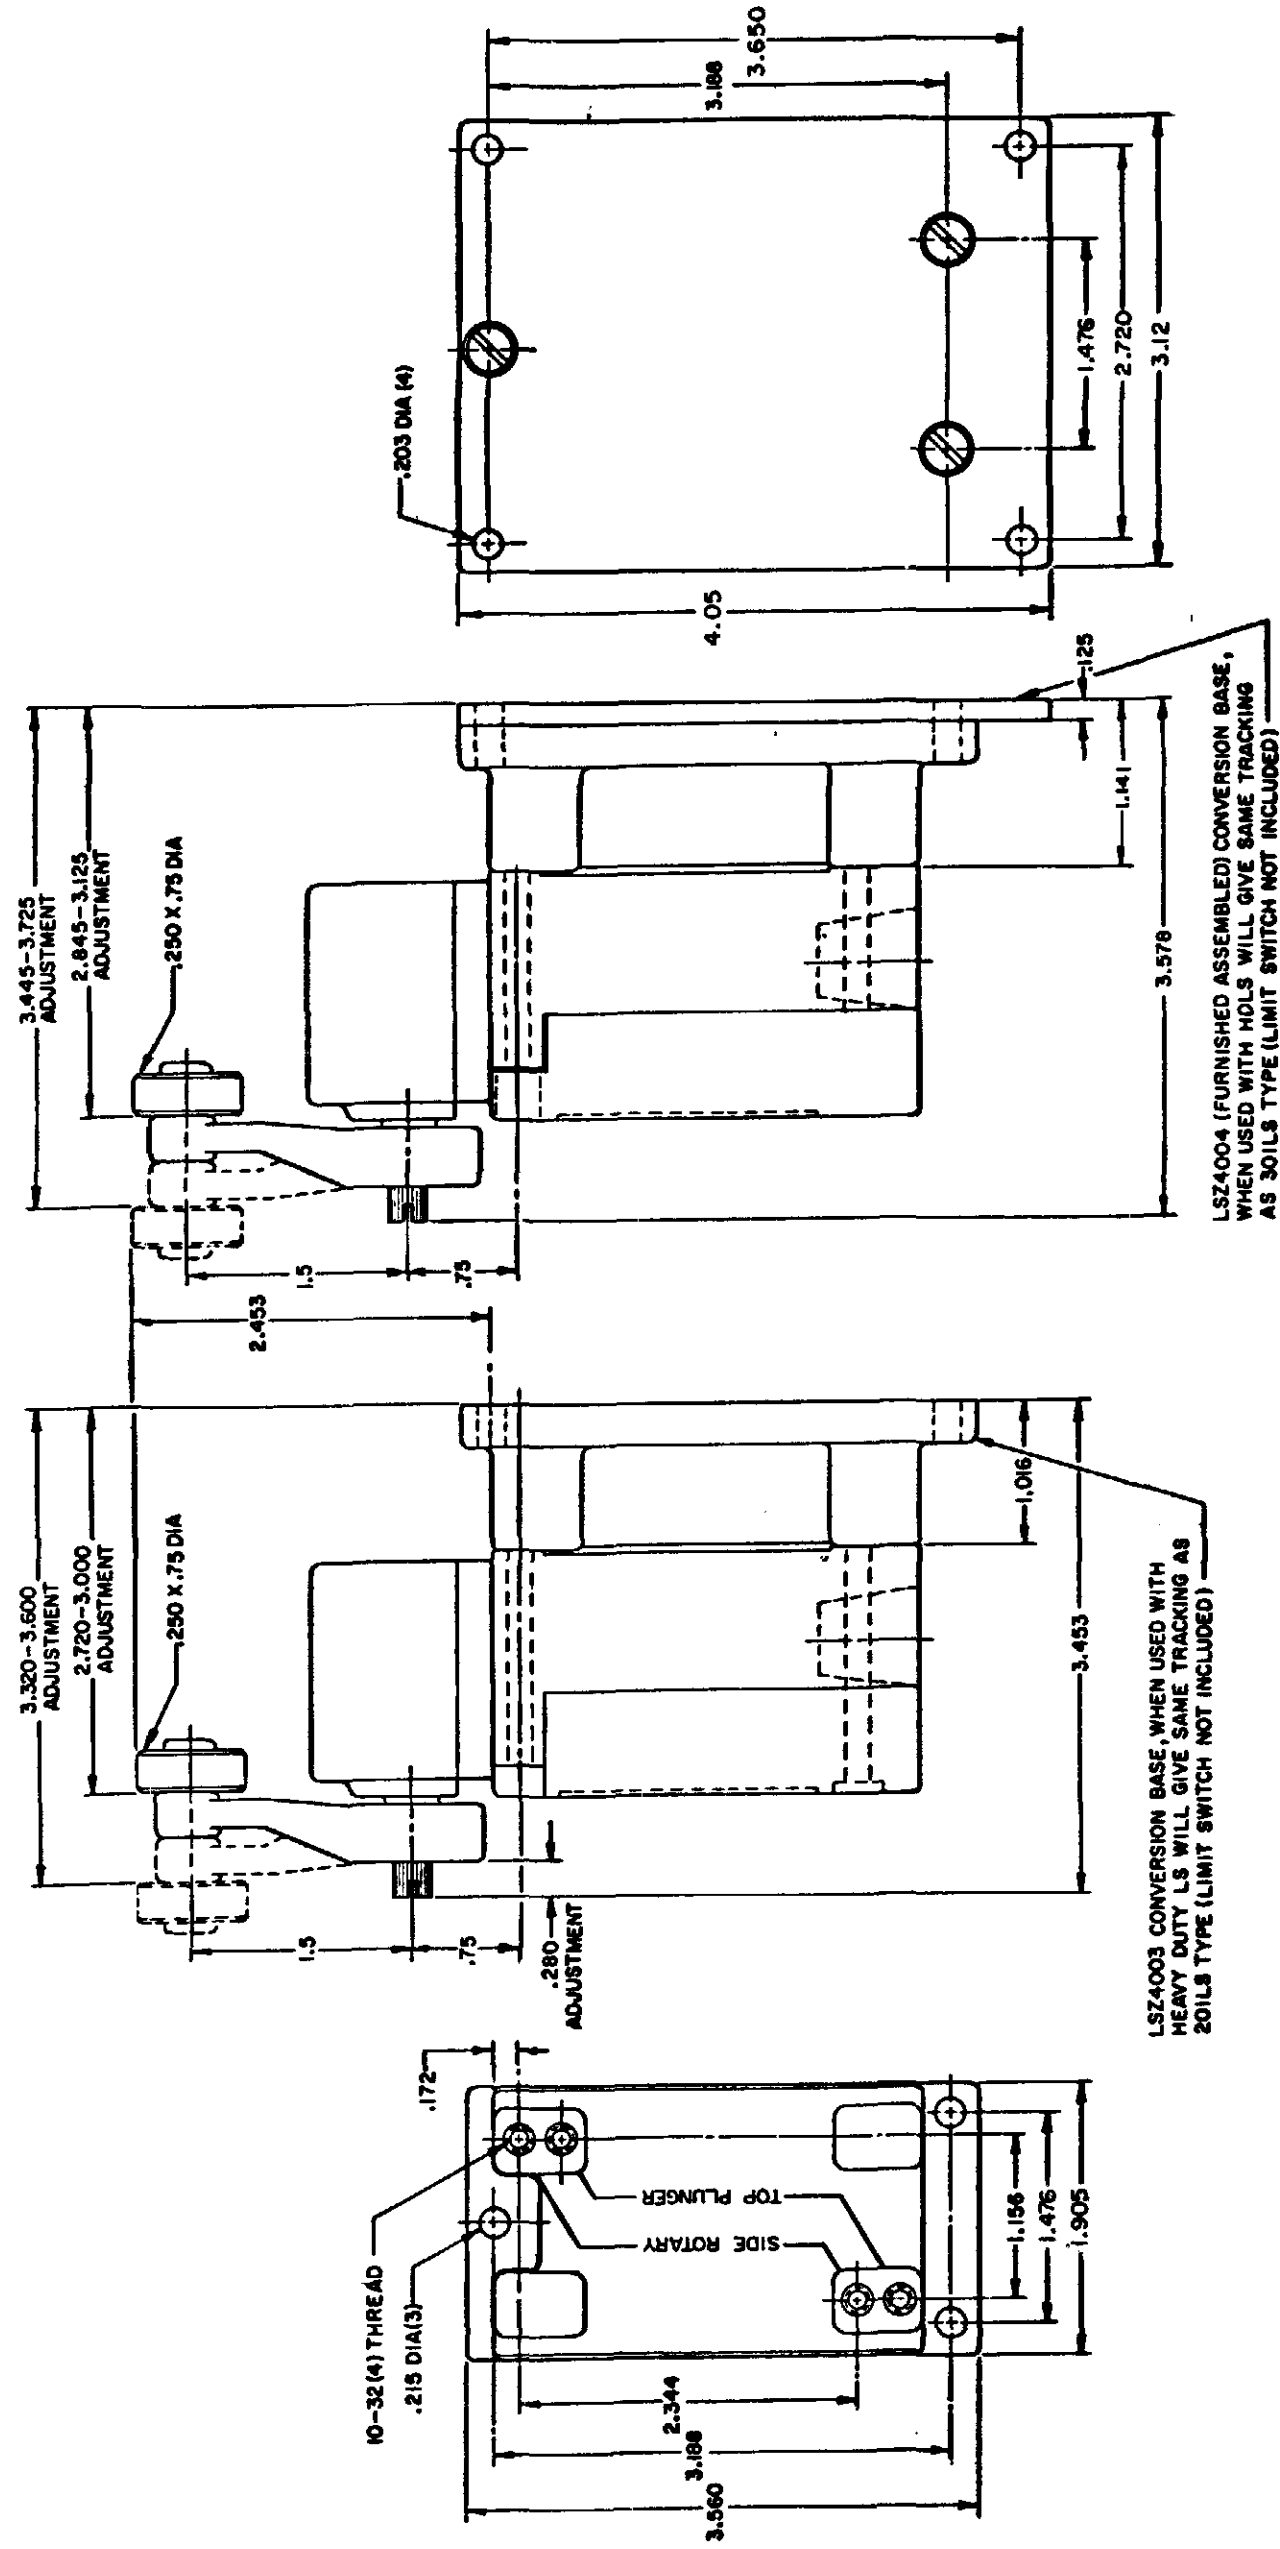

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER LSZ4003

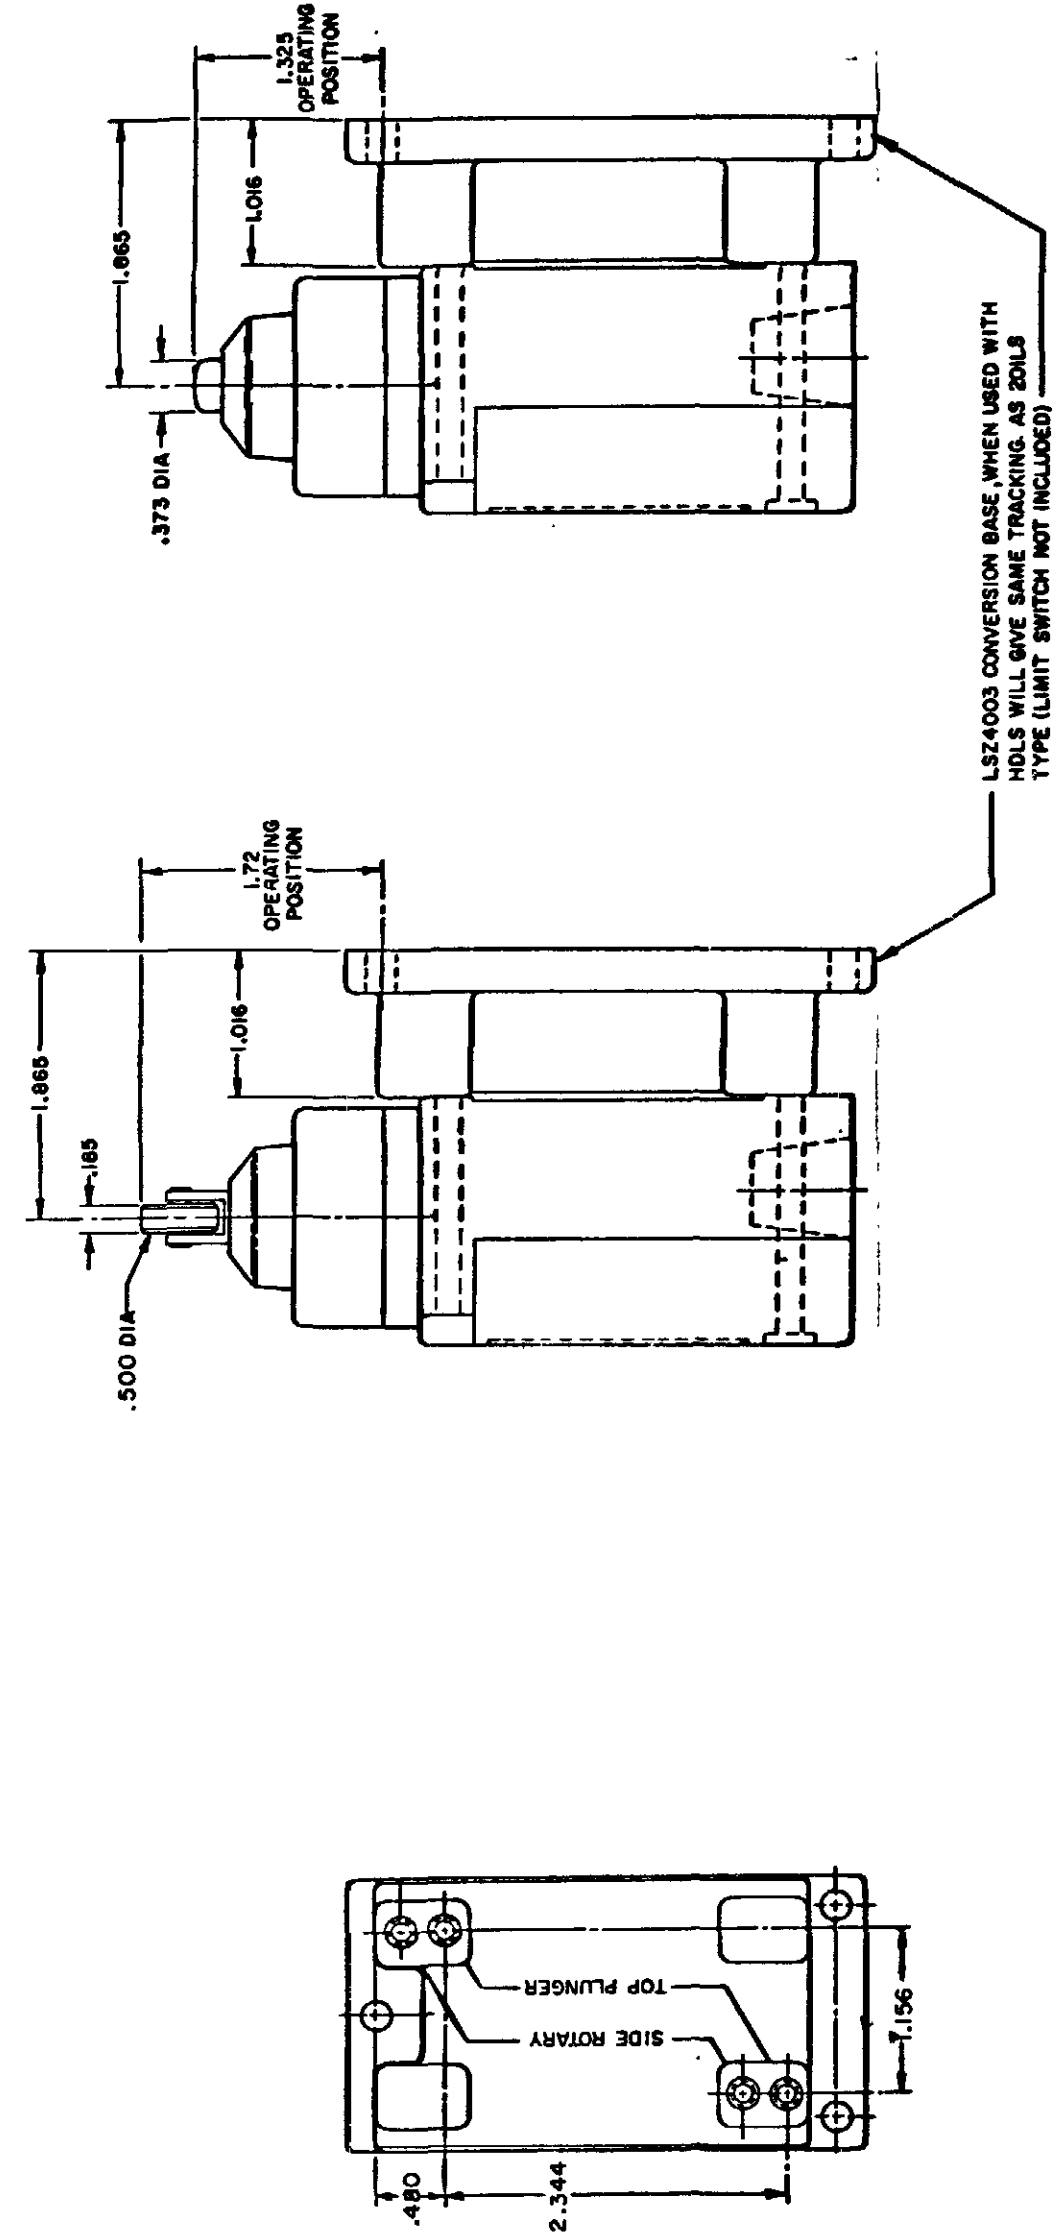

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

CATALOG LISTING
M LSA-LSW SERIES CHART 1
PAGE 10 OF 10
ISSUE 12
PSR 10JUL07
CHECK 11AUG04
AK 11JUL94
MAM 15 JUN 94
DRAWN

REVISIONS
L 0031956
BS 10JUL07
B 201004
CSL 10 AUG 00
C 201748
CSL 17 NOV 00
D 202198
CSL 23 JAN 01
E 204871
GLW FEB 02
F 206581
GCH 14 OCT 02
G 206783
CSL 31 OCT 02
H 207179
GLH 14 JAN 03
J 207474
TSM 18 FEB 03
K 0006871
KR 11AUG04

HEAD TYPE	CELLULOSE DETERGENT 5 STAR ASTM #1 ASTM #2 ASTM #3 ASTM #4 HOUGHTON SAFE 271 HOUGHTON SAFE 620 1010, 1055, 1120 MINERAL OIL PETR. OIL CRUDE SILICON GR & OIL SUNSAFE BEER STODDARD SOLV. CHLORINATED SOLVENTS CITRIC ACID DI-ESTER SYN. LUBRICANTS OZONE HYDRAUL PROGUARD PETRO. BASE HYDRAULIC OIL LARD OIL SILICATE ESTERS																							
LSA	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSB	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSC	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSD	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSE	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSF	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	2	4	4	2	2	2
LSG	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSH	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSJ	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSK	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSL	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSM	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSN	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSP	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSR	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2
LSV	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2
LSW	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	2	4	4	2	2	2
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																							
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																							

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9