


DESCRIPTION

This "Ultrafast Recovery" rectifier diode series is military qualified to MIL-PRF-19500/585 and is ideal for high-reliability applications where a failure cannot be tolerated. These industry-recognized 1.5 to 2.0 Amp rated rectifiers for working peak reverse voltages from 200 to 1000 volts are hermetically sealed with voidless-glass construction using an internal "Category I" metallurgical bond. These devices are also available in surface mount MELF package configurations by adding a "US" suffix (see separate data sheet for 1N6620US thru 1N6625US). Microsemi also offers numerous other rectifier products to meet higher and lower current ratings with various recovery time speed requirements including standard, fast and ultrafast device types in both through-hole and surface mount packages.

APPEARANCE


**Package "A"
Axial**

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- Popular JEDEC registered 1N6620 to 1N6625 series
- Voidless hermetically sealed glass package
- Extremely robust construction
- Triple-layer passivation
- Internal "Category I" Metallurgical bonds
- JAN, JANTX, and JANTXV available per MIL-PRF-19500/585
- Further options for screening in accordance with MIL-PRF-19500 for JANS by using a "SP" prefix, e.g. SP6620, SP6624, etc.
- Surface mount equivalents also available in a square end-cap MELF configuration with "US" suffix (see separate data sheet for 1N6620US thru 1N6625US)

APPLICATIONS / BENEFITS

- Ultrafast recovery rectifier series 200 to 1000 V
- Military and other high-reliability applications
- Switching power supplies or other applications requiring extremely fast switching & low forward loss
- High forward surge current capability
- Low thermal resistance
- Controlled avalanche with peak reverse power capability
- Inherently radiation hard as described in Microsemi MicroNote 050

MAXIMUM RATINGS

- Junction Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +175°C
- Peak Forward Surge Current @ 25°C: 20 Amps (except 1N6625 which is 15 Amps)
Note: Test pulse = 8.3 ms, half-sine wave.
- Average Rectified Forward Current (I_O) at $T_L = +55^\circ\text{C}$ (L=.375 inch from body):
1N6620 thru 1N6622: 2.0 Amps
1N6623 thru 1N6625: 1.5 Amps
(Derate linearly at 0.833%/°C for $T_L > +55^\circ\text{C}$)
- Average Rectified Forward Current (I_O) at $T_A = 25^\circ\text{C}$:
1N6620 thru 1N6622: 1.2 Amps
1N6623 thru 1N6625: 1.0 Amp
(Derate linearly at 0.67%/°C for $T_A > +25^\circ\text{C}$. This I_O rating is typical for PC boards where thermal resistance from mounting point to ambient is sufficiently controlled where $T_{J(max)}$ is not exceeded.)
- Thermal Resistance L= 0.375 inch ($R_{\theta JL}$): 38°C/W
- Capacitance at $V_R = 10$ V: 10 pF
- Solder temperature: 260°C for 10 s (maximum)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed voidless hard glass with Tungsten slugs
- TERMINATIONS: Axial-leads are Copper with Tin/Lead (Sn/Pb) finish
- MARKING: Body painted and part number, etc.
- POLARITY: Cathode indicated by band
- Tape & Reel option: Standard per EIA-296
- Weight: 340 mg
- See package dimensions on last page

ELECTRICAL CHARACTERISTICS @ 25°C

TYPE NUMBER	MINIMUM BREAK- DOWN VOLTAGE V_R $I_R = 50\mu A$	MAXIMUM FORWARD VOLTAGE $V_F @ I_F$		WORKING PEAK REVERSE VOLTAGE V_{RWM}	MAXIMUM REVERSE CURRENT $I_R @$ V_{RWM}		MAXIMUM REVERSE RECOVERY TIME (LOW CURRENT) t_{rr} Note 1	MAXIMUM REVERSE RECOVERY TIME (HIGH CURRENT) t_{rr} Note 2	PEAK RECOVERY CURRENT $I_{RM} (rec)$ $I_F = 2A,$ $100A/\mu s$ Note 2	FORWARD RECOVERY VOLTAGE $V_{FRM} Max$ $I_F = 0.5A$ $t_{fr} = 12ns$
					$T_A = 25^{\circ}C$	$T_A = 150^{\circ}C$				
					μA	μA				
	V	V @ A	V @ A	V	μA	μA	ns	ns	A	V
1N6620	220	1.40V @ 1.2A	1.60V @ 2.0A	200	0.5	150	30	45	3.5	12
1N6621	440	1.40V @ 1.2A	1.60V @ 2.0A	400	0.5	150	30	45	3.5	12
1N6622	660	1.40V @ 1.2A	1.60V @ 2.0A	600	0.5	150	30	45	3.5	12
1N6623	880	1.55V @ 1.0A	1.80V @ 1.5A	800	0.5	150	50	60	4.2	18
1N6624	990	1.55V @ 1.0A	1.80V @ 1.5A	900	0.5	150	50	60	4.2	18
1N6625	1100	1.75V @ 1.0A	1.95V @ 1.5A	1000	1.0	200	60	80	5.0	30

NOTE 1: Low Current Reverse Recovery Time Test Conditions: $I_F = 0.5A$, $I_{RM} = 1.0A$, $I_{R(REC)} = 0.25A$ per MIL-STD-750, Method 4031, Condition B.

NOTE 2: High Current Reverse Recovery Time Test Conditions: $I_F = 2A$, $di/dt = 100 A/\mu s$ MIL-STD-750, Method 4031, Condition D.

SYMBOLS & DEFINITIONS

Symbol	Definition
V_{BR}	Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range.
V_F	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
I_R	Maximum Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.
C	Capacitance: The capacitance of the TVS as defined @ 0 volts at a frequency of 1 MHz and stated in picofarads.
t_{rr}	Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified recovery decay point after a peak reverse current is reached.

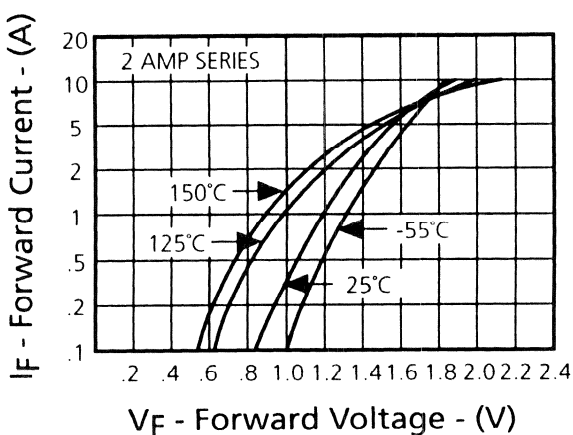
CHARTS AND GRAPHS


FIGURE 1
Typical Forward Current
vs
Forward Voltage

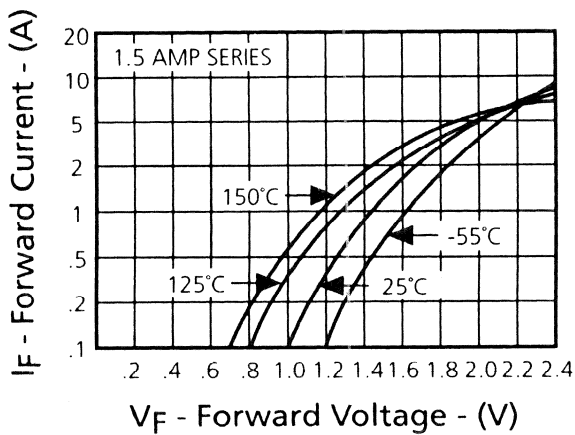


FIGURE 2
Typical Forward Current
vs
Forward Voltage

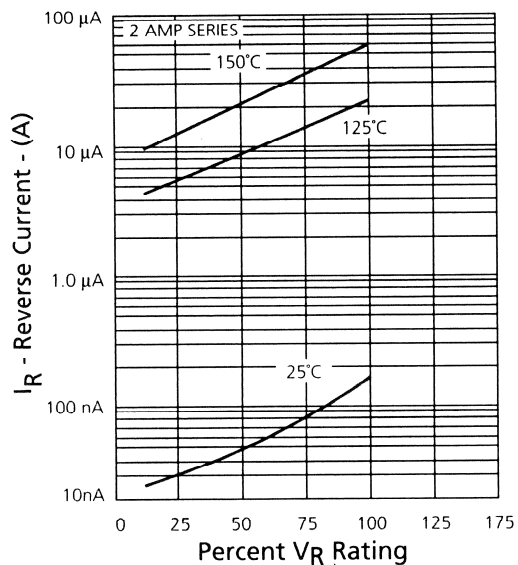


FIGURE 3
Typical Reverse Current vs.
Applied Reverse Voltage

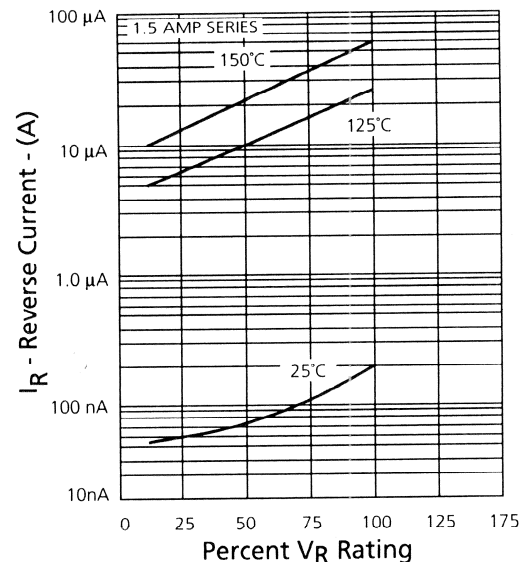


FIGURE 4
Typical Reverse Current vs.
Applied Reverse Voltage

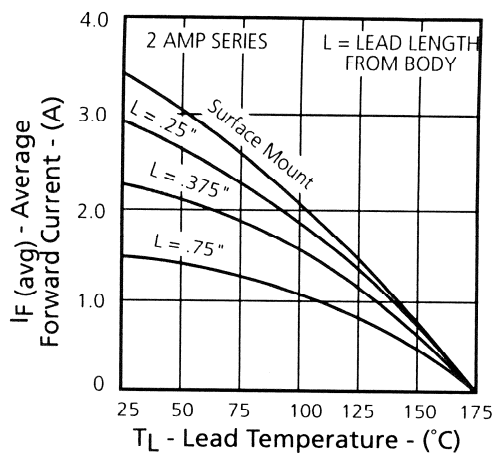


FIGURE 5
Average Forward Current vs.
Lead Temperature (50% Duty Cycle, Square Wave)

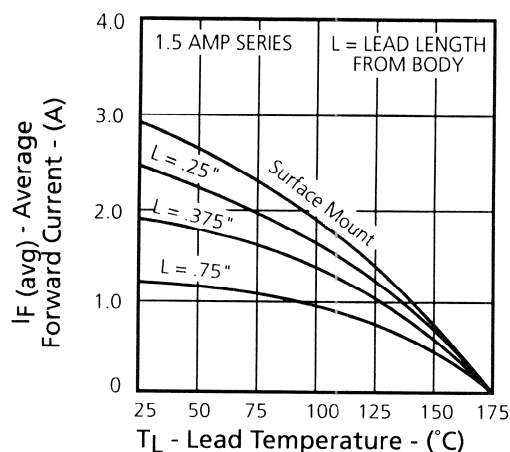


FIGURE 6
Average Forward Current vs.
Lead Temperature (50% Duty Cycle, Square Wave)

**VOIDLESS-HERMETICALLY SEALED
ULTRA FAST RECOVERY GLASS
RECTIFIERS**

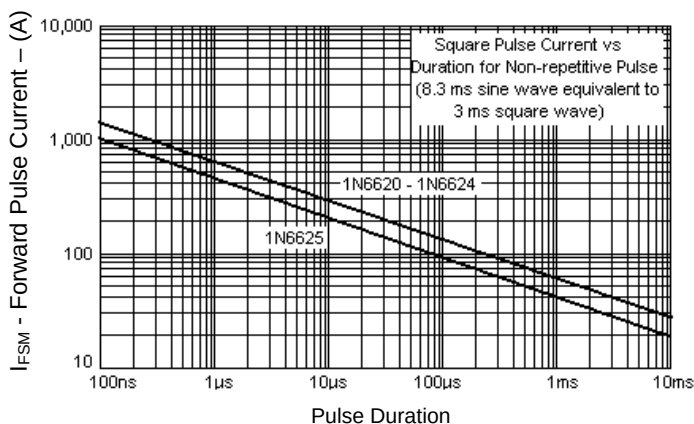


FIGURE 7
Forward Pulse Current vs.
Pulse Duration


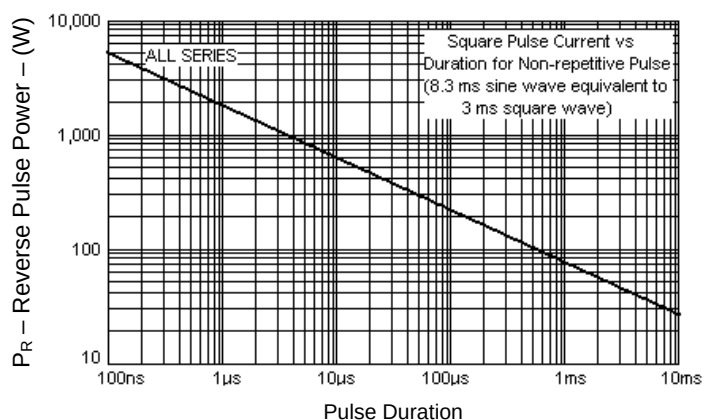


FIGURE 8
Reverse Pulse Power vs.
Pulse Duration

PACKAGE DIMENSIONS

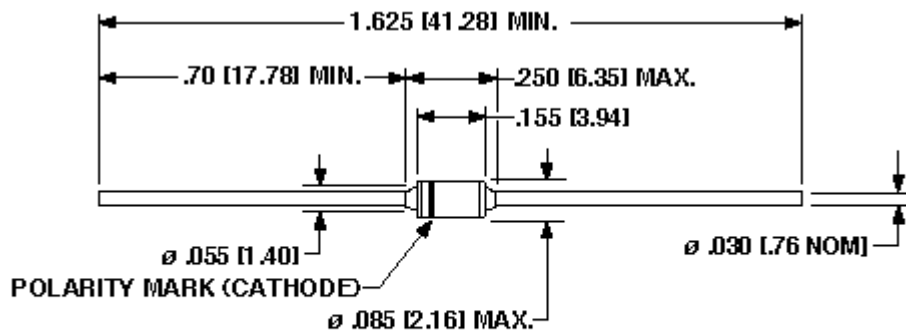

NOTE: DIMENSIONS IN INCHES [mm]

Lead tolerance = +0.002/-0.003 inches

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[JANTX1N6622U](#) [JANS1N6620](#) [JAN1N6621/TR](#) [JANTX1N6623/TR](#) [JAN1N6624/TR](#) [JANTX1N6622/TR](#) [1N6620/TR](#)
[JAN1N6620/TR](#) [JANTX1N6621/TR](#) [JANTX1N6620/TR](#) [1N6625/TR](#) [JANTXV1N6623/TR](#) [JANTX1N6624/TR](#)
[1N6620e3/TR](#) [JANTXV1N6620/TR](#) [JANTX1N6625/TR](#) [1N6622/TR](#) [1N6623/TR](#) [JAN1N6623/TR](#) [JANTXV1N6621/TR](#)
[1N6620e3](#) [1N6621/TR](#) [JAN1N6625/TR](#) [JAN1N6620U/TR](#) [JANTXV1N6624/TR](#) [JANTXV1N6622/TR](#)
[JANTXV1N6625/TR](#) [1N6622E3](#) [1N6625E3](#) [1N6622E3/TR](#) [1N6624/TR](#) [1N6625E3/TR](#) [JAN1N6622/TR](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9