


Power Relay F7

- Pin assignment similar to ISO 7588 part 1
- Customized versions on request
 - 24VDC versions with contact gap >0.8mm
 - Integrated components (e.g. resistor, diode)
 - Customized marking/color
 - Special covers (e.g. notches, release features, brackets)

Typical applications

Cross carline up to 70A for example: ABS control, cooling fan, energy management, engine control, glow plug, heated front screen, ignition, lamps: front, rear, fog light, main switch/supply relay.

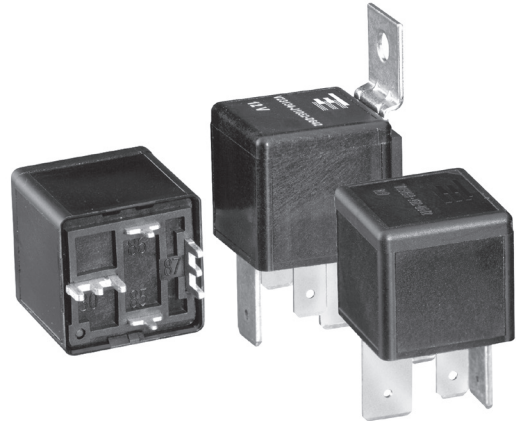

F134J_a_bw

Contact Data

| | | | |
|---|--|---|--------------------------------|
| Contact arrangement | 1 form A, 1 NO | 1 form A, 1 NO | 1 form A, 1 NO |
| Contact gap | – | – | >0.8mm |
| Rated voltage | 12VDC | 24VDC | 24VDC ¹⁾ |
| Limiting continuous current | | | |
| 23°C | 70A | 70A | 70A |
| 85°C | 50A | 50A | 50A |
| 125°C | 30A | 30A | 30A |
| Limiting making current ²⁾ | 240A | 240A | 240A |
| Limiting breaking current | 70A | 25A | 40A |
| Limiting short-time current overload current, ISO 8820-3 ³⁾ | | 1.35 x 50A, 1800s 2.00 x 50A, 5s 3.50 x 50A, 0.5s 6.00 x 50A, 0.2s | |
| Jump start test, ISO 16750-1 | | 24VDC for 5min, conducting nominal current at 23°C | |
| Contact material | | Silver based | |
| Min. recommended contact load ⁴⁾ | | 1A at 5VDC | |
| Initial voltage drop, form A (NO) contact at 10A, typ./max. | | 10/300mV | |
| Frequency of operation at nominal load | | 6 ops./min (0.1Hz) | |
| Operate/release time typ. | | 7/2ms ⁵⁾ | |
| Electrical endurance ⁶⁾ | | | |
| resistive load at 14VDC | >1x10 ⁵ ops. 70A >2x10 ⁵ ops. 50A | – | – |
| resistive load at 28VDC | – | >1x10 ⁵ ops. 25A | >1x10 ⁵ ops. 40A |

Contact Data (continued)

| | |
|---|-------------------------|
| Mechanical endurance | >1x10 ⁶ ops. |
| 1) Special high performance 24VDC version with contact gap >0.8mm. | |
| 2) The values apply to a resistive or inductive load with suitable spark suppression and at maximum 14VDC for 12VDC or 28VDC for 24VDC load voltages. For a load current duration of maximum 3s for a make/break ratio of 1:10. | |
| 3) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current. | |
| 4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at http://relays.te.com/appnotes/ | |
| 5) For unsuppressed relay coil. Any parallel device to the coil will increase the release time. | |
| 6) Electrical endurance data is not valid for diode versions. Any diode or pn-junction parallel to the coil (internal or external) will significantly decrease the electrical lifetime, especially when used for inductive loads. | |

Coil Data

| | |
|--------------------|--------------|
| Rated coil voltage | 12VDC, 24VDC |
|--------------------|--------------|

Coil versions, DC coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance ⁷⁾ Ω±10% | Rated coil power ⁷⁾ W |
|-----------|-------------------|---------------------|---------------------|-------------------------------------|----------------------------------|
| 052 | 12 | 7.2 | 1.6 | 90 | 1.6 |
| 053 | 24 | 14.4 | 3.2 | 324 | 1.8 |
| 065 | 24 | 14.4 | 2.4 | 288 | 2.0 |
| 165 | 24 | 16.0 | 4.0 | 288 | 2.0 |

7) Without components in parallel.


All figures are given for coil without pre-energization, at ambient temperature +23°C.

Max. DC load breaking capacity



Load limit curve: safe shutdown, no stationary arc/make contact.
Load limit curve measured with low inductive resistors verified for 1000 switching events.

Coil operating range

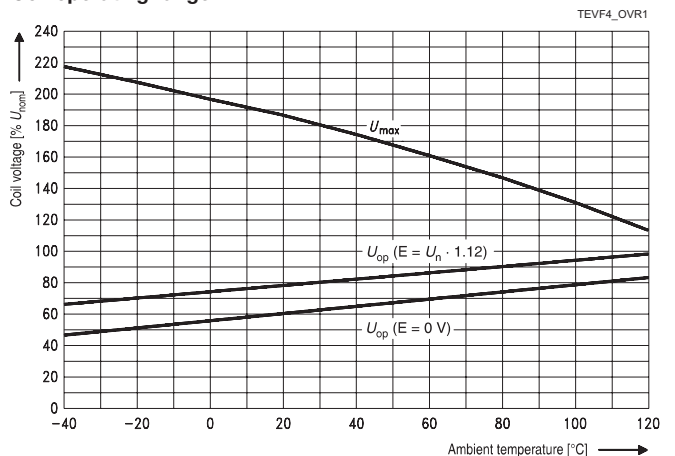

Does not take into account the temperature rise due to the contact current
E = pre-energization.

Power Relay F7 (Continued)

Insulation Data

| | |
|----------------------------------|--------------------------|
| Initial dielectric strength | |
| between open contacts | 500V _{rms} |
| between contact and coil | 500V _{rms} |
| between adjacent contacts | 500V _{rms} |
| Load dump test | |
| ISO 7637-1 (12VDC), test pulse 5 | V _s =+86.5VDC |
| ISO 7637-2 (24VDC), test pulse 5 | V _s =+200VDC |

Other Data

| | |
|---|--|
| EU RoHS/ELV compliance | compliant |
| Protection to heat and fire according UL-94 | HB or better ⁸⁾ |
| Ambient temperature | -40 to 125°C |
| Climatic cycling with condensation EN ISO 6988 | 6 cycles, storage 8/16h |
| Temperature cycling, IEC 60068-2-14, Nb | 10 cycles, -40/+85°C (5°C/min) |
| Damp heat cyclic, IEC 60068-2-30, Db, Variant 1 | 6 cycles, upper air temp. 55°C |
| Damp heat constant, IEC 60068-2-3, Ca | 56 days |
| Category of environmental protection, IEC 61810 | RTI – dustproof |
| Degree of protection, IEC 60529 | IP54 (dustproof) |
| Corrosive gas | |
| IEC 60068-2-42 | 10±2cm ³ /m ³ SO ₂ , 10 days |
| IEC 60068-2-43 | 1±0.3cm ³ /m ³ H ₂ S, 10 days |
| Vibration resistance (functional) IEC 60068-2-6 (sine sweep) | 10 to 500Hz, min. 5g ⁹⁾ |

Other Data (continued)

| | |
|---|------------------------------|
| Shock resistance (functional) IEC 60068-2-27 (half sine) | 6ms, min. 30g. ⁹⁾ |
| Drop test, free fall IEC 60068-2-32 | 1m onto concrete |
| Terminal type | plug-in, QC/ PCB |
| Cover retention | |
| pull force | 150N |
| push force | 200N |
| Terminal retention | |
| pull force | 150N |
| push force | 150N |
| resistance to bending | 10N ¹⁰⁾ |
| force applied to side | 10N ¹⁰⁾ |
| torque | 0.3Nm |
| Weight | approx. 38g (1.3oz) |
| Resistance to soldering heat THT IEC 60068-2-20 | 260°C, 10s |
| Packaging unit | |
| plug-in: | 210 pcs. |
| plug-in with bracket: | 208 pcs. |
| PCB | 315 pcs. |

8) Refers to used materials.

9) No change in the switching state >10µs. Valid for NC contacts, NO contact values significantly higher.


10) Values apply 2mm from the end of the terminal. When the force is removed, the terminal must not have moved by more than 0.3mm.

Accessories

For details see datasheet

Connectors for Maxi ISO Relays



Terminal Assignment

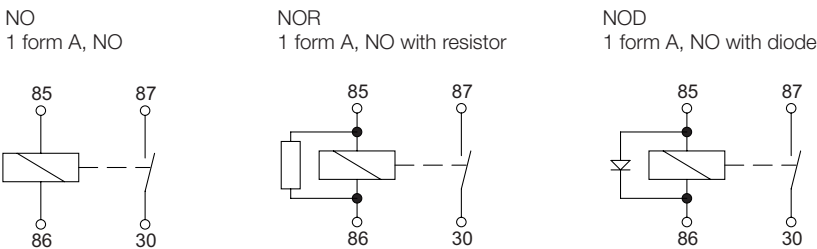

Dimensions

Power Relay F7 with quick connect terminals similar to ISO 8092-1

View of the terminals (bottom view)

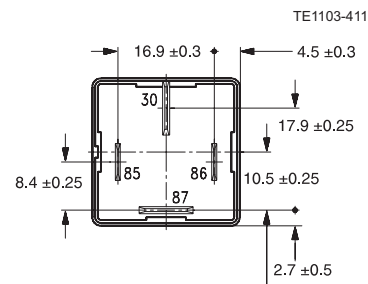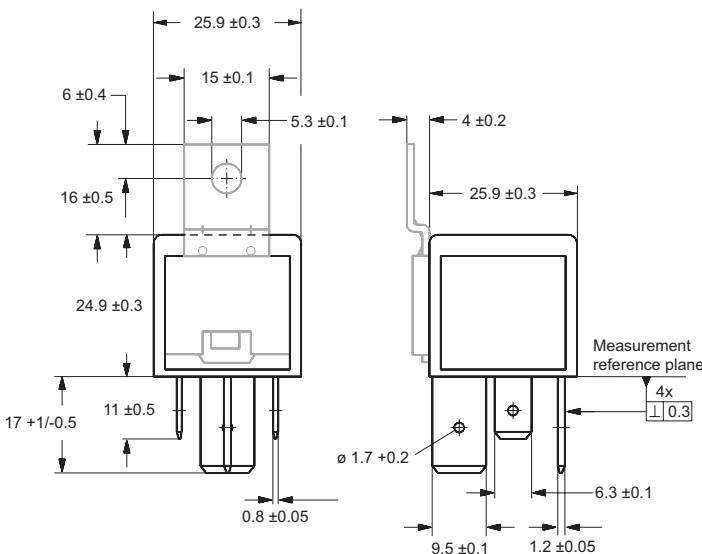





Power Relay F7 (Continued)

Dimensions (continued)

Power Relay F7 with PCB terminals

View of the terminals (bottom view)

Mounting hole layout (bottom view)

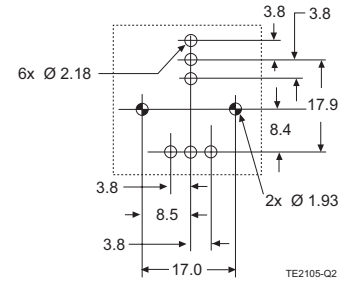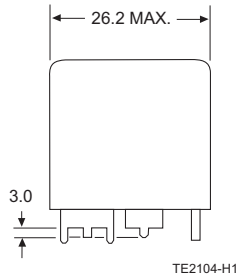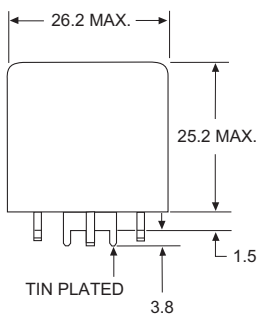

Product code structure

Typical product code **V23134 -J 0 052 -D642**

| | | | | |
|-----------------------------|--|-------------------------------------|--|--|
| Type | V23134 Power Relay F | | | |
| Contact arrangement | J 1 form A, 1 NO | | | |
| Cover | 0 Standard | 1 Bracket at terminal 30 ISO | | |
| | 2 Bracket near terminal 86 ISO | | | |
| Coil | 052 12VDC | 053 24VDC | | |
| | 165 24VDC | 065 24VDC | | |
| Terminal/arrangement | D642 Plug-in/NO | | | |
| | Xnnn Customized (nnn: version number) | | | |

Production in Europe (only)

| Product code | Arrangement | Cover | Coil suppl. | Circuit ¹⁾ | Coil | Contact mat. | Terminals | Part number |
|-----------------------------------|----------------|----------|--------------------|-----------------------|-------|--------------|-------------|-------------|
| V23134-J0052-D642 | 1 form A, 1 NO | Standard | | NO | 12VDC | Silver based | Plug-in, QC | 7-1393303-3 |
| V23134-J0052-X429 | | | Resistor 680Ω | NOR | | | | 1-1414147-0 |
| V23134-J0052-X439 | | | Diode (cathode 86) | NOD | | | | 1-1414286-0 |
| V23134-J0052-X455 | | | Resistor 470Ω | NOR | | | PCB | 1-1414610-0 |
| V23134-J0052-X511 | | | | NO | | | | 3-1415001-2 |
| V23134-J0052-X461 ³⁾ | | | Resistor 560Ω | NOR | | | Plug-in, QC | 1-1414469-0 |
| V23134-J0053-D642 | | | | NO | 24VDC | | | 9-1393303-7 |
| V23134-J0065-X497 ⁴⁾ | | | | | | | PCB | 3-1414937-3 |
| V23134-J0165-X537 ²⁾³⁾ | | | Resistor 1200Ω | NOR | | | Plug-in, QC | 3-1904117-4 |
| V23134-J1052-D642 | | Bracket | | NO | 12VDC | | | 0-1393304-9 |
| V23134-J1052-X281 | | | Resistor 560Ω | NOR | | | | 1-1393304-0 |
| V23134-J1053-D642 | | | | NO | 24VDC | | | 1-1393304-1 |
| V23134-J2165-X538 ²⁾³⁾ | | | Resistor 1200Ω | NOR | | | | 3-1904117-5 |

1) See terminal assignment diagrams. 2) Special feature: contact gap >0.8mm. Other types on request.
3) Special feature: 14.5mm load terminals. 4) Packed in tray with 300 pcs. per unit.
This list represents the most common types and does not show all variants covered by this datasheet.

Production in Asia (only)

| Product code | Arrangement | Cover | Coil suppl. | Circuit ¹⁾ | Coil | Contact mat. | Terminals | Part number |
|---------------------------------|----------------|----------|--------------------|-----------------------|-------|--------------|-------------|-------------|
| V23134-J0052-D642 | 1 form A, 1 NO | Standard | | NO | 12VDC | Silver based | Plug-in, QC | 7-1904094-7 |
| V23134-J0052-X429 | | | Resistor 680Ω | NOR | | | | 7-1904094-8 |
| V23134-J0052-X439 | | | Diode (cathode 86) | NOD | | | | 7-1904094-9 |
| V23134-J0052-X461 ³⁾ | | | Resistor 560Ω | NOR | | | | 8-1904094-0 |
| V23134-J0053-D642 | | | | NO | 24VDC | | | 8-1904094-3 |

1) See terminal assignment diagrams. 2) Special feature: contact gap >0.8mm. Other types on request.
3) Special feature: 14.5mm load terminals.
This list represents the most common types and does not show all variants covered by this datasheet.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9