

## 45/60 Watts

- AC Input LED Driver
- Constant Voltage/Constant Current Operation
- Constant Current Dimming Versions
- High Efficiency
- Water Proof to IP67
- Class 2
- 3 Year Warranty



The DLE series of AC input LED drivers incorporate universal input with active power factor correction in a two power stage design, eliminating flicker while providing a high efficiency solution. Designed as a class II isolation product, without the need for a safety earth, DLE series LED drivers are also approved as a class 2 limited power source, making them suitable for a wide range of applications. Dimmable constant current versions are available with the facility for PWM, voltage and resistance programming.

**Dimensions:**

**DLE45/60:**

6.73 x 1.78 x 1.27" (164.1 x 45.3 x 32.5 mm)

### Models & Ratings - Constant Voltage / Constant Current Models

Output Power	Output Voltage	Output Current	Output Voltage Range in Constant Current Mode	OVP Range	Efficiency <sup>(1)</sup>	Model Number
45 W	24 V	1850 mA	16 - 24 V	26.4-31.2 V	85.0%	DLE45PS24
45 W	36 V	1250 mA	24 - 36 V	39.6-46.8 V	86.0%	DLE45PS36
48 W	48 V	1000 mA	34 - 48 V	52.8-62.4 V	87.0%	DLE45PS48
40 W	57 V	700 mA	40 - 57 V	62.9-70.0 V	87.0%	DLE45PS57
50 W	12 V	4200 mA	9 - 12 V	13.2-15.6 V	86.0%	DLE60PS12
60 W	24 V	2500 mA	16 - 24 V	26.4-31.2 V	86.0%	DLE60PS24
60 W	36 V	1650 mA	24 - 36 V	39.6-46.8 V	87.0%	DLE60PS36
60 W	48 V	1250 mA	34 - 48 V	52.8-62.4 V	88.0%	DLE60PS48
60 W	57 V	1050 mA	40 - 57 V	62.9-70.0 V	88.0%	DLE60PS57

### Models & Ratings - Dimmable Models

Output Power	Output Voltage	Output Current	Output Voltage Range in Constant Current Mode	OVP Range	Efficiency <sup>(1)</sup>	Model Number
45 W	24 V	1850 mA	16 - 24 V	26.4-31.2 V	85.0%	DLE45PS1850-AD
45 W	36 V	1250 mA	24 - 36 V	39.6-46.8 V	86.0%	DLE45PS1250-AD
48 W	48 V	1000 mA	34 - 48 V	52.8-62.4 V	87.0%	DLE45PS1000-AD
40 W	57 V	700 mA	40 - 57 V	62.9-70.0 V	87.0%	DLE45PS700-AD
50 W	12 V	4200 mA	9 - 12 V	13.2-15.6 V	86.0%	DLE60PS4200-AD
60 W	24 V	2500 mA	16 - 24 V	26.4-31.2 V	86.0%	DLE60PS2500-AD
60 W	36 V	1650 mA	24 - 36 V	39.6-46.8 V	87.0%	DLE60PS1650-AD
60 W	48 V	1250 mA	34 - 48 V	52.8-62.4 V	88.0%	DLE60PS1250-AD
60 W	57 V	1050 mA	40 - 57 V	62.9-70.0 V	88.0%	DLE60PS1050-AD

**Notes**

1. Typical efficiency at full load and 230 VAC input.


### Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage - Operating	90		305	VAC	See derating curve
Input Frequency	47		63	Hz	
Power Factor		>0.9			Measured at 230 VAC, full load
Input Current		0.6		A	115 VAC
		0.3			230 VAC
Inrush Current			45	A	230 VAC cold start, +25 °C
Input Protection	Internal T1.0 A/250 V fuse fitted in line				

### Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	12		57	VDC	See models and ratings table
Minimum Load					No minimum load required
Start Up Delay			1.5	s	Measured at 115 VAC
Hold Up Time	20			ms	
Line Regulation			±0.5	%	
Load Regulation		±1		%	Constant voltage mode
		±5			Constant current mode
Turn On Overshoot			7	%	Constant voltage mode
Transient Response			4	%	Deviation, recovery to within 1% in 10 ms for a 50% load change
Ripple & Noise			200/250	mV pk-pk	≤24 V/>24 V. Measured using 12" twisted pair with 0.1 μF and 47 μF capacitors in parallel at 20 MHz bandwidth, at 25 °C
Oversvoltage Protection					See models and ratings table, recycle AC to Reset
Overload Protection	95		105	%	Auto Recovery
Short Circuit Protection					Trip & restart (hiccup mode)
Temperature Coefficient		0.04		%/°C	

### Constant Current Curve

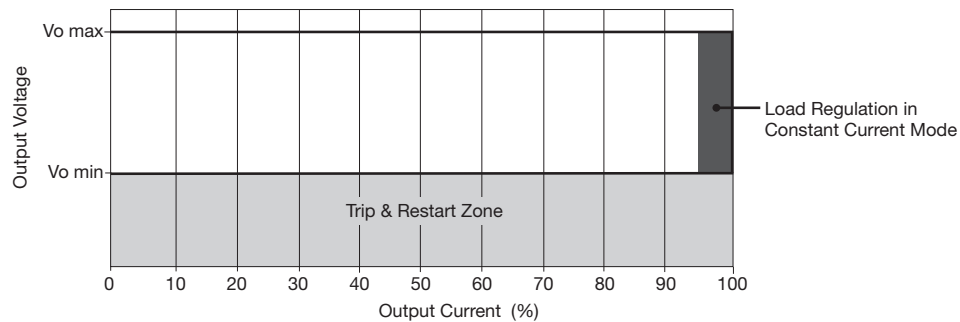



### General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		87		%	See models and tables
Isolation: Input to Output	3750			VAC	
Switching Frequency		100		kHz	
Mean Time Between Failure		>200		kHrs	MIL-HDBK-217F at 25 °C GB
Weight		0.9 (410)		lb (kg)	

### Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-20		+50	°C	See derating curve
Operating Humidity	20		90	%	RH, non-condensing
Storage Temperature	-40		+80	°C	Some specification parameters maybe exceeded until after 20 minutes warm up period.
Operating Altitude			3000	m	
Shock					30 g pk, half sine, 6 axes EN60068-2-27, -2-47 & MIL-STD-810F 514.5 cat 4
Vibration					10-500 Hz, 2 g, 10 mins/cycle, 6 cycles in each of axes

### Derating Curves

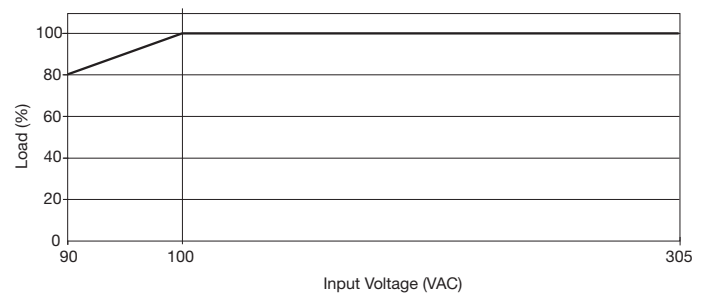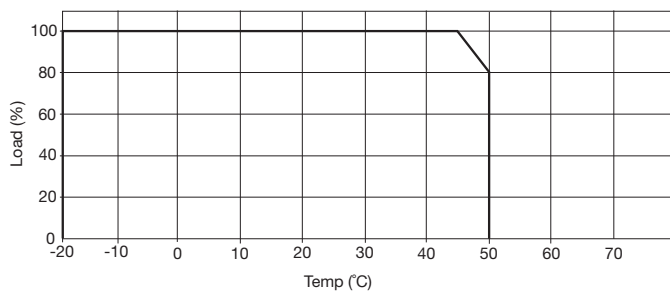

### EMC: Emissions

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Conducted	EN55015	Class B		
Radiated	EN55015	Class B		
Harmonic Current	EN61000-3-2	Class C		
Voltage Fluctuations	EN61000-3-3			


### EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Equipment for General Lighting Purposes	EN61547	as below	as below	
ESD Immunity	EN61000-4-2		A	8 kV air and 4 kV contact
Radiated Immunity	EN61000-4-3	2	A	
EFT/Burst	EN61000-4-4	2	A	
Surges	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	2	A	
Magnetic Field	EN61000-4-8	2	A	
Dips and Interruptions	EN61000-4-11	Dip: 30%, 10 ms	A	
		Dip: 30%, 200 ms	A/B	At 230 VAC/100 VAC
		Int: 100%, 8.3 ms	A/B	At 230 VAC/100 VAC


### Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
UL	UL8750	
TUV	EN61347	
CE	CE Mark	
IEC	IEC61347-2-13 used in conjunction with IEC61347-1	
IP	IEC60529	

### Mechanical Details - Constant Voltage / Constant Current

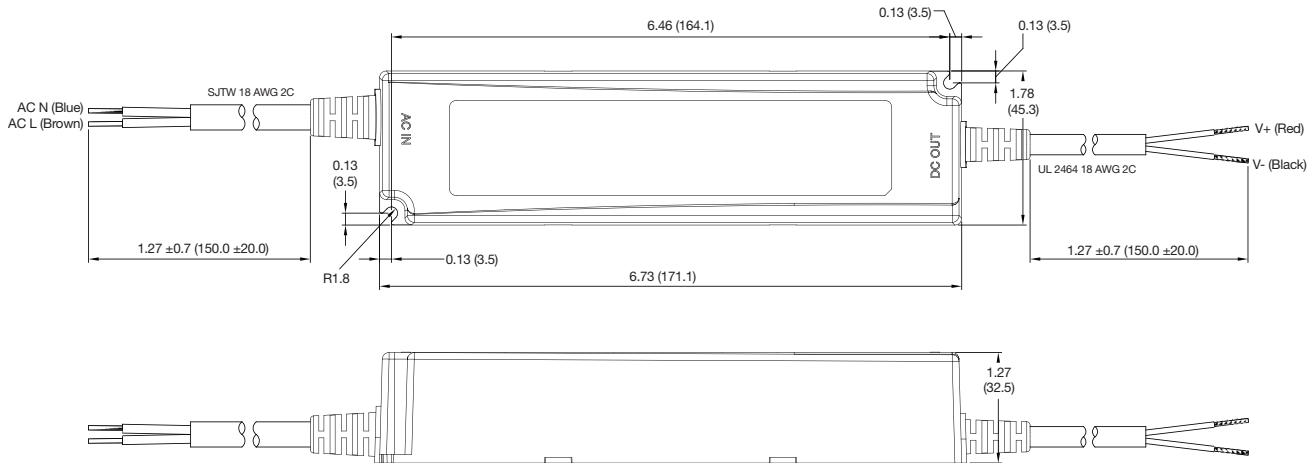

### Mechanical Details - Dimmable Version

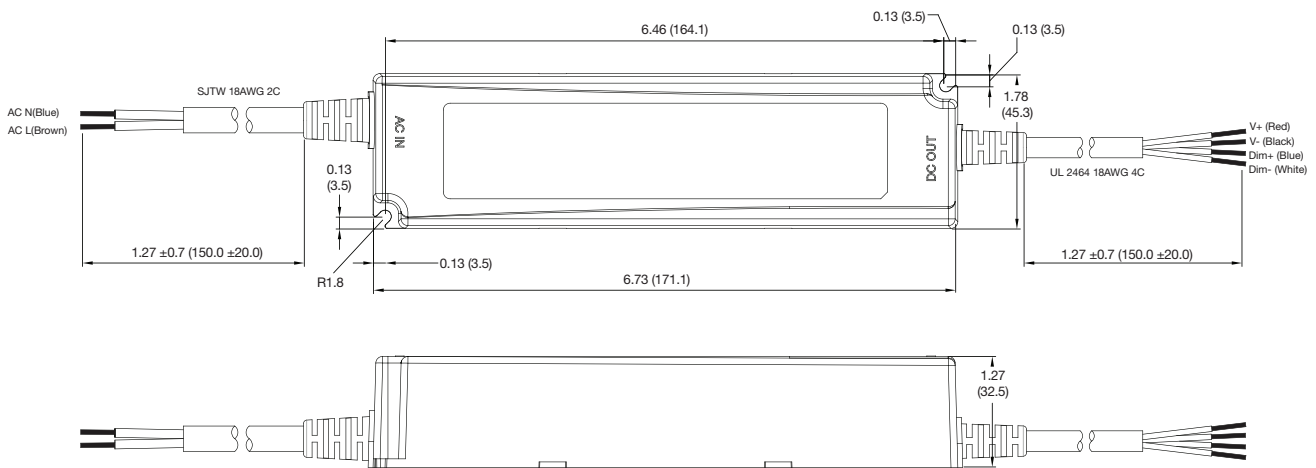


#### Notes

1. Dimensions shown in inches (mm).
2. Weight: 2.8 lb (1.27 kg).

3. Tolerance: 0.X = ±0.008 (±0.2)  
0.XX = ±0.002 (±0.05)

## Output Current Adjustment by Variable Resistor

Connect a variable resistor between Dim+ and Dim-.




The Dimmed output current can be determined using the equation:

$$\text{Dimmed Current} = \frac{\text{Maximum Current} \times R}{100 \text{ k}}$$

Where the value of R is between 10 kΩ and 100 kΩ. The corresponding range of output current is 10% to 100%

## Output Current Adjustment by DC Voltage

Connect a variable voltage between Dim+ and Dim-.

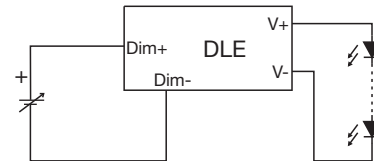


The dimmed output current is given by:

$$\text{Dimmed Current} = \frac{\text{Maximum Current} \times V}{10 \text{ k}}$$

Where V is the value of control voltage in the range of 1.0 V to 10.0 VDC. The corresponding range of output current is 10% to 100%.

## Output Current Adjustment by PWM

A Pulse Width Modulated (PWM) signal with duty cycle DPWM can be applied between Dim+ and Dim-.

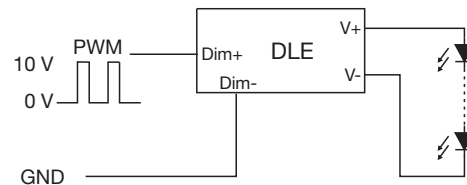

The dimmed output current is given by:

$$\text{Dimmed Current} = \text{Maximum Current} \times \text{DP}_{\text{PWM}} \%$$

(DP<sub>PWM</sub> = PWM duty cycle)

Where DP<sub>PWM</sub> is the % of duty cycle between 10% and 100%. The corresponding range of output current is 10% to 100%. PWM frequency should be in the range 0.5 kHz to 5 kHz

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9