

# General Specifications

## Electrical Capacity (Resistive Load)

**Power Level (silver):** 6A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC

**Logic Level (gold):** 0.4VA maximum @ 28V AC/DC maximum

(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

**Note:** Find additional explanation of operating range in Supplement section.

## Other Ratings

**Contact Resistance:** 10 milliohms maximum for silver; 20 milliohms maximum for gold

**Insulation Resistance:** 1,000 megohms minimum @ 500V DC

**Dielectric Strength:** 1,000V AC minimum between contacts for 1 minute minimum;

1,500V AC minimum between contacts & case for 1 minute minimum

**Mechanical Life:** 50,000 operations minimum

**Electrical Life:** 25,000 operations minimum

**Nominal Operating Force:** On-to-On Position Off-to-On Position

Single Pole 3.19N 3.92N

Double Pole 4.41N 7.06N

**Angle of Throw:** 20°

## Materials & Finishes

**Bushing:** Brass with nickel plating

**Housing:** Stainless steel

**Mounting Bracket:** Steel with tin plating

**Movable Contacts:** Silver alloy or silver alloy with gold plating

**Stationary Contacts:** Silver with silver plating or copper or brass with gold plating

Phosphor bronze

**Base:** Diallyl phthalate (UL94V-0)

**Switch Terminals:** Copper with silver or gold plating

**Lamp Terminals:** Brass with silver or gold plating

## Environmental Data

**Operating Temp Range:** -10°C through +55°C (+14°F through +131°F)

**Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)

**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours

**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

## Installation

**Mounting Torque:** 1.47Nm (13 lb-in) for double nut; .67Nm (6 lb-in) for single nut

**Soldering Time & Temp:** Wave Soldering (PC version): See Profile B in Supplement section.

Manual Soldering: See Profile B in Supplement section.

**Note:** Lever must be in center position while soldering.

PC mountable device is not process sealed. Hand clean locally using alcohol based solution.

**Cleaning:**

## Standards & Certifications

**Flammability Standards:** UL94V-0 base

**UL:** File No. E44145 - Recognized only when ordered with marking on switch.

Add "/U" to end of part number to order UL recognized switch.

Single pole with synchronous circuits & single color LEDs & solder lug or PC recognized at 6A @ 125V AC.

**CSA:** File No. 023535\_0\_000 - Certified only when ordered with marking on switch.

Add "/C" to end of part number to order CSA certified switch.

All single pole with synchronous circuits & single color LEDs certified at 6A @ 125V AC.

# Distinctive Characteristics

Industry's first LED illumination at tip of toggle switches.

Single color LEDs of red, yellow, and green, plus bicolor red/green, to meet varied design requirements.

LEDs can operate independently from or synchronously with switching operation.

Antijamming feature to protect contacts from damage due to excessive downward force on the toggle.

High torque bushing prevents the bushing from rotating or separating from the metal frame during installation.

Stainless steel frame resists corrosion.

Silver contacts are of specially composed alloy for hardness.


High insulating barriers protect against crossover in double pole devices.

Terminals are molded in and epoxy sealed to lock out flux, dust, and other contaminants.


1,500V dielectric strength between switch contacts and case is accomplished by clinching the frame away from the terminals.



Actual Size

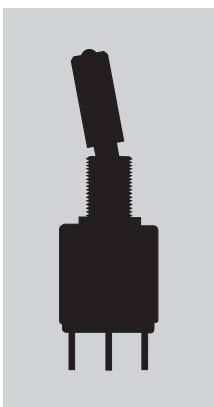

### TYPICAL SWITCH ORDERING EXAMPLE

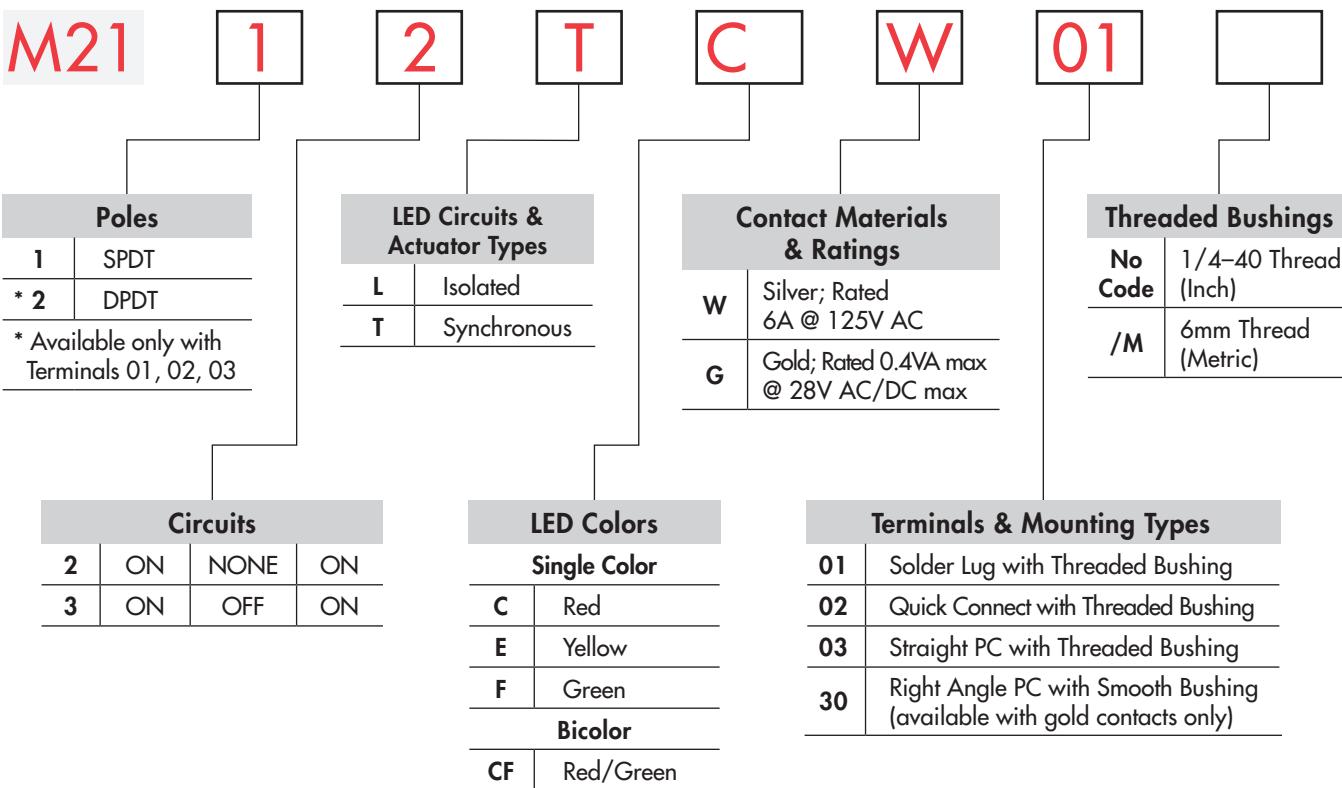


#### IMPORTANT:

Switches are supplied without UL & CSA marking unless specified.  
**UL & CSA recognized only when ordered with marking on the switch.**  
 Specific models, ratings, & ordering instructions are noted on the General Specifications page.



#### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**M2112TCW01**

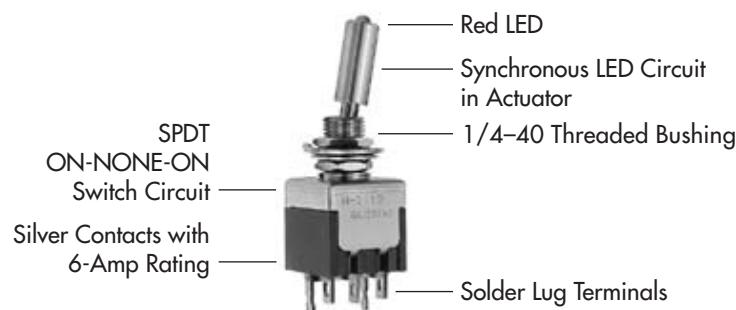

		POLES & CIRCUITS & LED ILLUMINATION			Schematics	
Model	Pole & Throw	Toggle Position & Terminal Numbers				
		Down Keyway	Center	Up		
<b>M2112</b>	<b>SPDT</b> Connected Power Terminals	ON 2-3	NONE NONE	ON 2-1		
LED Circuit	Isolated LEDs (see schematics) Connected LED Terminals	ON 4-6	NONE NONE	ON 4-6	Isolated Single Color LED	
	Synchronous Single Color LED Connected LED Terminals	ON 4-6	NONE NONE	OFF OPEN	Isolated Bicolor LED	
	Synchronous Bicolor LED Connected LED Terminals	Red 5-6	NONE NONE	Green 5-4	Synchronous Single Color LED	
	<b>M2113</b>	<b>SPDT</b> Connected Power Terminals	ON 2-3	OFF OPEN	ON 2-1	Synchronous Bicolor LED
LED Circuit	Isolated LEDs (see schematics) Connected LED Terminals	ON 4-6	ON 4-6	ON 4-6	Isolated Single Color LED	
	Synchronous Single Color LED Connected LED Terminals	ON 4-6	OFF OPEN	ON 4-6	Synchronous Bicolor LED	
	Synchronous Bicolor LED Connected LED Terminals	Red 5-6	OFF OPEN	Green 5-4	External Connection	
	<b>M2122</b>	<b>DPDT</b> Connected Power Terminals	ON 2-3 5-6	NONE NONE	ON 2-1 5-4	Isolated Single Color LED
LED Circuit	Isolated LEDs (see schematics) Connected LED Terminals	ON 7-9	NONE NONE	ON 7-9	Isolated Bicolor LED	
	Synchronous Single Color LED Connected LED Terminals	ON 7-9	NONE NONE	OFF OPEN	Synchronous Single Color LED	
	Synchronous Bicolor LED Connected LED Terminals	Red 8-9	NONE NONE	Green 8-7	Synchronous Bicolor LED	
	<b>M2123</b>	<b>DPDT</b> Connected Power Terminals	ON 2-3 5-6	OFF OPEN	ON 2-1 5-4	External Connection
LED Circuit	Isolated LEDs (see schematics) Connected LED Terminals	ON 7-9	ON 7-9	ON 7-9	Isolated Single Color LED	
	Synchronous Single Color LED Connected LED Terminals	ON 7-9	OFF OPEN	ON 7-9	Synchronous Bicolor LED	
	Synchronous Bicolor LED Connected LED Terminals	Red 8-9	OFF OPEN	Green 8-7	External Connection	

## LED COLORS &amp; SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in Supplement Section.

The LED is an integral part of the switch and not available separately. Bicolor LED is translucent white when unlit.	Color	Single Color			Bicolor	
		<b>C</b> Red	<b>E</b> Yellow	<b>F</b> Green	<b>CF</b> Red/Green	Units
Maximum Forward Current	$I_{FM}$	25	30	30	25	mA
Typical Forward Current	$I_F$	20	20	20	10	mA
Forward Voltage	$V_F$	2.1	2.1	2.1	1.7/2.0	V
Maximum Reverse Voltage	$V_{RM}$	4	4	4	—	V
Current Reduction Rate Above 25°C	$\Delta I_F$	0.33	0.40	0.40	0.33/0.33	mA/°C
Ambient Temperature Range		-10° ~ +55°C				

### LED CIRCUIT, TOGGLE, & MOUNTING TYPE COMBINATIONS




**Toggle with Isolated LED Circuit**




**Toggle with Synchronous LED Circuit**

Finish: Brushed aluminum

Standard Hardware: 2 AT513H Hex Nuts, 1 AT507H Locking Ring, 1 AT509 Lockwasher Standard & optional hardware details in Accessories & Hardware section.




Threaded Bushing combines with Terminal codes 01, 02, & 03.




Smooth Bushing combines with Terminal code 30.

Max. Panel Thickness with Standard Hardware .102" (2.6mm)



Max. Panel Thickness without Locking Ring .134" (3.4mm)





### TYPICAL SWITCH DIMENSIONS

#### Solder Lug



**M2112TCFW01**

#### Single Pole

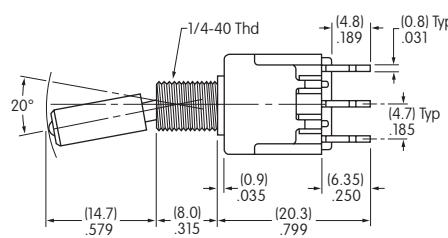



Single color LED switch does not have terminal 5.

#### Solder Lug



**M2122TCFW01**

#### Double Pole

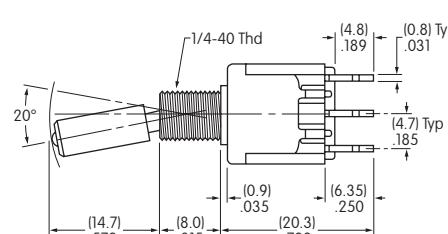



Single color LED switch does not have terminal 8.

#### Right Angle PC



**M2112TCFG30**

#### Single Pole Only

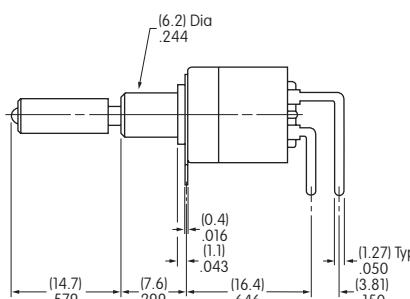

Gold contact material only

## CONTACT MATERIALS &amp; RATINGS

**W**

Silver over Silver

Power Level

6A @ 125V AC &amp; 3A @ 250V AC

**G**


Gold over Brass or Copper

Logic Level



0.4VA maximum @ 28V AC/DC maximum

Complete explanation of operating range in Supplement section.


## TERMINALS

**01**Solder Lug with  
Turret LED Terminal**02**


Quick Connect

**03**Straight PC with  
Turret LED Terminal


Single Pole

Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 5.


Double Pole

Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 8.**30**

Right Angle PC

LED terminals  
only available  
in brass with  
silver plating


Single Pole

Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 5.


## STANDARD MOUNTING HARDWARE

**AT513H**


Hexagon Nuts (2 per switch)

**Material:** Brass with nickel plating**AT507H**

Locking Ring (1 per switch)

**Material:** Steel with chromate over zinc**AT509**

Lockwasher (1 per switch)

**Material:** Steel with chromate over zinc**Optional Hardware:** Knurled nuts, dress nuts, and ON-OFF plates are available; see details in Accessories & Hardware section.

# General Specifications

## Electrical Capacity (Resistive Load)

**Power Level (silver):** 6A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC

**Logic Level (gold):** 0.4VA maximum @ 28V AC/DC maximum

(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

**Note:** Find additional explanation of operating range in Supplement section.

## Other Ratings

**Contact Resistance:** 10 milliohms maximum for silver; 20 milliohms maximum for gold

**Insulation Resistance:** 1,000 megohms minimum @ 500V DC

**Dielectric Strength:** 1,000V AC minimum between contacts for 1 minute minimum; 1,500V AC minimum between contacts & case for 1 minute minimum

**Mechanical Life:** 50,000 operations minimum

**Electrical Life:** 25,000 operations minimum

<b>Nominal Operating Force:</b>		On-to-On Position	Off-to-On Position
Paddles	Single Pole	3.19N	3.92N
	Double Pole	4.41N	7.06N
Rockers	Single Pole	6.37N	9.80N
	Double Pole	13.73N	17.65N

**Angle of Throw:** 20°

## Materials & Finishes

**Housing:** Stainless steel

**Mounting Bracket:** Steel with tin plating

**Movable Contacts:** Silver alloy or silver alloy with gold plating

**Stationary Contacts:** Silver with silver plating or copper or brass with gold plating

**Lamp Contacts:** Phosphor bronze

**Base:** Diallyl phthalate (UL94V-0)

**Switch Terminals:** Copper with silver or gold plating

**Lamp Terminals:** Brass with silver or gold plating

## Environmental Data

**Operating Temp Range:** -10°C through +55°C (+14°F through +131°F) for rockers

-25°C through +70°C (-13°F through +158°F) for paddles

90 ~ 95% humidity for 96 hours @ 40°C (104°F)

**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours

**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

## Installation

**Soldering Time & Temp:** Wave Soldering (PC version): See Profile B in Supplement section.

Manual Soldering: See Profile B in Supplement section.

**Note:** Lever must be in center position while soldering.

PC mountable device is not process sealed. Hand clean locally using alcohol based solution.

**Cleaning:**

## Standards & Certifications

**Flammability Standards:** UL94V-0 base

**UL:** **File No. E44145 - Recognized only when ordered with marking on switch.**

Add "/U" before dash in part number to order UL recognized switch.


Single pole rockers with synchronous circuits & single color LEDs & solder lug or PC recognized at 6A @ 125V AC.

**CSA:** **File No. 023535\_0\_000 - Certified only when ordered with marking on switch.**

Add "/C" before dash in part number to order CSA certified switch.


All single pole rockers with synchronous circuits & single color LEDs certified at 6A @ 125V AC.

## TYPICAL SWITCH ORDERING EXAMPLE

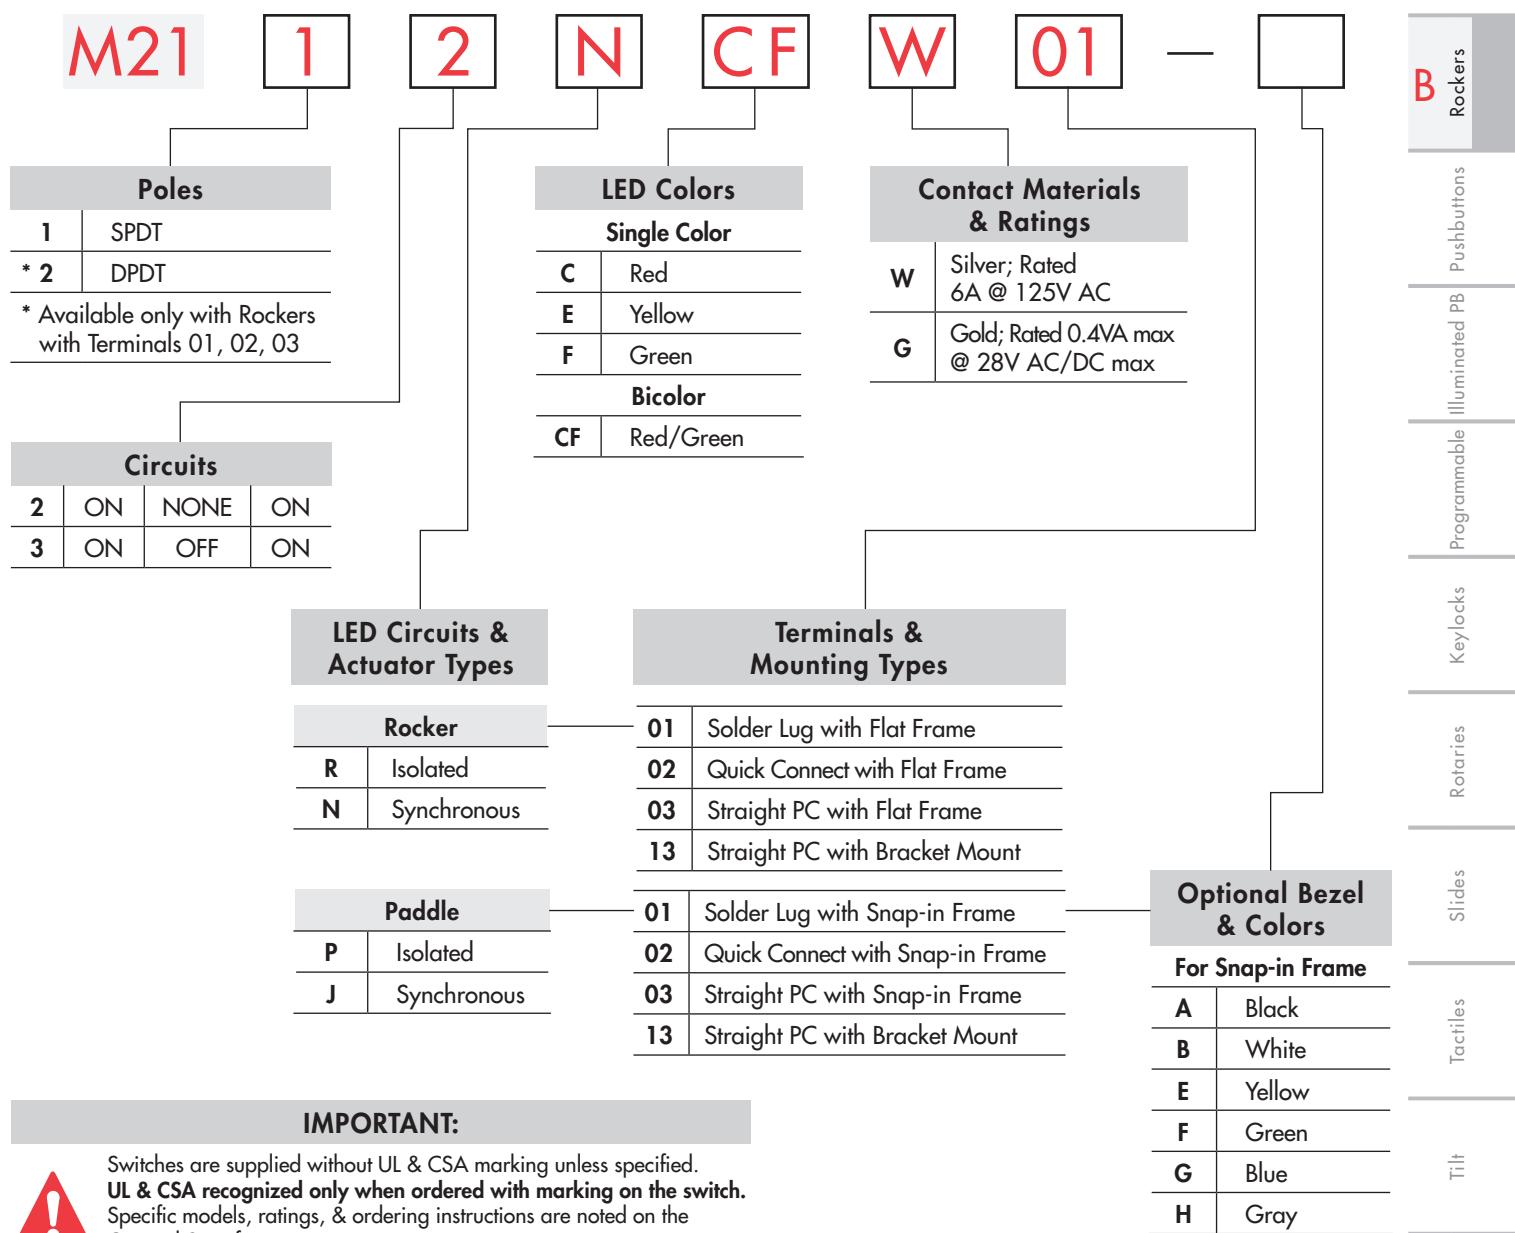

## DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M2112NCFW01

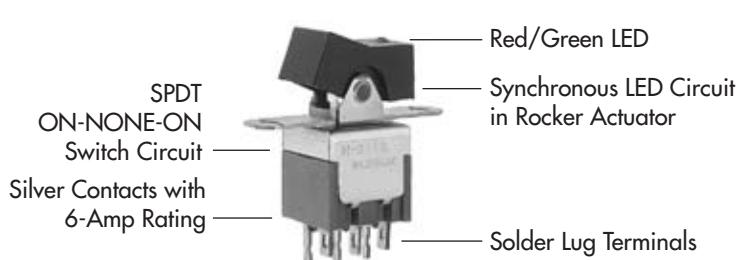

# Series M2100

## LED Tipped Rockers & Paddles

Toggles  
Rockers B

Pushbuttons  
Connected Power Terminals  
Programmable Illuminated PB

Keylocks  
Rotaries

Slides  
Tactiles








Touch

Indicators

Accessories

Supplement

### POLES & CIRCUITS & LED ILLUMINATION

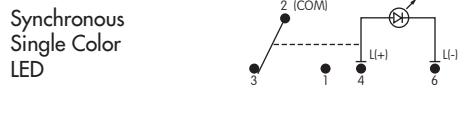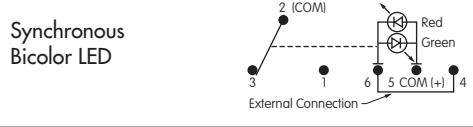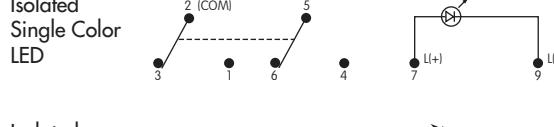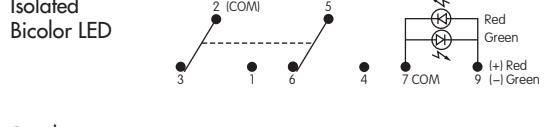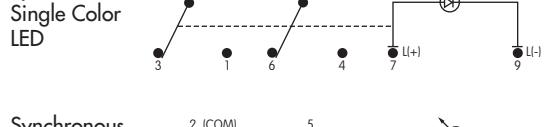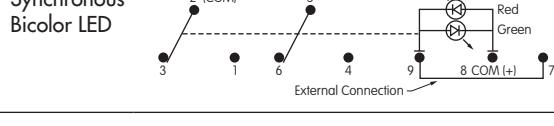Model	Pole & Throw	Toggle Position & Terminal Numbers			Schematics
		Down	Center	Up	
<b>M2112</b>	<b>SPDT</b>	ON 2-3	NONE NONE	ON 2-1	<p>Notes: Terminal numbers are not actually on the switch. LEDs require an external power source.</p>        
LED Circuit	Isolated LEDs (see schematics)	ON 4-6	NONE NONE	ON 4-6	
	Connected LED Terminals	ON 4-6	NONE NONE	ON 4-6	
	Synchronous Single Color LED	ON 4-6	NONE NONE	OFF OPEN	
	Connected LED Terminals	Red 5-6	NONE NONE	Green 5-4	
<b>M2113</b>	<b>SPDT</b>	ON 2-3	OFF OPEN	ON 2-1	
LED Circuit	Isolated LEDs (see schematics)	ON 4-6	ON 4-6	ON 4-6	
	Connected LED Terminals	ON 4-6	OFF OPEN	ON 4-6	
	Synchronous Single Color LED	ON 4-6	OFF OPEN	ON 4-6	
	Connected LED Terminals	Red 5-6	OFF OPEN	Green 5-4	
<b>M2122</b>	<b>DPDT</b>	ON 2-3 5-6	NONE NONE	ON 2-1 5-4	
LED Circuit	Isolated LEDs (see schematics)	ON 7-9	NONE NONE	ON 7-9	
	Connected LED Terminals	ON 7-9	NONE NONE	OFF OPEN	
	Synchronous Single Color LED	ON 7-9	NONE NONE	ON 7-9	
	Connected LED Terminals	Red 8-9	NONE NONE	Green 8-7	
<b>M2123</b>	<b>DPDT</b>	ON 2-3 5-6	OFF OPEN	ON 2-1 5-4	
LED Circuit	Isolated LEDs (see schematics)	ON 7-9	ON 7-9	ON 7-9	
	Connected LED Terminals	ON 7-9	OFF OPEN	ON 7-9	
	Synchronous Single Color LED	ON 7-9	OFF OPEN	ON 7-9	
	Connected LED Terminals	Red 8-9	OFF OPEN	Green 8-7	

### LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in Supplement Section. The LED is an integral part of the switch and not available separately. Bicolor LED is translucent white when unlit.

	Rockers				Paddles				Units
	Single Color			Bicolor	Single Color			Bicolor	
	C	E	F	CF	C	E	F	CF	
Maximum Forward Current	$I_{FM}$	25	30	30	25	25	30	25	30/25 mA
Typical Forward Current	$I_F$	20	20	20	20	20	20	20	20/20 mA
Forward Voltage	$V_F$	2.1	2.1	2.1	1.7/2.0	2.25	2.1	2.2	2.0/2.2 V
Maximum Reverse Voltage	$V_{RM}$	4	4	4	—	5	5	5	— V
Current Reduction Rate Above 25°C	$\Delta I_F$	0.33	0.40	0.40	0.33/0.33	0.33	0.40	0.33	0.43/0.38 mA/°C
Ambient Temperature Range		-10° ~ +55°C				-25° ~ +70°C			

## LED CIRCUIT, ROCKER, &amp; MOUNTING TYPE COMBINATIONS



Rocker with Isolated LED Circuit




Rocker with Synchronous LED Circuit


Material: Polyamide

Finish: Matte

Color: Black




Flat Frame combines with Terminal codes 01, 02, &amp; 03.





Bracket combines with Terminal code 13.


Maximum Panel Thickness .126" (3.2mm)





## TYPICAL ROCKER SWITCH DIMENSIONS

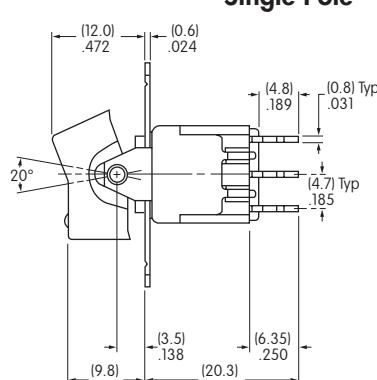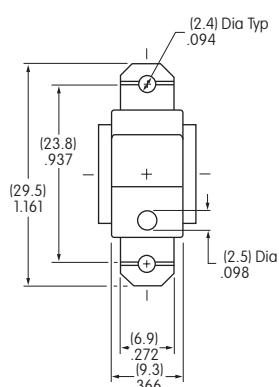


## Single Pole



## Solder Lug

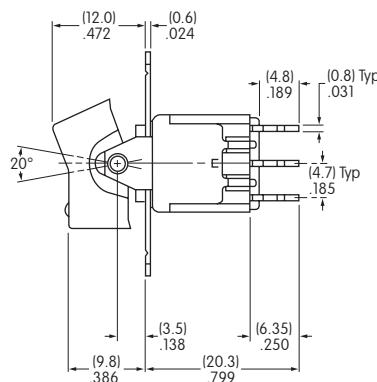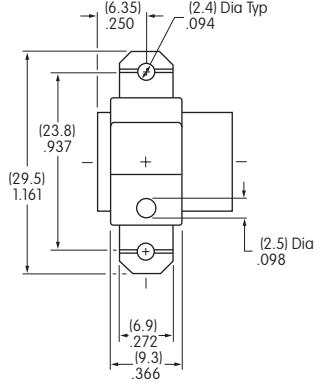

## Double Pole





## Solder Lug




Single color LED switch does not have terminal 8.


M2122NCFW01



## Single Pole Only



## Straight PC • Bracket



Direction of Actuation



Single color LED switch does not have terminal 5. Silver contact material is standard.

M2112NCFW13

### LED CIRCUIT, PADDLE, & MOUNTING TYPE COMBINATIONS

**P**

Paddle with Isolated LED Circuit





Maximum Panel Thickness  
.039" ~ .126" (1.0 ~ 3.2mm)  
without Bezel  
.039" ~ .098" (1.0 ~ 2.5mm)  
with Bezel

**J**

Paddle with Synchronous LED Circuit

Maximum Panel Thickness  
.126" (3.2mm)

Material: Polyamide  
Finish: Matte  
Color: Black

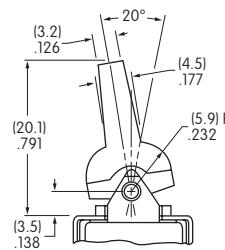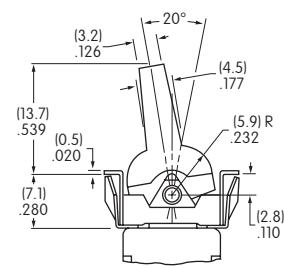


Snap-in combines with Terminal codes 01, 02, & 03



Bracket combines with Terminal code 13

### TYPICAL PADDLE SWITCH DIMENSIONS

Solder Lug • Snap-in




Single Pole Only

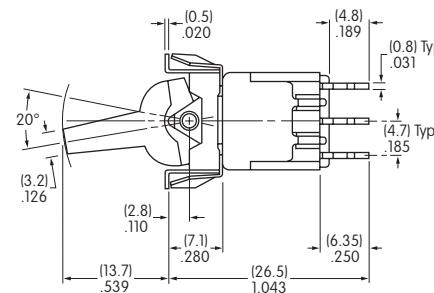



**M2112JCFW01**

Single color LED switch does not have terminal 5.

Straight PC • Bracket



Single Pole Only

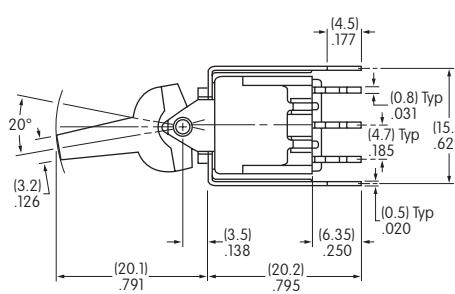

**M2112JCFW13**

Silver contact material is standard. Single color LED switch does not have terminal 5.

## CONTACT MATERIALS &amp; RATINGS

**W**

Silver over Silver

Power Level

6A @ 125V AC &amp; 3A @ 250V AC

**G**

Gold over Brass or Copper


Logic Level

0.4VA maximum @ 28V AC/DC maximum


Complete explanation of operating range in Supplement section.

**01**


Solder Lug with Turret LED Terminal

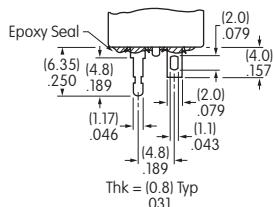**02**


Quick Connect

**03**

Straight PC with Turret LED Terminal




Single Pole



Single color LED &amp; isolated bicolor LED switches do not have terminal 5.


Double Pole




Single color LED &amp; isolated bicolor LED switches do not have terminal 8.

**13**

Straight PC with Bracket &amp; Turret LED Terminal



Single Pole





Single color LED &amp; isolated bicolor LED switches do not have terminal 5.

## OPTIONAL BEZEL &amp; COLORS

## AT2107 Bezel for Snap-in Panel Frame

Material: Polyamide

Finish: Matte



Colors Available:

**A**

Black

**B**

White

**E**

Yellow

**F**

Green

**G**

Blue

**H**

Gray

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9