

## SL1003A Series



### Agency Approvals

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
|        | E128662            |

### 3 Electrode GDT Graphical Symbol



### Description

The SL1003A series has been especially developed for Broadband equipment. Special design features provide high levels of protection against fast rising transients in the 100V/μs to 1kV/μs range usually caused by lightning disturbances.

These devices have ultra low capacitance 1.5pF and present insignificant signal losses up to 1.5GHz. These devices are extremely robust and are able to divert a 5000A pulse without destruction. For AC Power Cross of long duration, over-current protection is recommended.

### Features

- RoHS compliant
- Low insertion loss
- Surface mountable
- 5kA surge capability tested with 8/20μs pulse as defined by IEC 61000-4-5
- GHz working frequency
- Excellent response to fast rising transients
- Can be used to meet Telcordia GR1089 without series resistance
- 10/700 6kV capability, as per ITU-Tk.21, enhanced test level
- 2000 Amp 2/10μs surge rating

### Applications

- Broadband equipment
- ADSL equipment
- XDSL equipment
- Satellite and CATV equipment
- General telecom equipment

### Electrical Characteristics

| Part Number | Device Specifications (at 25°C)                        |     |     |                                                               |                                                              |                                |                                   |                                                      | Life Ratings                          |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |
|-------------|--------------------------------------------------------|-----|-----|---------------------------------------------------------------|--------------------------------------------------------------|--------------------------------|-----------------------------------|------------------------------------------------------|---------------------------------------|--------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------------|----------------------------------------|--------------------------------------------------------|--|--|--|--|--|--|--|
|             | DC Breakdown<br>in Volts <sup>1,2,3</sup><br>(@100V/s) |     |     | Impulse<br>Breakdown<br>in Volts <sup>2,3</sup><br>(@100V/μs) | Impulse<br>Breakdown<br>In Volts <sup>2,3</sup><br>(@1kV/μs) | Insulation<br>Resistance       | Capacitance<br>(@1MHz<br>0V Bias) | Arc<br>Voltage<br>(on state<br>Voltage)<br>@1Amp Min | Surge<br>Life<br>(@200A<br>10/1000μs) | Nominal<br>Impulse<br>Discharge<br>Current<br>(8/20μs) | Nominal<br>AC<br>Discharge<br>Current<br>(10x1s<br>@50Hz) | AC<br>Discharge<br>Current<br>(9 Cycles @<br>50Hz) | DC<br>Holdover<br>Voltage <sup>4</sup> | Max Impulse<br>Discharge<br>Current<br>(1 Application) |  |  |  |  |  |  |  |
|             | MIN                                                    | TYP | MAX | MAX                                                           |                                                              | MIN                            | MAX                               | TYP                                                  |                                       |                                                        |                                                           |                                                    | TYP                                    | @ 10/350μs                                             |  |  |  |  |  |  |  |
| SL1003A090  | 72                                                     | 90  | 108 | 600                                                           | 700                                                          | 10 <sup>9</sup> Ω<br>(at 50V)  | 1.5 pF                            | ~10 to<br>35 V                                       | 300<br>shots                          | 10 shots<br>(@10kA)                                    | 10 A                                                      | 30 A                                               | 50 V                                   | 2 kA                                                   |  |  |  |  |  |  |  |
| SL1003A230  | 184                                                    | 230 | 276 |                                                               | 750                                                          | 10 <sup>9</sup> Ω<br>(at 100V) |                                   |                                                      |                                       |                                                        |                                                           |                                                    | 135 V                                  |                                                        |  |  |  |  |  |  |  |
| SL1003A250  | 200                                                    | 250 | 300 |                                                               |                                                              |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |
| SL1003A260  | 210                                                    | 260 | 310 |                                                               |                                                              |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |
| SL1003A300  | 240                                                    | 300 | 360 | 750                                                           | 850                                                          |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    | 135 V                                  |                                                        |  |  |  |  |  |  |  |
| SL1003A350  | 280                                                    | 350 | 420 | 800                                                           | 900                                                          |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |
| SL1003A400  | 320                                                    | 400 | 480 | 850                                                           | 950                                                          |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |
| SL1003A450  | 360                                                    | 450 | 540 | 900                                                           | 1000                                                         |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |
| SL1003A500  | 400                                                    | 500 | 600 | 1100                                                          | 1400                                                         |                                |                                   |                                                      |                                       |                                                        |                                                           |                                                    |                                        |                                                        |  |  |  |  |  |  |  |

Notes:

- At delivery AQL 0.65 level II, DIN ISO 2859
- In ionized mode, tested according to ITU-T Rec. K.12
- Comparable to the silicon measurement Switching Voltage (Vs)
- Reference REA PE-80, 0.2A. Tested to ITU-T Rec. K.12 and REA PE-80 < 150 msecs.

### Product Characteristics

|                        |                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------|
| <b>Materials</b>       | <b>Leaded Device:</b><br>Tin-plated copper wire<br><b>Core and Surface Mount:</b> Dull Tin-plated |
| <b>Product Marking</b> | Littelfuse 'LF' Mark, voltage and date code                                                       |


|                                            |                  |
|--------------------------------------------|------------------|
| <b>Glow to Arc Transition Current</b>      | ~1 Amp           |
| <b>Glow Voltage</b>                        | ~60 to 200 Volts |
| <b>Storage and Operational Temperature</b> | -40 to +90°C     |

### Device Dimensions


For SL1003A series:

Dimensions are in millimeters [and inches]


#### 'R' Type Radial Lead Devices (SL1003AxxxR-001)

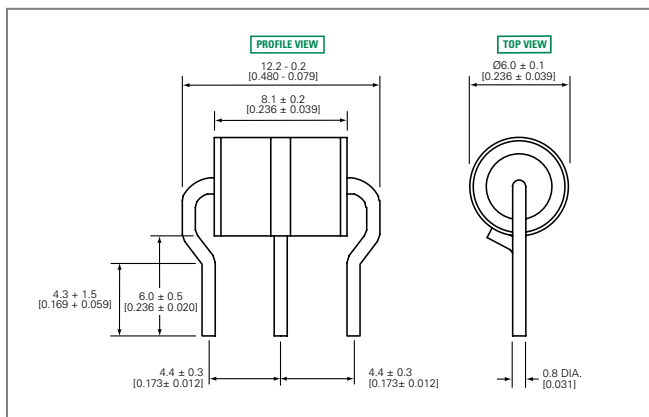


#### 'C' Type Core Devices

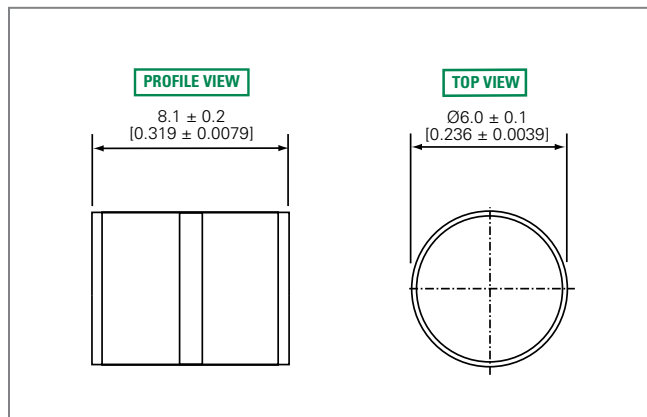

#### 'R' Type Radial Lead Devices (SL1003AxxxR and SL1003AxxxRF)

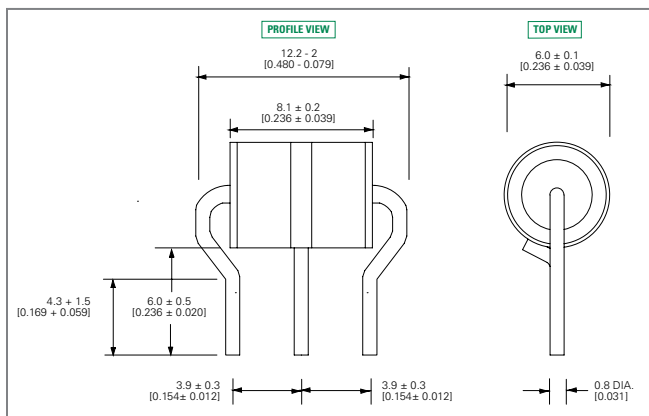


#### 'SM' Type Surface Mount Devices

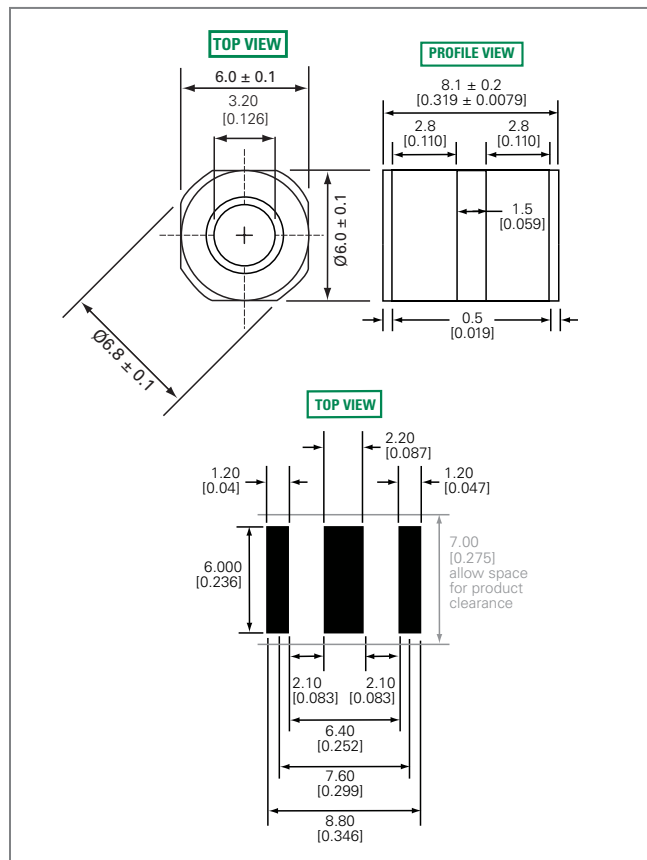


### Soldering Parameters - Reflow Soldering (Surface Mount Devices)

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb-free assembly        |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (Min to Max) ( $t_s$ )      | 60 – 180 seconds        |
| Average Ramp-up Rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max.         |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max.         |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of Actual Peak Temperature ( $t_p$ )   |                                    | 10 – 30 seconds         |
| Ramp-down Rate                                         |                                    | 6°C/second max.         |
| Time 25°C to Peak Temperature ( $T_p$ )                |                                    | 8 minutes max.          |
| Do not exceed                                          |                                    | 260°C                   |

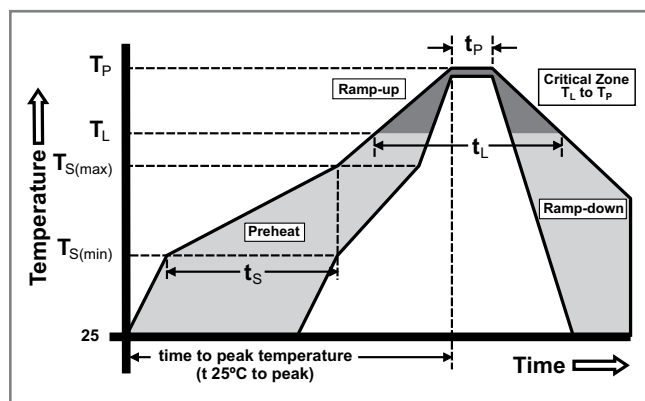

### Soldering Parameters - Wave Soldering (Thru-Hole Devices)

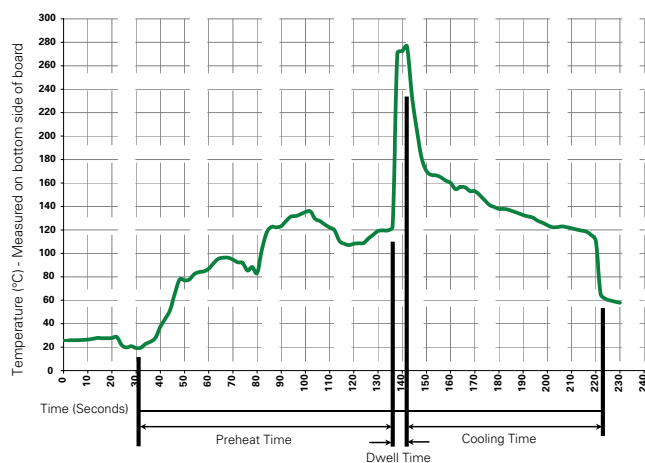

### Recommended Process Parameters:

| Wave Parameter                           | Lead-Free Recommendation          |
|------------------------------------------|-----------------------------------|
| <b>Preheat:</b>                          |                                   |
| (Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                     | 100° C                            |
| Temperature Maximum:                     | 150° C                            |
| Preheat Time:                            | 60-180 seconds                    |
| <b>Solder Pot Temperature:</b>           | 280° C Maximum                    |
| <b>Solder Dwell Time:</b>                | 2-5 seconds                       |

### Soldering Parameters - Hand Soldering



Solder Iron Temperature: 350° C +/- 5°C  
Heating Time: 5 seconds max.

### Packaging

**'C' Type Core Items:** Package bulk pack in polybag, 500 pcs/bag

**'R' and 'RF' Type Radial Lead Items:** Packed in tray, 100 pcs/tray

**'SM' Type Surface Mount Items:** Packaged tape and reel carrier, 700 pcs/reel (specifications below)

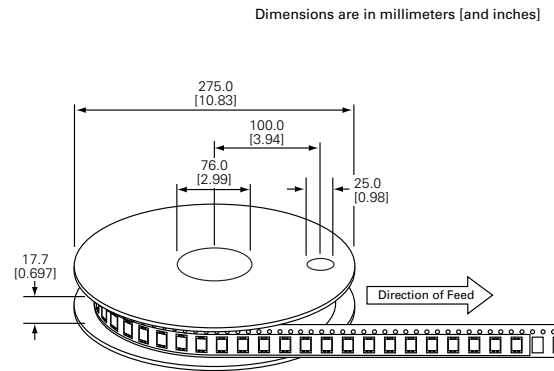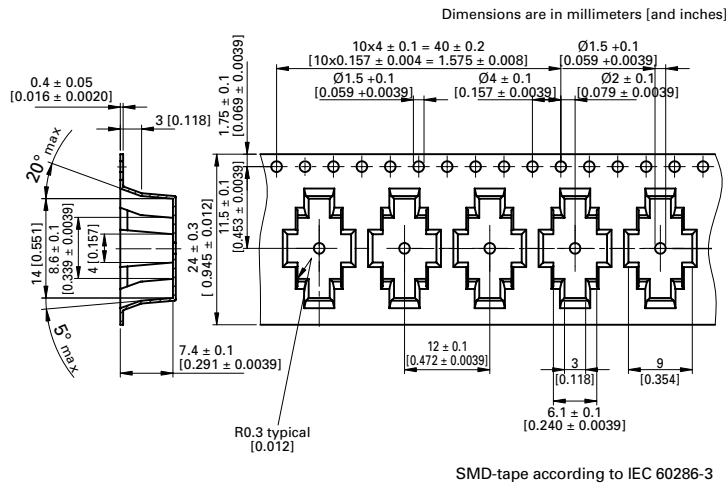

### Part Numbering System and Ordering Information

**SL1003 A XXX XX**

**Type 3 Pole Arrestor**

**Voltage**

**Pin Configuration**

- C** = Core type (Packed in polybag, 500pcs/bag)
- R** = Radial Lead without Failsafe (Packed in tray, 100pcs/tray)
- RF** = Radial Lead with Failsafe (Packed in tray, 100pcs/tray)
- SM** = Surface Mount (Packed in carrier and tape, 700pcs/reel)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9