

NOTE:

	B
	B1

MATERIAL :

HOUSING : THERMOPLASTIC, UL94V-0, BLACK COLOR.






CONTACT : PHOSPHOR BRASS, THICKNESS=0.20mm.

CONTACT : PHOSPHOR BRASS, THICKNESS=0.20mm.
 2 FINISH:
 CONTACT : GOLD PLATED (SEE TABLE) ON CONTACT AREA
 80μ" MIN. MATTE TIN PLATED ON SOLDER TAILS,
 50μ" MIN. NICKEL UNDERPLATED ALL OVER

3. APPLICATION :
SOLDERTAIL LENGTH 2.6 FOR PCB THICKNESS 1.0 MAX.
1.2 FOR PCB THICKNESS 0.3 MAX.


4. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B

5. QUALIFICATION TEST REPORT: 501-57197

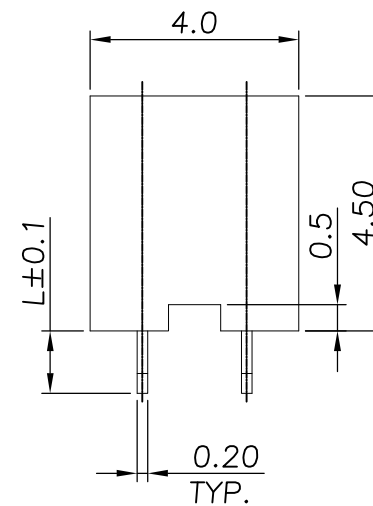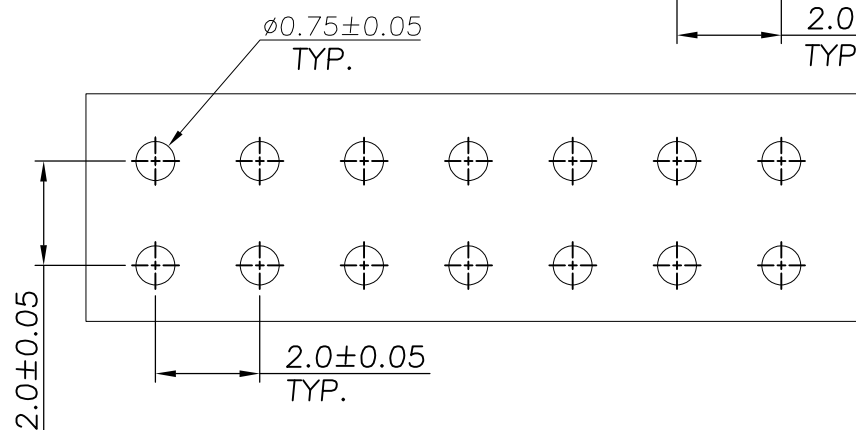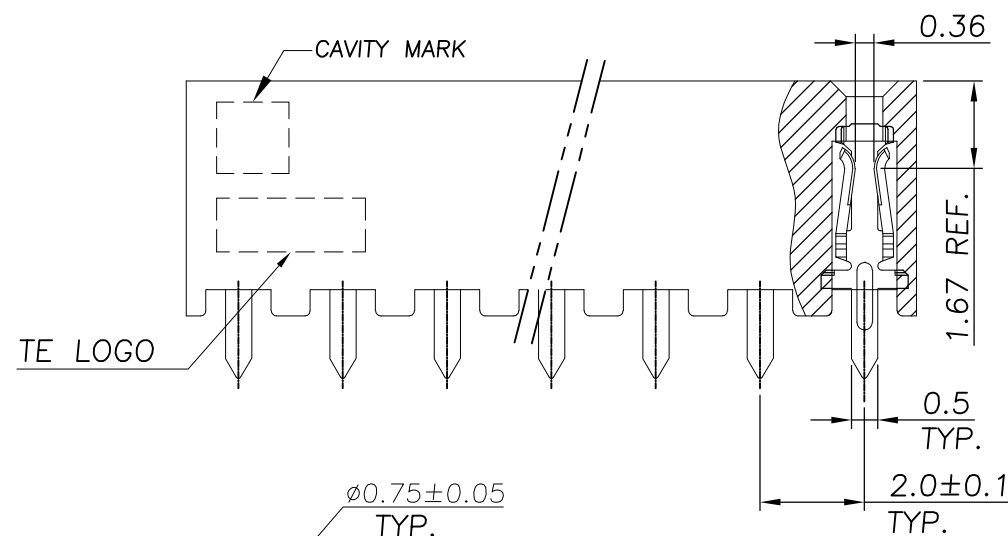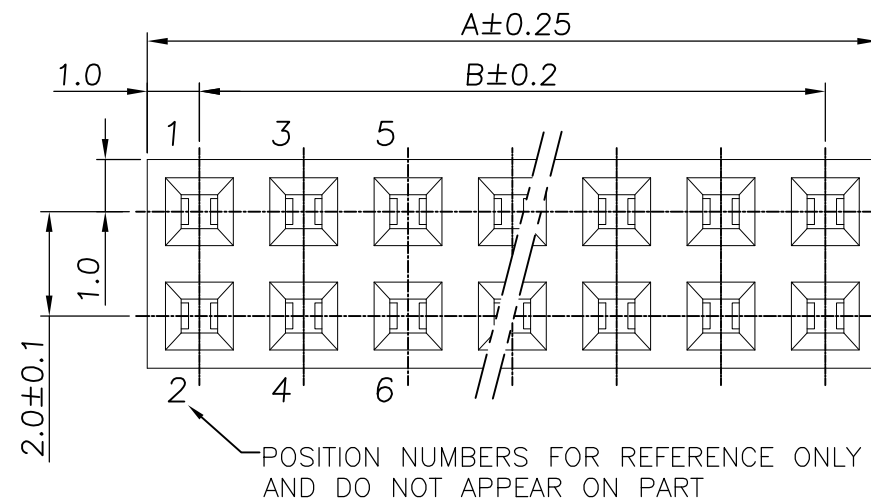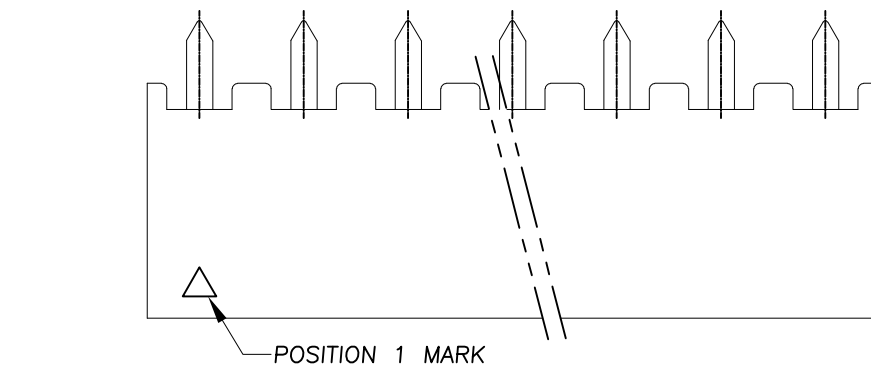

OBSELETE	2.6±0.1	30μ"	6	40	38	40	9	-9	OBSELETE	8μ"	2.6±0.1	6	40	38	40	4	-9	
				50	48	50	9	-8					50	48	50	4	-8	
OBSELETE					48	46	48	9	-7					48	46	48	4	-7
OBSELETE					46	44	46	9	-6					46	44	46	4	-6
OBSELETE					44	42	44	9	-5					44	42	44	4	-5
OBSELETE					42	40	42	9	-4					42	40	42	4	-4
OBSELETE					40	38	40	9	-3					40	38	40	4	-3
OBSELETE					38	36	38	9	-2					38	36	38	4	-2
OBSELETE					36	34	36	9	-1					36	34	36	4	-1
OBSELETE					34	32	34	9	0					34	32	34	4	0
OBSELETE					32	30	32	8	9					32	30	32	3	-9
OBSELETE					30	28	30	8	-8					30	28	30	3	-8
OBSELETE					28	26	28	8	-7					28	26	28	3	-7
OBSELETE					26	24	26	8	-6					26	24	26	3	-6
OBSELETE					24	22	24	8	-5					24	22	24	3	-5
OBSELETE					22	20	22	8	-4					22	20	22	3	-4
OBSELETE					20	18	20	8	-3					20	18	20	3	-3
OBSELETE					18	16	18	8	-2					18	16	18	3	-2
OBSELETE					16	14	16	8	-1					16	14	16	3	-1
OBSELETE					14	12	14	8	0					14	12	14	3	0
OBSELETE		12	10	12	7	9		12	10	12	2	-9						
OBSELETE		10	8	10	7	8		10	8	10	2	-8						
OBSELETE		8	6	8	7	-7		8	6	8	2	-7						
		6	4	6	7	-6		6	4	6	2	-6						
OBSELETE		4	2	4	7	-5		4	2	4	2	-5						
	1.2±0.1	8μ"	6	50	48	50	7	-4	OBSELETE	8μ"	1.2±0.1	6	50	48	50	2	-4	
				48	46	48	7	-3					48	46	48	2	-3	
				46	44	46	7	-2					46	44	46	2	-2	
				44	42	44	7	-1					44	42	44	2	-1	
				42	40	42	7	0					42	40	42	2	0	
				40	38	40	6	9					40	38	40	1	-9	
				38	36	38	6	-8					38	36	38	1	-8	
				36	34	36	6	-7					36	34	36	1	-7	
				34	32	34	6	-6					34	32	34	1	-6	
				32	30	32	6	-5					32	30	32	1	-5	
				30	28	30	6	-4					30	28	30	1	-4	
				28	26	28	6	-3					28	26	28	1	-3	
				26	24	26	6	-2					26	24	26	1	-2	
				24	22	24	6	-1					24	22	24	1	-1	
				22	20	22	6	0					22	20	22	1	0	
				20	18	20	5	9					20	18	20		9	
				18	16	18	5	8					18	16	18		8	
				16	14	16	5	7					16	14	16		7	
				14	12	14	5	6					14	12	14		6	
				12	10	12	5	5					12	10	12		5	
	10	8	10	5	4		10	8	10		4							
	8	6	8	5	3		8	6	8		3							
	6	4	6	5	2		6	4	6		2							
OBSELETE		4	2	4	5	-1	OBSELETE		4	2	4	5	-1					
	GOLD PLATE THICKNESS	"L"	KEYING POS.	A	B	POS	PART NUMBER		GOLD PLATE THICKNESS	"L"	KEYING POS.	A	B	POS	PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		O.HU CHK 23-MAR-2006 S.HDU		TE Connectivity					
		0 PLC ± -		APVD 23-MAR-2006 W.J.KE		NAME AMPMODU 2.0mm PITCH,REC CONN,VERTICAL,MOUNT TYPE					
		1 PLC ± 0.15		PRODUCT SPEC 108-57197							
		2 PLC ± 0.10		APPLICATION SPEC							
MATERIAL 		3 PLC ± 0.05		—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		4 PLC ± -		WEIGHT —		A3	—	C-1734506	—		
		ANGLES ± 3°									
FINISH 				CUSTOMER DRAWING					SCALE 1:1	SHEET 1 OF 2	REV B1

~~THIS DRAWING IS UNPUBLISHED~~

RELEASED FOR PUBLICATION

MAR , 2006.

© COPYRIGHT 2009 By -

ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

p

LTR

DESCRIPTION

DATE _____

DWN

APVD

SEE SHEET 1

OUTER CARTON

340mm(L)*295mm(W)*320mm(H)

CONNECTOR

- BOX

314mm(L)*128mm(W)*11mm(H)


CORRUGATE PAPER

—INNER CARTON

320mm(L)*138mm(W)*144mm(H)

OBSOLETE	2.6±0.1	5040	1260	105	40	9		
		4320	1080	90	50	9		
OBSOLETE		4320	1080	90	48	9		
OBSOLETE		4320	1080	90	46	9		
OBSOLETE		4320	1080	90	44	9		
OBSOLETE		5040	1260	105	42	9		
OBSOLETE		5040	1260	105	40	9		
OBSOLETE		5040	1260	105	38	9		
OBSOLETE		5760	1440	120	36	9		
OBSOLETE		5760	1440	120	34	9		
OBSOLETE		6480	1620	135	32	8		
OBSOLETE		7200	1800	150	30	8		
OBSOLETE		7200	1800	150	28	8		
OBSOLETE		7920	1980	165	26	8		
OBSOLETE		8640	2160	180	24	8		
OBSOLETE		9360	2340	195	22	8		
OBSOLETE		10080	2520	210	20	8		
OBSOLETE		11520	2880	240	18	8		
OBSOLETE		12960	3240	270	16	8		
OBSOLETE		15120	3780	315	14	8		
OBSOLETE	17280	4320	360	12	7			
OBSOLETE	20880	5220	435	10	7			
OBSOLETE	26640	6660	555	8	7			
		35280	8820	735	6	7		
OBSOLETE		51840	12960	1080	4	7	1734506	
1.2±0.1		4320	1080	90	50	7		
		4320	1080	90	48	7		
		4320	1080	90	46	7		
		4320	1080	90	44	7		
		5040	1260	105	42	7		
		5040	1260	105	40	6		
		5040	1260	105	38	6		
		5760	1440	120	36	6		
		5760	1440	120	34	6		
		6480	1620	135	32	6		
		7200	1800	150	30	6		
		7200	1800	150	28	6		
		7920	1980	165	26	6		
		8640	2160	180	24	6		
		9360	2340	195	22	6		
		10080	2520	210	20	5		
		11520	2880	240	18	5		
		12960	3240	270	16	5		
		15120	3780	315	14	5		
		17280	4320	360	12	5		
	20880	5220	435	10	5			
	26640	6660	555	8	5			
	35280	8820	735	6	5			
OBSOLETE		51840	12960	1080	4	5	1734506	
"L"	Pcs/Carton	Pcs/Inner Carton	Pcs/BOX	POS.	PART NUMBER			

OBSELETE									
2.6±0.1		5040	1260	105	40	4-	↑	-6	
		4320	1080	90	50	4-		-8	
		4320	1080	90	48	4-		-7	
		4320	1080	90	46	4-		-6	
		4320	1080	90	44	4-		-5	
		5040	1260	105	42	4-		-4	
		5040	1260	105	40	4-		-3	
		5040	1260	105	38	4-		-2	
		5760	1440	120	36	4-		-1	
		5760	1440	120	34	4-		0	
		6480	1620	135	32	3-		-9	
		7200	1800	150	30	3-		-8	
		7200	1800	150	28	3-		-7	
		7920	1980	165	26	3-		-6	
		8640	2160	180	24	3-		-5	
		9360	2340	195	22	3-		-4	
		10080	2520	210	20	3-		-3	
		11520	2880	240	18	3-		-2	
		12960	3240	270	16	3-		-1	
		15120	3780	315	14	3-		0	
		17280	4320	360	12	2-		-9	
		20880	5220	435	10	2-		-8	
		26640	6660	555	8	2-		-7	
		35280	8820	735	6	2-		-6	
		51840	12960	1080	4	2	1734506	5	
	OBSELETE	↑	4320	1080	90	60	2	↑	4
	4320		1080	90	48	2		3	
	4320		1080	90	46	2		2	
	4320		1080	90	44	2		1	
	5040		1260	105	42	2		0	
	5040		1260	105	40	1		-9	
	5040		1260	105	38	1		-8	
	5760		1440	120	36	1		-7	
	5760		1440	120	34	1		-6	
	6480		1620	135	32	1		-5	
	7200		1800	150	30	1		-4	
	7200		1800	150	28	1		-3	
	7920		1980	165	26	1		-2	
	8640		2160	180	24	1		-1	
	9360		2340	195	22	1		0	
	10080		2520	210	20			9	
	11520		2880	240	18			8	
	12960		3240	270	16			7	
	15120		3780	315	14			6	
	17280		4320	360	12			5	
	20880		5220	435	10			4	
	26640		6660	555	8			3	
	35280		8820	735	6			2	
	51840		12960	1080	4		1734506	1	
OBSELETE									
"L"	Pcs/Carton		Pcs/Inner Carton	Pcs/BOX	POS.	PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O.HU		 TE Connectivity				
		CHK S.HDU						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME AMPMODU 2.0mm PITCH,REC CONN,VERTICAL,MOUNT TYPE				
		APVD W.J.KE						
		PRODUCT SPEC 108-57197						
		APPLICATION SPEC —						
MATERIAL SEE SHEET 1		FINISH SEE SHEET 1		SIZE A3	CAGE CODE —	DRAWING NO C-1734506	RESTRICTED TO —	
CUSTOMER DRAWING						SCALE 1:1	SHEET 2 OF 2	REV R1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9