

Specification

- Part No. : **MA650.A.AB.002**
- Product Name : Spartan Antenna 2in1 MA650 with 10M cable length
- Feature : Cellular 850/900/1700/1800/2100MHz
GSM/CDMA/UMTS/HSPA
GPS/GLONASS/GALILEO – 5dBiC
IP67 Waterproof
High Efficiency / Peak Gain Outdoor Antenna
Advanced RF Design and Materials
Heavy Duty – Integrated Metal Base/
Ground-plane
Standard 10 meters low loss cables
Custom cables and connectors available
RoHS Compliant



1. Introduction

The Spartan MA650 antenna is a low profile, heavy-duty, fully IP67 waterproof external M2M antenna for use in telematics, transportation and remote monitoring applications. With a standard length of 10 meters of very low loss cable it is specially designed suitable for e-Bus or train telematics applications where long cable lengths are needed.

The Spartan MA650 antenna is unique in the market because it combines 2in1 GPS/GALILEO, Cellular (3G and 2G) antennas in a heavy-duty structure with high efficiency in a low profile compact format. The antenna screws down permanently onto a roof or metal panel and can be pole or wall-mounted. The antennas are designed to be isolated from each other to prevent cross-interference.

For industries such as commercial vehicle telematics, remote monitoring, smart meter systems, construction equipment, at only 40mm high, the Spartan provides an unobtrusive, robust, rugged antenna that is durable even in extreme environments.

2. Specification Table


ELECTRICAL – GPS/GLONASS/GALILEO Passive Antenna	
Frequency	1575.42 ± 3MHz 1602 ± 3MHz
Radiation Efficiency	50%
Peak Gain	4 ±1 dBic typ.
VSWR	2:1 Max
Polarization	Linear
Impedance	50Ω

ELECTRICAL - LNA			
Frequency	1575.42 ± 3MHz 1602 ± 3MHz		
Impedance	50 Ω		
VSWR	2:1 Max		
DC Power Input	3.3V	4V	5V
Gain @3.3V	28dB	28dB	28dB
Noise Figure	1.50dB	1.55dB	1.62dB
Power Consumption	8mA	10mA	13mA
Band Attenuation	±50MHz	±70MHz	±100MHz
	30dB	30dB	30dB


ELECTRICAL – Cellular Antenna					
Frequency (GHz)	824~896	880~960	1710~1880	1850~1990	1920~2170
Peak Gain (dBi) *	-0.5	-0.5	-1.0	-0.5	-0.8
Avg. Gain (dBi) *	-5.8	-5.6	-5.4	-5.3	-5.5
Efficiency (%) *	29	28	30	27.9	28
VSWR	3 Max				
Polarization	Linear				
Radiation pattern	Omni				
*Including 10 meters cable loss					
MECHANICAL					
Antenna Dimensions	Height 50mm x Diameter 150mm				
Housing	PC				
Base and thread	Nickel plated Zinc				
Waterproof	IP67				
ENVIRONMENTAL					
Operating Temperature	-40°C to 85°C				
Storage Temperature	-40°C to 80°C				
Humidity	Non-condensing 65°C 95% RH				

3. Cellular Antenna Characteristics


3.1. VSWR

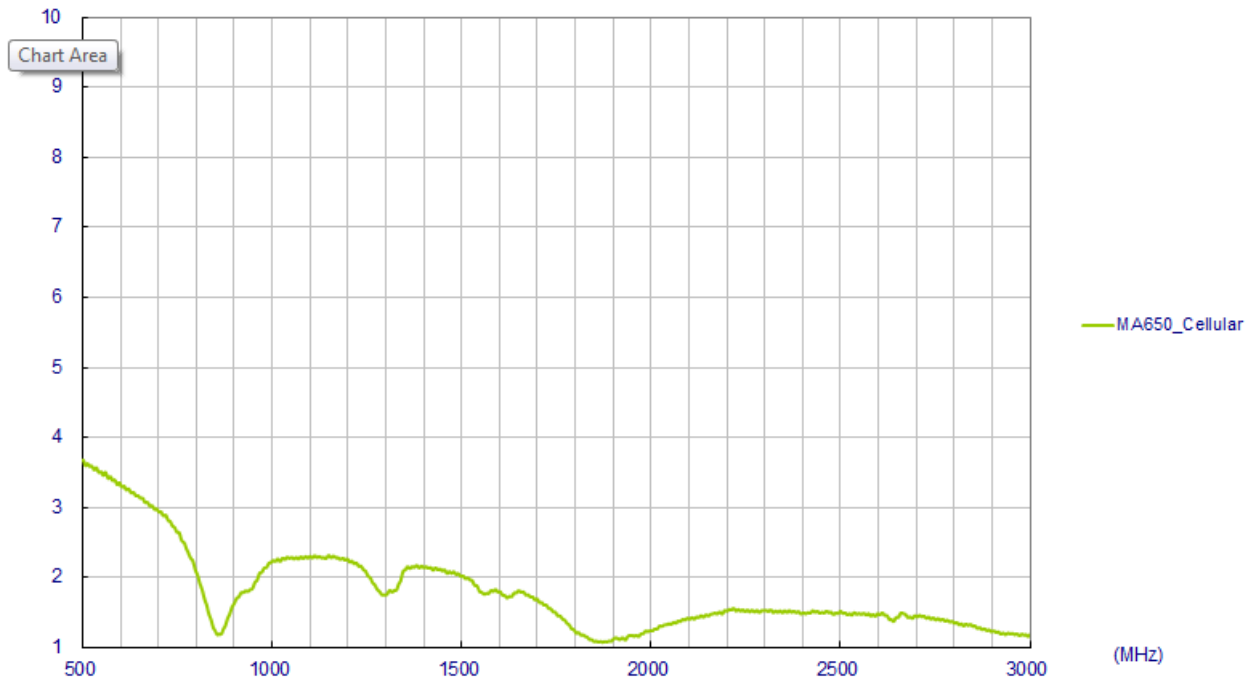


3.2. Efficiency

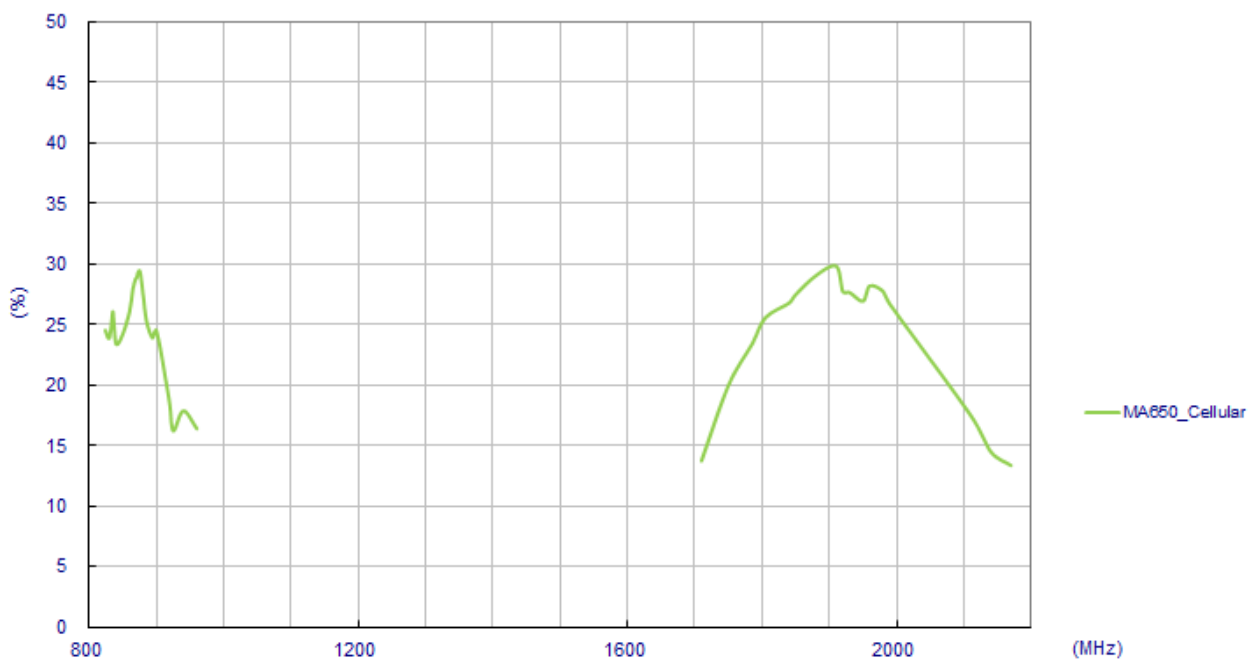

3.3. Peak Gain

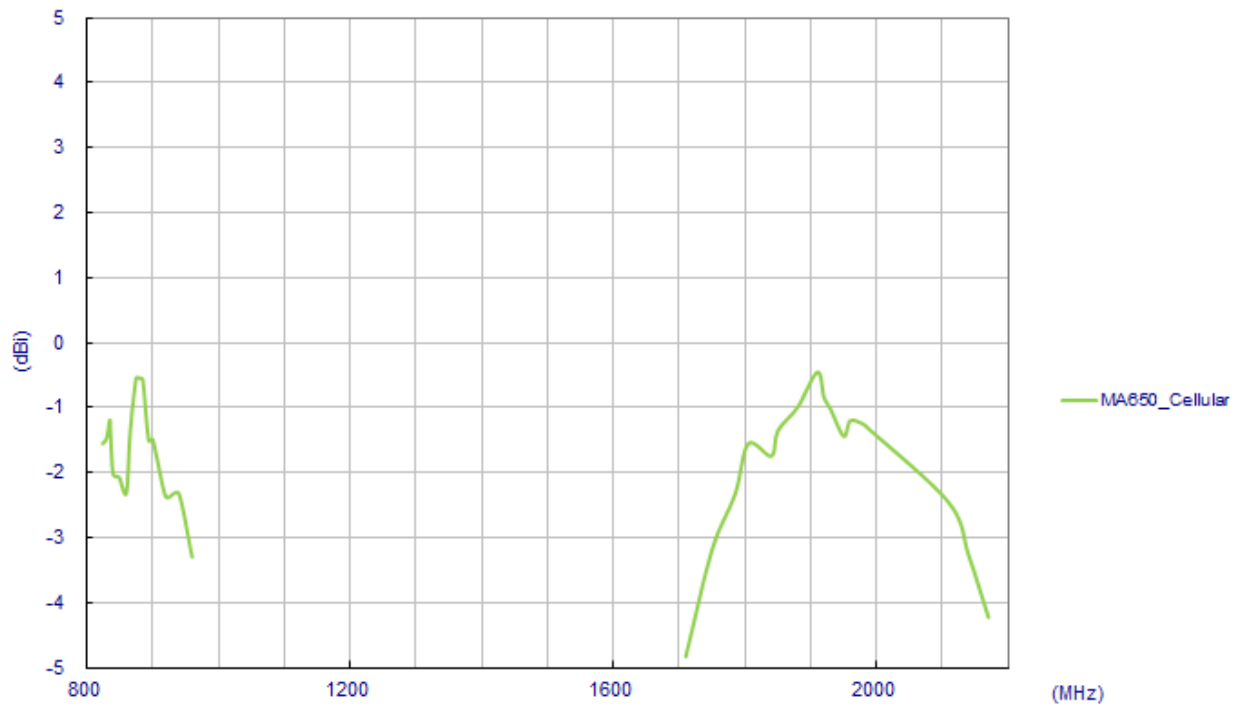


3.4. Average Gain


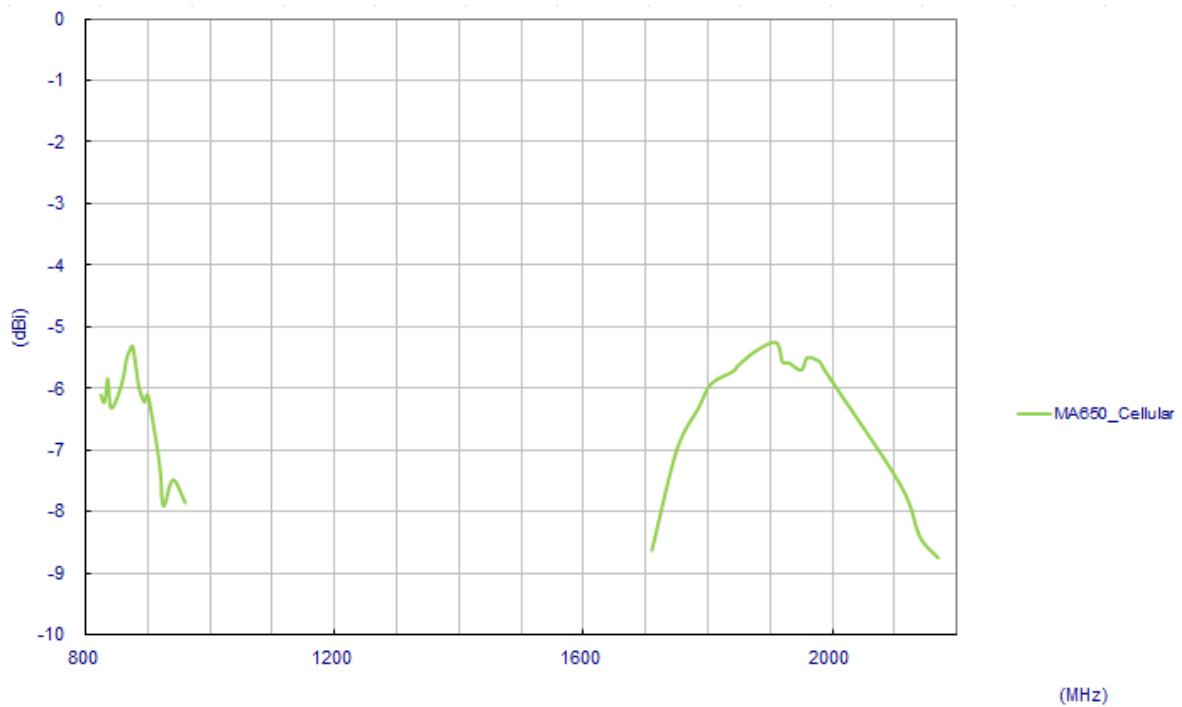


4. Radiation Patterns - Cellular



4.1. Antenna Setup

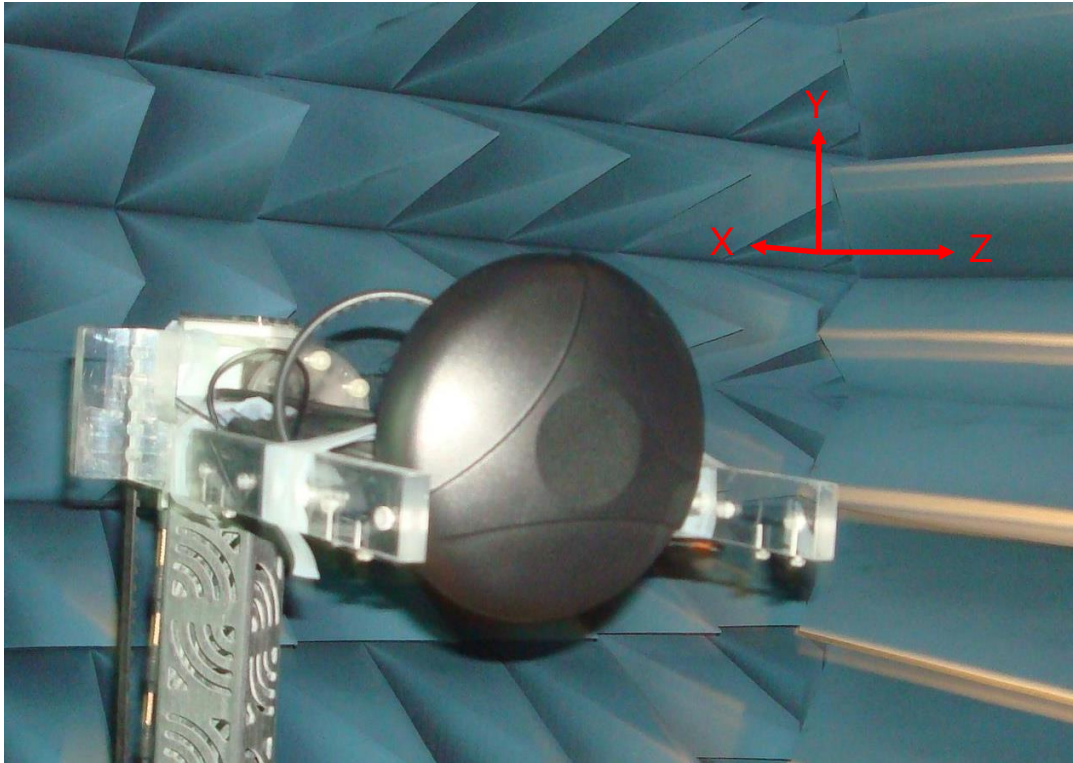

4.2. XY Plane

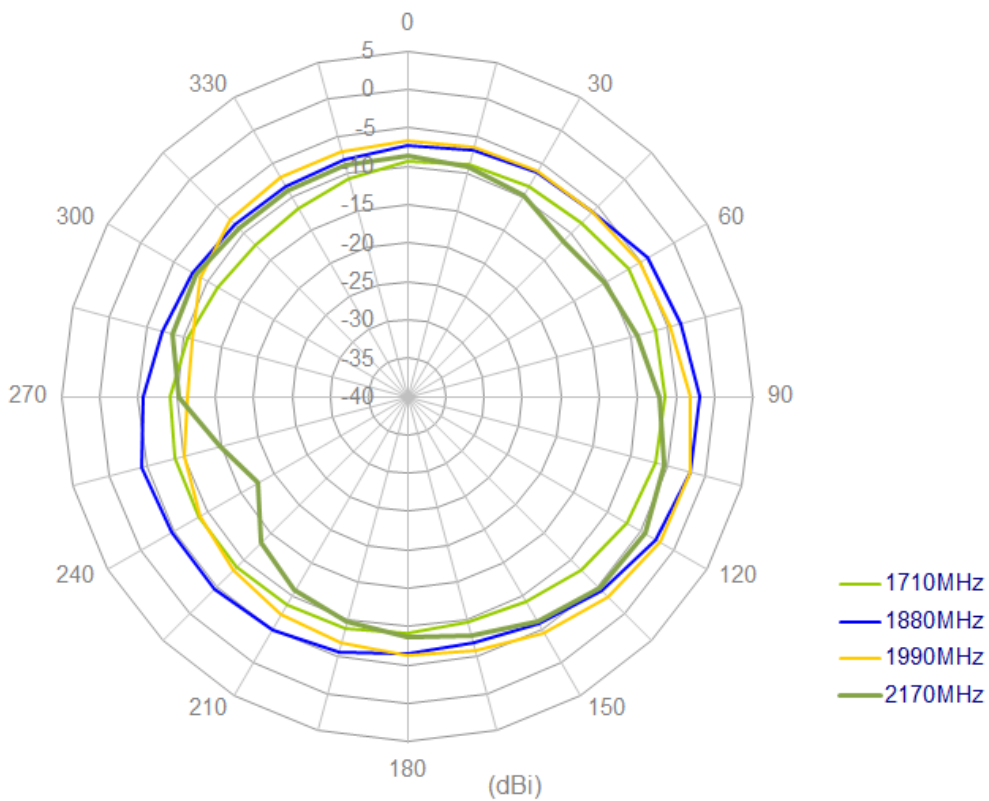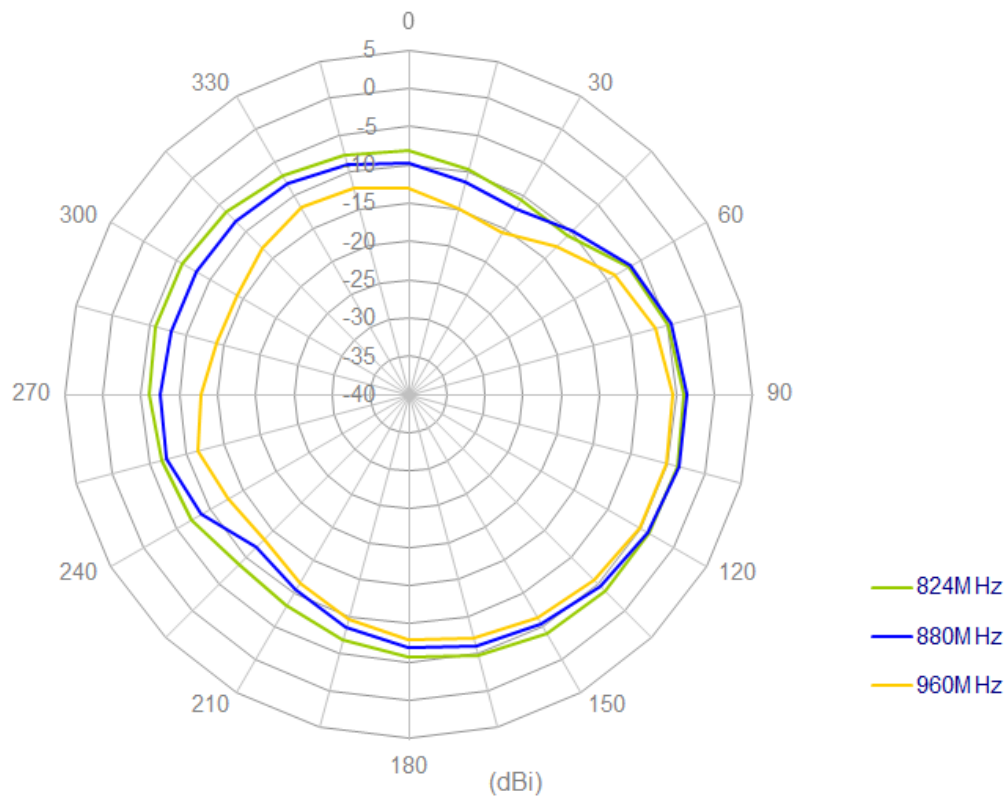


4.3. XZ Plane

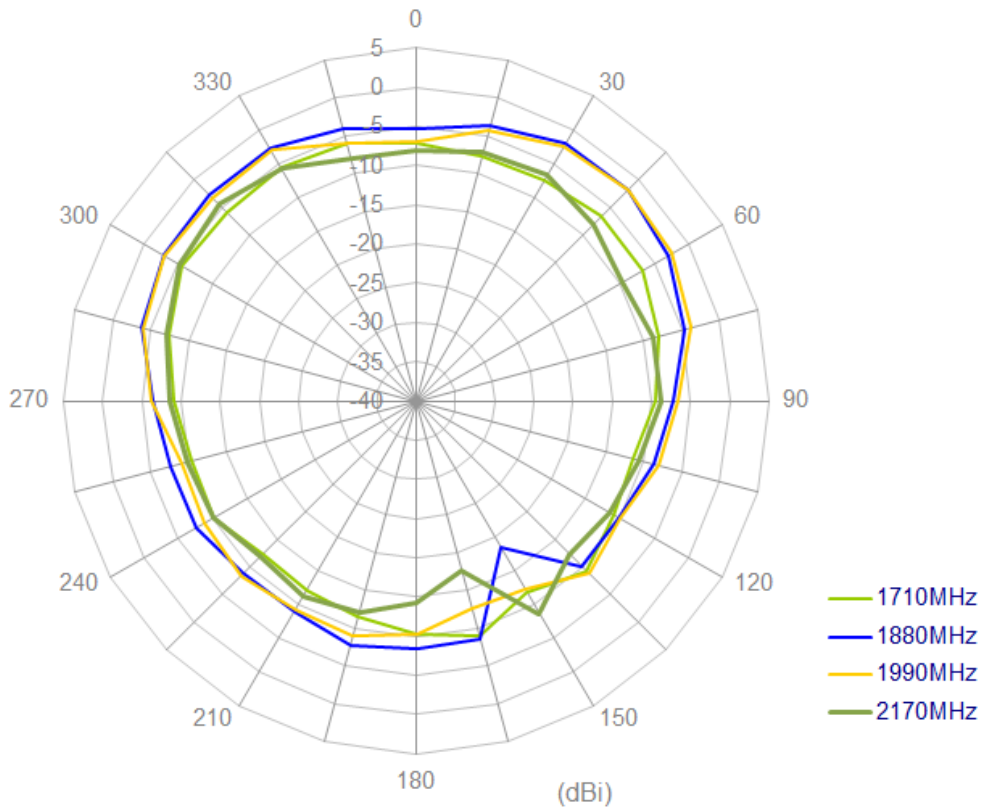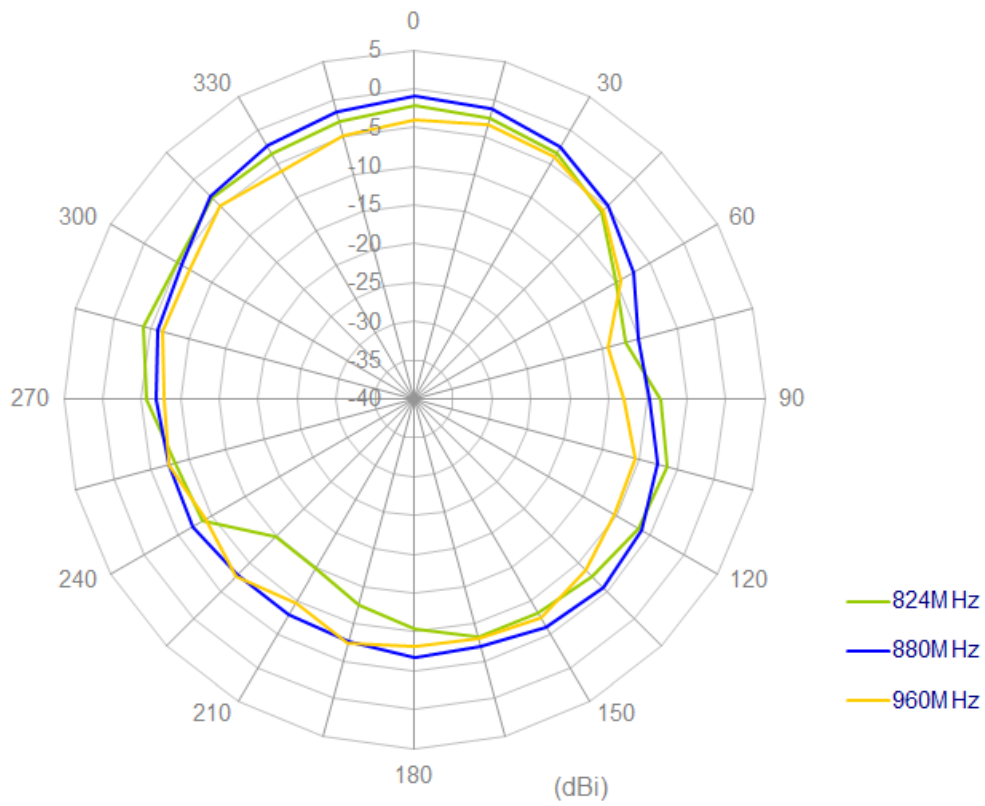

5. GPS/GLONASS/GALILEO Antenna

Characteristics


5.1. Block Diagram

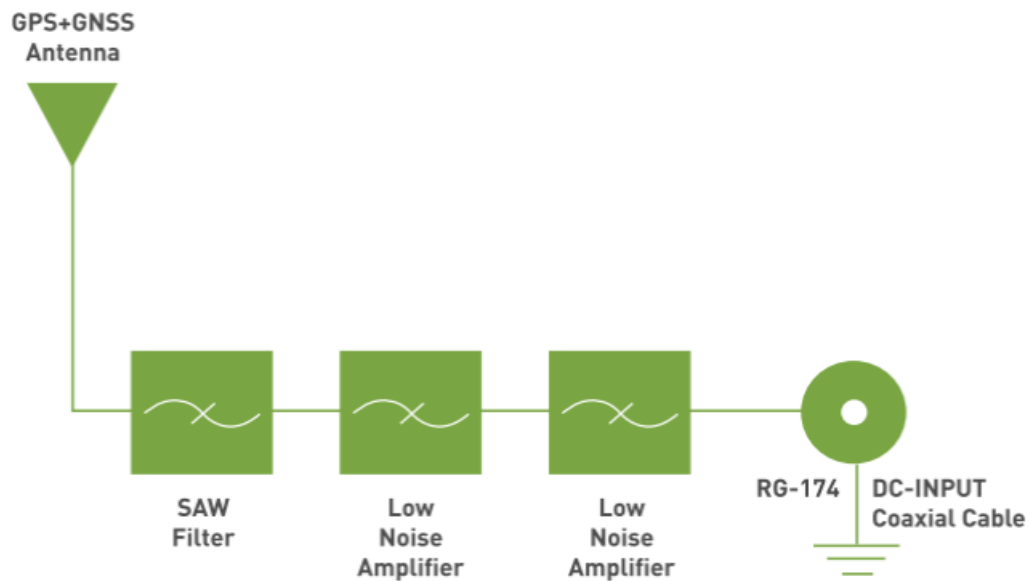


5.2. Return Loss



5.3. LNA S 22

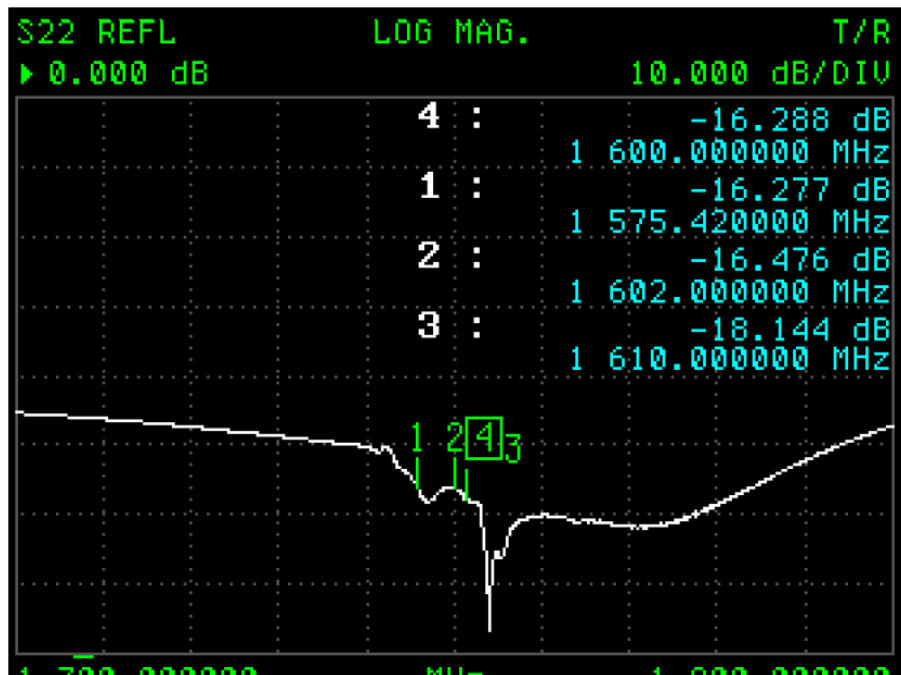

5.4. LNA S 21

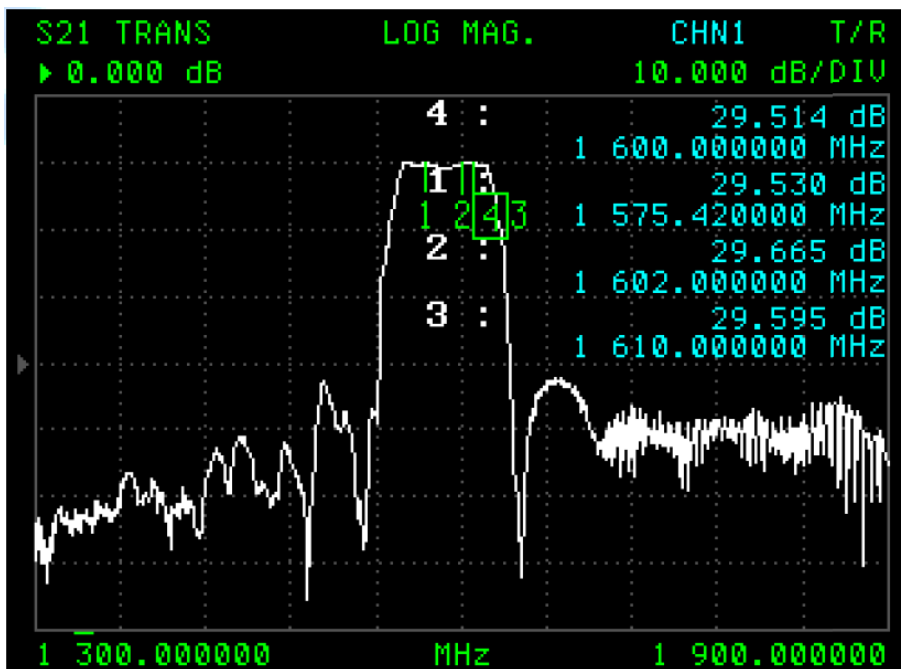


6. GPS/GLONASS/GALILEO Radiation patterns

6.1. Antenna Setup




6.2. XZ Plane

6.2.1. 1575MHz

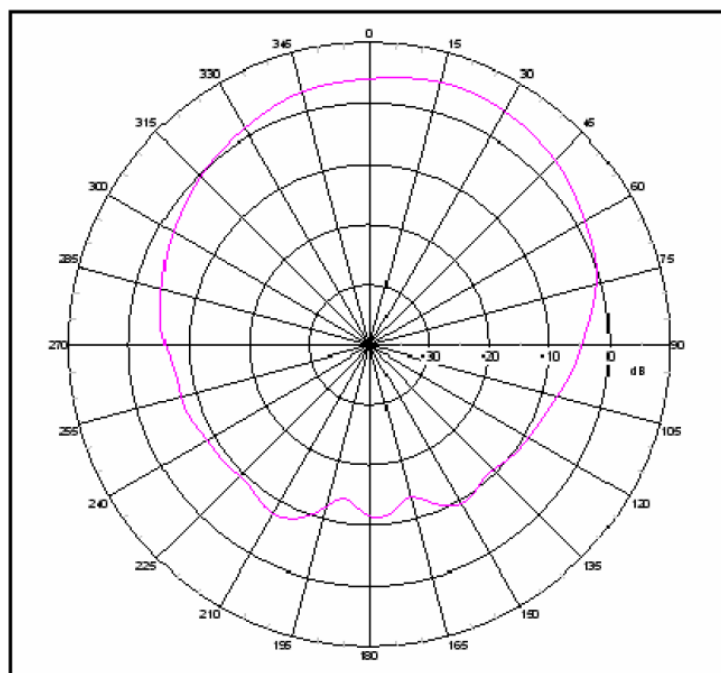


6.2.2. 1602MHz

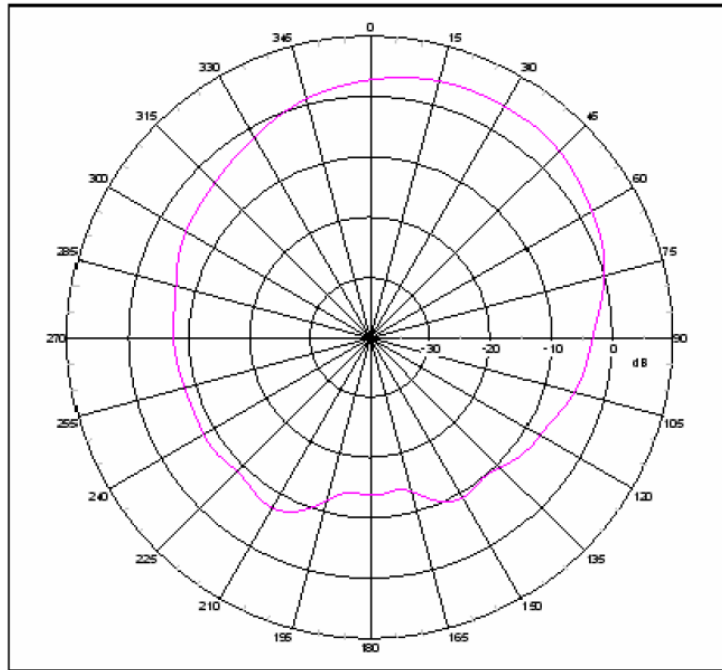


6.3. YZ Plane


6.3.1. 1575MHz

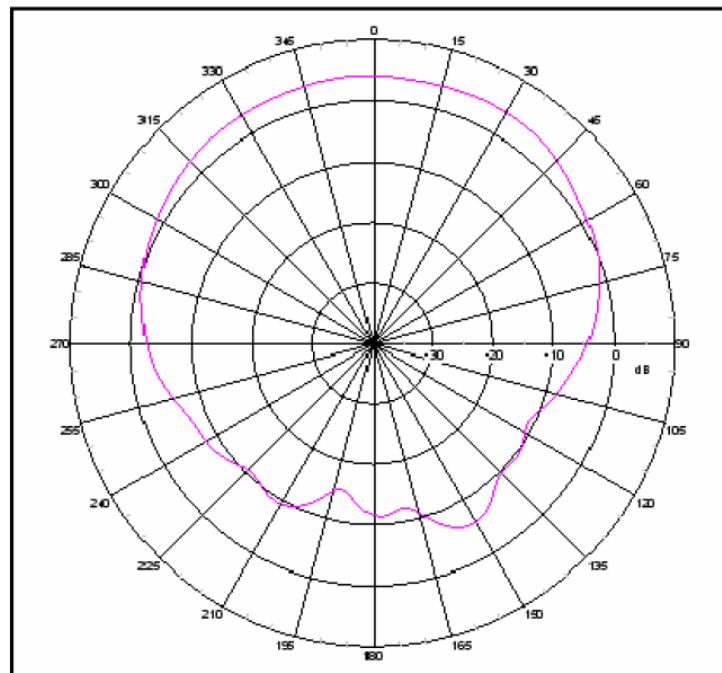


6.3.2. 1602MHz

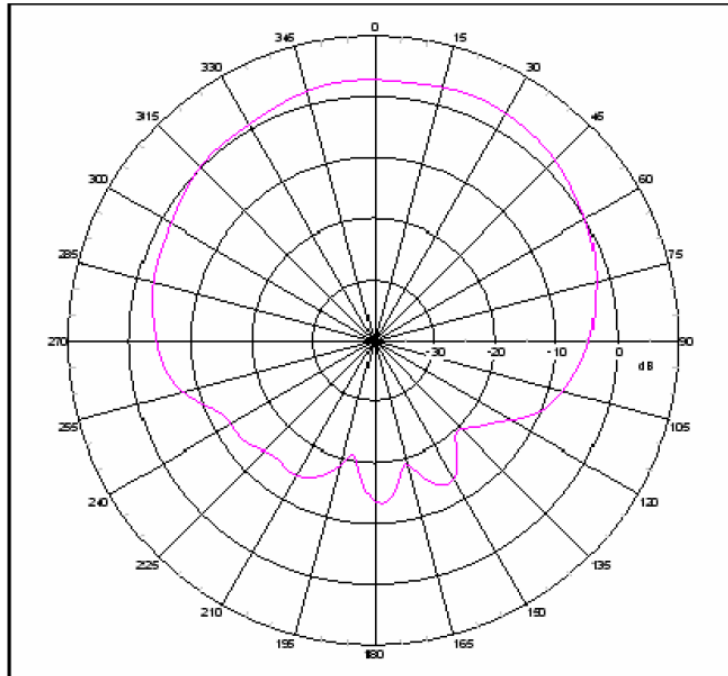


7. Drawing

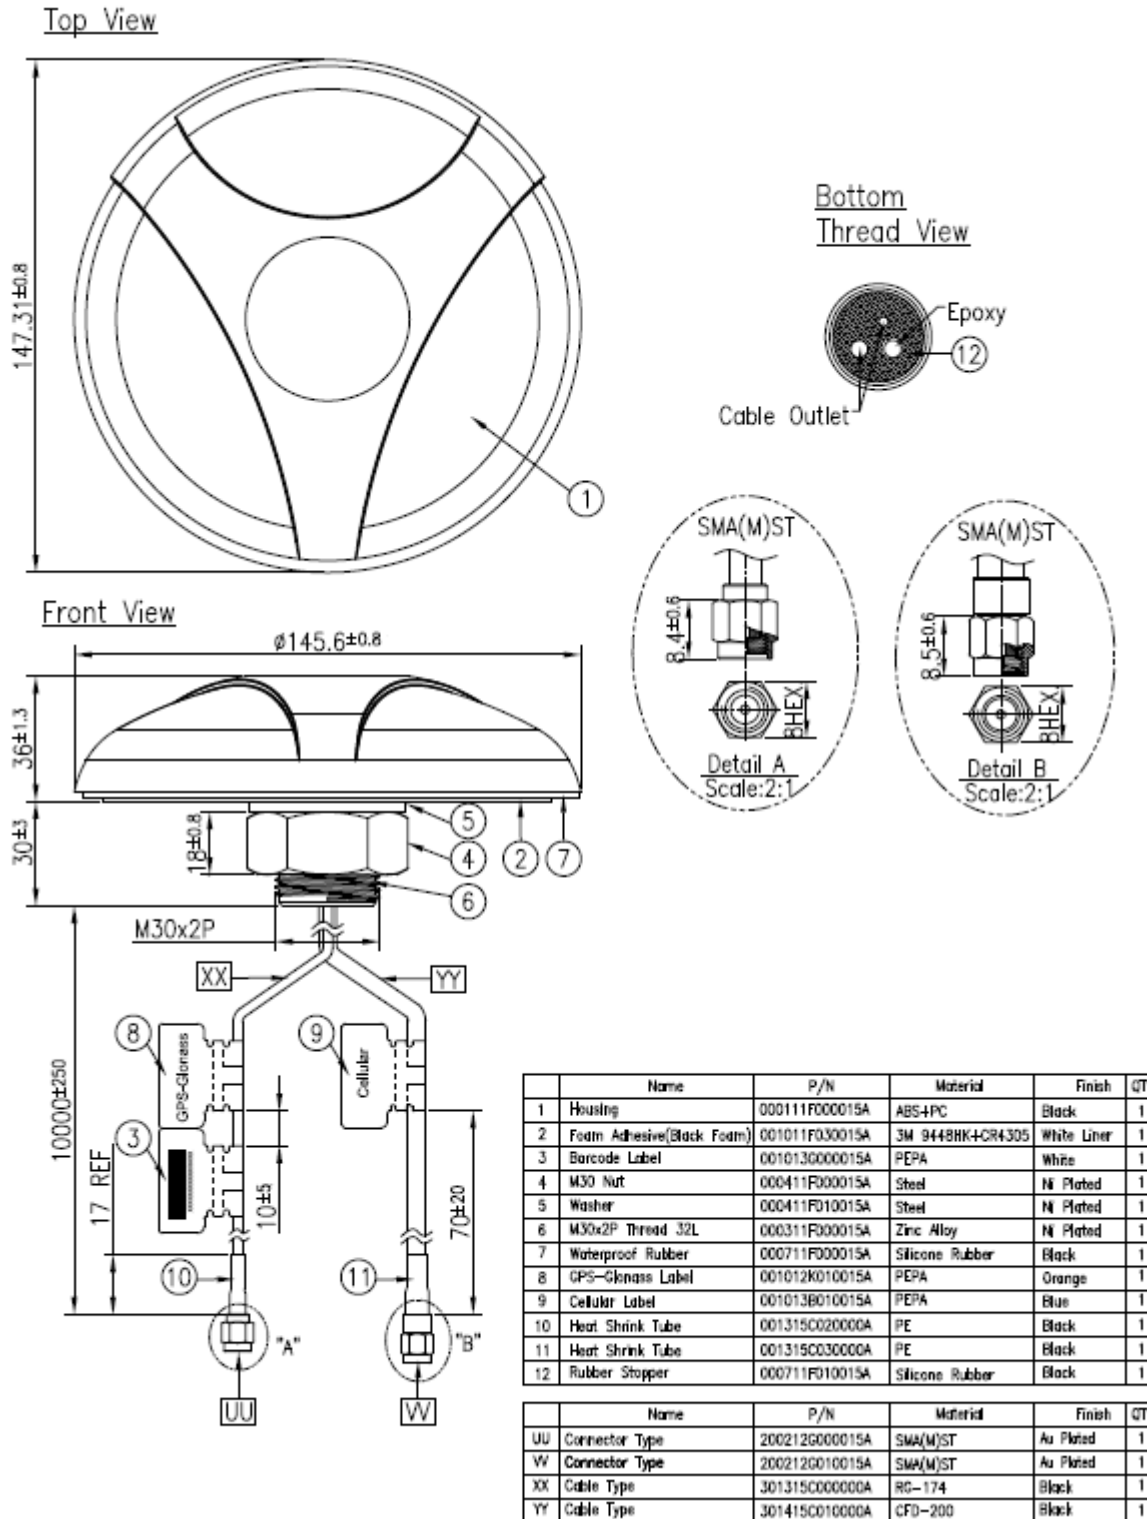


8. Installation

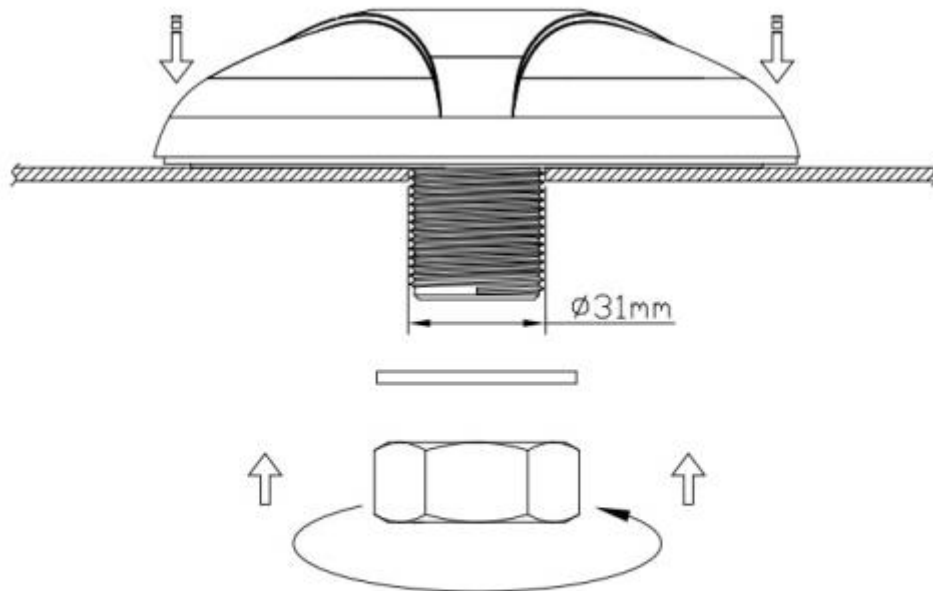


Recommended Torque for Mounting 49 N·m
Maximum Torque for Mounting 58.8 N·m

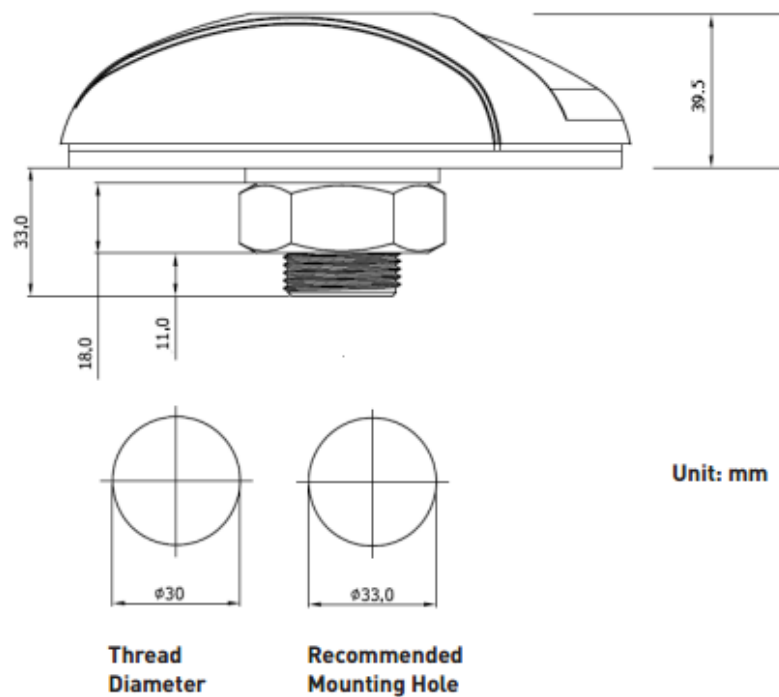


9. Packaging

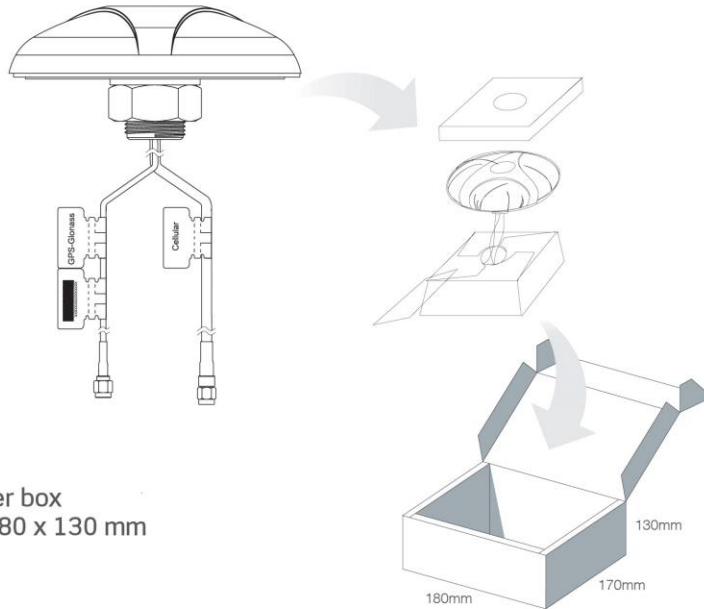

1 pcs MA650.A.AB.008 per box
Box Dimensions - 170 x 180 x 130 mm
Weight - 1146g

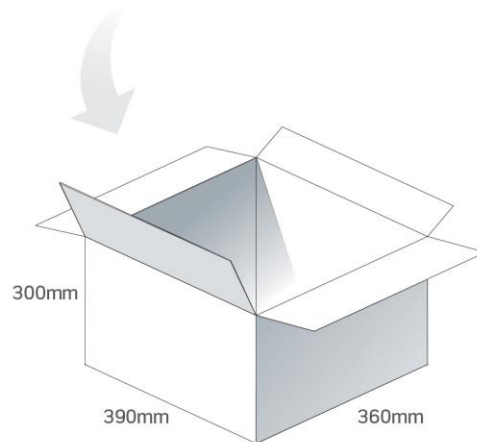

8 pcs MA650.A.AB.008 per carton
Carton - 390 x 360 x 300mm
Weight - 10.2Kg

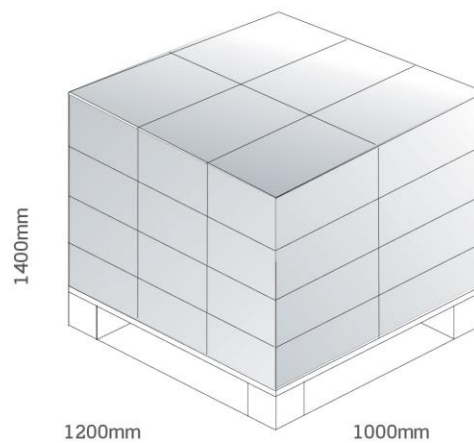

Pallet Dimensions 1200 x 1000 x 1400mm
24 Cartons per Pallet
6 Cartons per layer
4 Layers

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice.

Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9