

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0712643000](#)  
**Status:** **Active**  
**Overview:** [ieee 1394](#)  
**Description:** 1.27mm (.050") Pitch MUSIC™ SSA/1394 Receptacle, 4-Bay Through-Hole, Vertical

**Documents:**

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Drawing \(PDF\)](#)

**Agency Certification**


CSA LR19980  
 UL E29179

**General**

Product Family I/O Connectors  
 Series [71264](#)  
 Application Board-to-Board  
 Component Type Receptacle  
 Overview [ieee 1394](#)  
 Product Name IEEE 1394  
 Type N/A

**Physical**


Boot Color N/A  
 Circuits (Loaded) 38  
 Circuits (maximum) 38  
 Flammability 94V-0  
 Gender Receptacle  
 Keying to Mating Part Yes  
 Lock to Mating Part None  
 Material - Metal Phosphor Bronze  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Number of Rows 2  
 Orientation Vertical  
 PC Tail Length (in) 0.110 In  
 PC Tail Length (mm) 2.79 mm  
 PCB Locator Yes  
 PCB Retention Yes  
 PCB Thickness Recommended (in) 0.062 In  
 PCB Thickness Recommended (mm) 1.60 mm  
 Packaging Type Tray  
 Panel Mount No  
 Pitch - Mating Interface (in) 0.050 In  
 Pitch - Mating Interface (mm) 1.27 mm  
 Pitch - Term. Interface (in) 0.050 In  
 Pitch - Term. Interface (mm) 1.27 mm  
 Plating min: Mating (µin) 30  
 Plating min: Mating (µm) 0.75  
 Plating min: Termination (µin) 10  
 Plating min: Termination (µm) 0.25  
 Polarized to Mating Part Yes  
 Polarized to PCB Yes  
 Ports 4  
 Surface Mount Compatible (SMC) No  
 Termination Interface: Style Through Hole

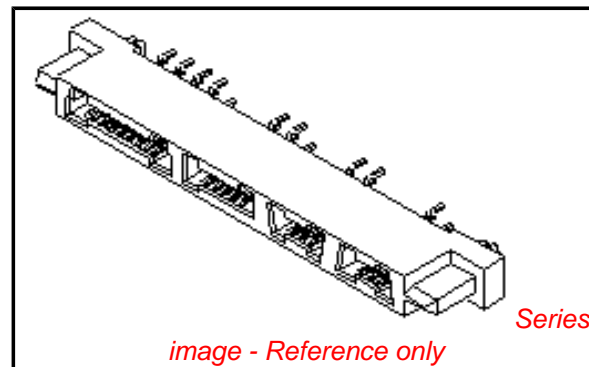

**EU RoHS**

**ELV and RoHS  
 Compliant  
 REACH SVHC  
 Contains SVHC: No  
 Halogen-Free  
 Status  
 Not Reviewed**

**China RoHS**



**Need more information on product  
 environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of  
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any  
 non-product compliance questions.

**Search Parts in this Series**

[71264Series](#)

**Mates With**

[71265](#)

|                        |     |
|------------------------|-----|
| Waterproof / Dustproof | No  |
| Wire Size AWG          | N/A |

**Electrical**

|                               |           |
|-------------------------------|-----------|
| Current - Maximum per Contact | N/A       |
| Grounding to Panel            | Press-Fit |
| Shielded                      | No        |

**Solder Process Data**


|                              |                              |
|------------------------------|------------------------------|
| Lead-free Process Capability | SMC & Wave Capable (TH only) |
| Process Temperature max. C   | 235                          |

**Material Info****Reference - Drawing Numbers**




|                         |                |
|-------------------------|----------------|
| Packaging Specification | PK-71264-0000  |
| Sales Drawing           | SDA-71264-3*** |

This document was generated on 05/19/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

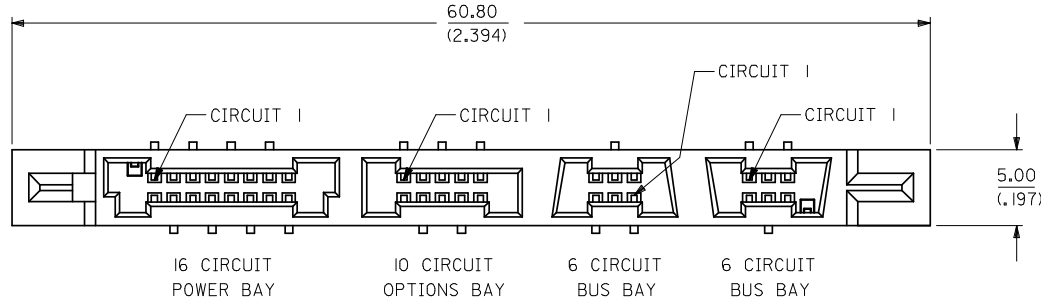


NOTES:  
 1. MATERIALS:  
 HOUSING - 30% GLASS FILLED POLYMER, 94V-0, BLACK.  
 TERMINALS - COPPER ALLOY.  
 2. PLATING:  
 0.00076/(.000030) GOLD OVER 0.0019/(.000075) NICKEL IN CONTACT AREA AND 0.0013/(.000050) TIN OVER NICKEL IN PC TAIL AREA.  
 3. RECOMMENDED PC BOARD THICKNESS IS 1.6/(.062), REFER TO SHEET 2 FOR LAYOUT.

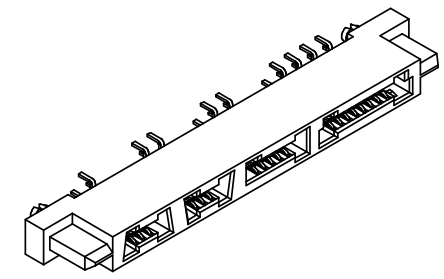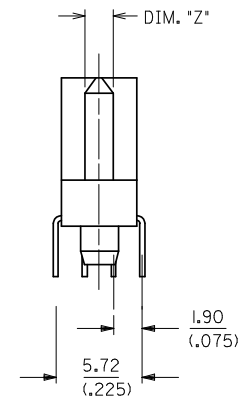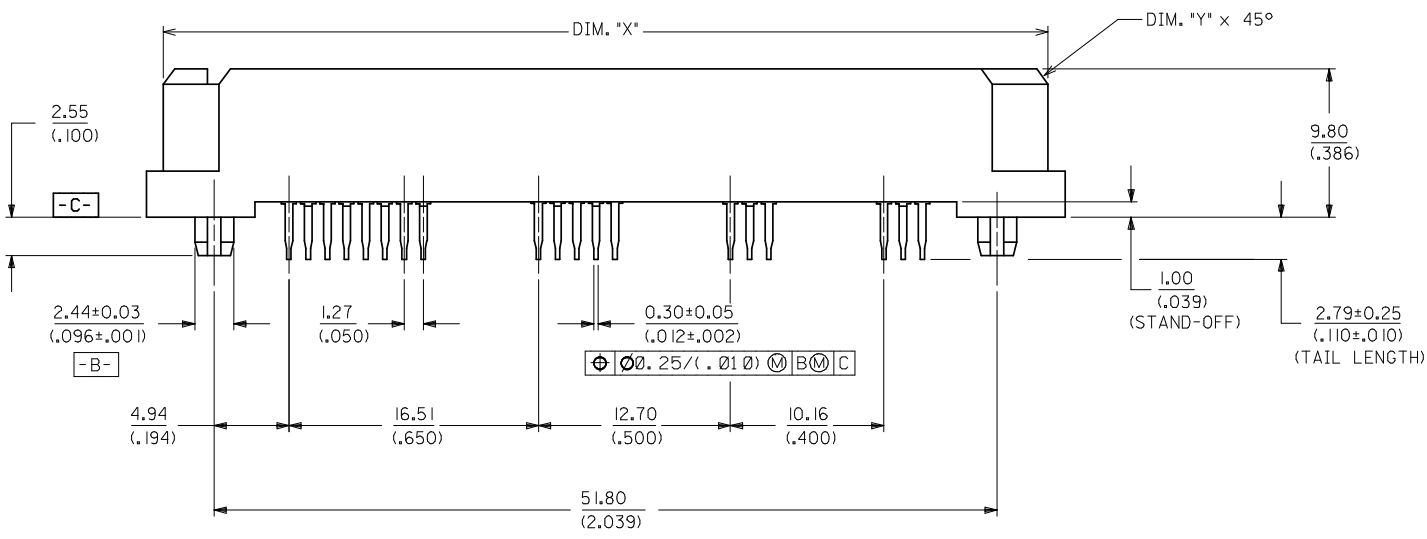

| PART #     | DIM "X"                    | DIM. "Y"                 | DIM. "Z"                 |
|------------|----------------------------|--------------------------|--------------------------|
| 71264-3000 | 57.55±0.05<br>(2.266±.002) | 1.00±0.05<br>(.039±.002) | 1.87±0.05<br>(.074±.002) |

NOTE 2 REMVD LEAD  
 EC NO: UCP2006-1381  
 DRWN:TWCCLELL 2005/12/24  
 CHKD:BANAKIS 2005/12/29  
 APPR:MBANAKIS 2006/01/03

|  |  |  |   |   |                        |
|--|--|--|---|---|------------------------|
| QUALITY SYMBOLS<br>▼=0<br>▽=0                              | GENERAL TOLERANCES (UNLESS SPECIFIED)  | DIMENSION STYLE<br>MM/IN                                       | SCALE<br>4:1  | DESIGN UNITS<br>INCH  | THIRD ANGLE PROJECTION |
|  | 4 PLACES ± --- ± ---<br>3 PLACES ± --- ±.010<br>2 PLACES ± 0.25 ±.02<br>1 PLACE ± 0.5 ± ---<br>ANGULAR ±1/2° | DRAWN BY<br>MOS<br>CHECKED BY<br>MOS<br>APPROVED BY<br>BANAKIS | DATE<br>6/11/95<br>DATE<br>6/11/95<br>DATE<br>6/11/95 | TITLE<br>MUSIC SSA 4-BAY<br>VERTICAL RECEPTACLE<br>CONNECTOR ASSEMBLY | MOLEX INCORPORATED     |
| DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS | SEE CHART  | MATERIAL NO.<br>SDA-71264-3***                                 | DOCUMENT NO.<br>SDA-71264-3***                        | SHEET NO.<br>1 OF 2   |                        |

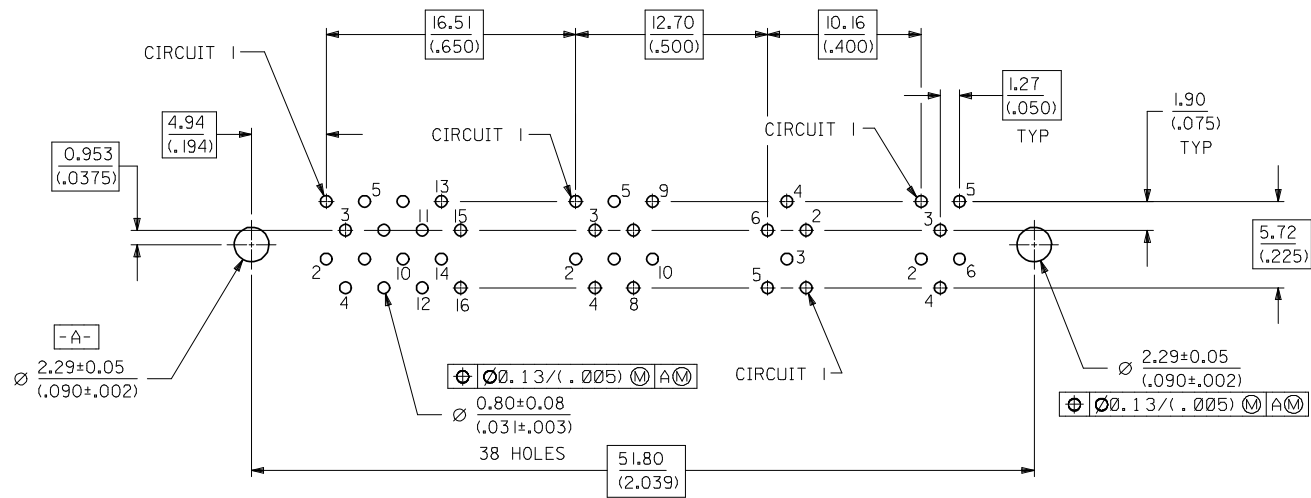

RECOMMENDED PC BOARD LAYOUT COMPONENT SIDE

|  |                               |                                       |                      |  |                     |                           |                                |   |                     |
|--|-------------------------------|---------------------------------------|----------------------|--|---------------------|---------------------------|--------------------------------|---|---------------------|
| SEE SHEET 1<br>EC NO: UCP2006-1381<br>DRWN: MCCLLELL 2005/12/21<br>CHKD: BANAKIS 2005/12/29<br>APPR: MBANAKIS 2006/01/03 | QUALITY SYMBOLS<br>= 0<br>= 0 | GENERAL TOLERANCES (UNLESS SPECIFIED) |                      | DIMENSION STYLE<br>MM/IN                             | SCALE<br>4:1        | DESIGN UNITS<br>INCH      | THIRD ANGLE PROJECTION         |   |                     |
|  |                               | 4 PLACES ± .05 ± .02                  | 3 PLACES ± .05 ± .02 | 2 PLACES ± 0.25 ± .02                                | 1 PLACE ± 0.5 ± .02 | DRAWN BY<br>MOS 6/11/95   | DATE<br>6/11/95                | TITLE<br>MUSIC SSA 4-BAY VERTICAL RECEPTACLE CONNECTOR ASSEMBLY |                     |
|  |                               | ANGULAR ± 1/2°                        |                      | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS |                     | CHECKED BY<br>MOS 6/11/95 | DATE<br>6/11/95                | MOLEX INCORPORATED  |                     |
|  |                               | MATERIAL NO.<br>SEE CHART             |                      | APPROVED BY<br>BANAKIS 6/11/95                       |                     | DATE<br>6/11/95           | DOCUMENT NO.<br>SDA-71264-3*** |   | SHEET NO.<br>2 OF 2 |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9