


FEATURES


- Standard HC-49/U Package, HC-49/U SMMC Package Option Available
- Stable Frequency Over Temperature and Drive Level
- **Fundamental and 3rd Overtone Crystals**
- Frequency Range 1.8432 – 64 MHz
- Frequency Tolerance, ± 30 ppm Standard
- Frequency Stability, ± 50 ppm Standard
- Operating Temperature, -20°C to $+70^{\circ}\text{C}$ Standard, -40°C to $+85^{\circ}\text{C}$ Available
- Tape & Reel Packaging Available
- **RoHS/Green Compliant (6/6)**

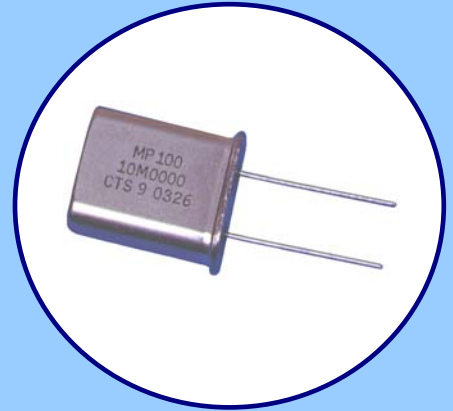

APPLICATIONS

The MP crystal series offers excellent long-term stability and reliability in a proven resistance-weld metal package. The excellent shock performance makes it suitable for microprocessor, telecommunication, industrial, consumer electronics and networking applications.

ORDERING INFORMATION

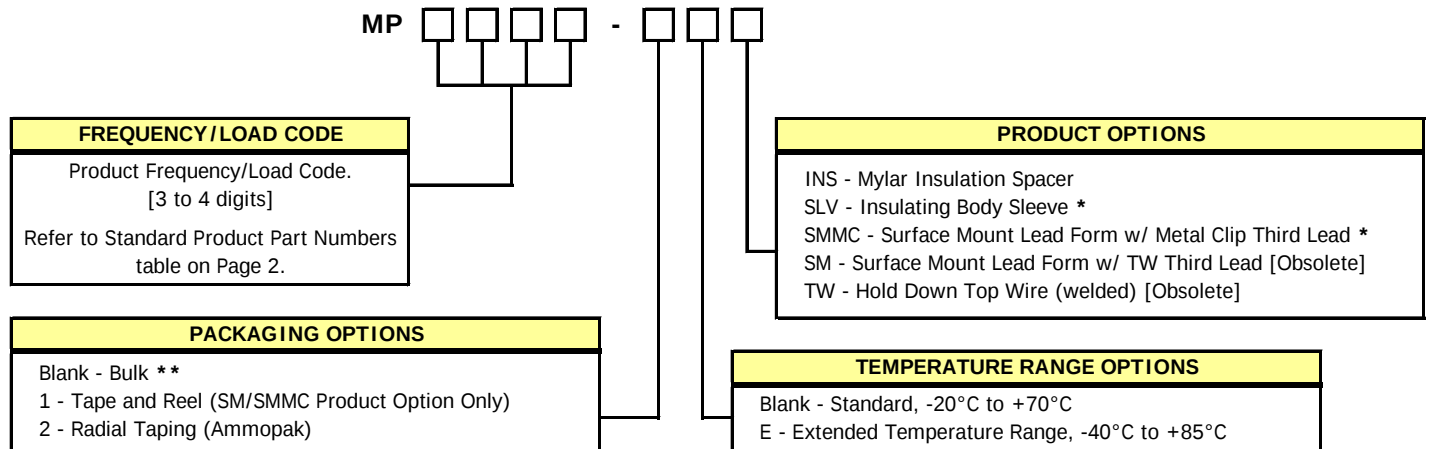

** Standard packaging is bulk in a bag.

* Consult factory for Option availability.

Non-Standard Ordering Options

- Custom requirements may be available upon request. Use form C052 to detail non-standard parameters.
(http://www.ctscorp.com/components/CTS_Crystal_Specifying_Form.xls)
- Contact your local CTS Representative or CTS Customer Service for assistance.

STANDARD PRODUCT PART NUMBERS

Part numbers in **BOLD** are common stock items through CTS authorized distributors. Non-bold part numbers may be stocked or are available for order.

Contact your CTS Distributor or local CTS Representative for availability.

FREQUENCY (MHz)	PART NUMBER -20/70°C	PART NUMBER -40/85°C	LOAD CAPACITANCE	OPERATING MODE
1.843200	MP018A	MP018A-E	Series	Fundamental
1.843200	MP018B	MP018B-E	18 pF	Fundamental
1.843200	MP018S	MP018S-E	13 pF	Fundamental
2.000000	MP020A	MP020A-E	Series	Fundamental
2.000000	MP020S	MP020S-E	20 pF	Fundamental
2.000000	MP020B	MP020B-E	18 pF	Fundamental
2.457600	MP024S	MP024S-E	32 pF	Fundamental
3.579545	MP036	MP036-E	Series	Fundamental
3.579545	MP036S	MP036S-E	18 pF	Fundamental
3.686400	MP037A	MP037A-E	Series	Fundamental
3.686400	MP037	MP037-E	20 pF	Fundamental
3.686400	MP037B	MP037B-E	18 pF	Fundamental
4.000000	MP04A	MP04A-E	Series	Fundamental
4.000000	MP040	MP040-E	20 pF	Fundamental
4.000000	MP040B	MP040B-E	18 pF	Fundamental
4.032000	MP043A	MP043A-E	Series	Fundamental
4.032000	MP043	MP043-E	20 pF	Fundamental
4.096000	MP042A	MP042A-E	20 pF	Fundamental
4.194304	MP041	MP041-E	12 pF	Fundamental
4.915200	MP049A	MP049A-E	Series	Fundamental
4.915200	MP042	MP042-E	20 pF	Fundamental
4.915200	MP049B	MP049B-E	18 pF	Fundamental
5.000000	MP05B	MP05B-E	Series	Fundamental
5.000000	MP05A	MP05A-E	20 pF	Fundamental
5.000000	MP050C	MP050C-E	18 pF	Fundamental
5.068000	MP050	MP050-E	Series	Fundamental
5.068000	MP051A	MP051A-E	20 pF	Fundamental
5.185000	MP052	MP052-E	Series	Fundamental
5.185000	MP051	MP051-E	20 pF	Fundamental
5.185000	MP052C	MP052C-E	32 pF	Fundamental
5.714300	MP057	MP057-E	Series	Fundamental
5.714300	MP057A	MP057A-E	20 pF	Fundamental
6.000000	MP060A	MP060A-E	Series	Fundamental
6.000000	MP060	MP060-E	20 pF	Fundamental
6.000000	MP060B	MP060B-E	18 pF	Fundamental
6.000000	MP060C	MP060C-E	32 pF	Fundamental
6.144000	MP061	MP061-E	20 pF	Fundamental
6.144000	MP061C	MP061C-E	32 pF	Fundamental
6.250000	MP062	MP062-E	30 pF	Fundamental
6.400000	MP064	MP064-E	20 pF	Fundamental
6.553600	MP065	MP065-E	20 pF	Fundamental
6.553600	MP065C	MP065C-E	12 pF	Fundamental
7.372800	MP073	MP073-E	Series	Fundamental
7.372800	MP073A	MP073A-E	20 pF	Fundamental
7.372800	MP073B	MP073B-E	18 pF	Fundamental
8.000000	MP080	MP080-E	Series	Fundamental
8.000000	MP080A	MP080A-E	20 pF	Fundamental
8.000000	MP080B	MP080B-E	18 pF	Fundamental
8.000000	MP080C	MP080C-E	32 pF	Fundamental
8.192000	MP081B	MP081B-E	18 pF	Fundamental
9.216000	MP092B	MP092B-E	18 pF	Fundamental
9.830400	MP098A	MP098A-E	Series	Fundamental
9.830400	MP098	MP098-E	20 pF	Fundamental
9.830400	MP098B	MP098B-E	18 pF	Fundamental
10.000000	MP100	MP100-E	Series	Fundamental
10.000000	MP100A	MP100A-E	20 pF	Fundamental
10.000000	MP100B	MP100B-E	18 pF	Fundamental
10.000000	MP101	MP101-E	30 pF	Fundamental

FREQUENCY (MHz)	PART NUMBER -20/70°C	PART NUMBER -40/85°C	LOAD CAPACITANCE	OPERATING MODE
10.738635	MP107	MP107-E	32 pF	Fundamental
11.000000	MP110B	MP110B-E	Series	Fundamental
11.000000	MP110A	MP110A-E	20 pF	Fundamental
11.000000	MP110	MP110-E	18 pF	Fundamental
11.059200	MP111	MP111-E	Series	Fundamental
11.059200	MP111A	MP111A-E	20 pF	Fundamental
11.059200	MP111B	MP111B-E	18 pF	Fundamental
11.059200	MP111C	MP111C-E	32 pF	Fundamental
12.000000	MP120	MP120-E	Series	Fundamental
12.000000	MP120A	MP120A-E	20 pF	Fundamental
12.000000	MP120B	MP120B-E	18 pF	Fundamental
12.000000	MP120C	MP120C-E	32 pF	Fundamental
12.288000	MP122C	MP122C-E	Series	Fundamental
12.288000	MP122A	MP122A-E	20 pF	Fundamental
12.288000	MP122B	MP122B-E	18 pF	Fundamental
12.288000	MP122	MP122-E	32 pF	Fundamental
14.318180	MP143	MP143-E	Series	Fundamental
14.318180	MP143B	MP143B-E	18 pF	Fundamental
14.745600	MP147	MP147-E	Series	Fundamental
14.745600	MP147A	MP147A-E	20 pF	Fundamental
14.745600	MP147B	MP147B-E	18 pF	Fundamental
15.000000	MP150	MP150-E	Series	Fundamental
16.000000	MP160	MP160-E	Series	Fundamental
16.000000	MP160A	MP160A-E	20 pF	Fundamental
16.000000	MP160B	MP160B-E	18 pF	Fundamental
18.000000	MP180	MP180-E	Series	Fundamental
18.432000	MP184	MP184-E	Series	Fundamental
18.432000	MP184A	MP184A-E	20 pF	Fundamental
18.432000	MP184B	MP184B-E	18 pF	Fundamental
19.660800	MP196	MP196-E	Series	Fundamental
19.660800	MP196A	MP196A-E	20 pF	Fundamental
19.660800	MP196B	MP196B-E	18 pF	Fundamental
20.000000	MP200	MP200-E	Series	Fundamental
20.000000	MP200A	MP200A-E	20 pF	Fundamental
20.000000	MP200B	MP200B-E	18 pF	Fundamental
22.118400	MP221	MP221-E	20 pF	Fundamental
22.118400	MP221B	MP221B-E	18 pF	Fundamental
24.000000	MP240	MP240-E	Series	Fundamental
24.000000	MP240A	MP240A-E	20 pF	Fundamental
24.000000	MP240B	MP240B-E	18 pF	Fundamental
24.576000	MP245	MP245-E	Series	Fundamental
24.576000	MP245B	MP245B-E	18 pF	Fundamental
25.000000	MP250	MP250-E	Series	Fundamental
25.000000	MP250A	MP250A-E	20 pF	Fundamental
25.000000	MP250B	MP250B-E	18 pF	Fundamental
27.000000	MP270	MP270-E	Series	3rd Overtone
27.000000	MP270B	MP270B-E	18 pF	3rd Overtone
32.000000	MP320A	MP320A-E	20 pF	3rd Overtone
32.000000	MP320B	MP320B-E	18 pF	3rd Overtone
32.768000	MP327B	MP327B-E	18 pF	3rd Overtone
36.000000	MP360	MP360-E	Series	3rd Overtone
40.000000	MP400	MP400-E	20 pF	3rd Overtone
48.000000	MP480	MP480-E	Series	3rd Overtone
48.000000	MP480A	MP480A-E	20 pF	3rd Overtone
48.000000	MP480B	MP480B-E	18 pF	3rd Overtone
50.000000	MP500B	MP500B-E	18 pF	3rd Overtone
64.000000	MP640B	MP640B-E	18 pF	3rd Overtone

ELECTRICAL CHARACTERISTICS

ELECTRICAL PARAMETERS	PARAMETER	VALUE
	Frequency Range	1.8432 MHz to 64.0 MHz
	Operating Mode	Fundamental or 3rd Overtone
	Crystal Cut	AT-Cut
	Frequency Tolerance @ +25°C	± 30 ppm Standard *
	Frequency Stability Tolerance (Operating Temperature Range, Referenced to 25°C Reading)	± 50 ppm Standard *
	Operating Temperature Range	-20°C to +70°C * -40°C to +85°C Available, See Ordering Information
	Equivalent Series Resistance	See ESR Table
	Load Capacitance or Resonance Mode	See Standard Part Numbers tables *
	Shunt Capacitance (C ₀)	7.0 pF Maximum
	Drive Level	100 µW Typical, 1,000 µW Maximum
	Aging @ +25°C	±3 ppm/yr Typical, ±5 ppm/yr Maximum
	Storage Temperature Range	-40°C to +85°C
	Reflow Condition, per JEDEC J-STD-020	+250°C Maximum, 10 Seconds Maximum

* Custom requirements may be available upon request. Use form C052 to detail non-standard parameters.

EQUIVALENT SERIES RESISTANCE TABLE

FREQUENCY RANGE	OSCILLATION MODE	ESR MAXIMUM
1.80 MHz - < 2.00 MHz	Fundamental	600 Ohms
2.00 MHz - < 2.40 MHz	Fundamental	500 Ohms
2.40 MHz - < 3.00 MHz	Fundamental	300 Ohms
3.00 MHz - < 3.70 MHz	Fundamental	200 Ohms
3.70 MHz - < 4.20 MHz	Fundamental	100 Ohms
4.20 MHz - < 4.90 MHz	Fundamental	70 Ohms
4.90 MHz - < 6.00 MHz	Fundamental	50 Ohms
6.00 MHz - < 8.00 MHz	Fundamental	40 Ohms
8.00 MHz - < 10.00 MHz	Fundamental	35 Ohms
10.00 MHz - < 12.50 MHz	Fundamental	30 Ohms
12.50 MHz - < 40.00 MHz	Fundamental	25 Ohms
24.00 MHz - < 64.00 MHz	3rd Overtone	55 Ohms

MECHANICAL SPECIFICATIONS

MP PACKAGE DRAWING



KEY: $\frac{\text{MM}}{\text{INCH}}$

MARKING INFORMATION

1. MPXXXX - CTS Part Number.
[Per Ordering Information Format]
2. XXMXXXXXX - Frequency is marked with only leading significant digits before the 'M' and 4 - 6 digits after the 'M' (including zeros).
Ex. XMXXXXXX - 3M579545
XXMXXXXXX - 14M31818
XXMXXXXX - 20M0000
3. ** - Manufacturing Site Code.
4. YYWW - Date Code, YY - year, WW - week.
5. Complete CTS part number, frequency value and date code information must appear on bag and box labels.

NOTES

1. Lead finish (e1), SnAgCu.

MP PACKAGE W/ WELDED TOP WIRE (TW) OPTION




OBsolete


KEY: $\frac{\text{MM}}{\text{INCH}}$

MECHANICAL SPECIFICATIONS

MP-SMMC OPTION W/ METAL CLIP THIRD LEAD

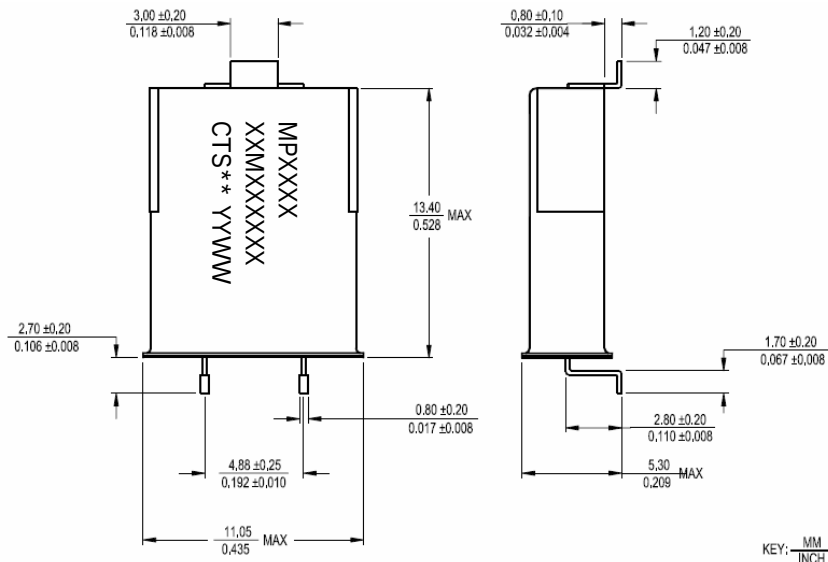

SUGGESTED SOLDER PAD GEOMETRY

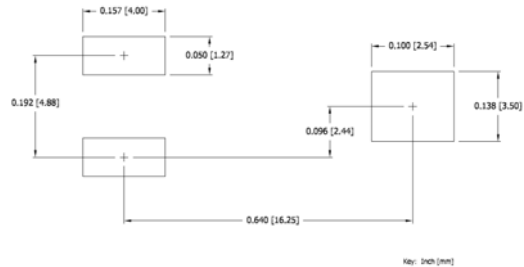

MP-SM OPTION W/ WELDED TOP WIRE THIRD LEAD



SUGGESTED SOLDER PAD GEOMETRY



OBSELETE

PACKAGING INFORMATION [Reference Only]

MP Radial Taping (Ammopak)



MP-SMMC Tape and Reel



ENVIRONMENTAL SPECIFICATIONS

Temperature Cycle:	400 cycles from -55°C to $+125^{\circ}\text{C}$, 10 minute dwell at each temperature, 1 minute transfer time between temperatures.
Mechanical Shock:	1,500g's, 0.5mS duration, $\frac{1}{2}$ sinewave, 3 shocks each direction along 3 mutually perpendicular planes (18 total shocks).
Sinusoidal Vibration:	0.06 inches double amplitude, 10 to 55 Hz and 20g's, 55 to 2,000 Hz, 3 cycles each in 3 mutually perpendicular planes (9 times total).
Gross Leak:	No leak shall appear while immersed in an FC40 or equivalent liquid at $+125^{\circ}\text{C}$ for 20 seconds.
Fine Leak:	Mass spectrometer leak rates less than 2×10^{-8} ATM cc/sec air equivalent.
Resistance to Solder Heat:	Product must survive 3 reflows of $+250^{\circ}\text{C}$ maximum, 10 seconds maximum.
High Temperature Operating Bias:	2,000 hours at $+125^{\circ}\text{C}$, disregarding frequency shift.
Frequency Aging:	1,000 hours at $+85^{\circ}\text{C}$, maximum ± 5 ppm shift.
Insulation Resistance:	500M Ohms @ $100V_{\text{DC}} \pm 15V_{\text{DC}}$.
Moisture Sensitivity Level:	Level 1 per JEDEC J-STD-020.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9