

SIDE ROTARY

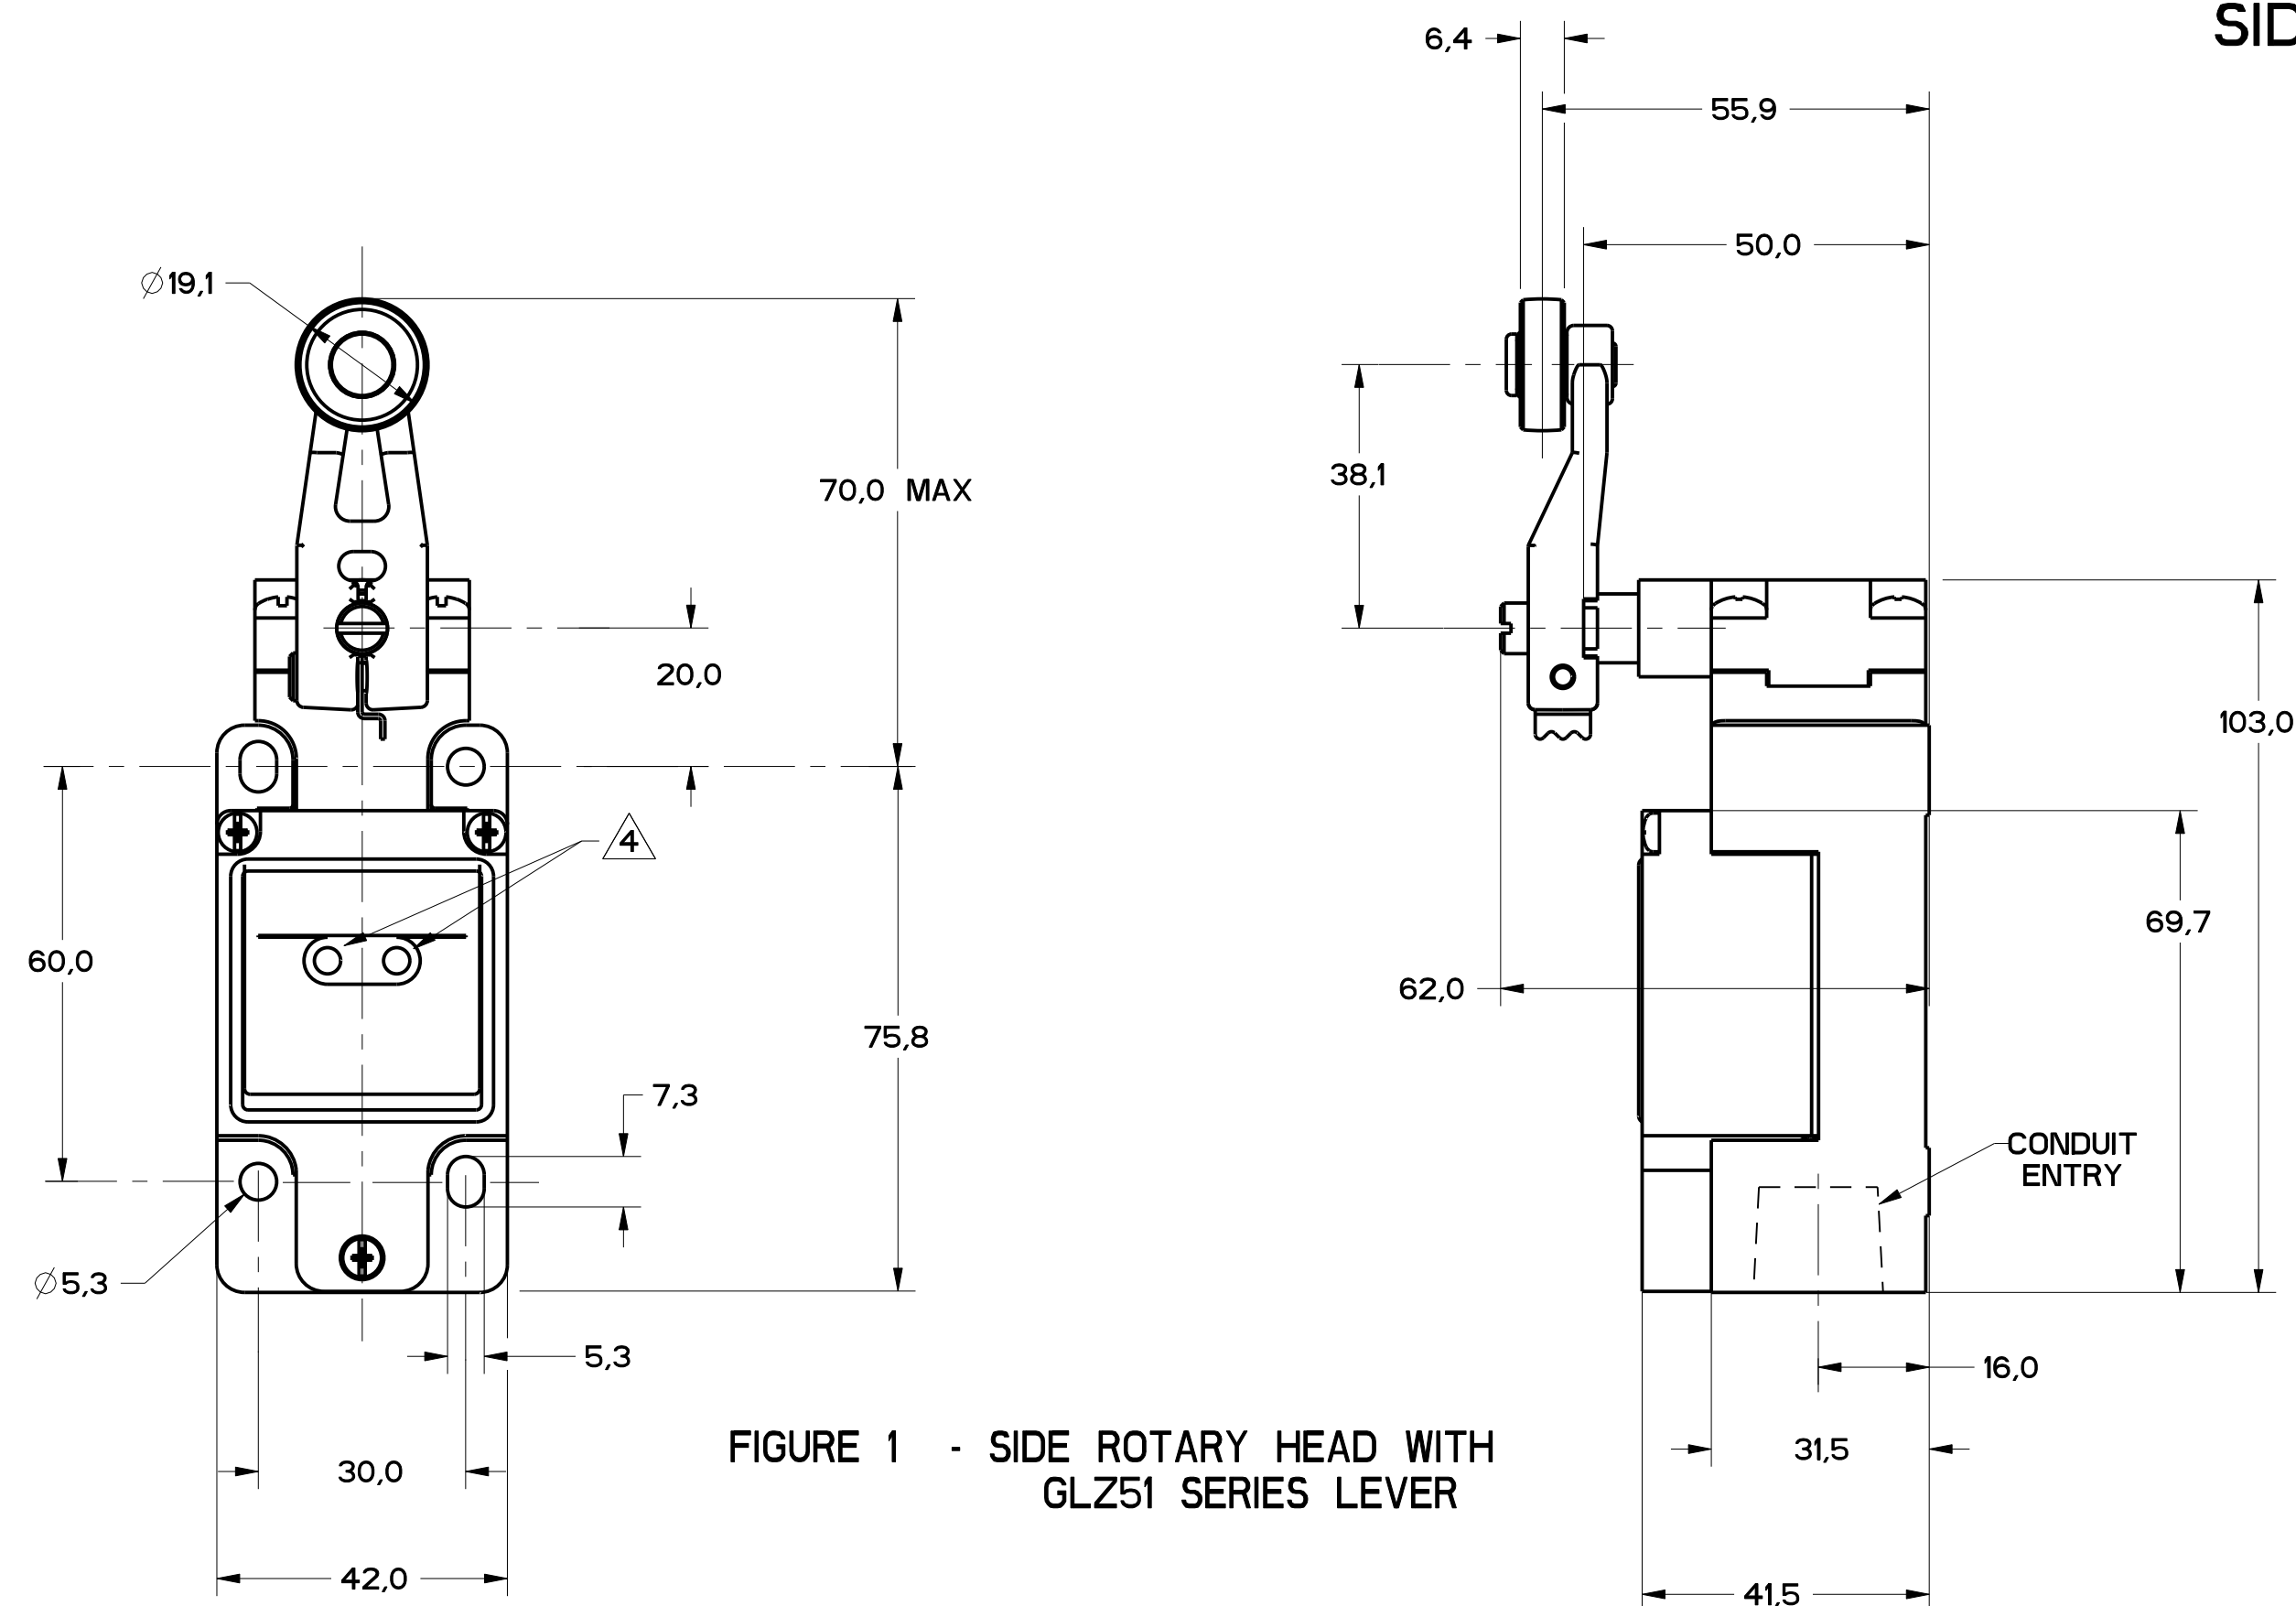


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

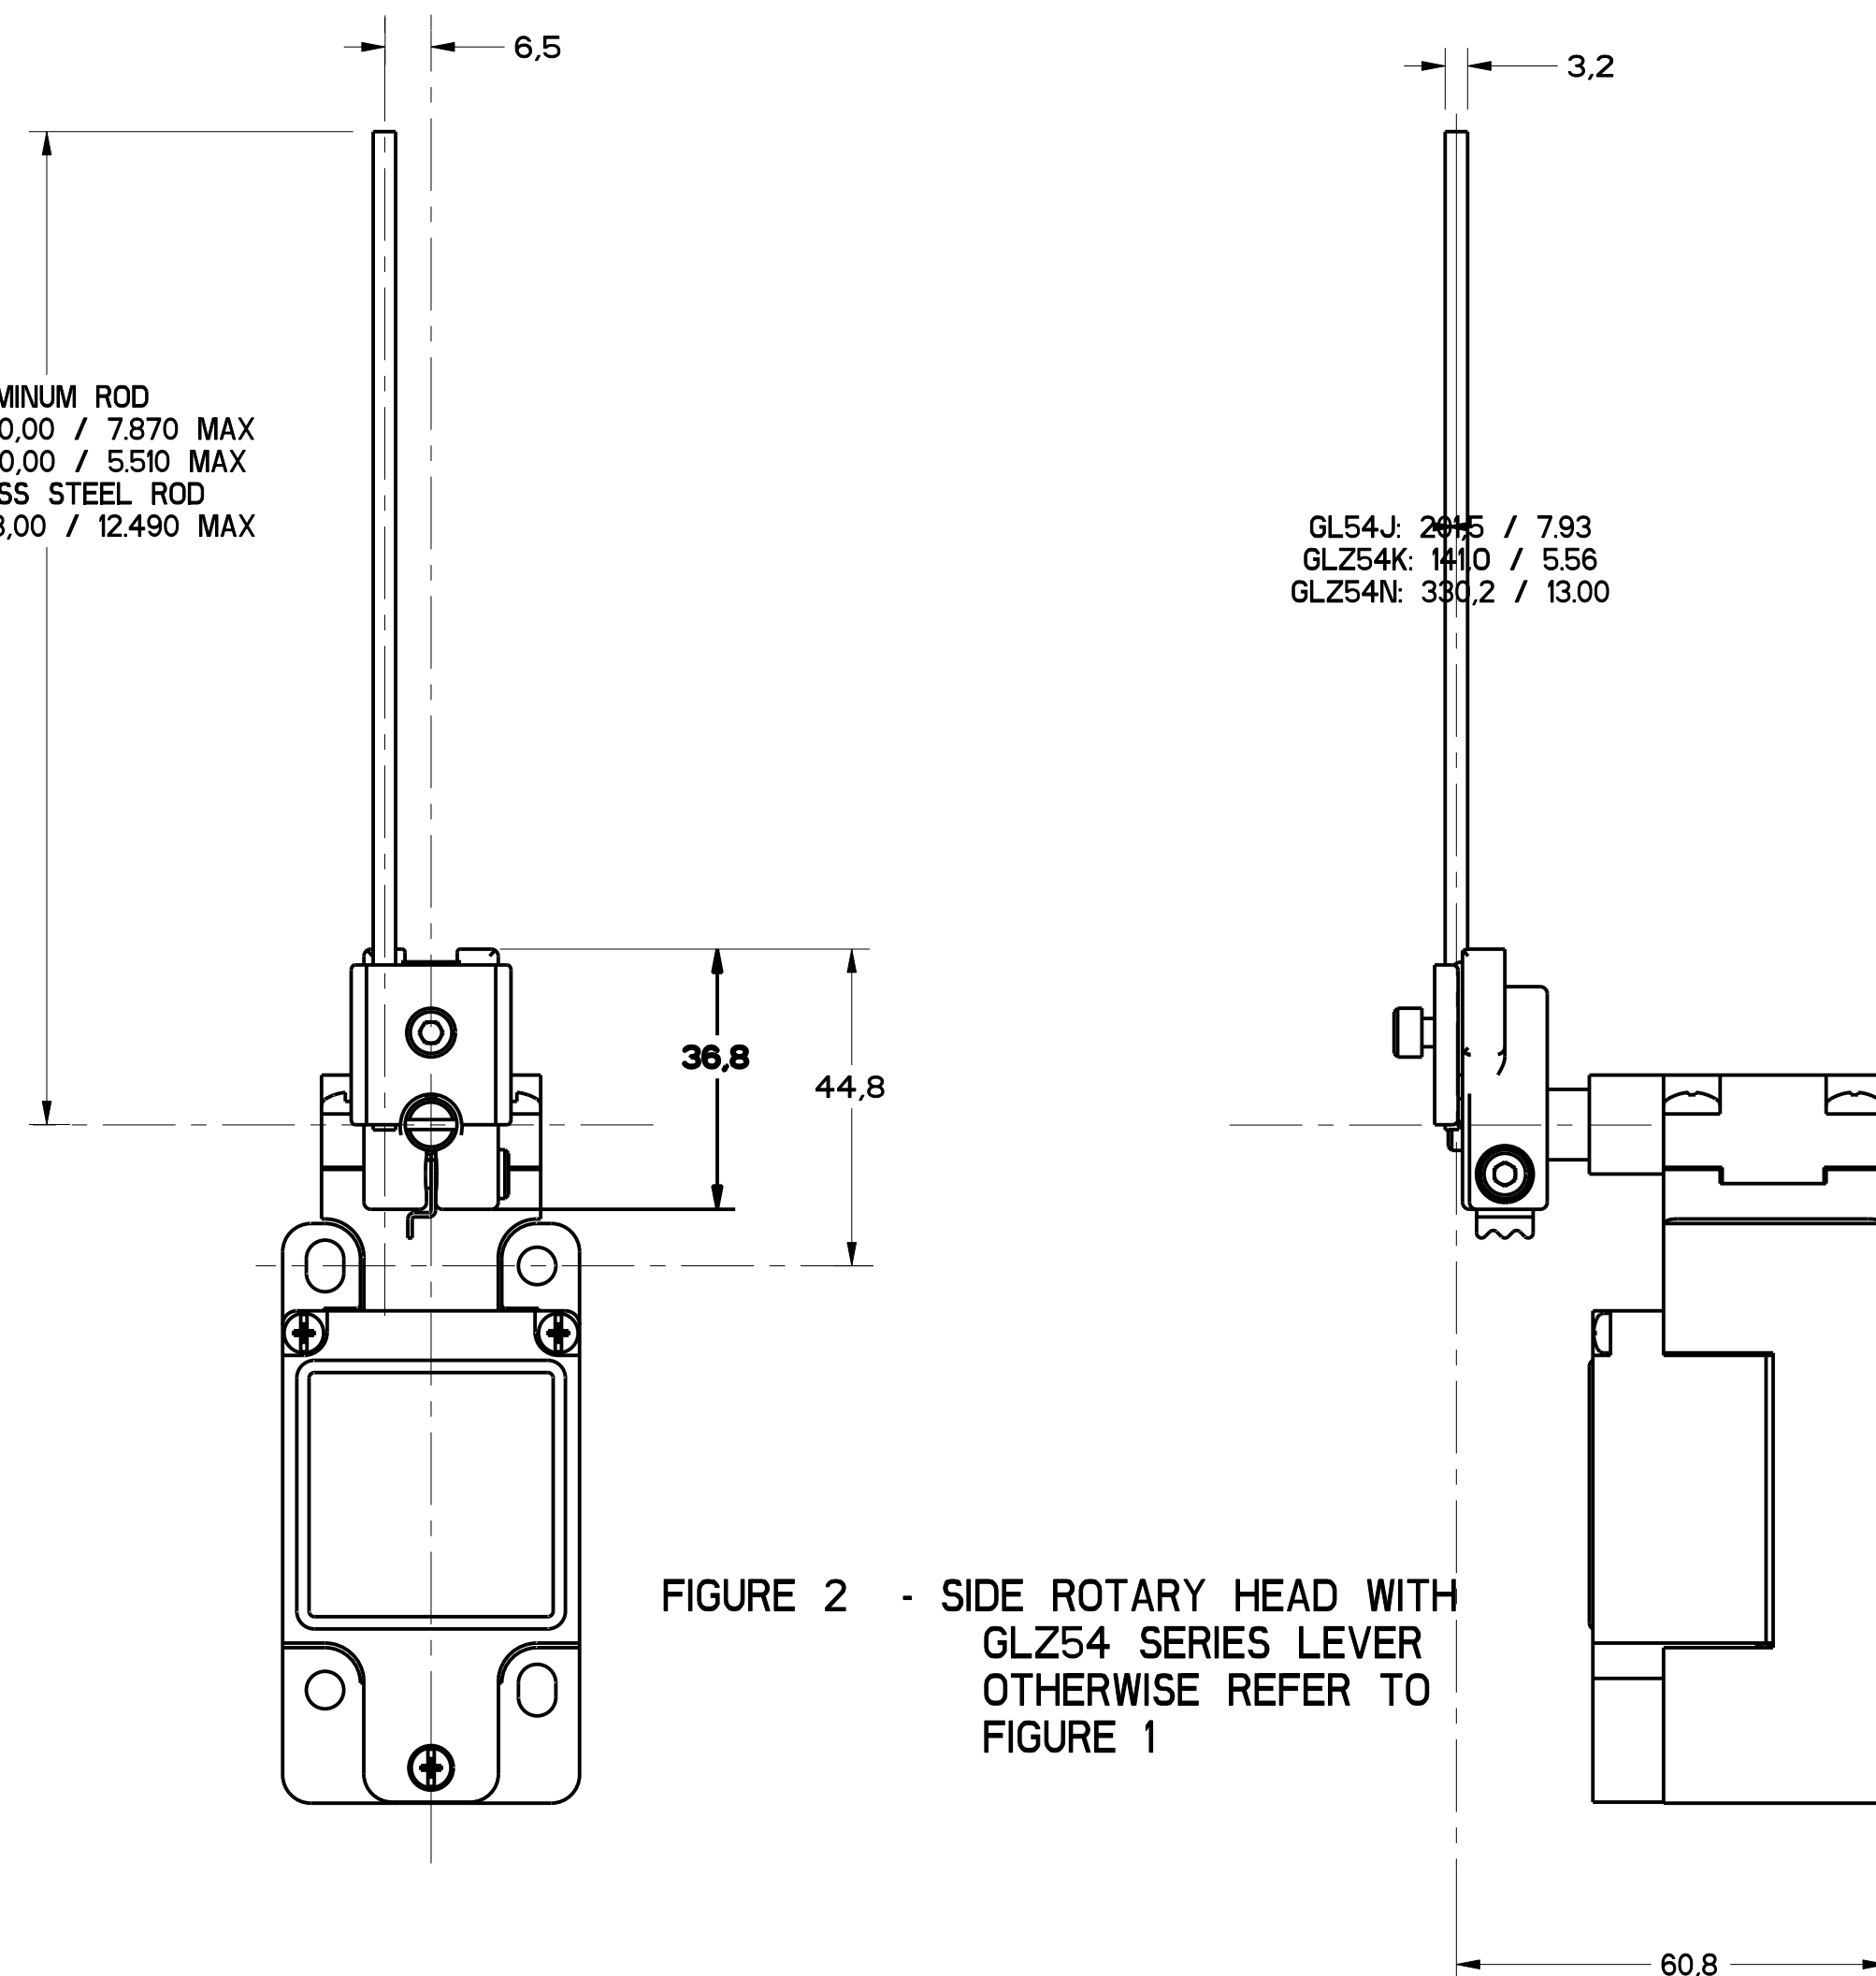


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13


NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GL*A***	1A	N/A	N/A
GL*B***	1B	N/A	N/A
GL*C***	1C	N/A	N/A
GL*D***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

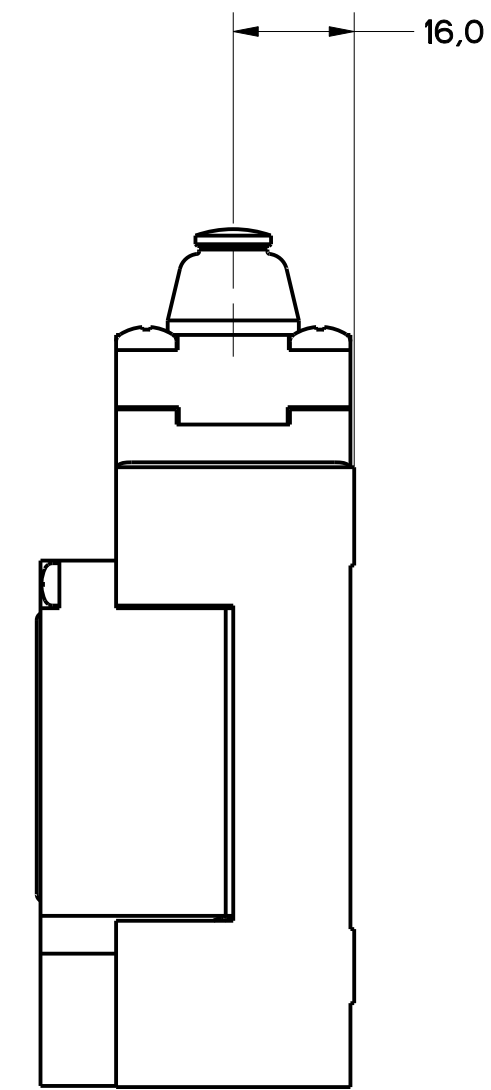


STEEL ROLLER

Ø 12,4

50,5

Technical drawing of a lamp head. The drawing shows a side profile of the lamp head assembly. Two dimensions are indicated: a horizontal distance of 4,7 from the left edge to the center of the lamp head, and a horizontal distance of 16,0 from the center of the lamp head to the right edge of the lamp body.

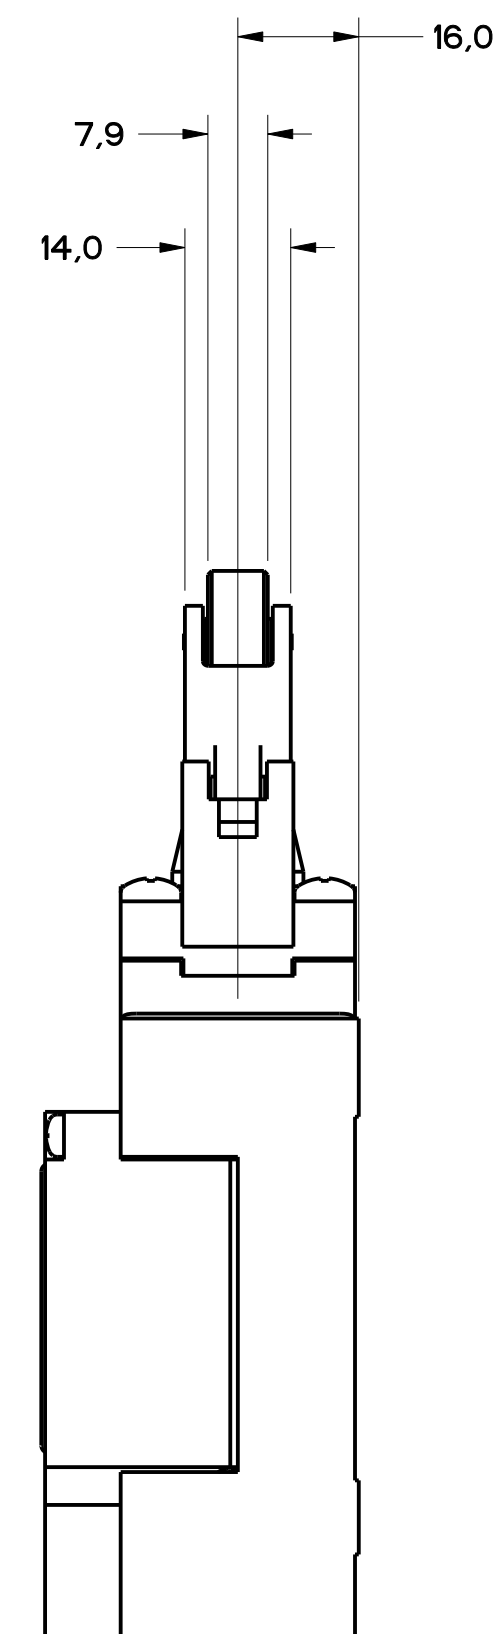

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>TWO PLACES</td> <td>0.004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>THREE PLACES</td> <td>0.0004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ANGLES</td> <td>± 1</td> <td>US</td> <td>CUSTOMARY</td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	0.01	0.01	ONE PLACE	0.4	0.01	0.01	TWO PLACES	0.004	0.01	0.01	THREE PLACES	0.0004	0.01	0.01	ANGLES	± 1	US	CUSTOMARY
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	0.01	0.01																												
ONE PLACE	0.4	0.01	0.01																												
TWO PLACES	0.004	0.01	0.01																												
THREE PLACES	0.0004	0.01	0.01																												
ANGLES	± 1	US	CUSTOMARY																												
FED. MFG. CODE 91929	CATALOG LISTING		<table border="1"> <tr> <td>SI METRIC</td> <td>US CUSTOMARY</td> </tr> <tr> <td>☒</td> <td>☐</td> </tr> </table>	SI METRIC	US CUSTOMARY	☒	☐																								
SI METRIC	US CUSTOMARY																														
☒	☐																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2	DESIGN UNITS ☒																												
			WEIGHT																												

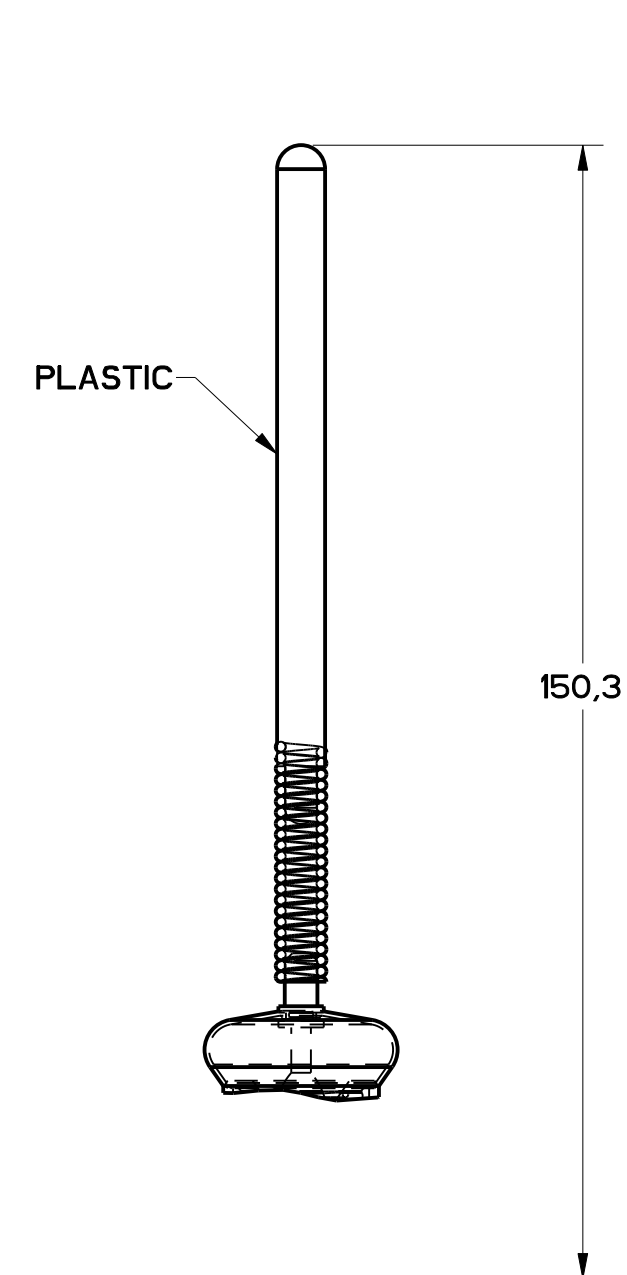
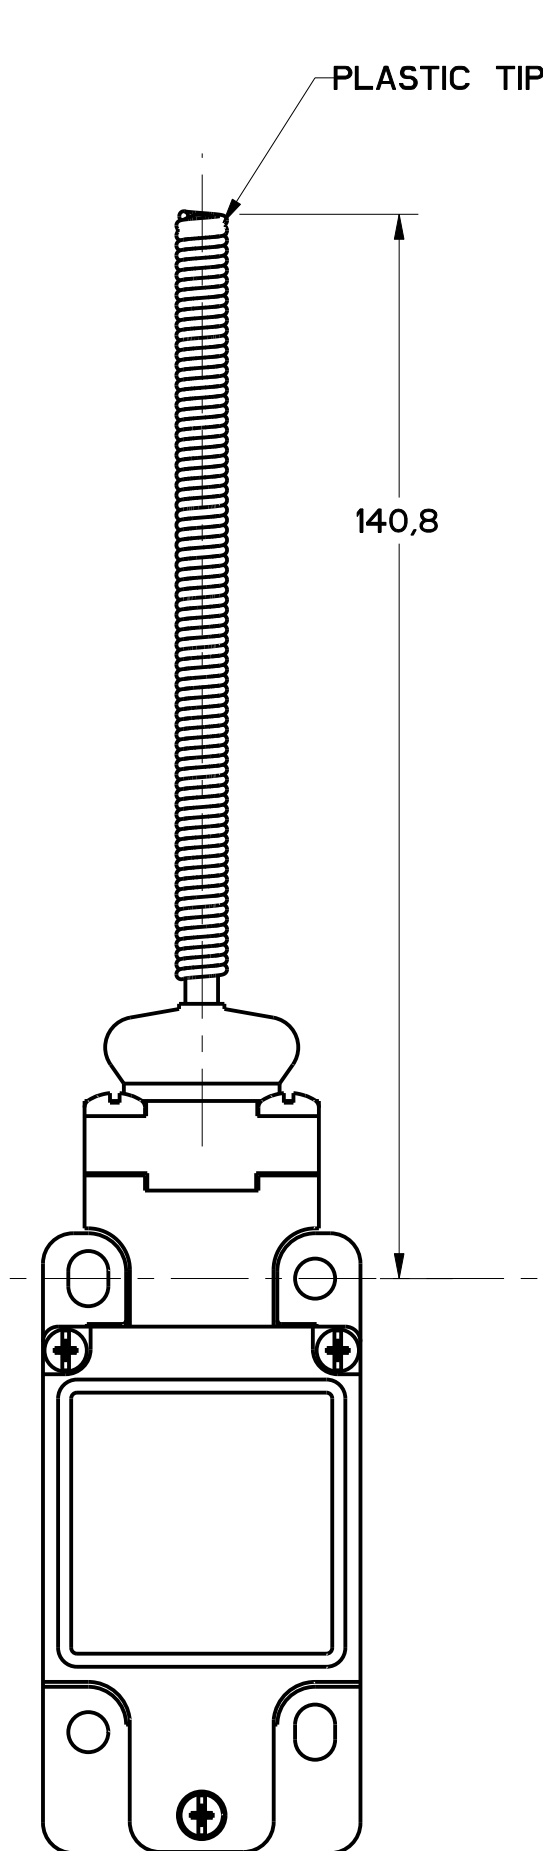


FIGURE 7A -
WOBBLE HEAD,
PLASTIC ACTUATOR,
OTHERWISE SAME AS FIGURE 7

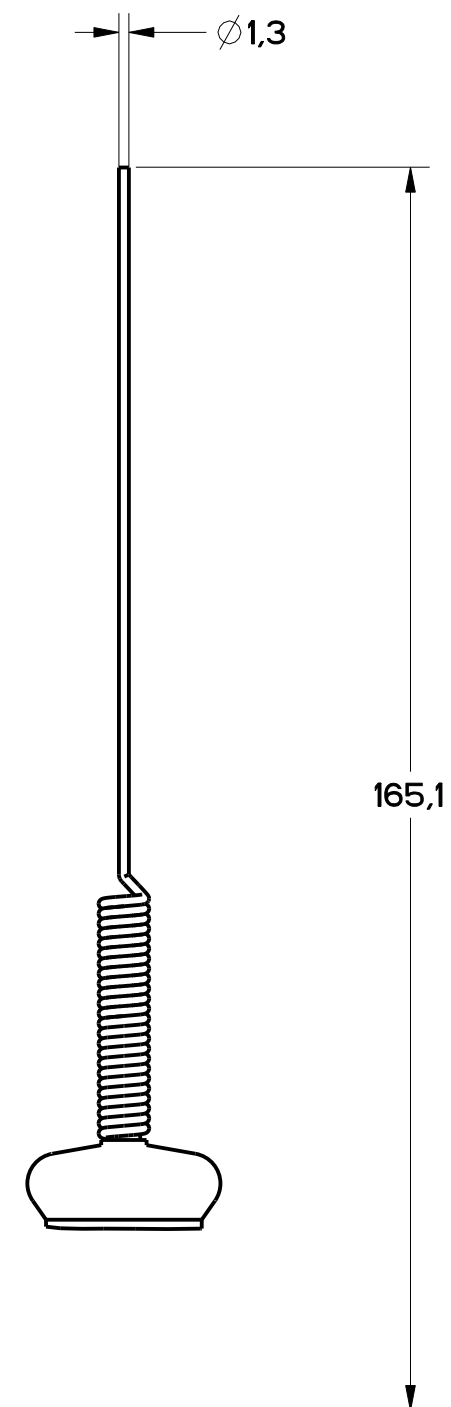


FIGURE 7B -
WOBBLE HEAD
STAINLESS STEEL SPRING
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

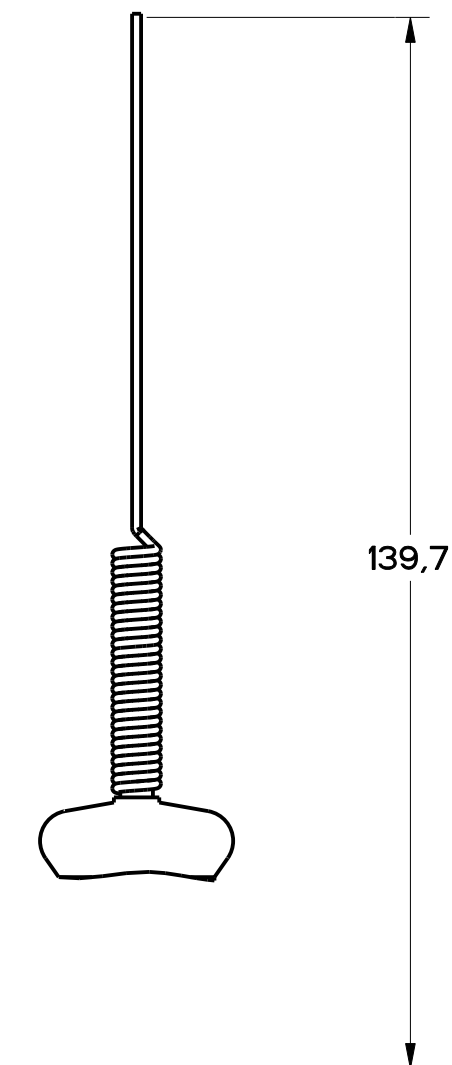


FIGURE 7C -
CAT WHISKER
ACTUATOR STAINLESS
STEEL SPRING
OTHERWISE SAME AS
FIGURE 7

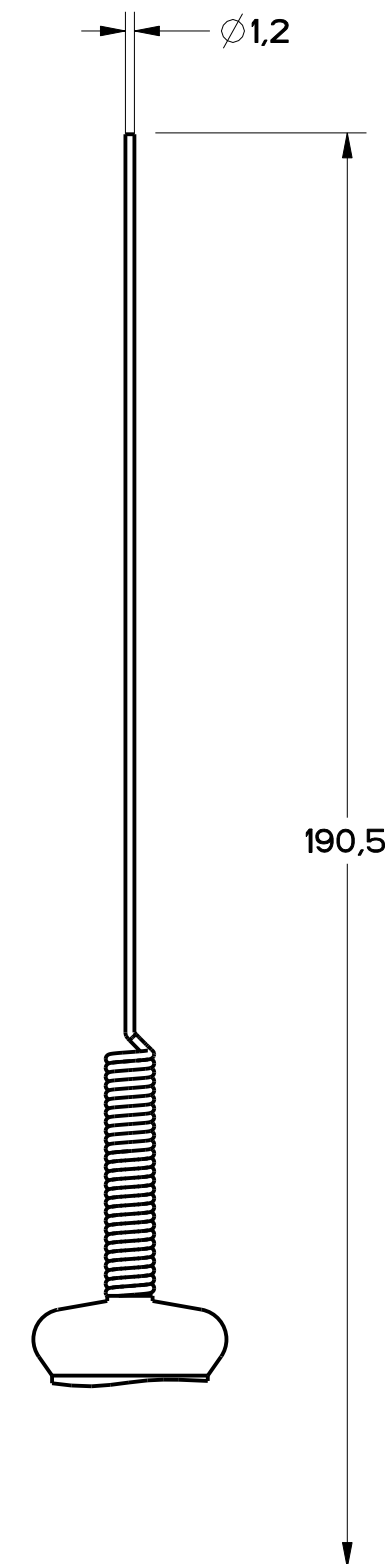


FIGURE 7D -
CAT WHISKER
ACTUATOR, STAINLESS
STEEL SPRING,
OTHERWISE SAME
AS FIGURE 7

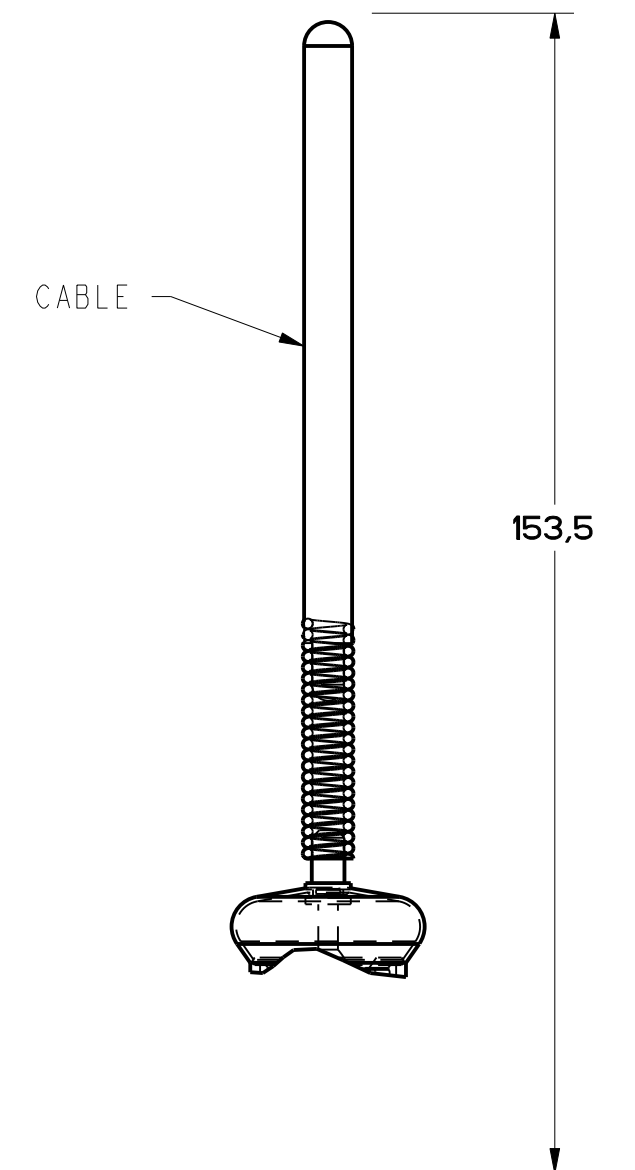


FIGURE 7E -
CABLE WOBBLE
ACTUATOR
OTHERWISE SAME
AS FIGURE 7

FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

THIRD ANGLE PROJECTION			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	INCHES	TOL.	MM
ONE PLACE	INCHES	±0.04	±1.0
TWO PLACES	INCHES	±0.015	±0.38
THREE PLACES	INCHES	±0.005	±0.13
ANGLES	DEGREES	±2°	±0.5°
DESIGN UNITS		SI METRIC	US CUSTOMARY
		☒	☐
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		SWITCH, ENCLOSED	
MICRO SWITCH a Honeywell Division		GL SERIES CHART 2	



CAM ACTUATION PER EN50041, FIGURES 8 AND 9 							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/s	MIN OPERATE VEL in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	Snap - Action Contacts Single Pole 	02056** 21-2213-14 >< 12 DIFFERENTIAL TRAVEL	9.7 2.2	11.4 2.6	.85 33.5	8.5 .33	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				<table><tr><td>Q'W</td><td>TOL</td><td>Q'W</td><td>TOL</td></tr><tr><td>dim</td><td>dim</td><td>"</td><td>"</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>		Q'W	TOL	Q'W	TOL	dim	dim	"	"																	
Q'W	TOL	Q'W	TOL																											
dim	dim	"	"																											
FED. MFG. CODE 91929	CATALOG LISTING		<table><tr><td>NO PLACES</td><td>X</td><td>1/2" (4)</td><td>1.4</td><td>0.85 (3)</td></tr><tr><td>ONE PLACE</td><td>X X</td><td>0.47 (18)</td><td>1.1X</td><td>0.90 (3)</td></tr><tr><td>TWO PLACES</td><td>X X X</td><td>0.15 (6)</td><td>1.1X</td><td>1.15 (9)</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td></td><td></td></tr><tr><td>ANGLES</td><td></td><td>±</td><td></td><td></td></tr></table>			NO PLACES	X	1/2" (4)	1.4	0.85 (3)	ONE PLACE	X X	0.47 (18)	1.1X	0.90 (3)	TWO PLACES	X X X	0.15 (6)	1.1X	1.15 (9)	THREE PLACES					ANGLES		±		
NO PLACES	X	1/2" (4)	1.4	0.85 (3)																										
ONE PLACE	X X	0.47 (18)	1.1X	0.90 (3)																										
TWO PLACES	X X X	0.15 (6)	1.1X	1.15 (9)																										
THREE PLACES																														
ANGLES		±																												
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2		SI METRIC ☒ US CUSTOMARY ☐																										
		DESIGN UNITS		WEIGHT																										

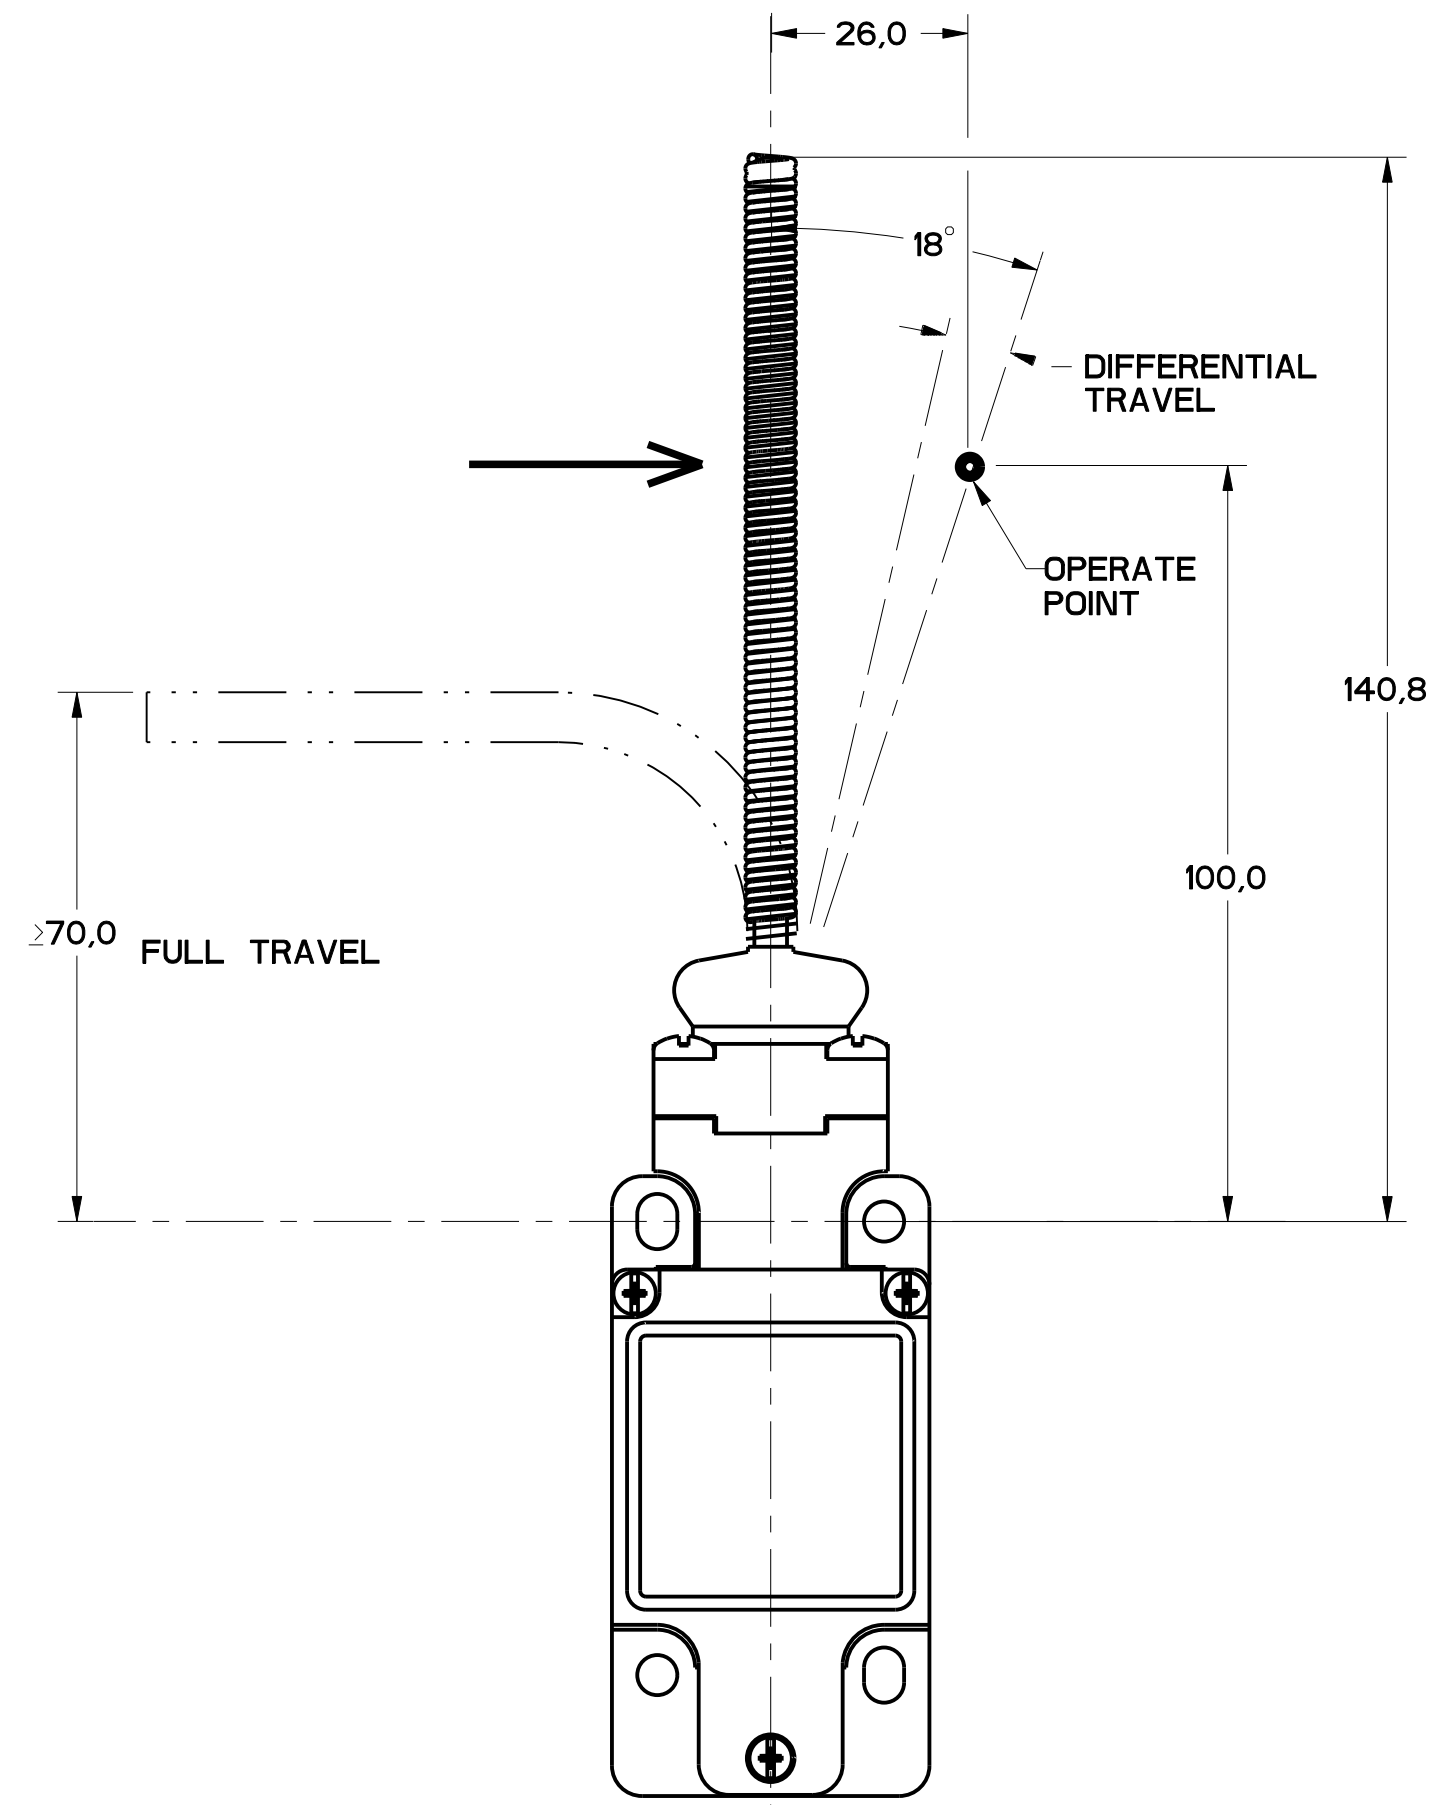


FIGURE 12

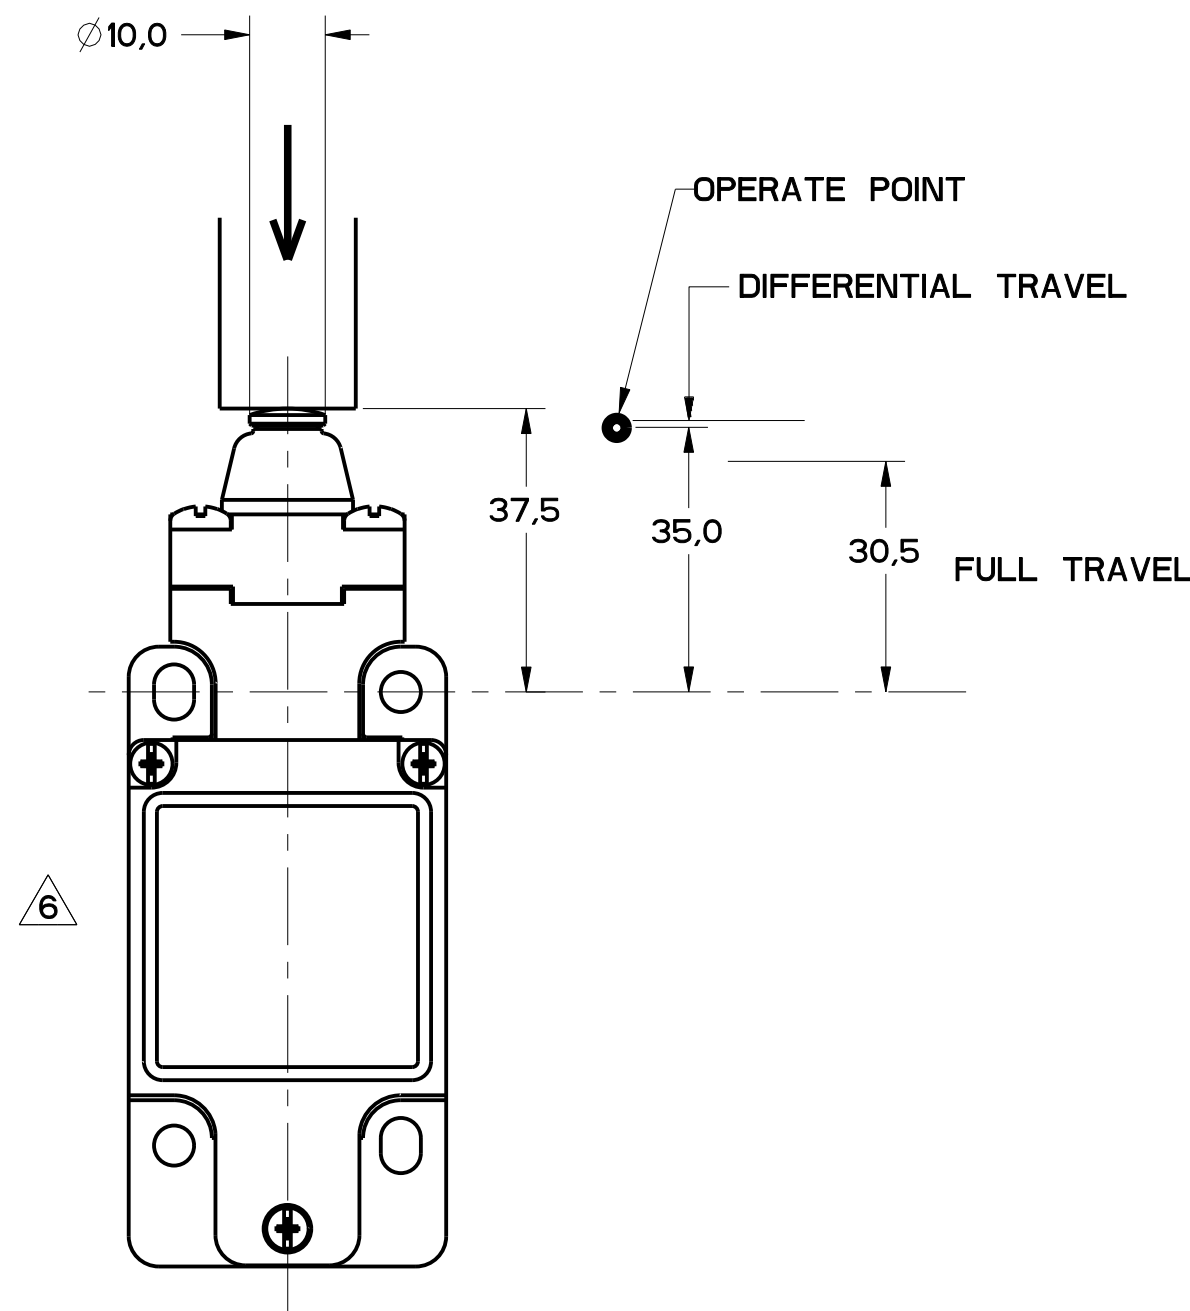


FIGURE 11

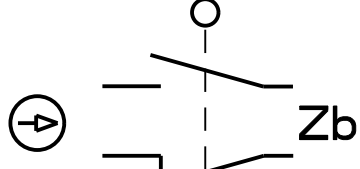
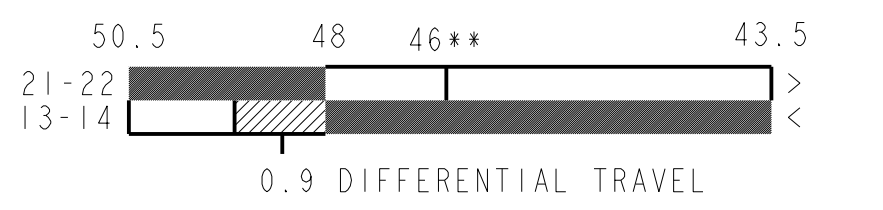
FIGURES 11, PIN PLUNGER HEAD, LINEAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S
GL**02B	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04
						250

FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE N·m LB·IN	MAXIMUM DISCONNECT TORQUE N·m LB·IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	 8° DIFFERENTIAL TRAVEL	0.2 1.8	N/A	360	8
						100

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	2.5 0.6	N/A	.5 19.7	11 .43
						100

REVISIONS		
A	CO	78529
B	CS	81101
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL mm/s in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 		16 3.6	27 6.0	0.1 3.9	1.0 .04	250

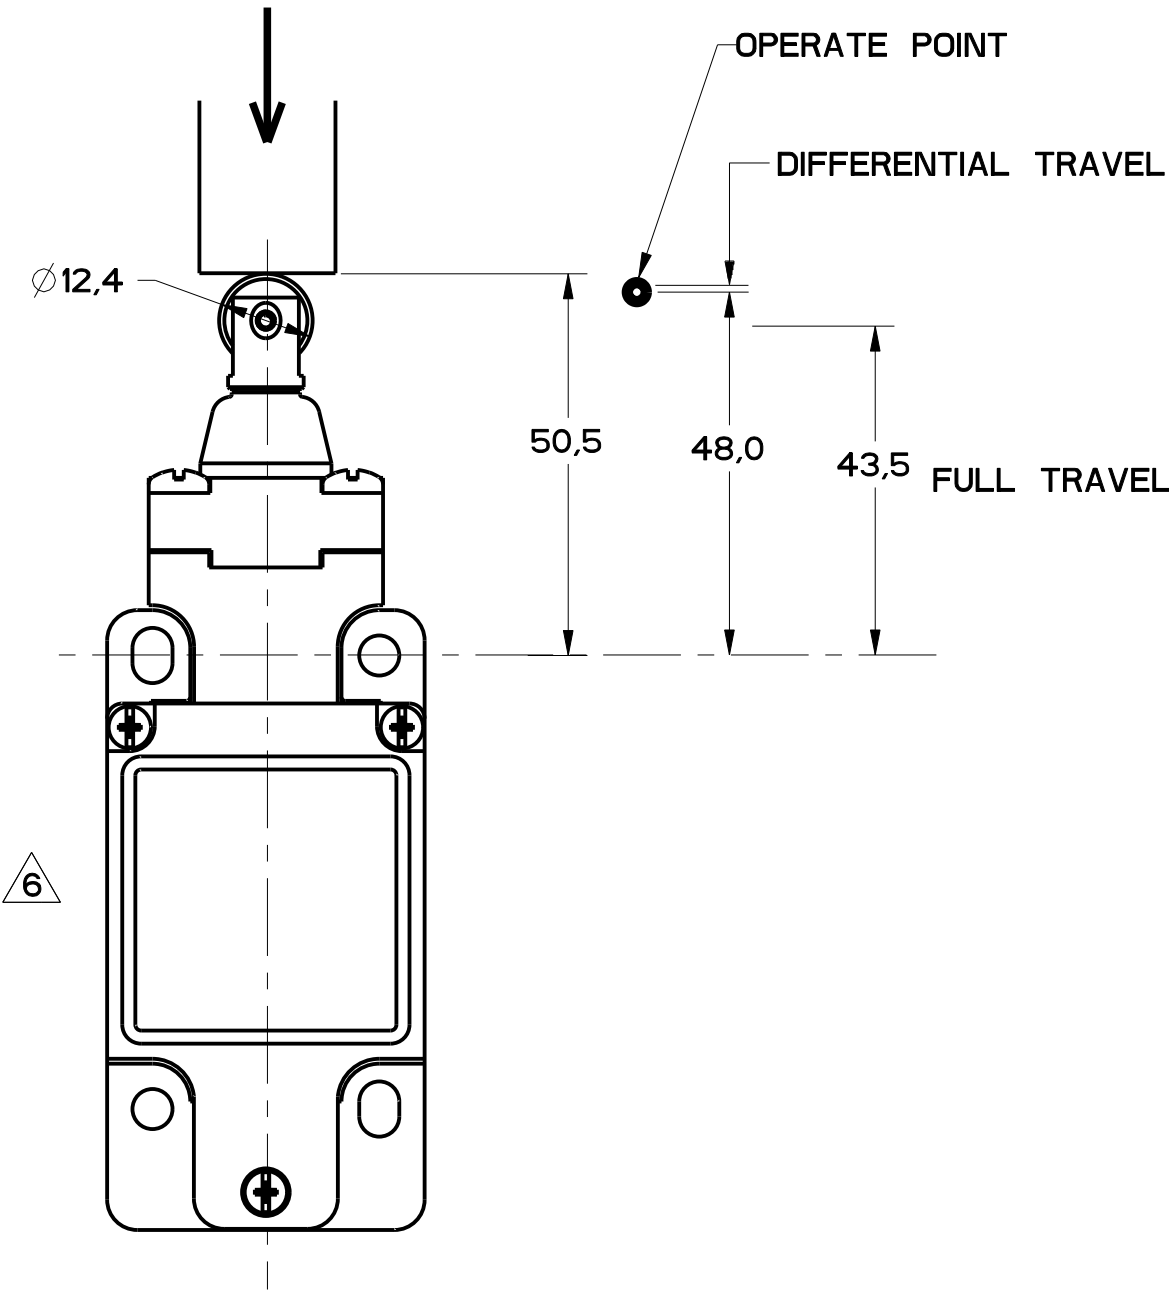


FIGURE 13A

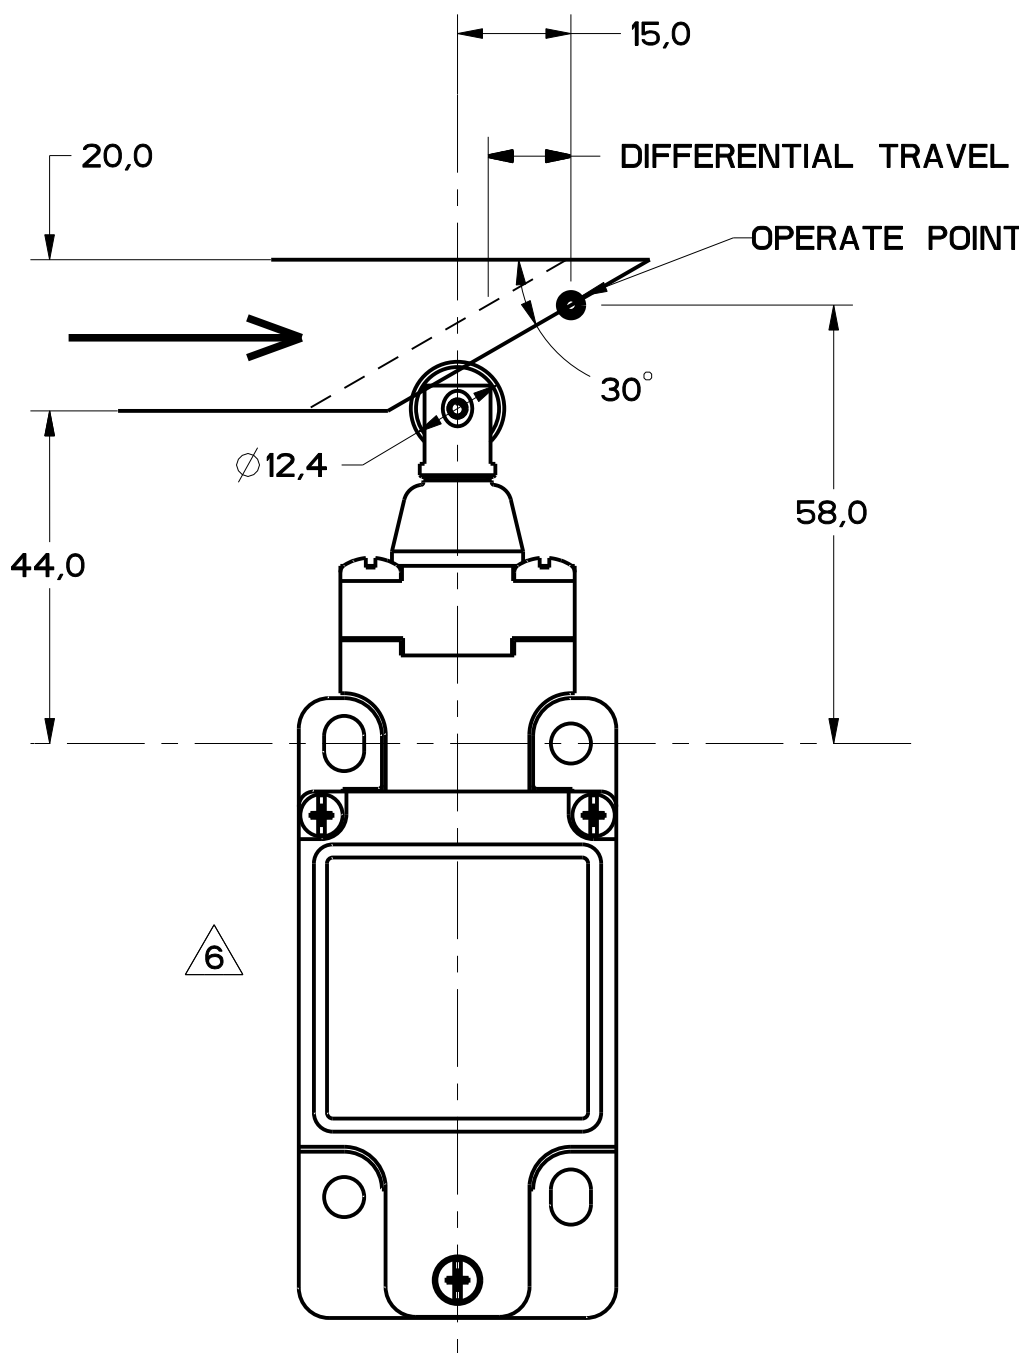
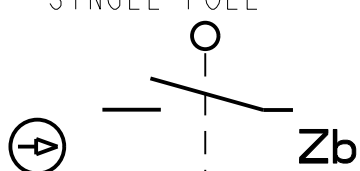
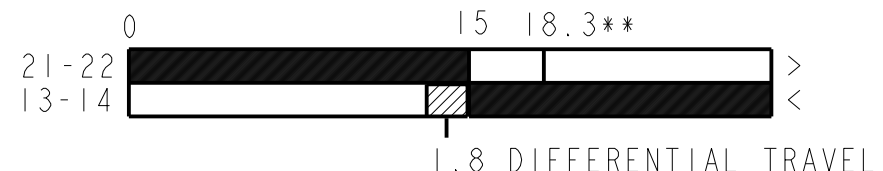



FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL mm/s in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 		9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	1/32	1/64
ONE PLACE	1/16	1/32	1/64
TWO PLACES	1/16	1/32	1/64
THREE PLACES	1/16	1/32	1/64
ANGLES	1/16	1/32	1/64
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

REVISIONS		
A	1	180292
B	1	01
C	20	SEP 94
D	CO	93789
E	REV	200788
F	0000401	
G	011	2 JUN 93
H	0002986	
I	20	JAN 94
J	0017532	
K	0000005	

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	9.5 2.1	12 2.7	0.17 6.7	1.7 .067	250

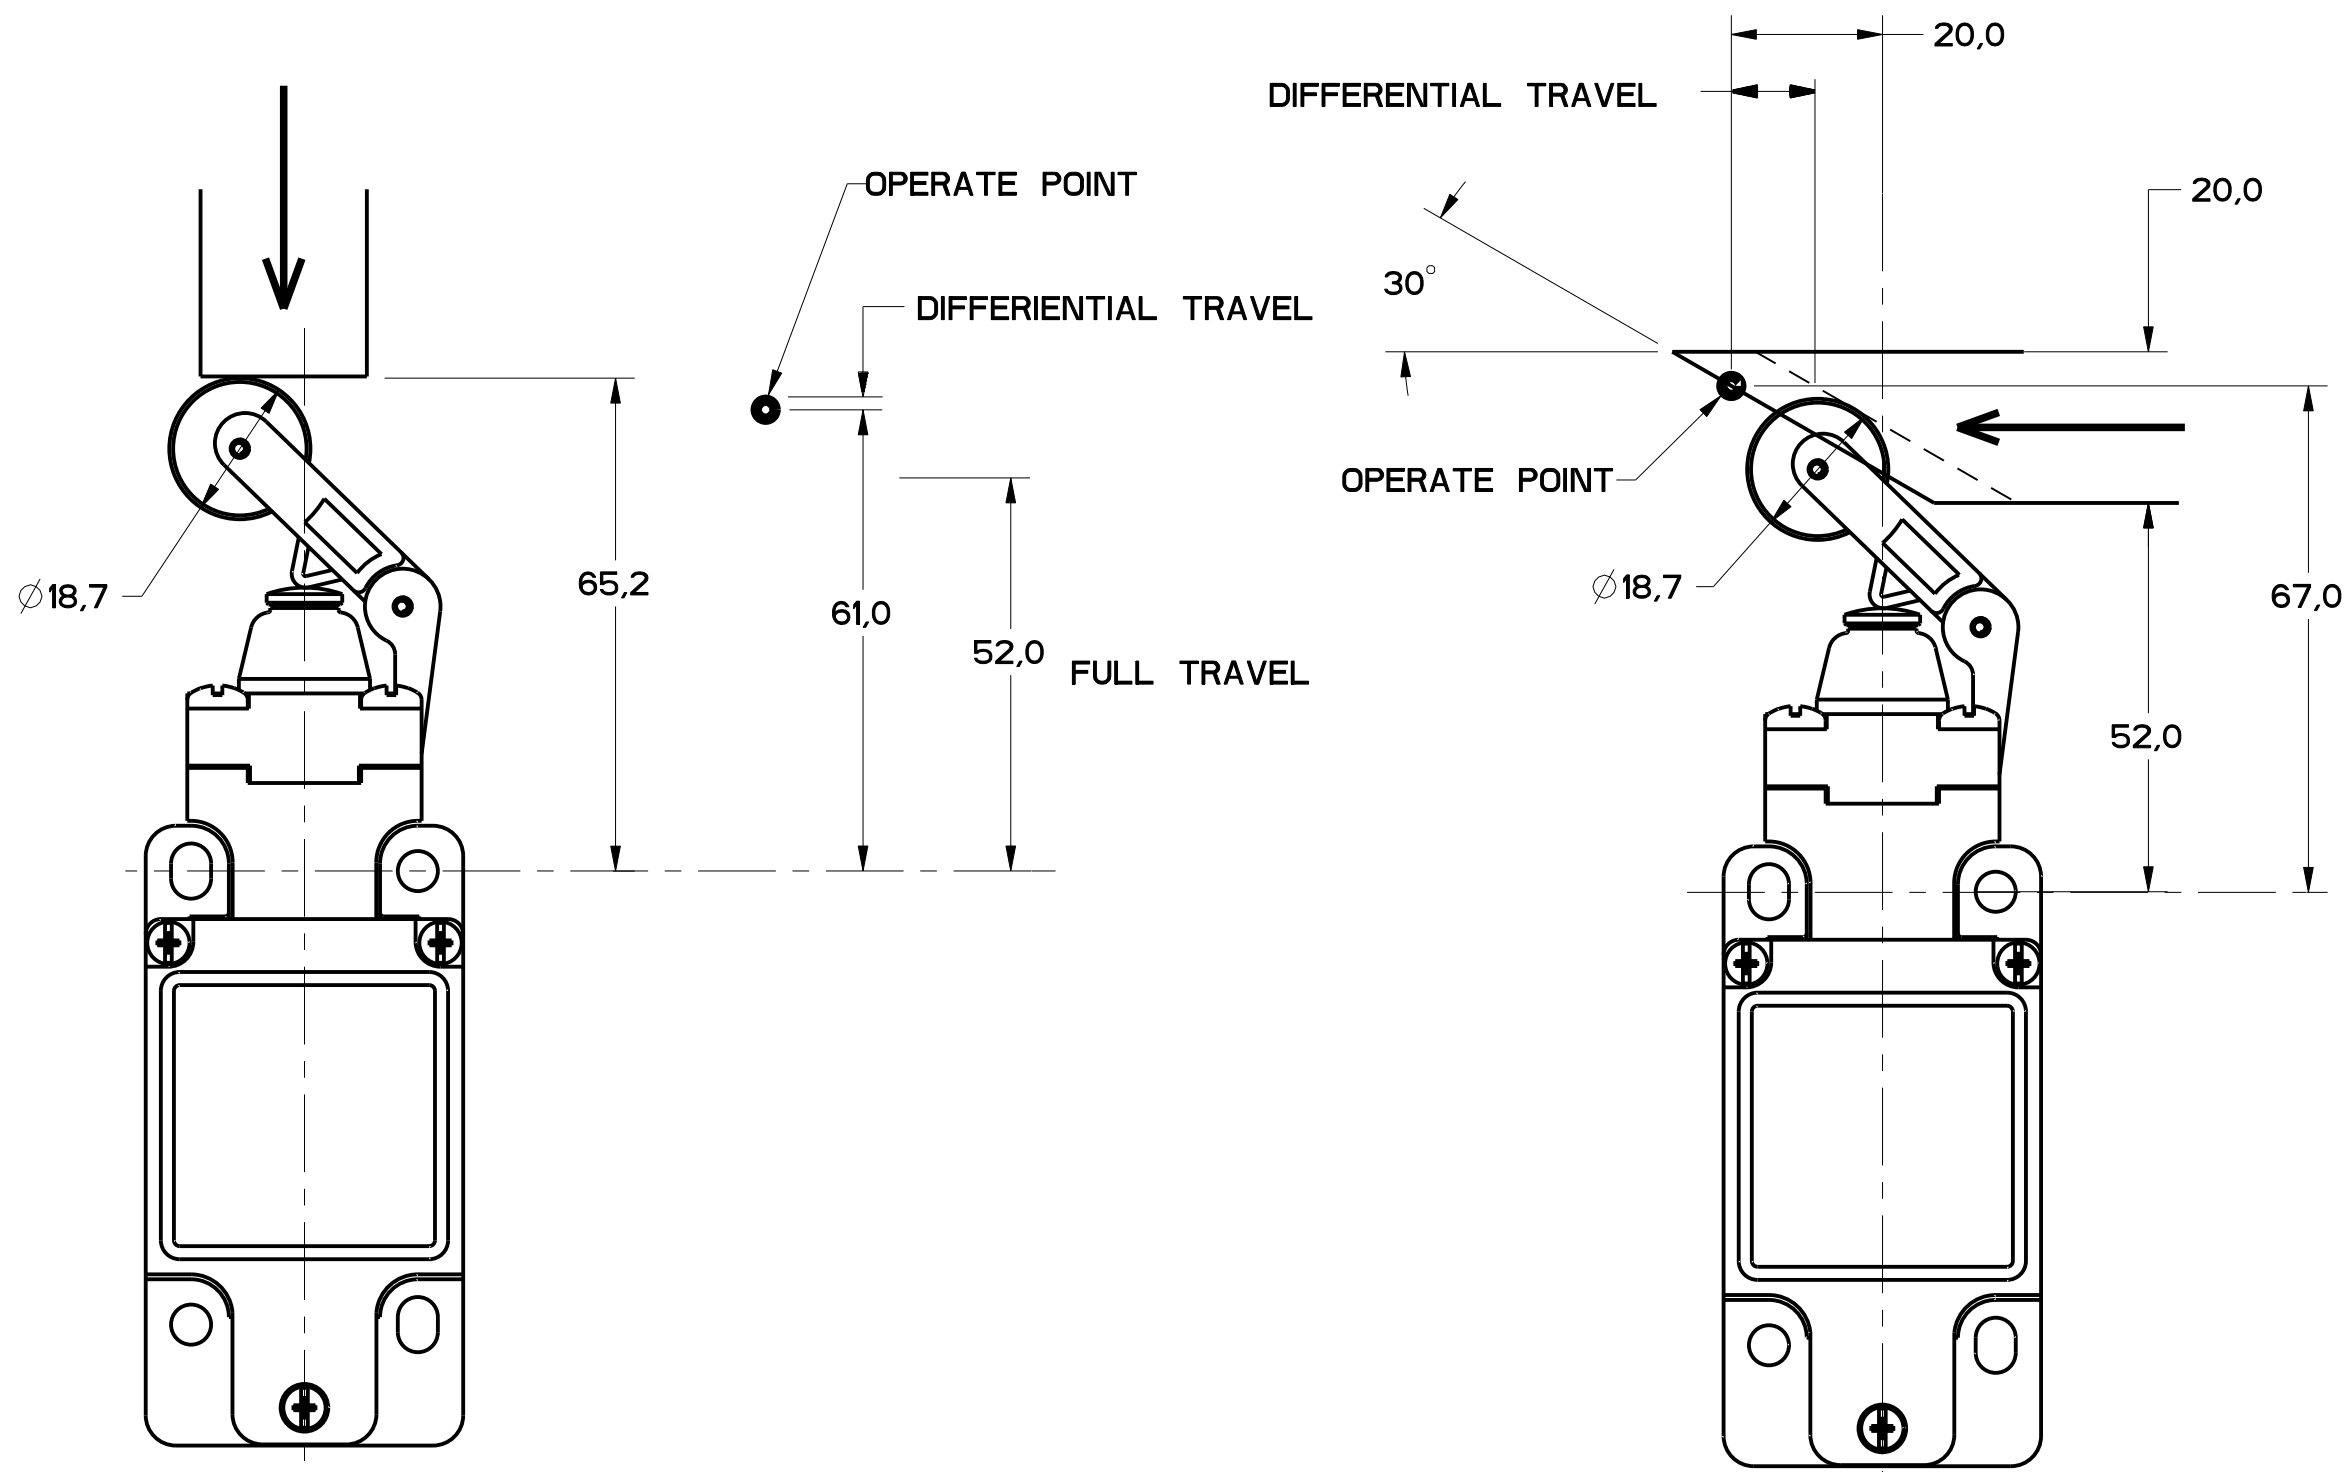


FIGURE 14A

FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250

THIRD ANGLE PROJECTION				
SCALE FULL				
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :				
	DIM	TOL	DIM	TOL
	mm	mm/in	in	mm/in
NO PLACES	X	1/16	1/16	0.005
ONE PLACES	X.X	0.015	0.015	0.001
TWO PLACES	X.XX	0.0015	0.0015	0.0001
THREE PLACES	X.XXX	0.00015	0.00015	0.00001
ANGLES	± 2			
SI METRIC		US CUSTOMARY		
DESIGN UNITS				

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

REVISIONS	
A	CO 78092
B	CO 80104
C	CO 83188
D	CO 83188
E	CO 83188
F	CO 83188
G	CO 83188
H	CO 83188
I	CO 83188
J	CO 83188
K	CO 83188
L	CO 83188
M	CO 83188
N	CO 83188
O	CO 83188
P	CO 83188
Q	CO 83188
R	CO 83188
S	CO 83188
T	CO 83188
U	CO 83188
V	CO 83188
W	CO 83188
X	CO 83188
Y	CO 83188
Z	CO 83188

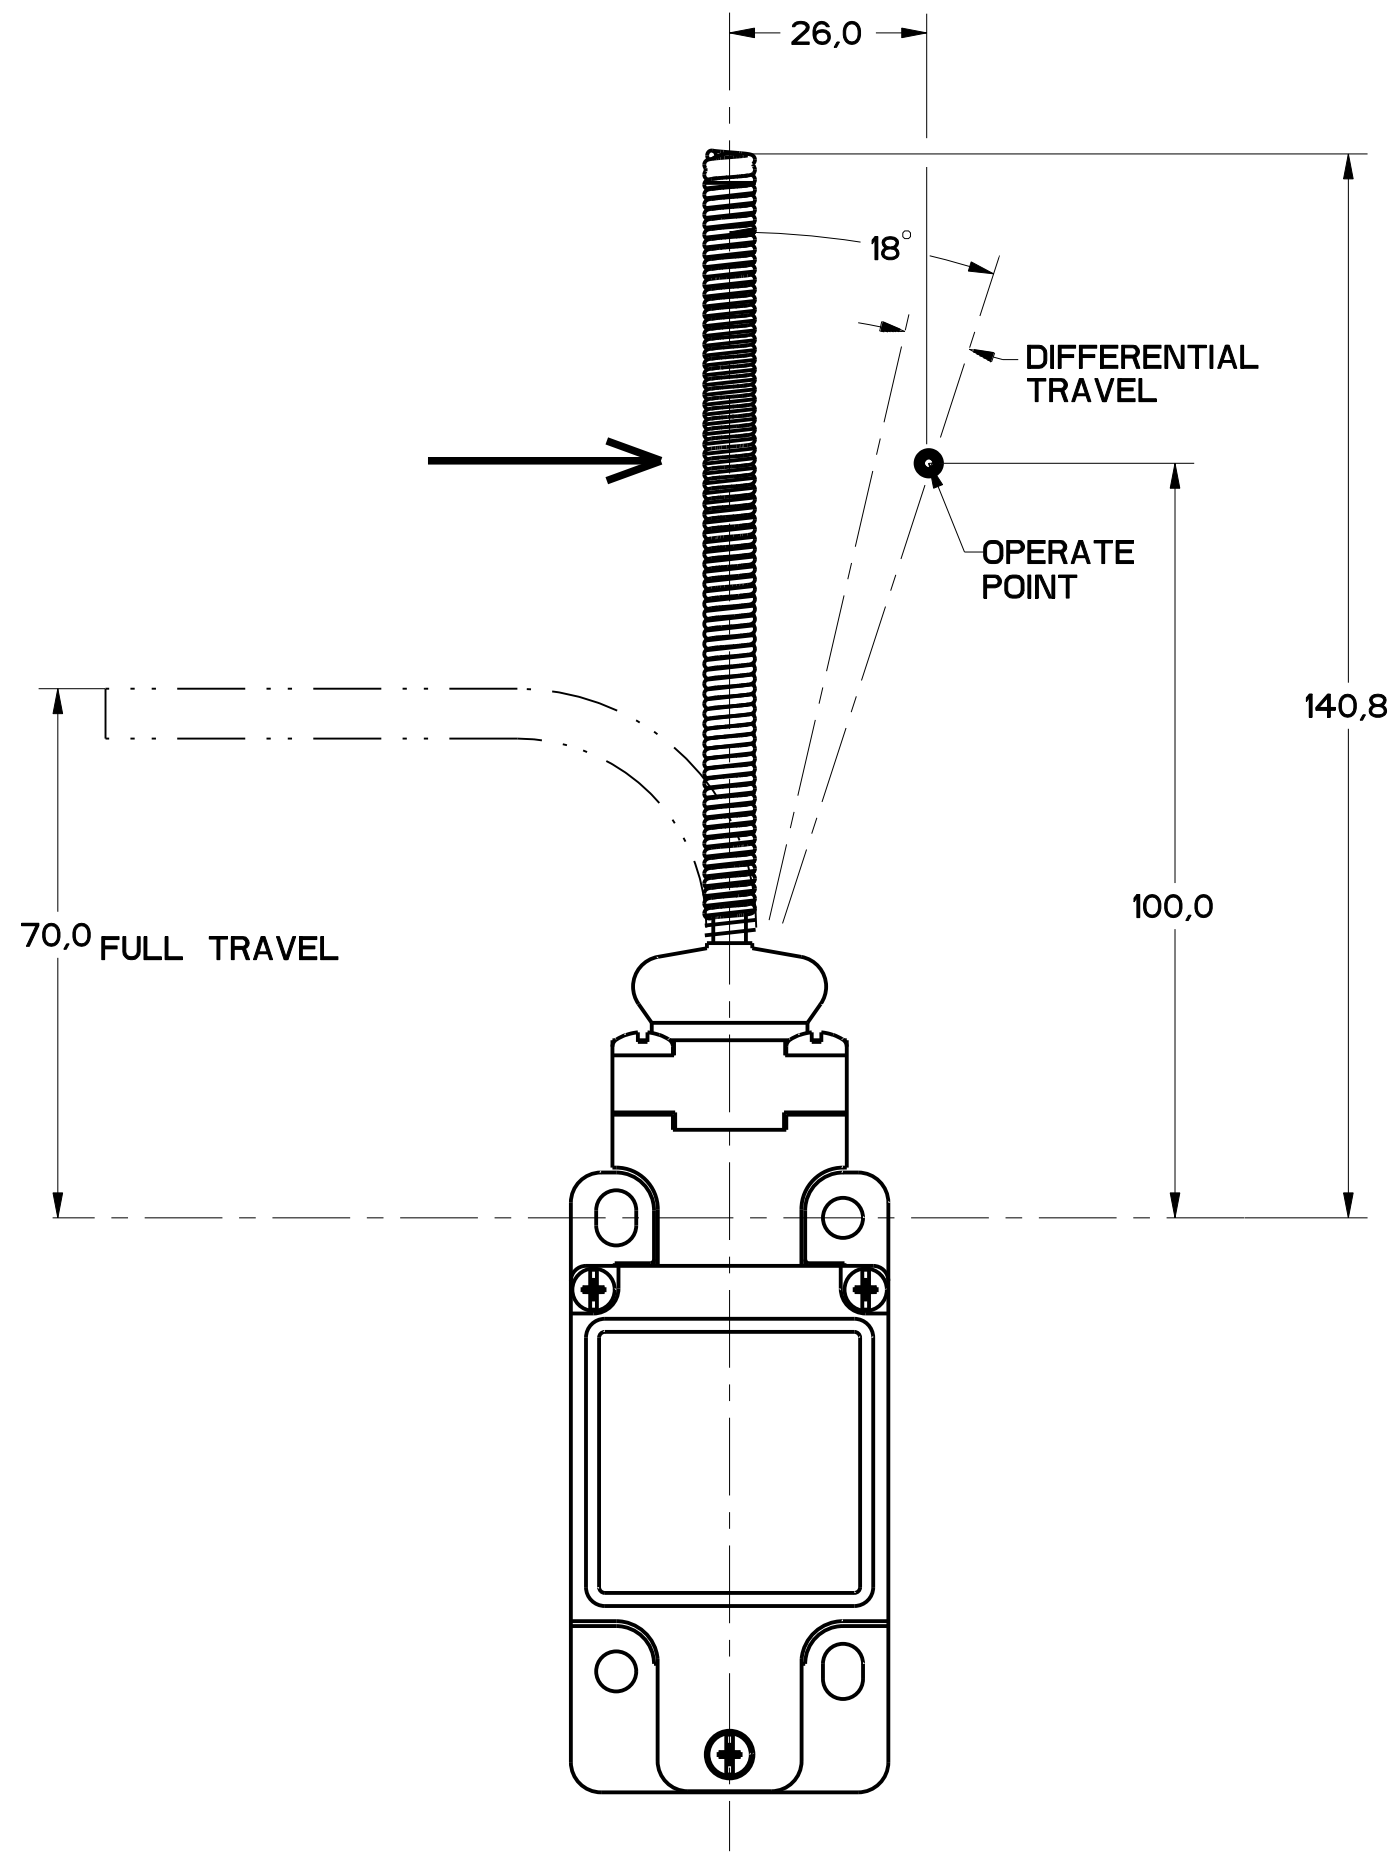


FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE m LB-IN	MAXIMUM DISCONNECT TORQUE m LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14 18° 8° DIFFERENTIAL TRAVEL	0.1 .9	N/A	360	8

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL m/s in/s	MIN OPERATE VEL m/s in/s
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14 26 12 DIFFERENTIAL TRAVEL	1.3 .3	N/A	.5 19.7	.11 .43

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9