

SIDE ROTARY



FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

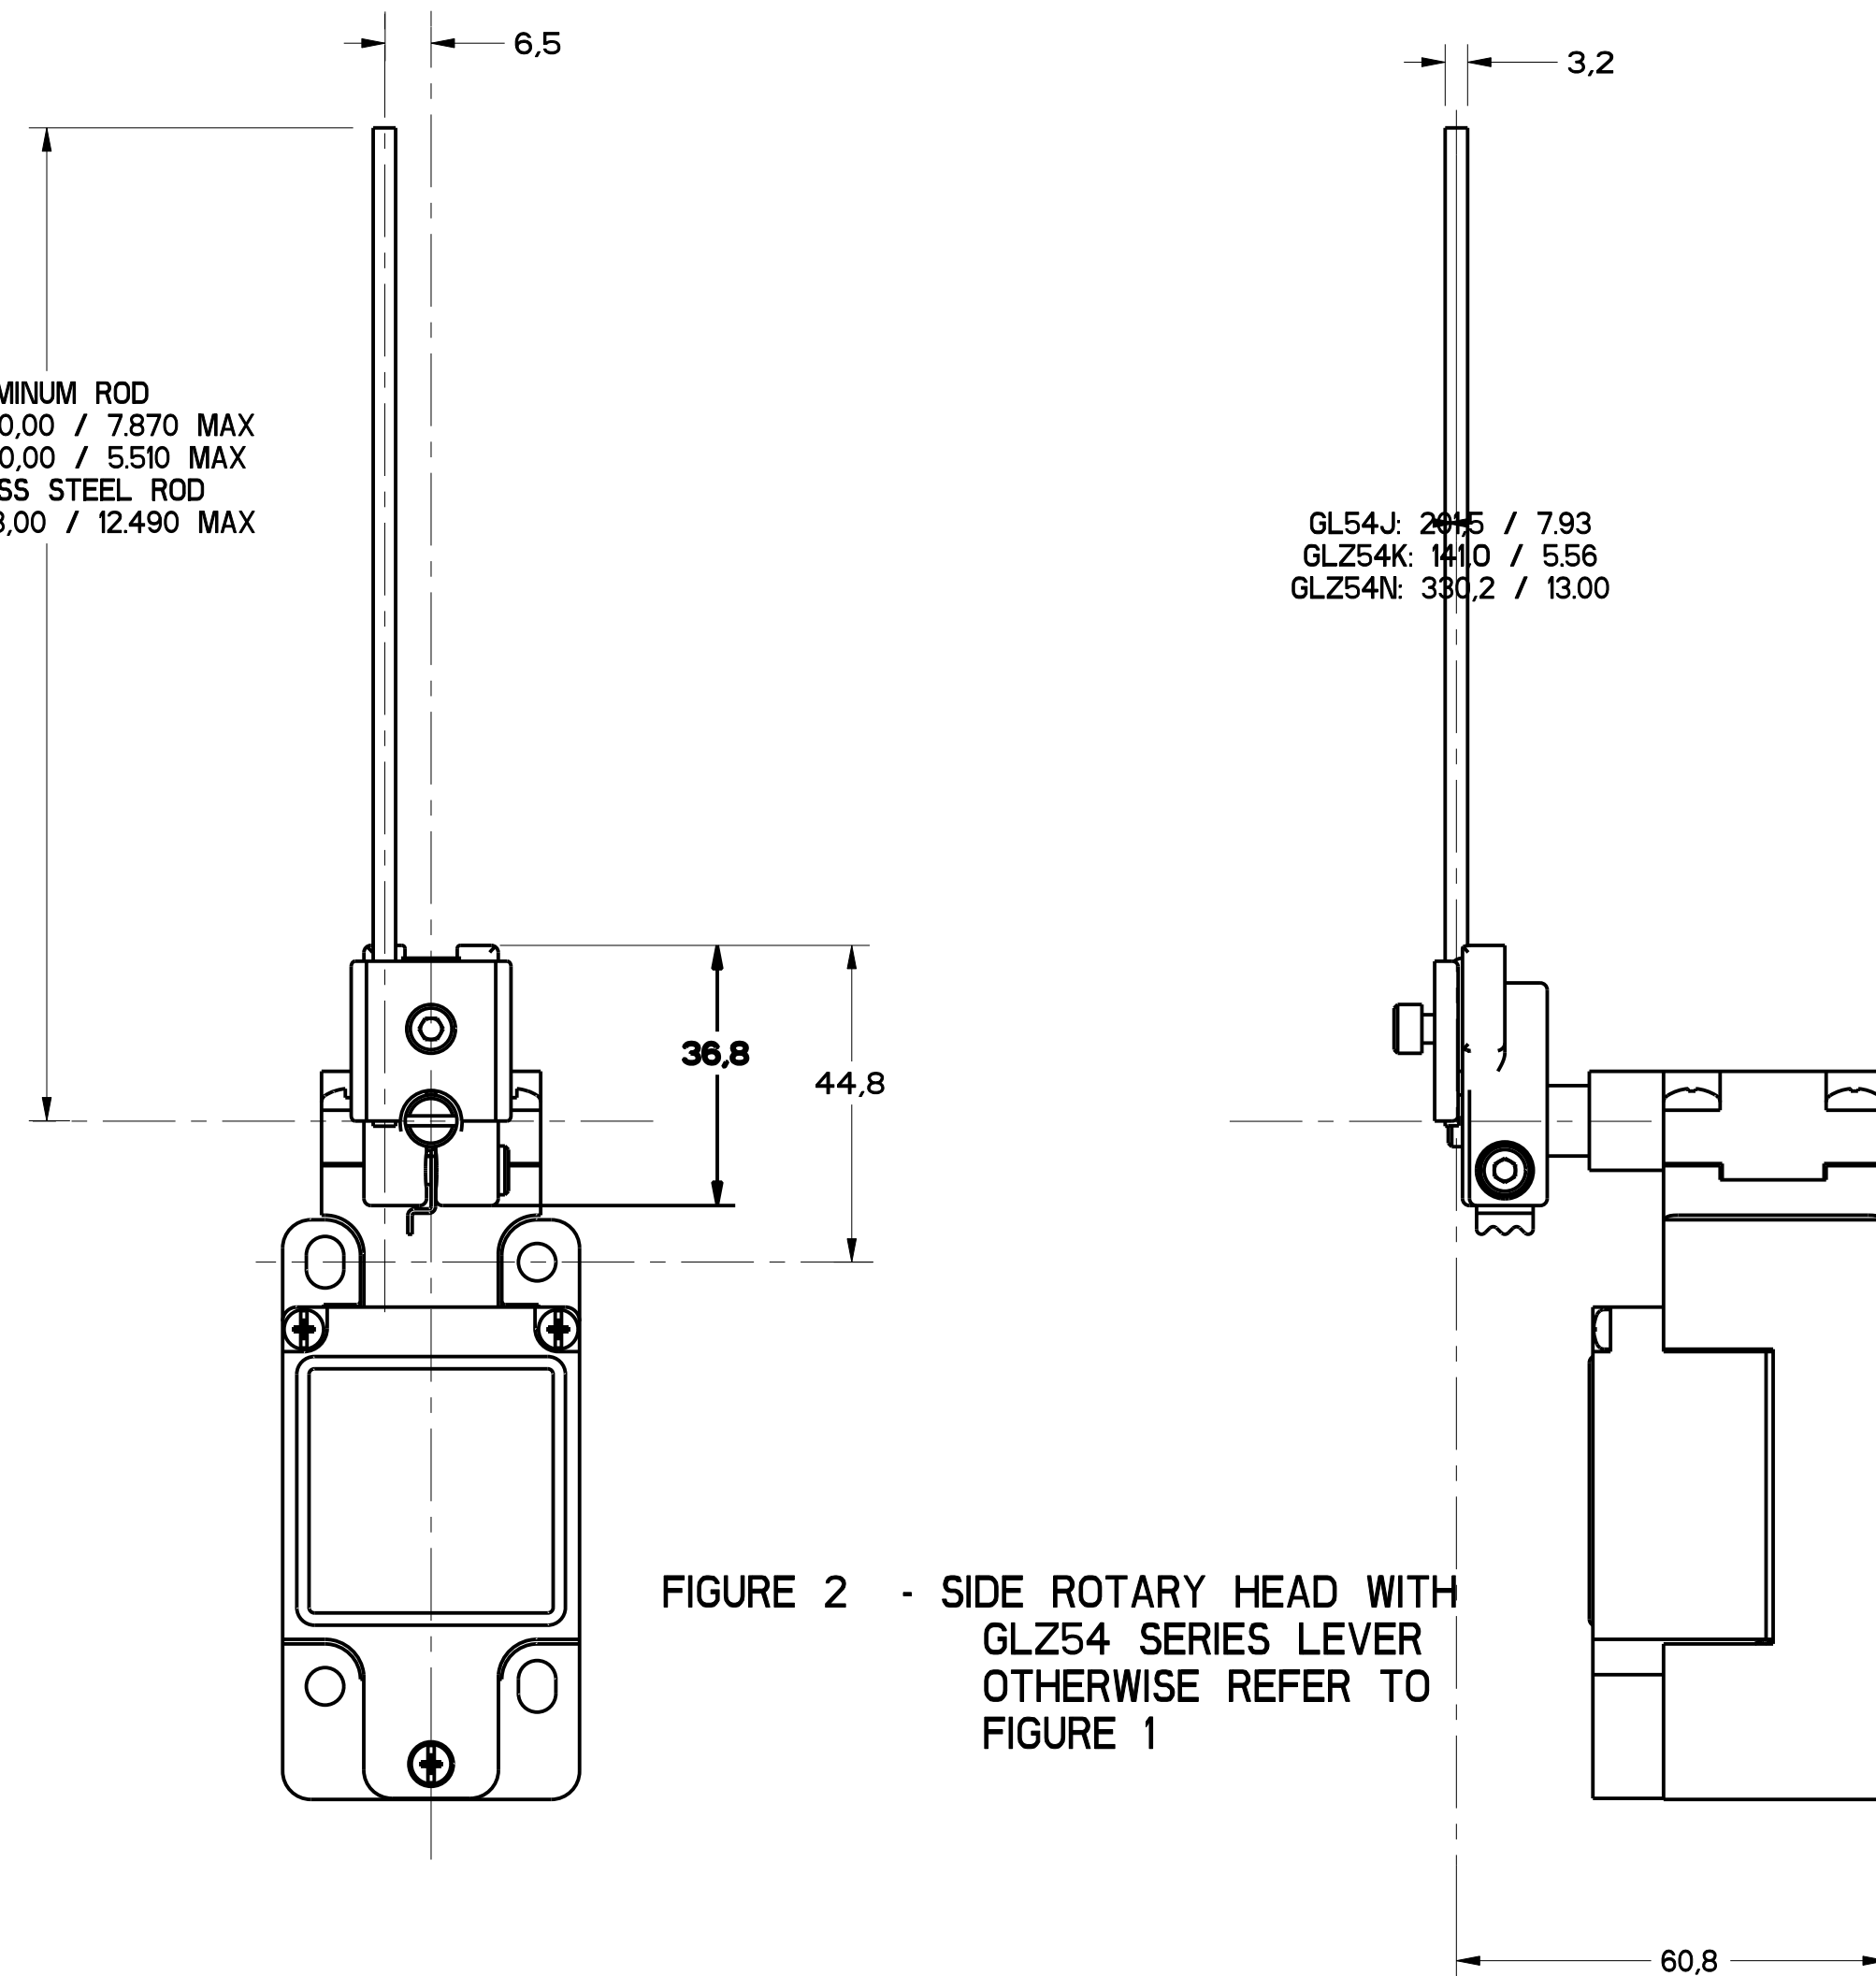


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE (ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F (PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

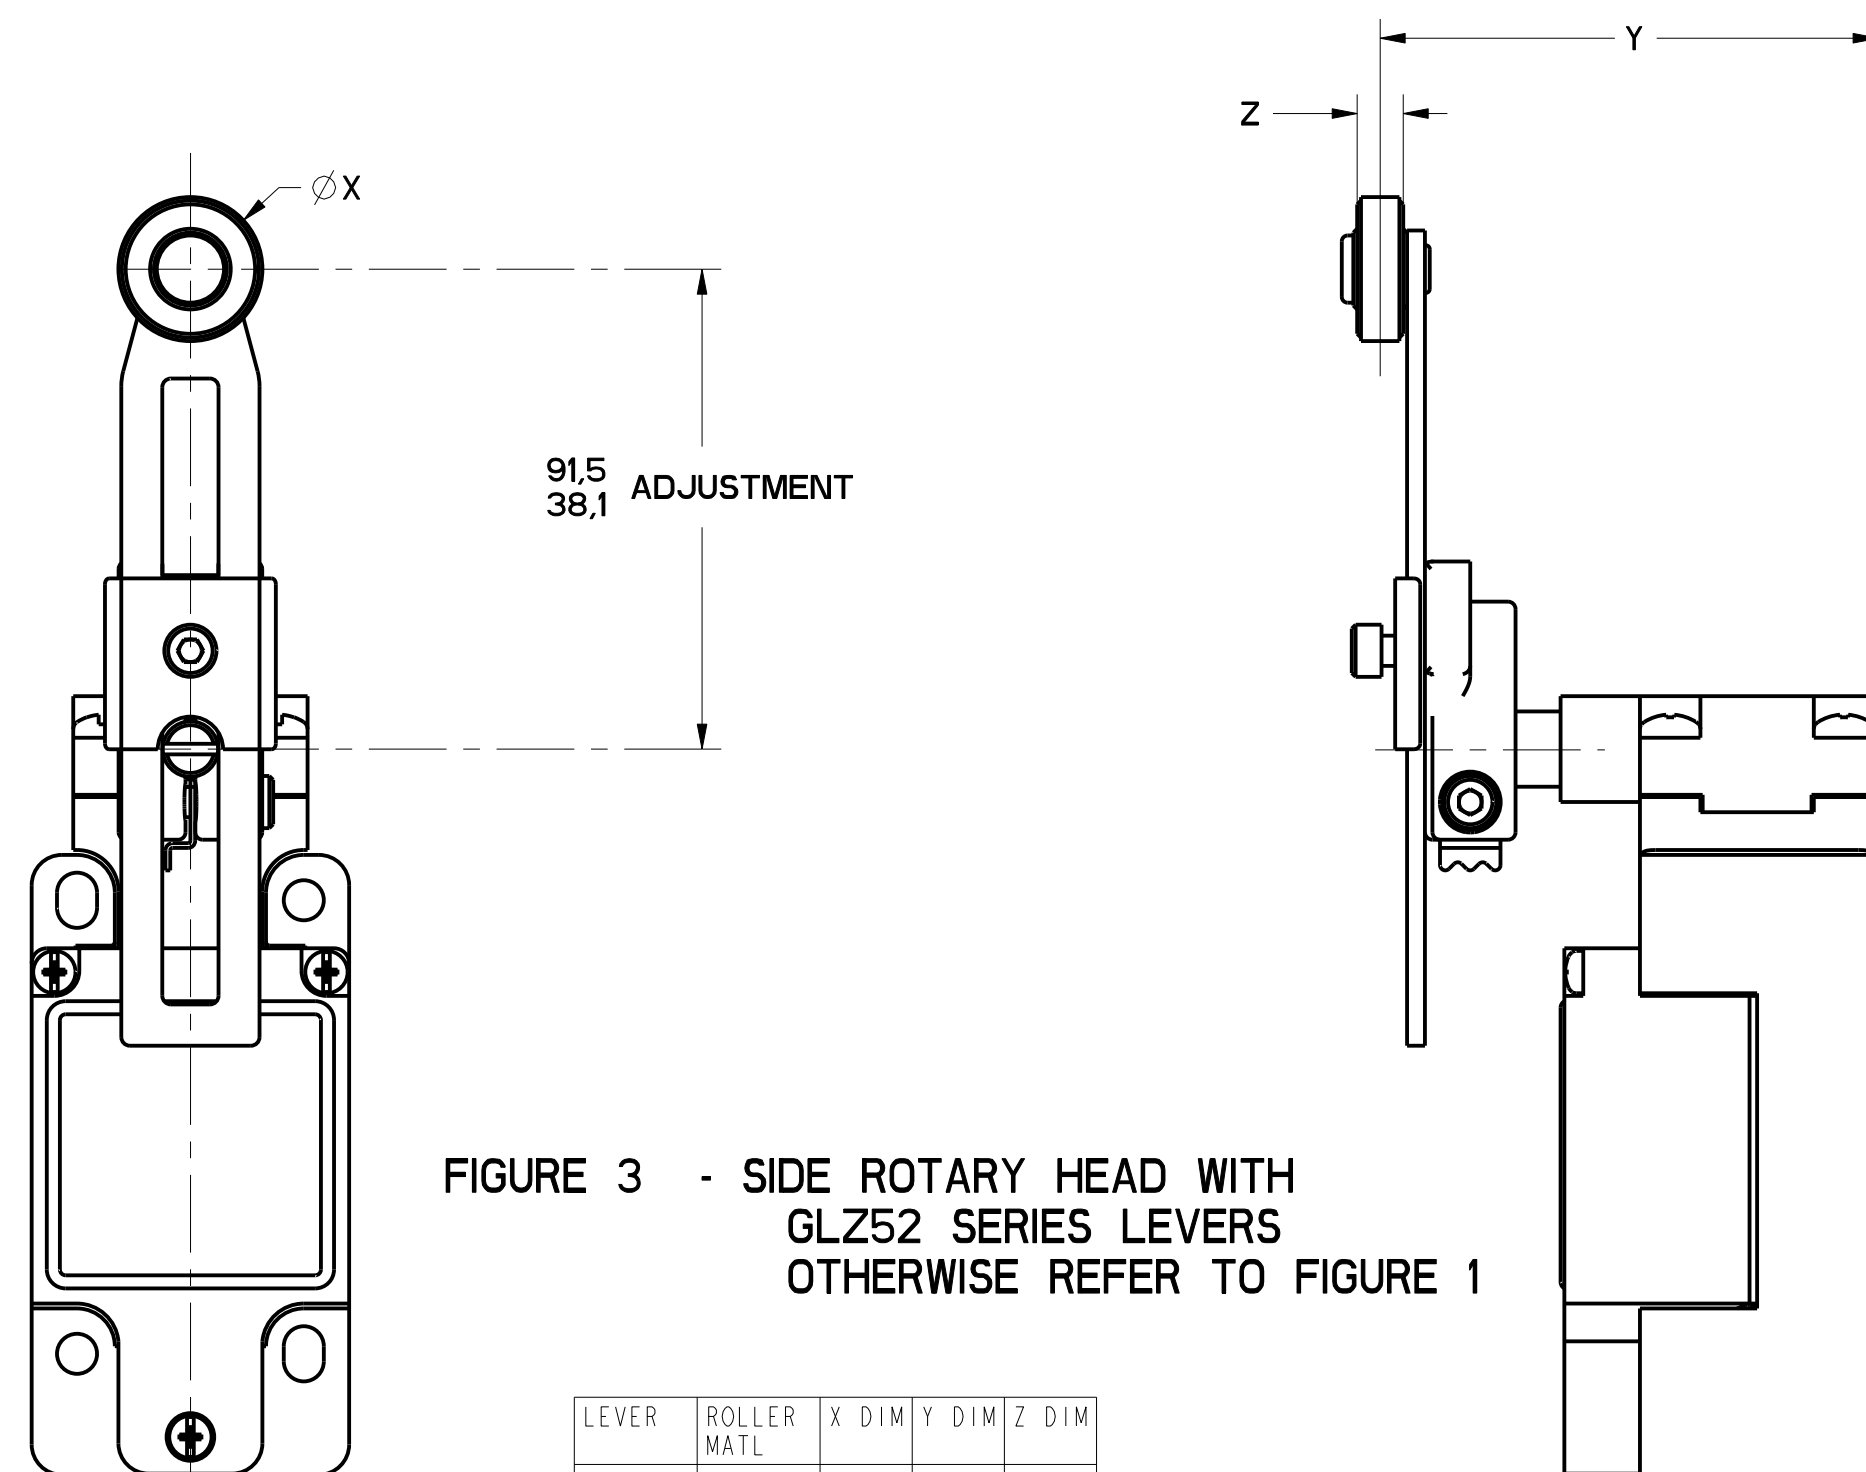



FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GL*A***	1A	N/A	N/A
GL*B***	1B	N/A	N/A
GL*C***	1C	N/A	N/A
GL*D***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		SWITCH, ENCLOSED	
MICRO SWITCH a Honeywell Division		GL SERIES CHART 2	
DESIGN UNITS		WEIGHT	

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	INCH	1/16	0.0625
ONE PLACE	INCH	1/32	0.03125
TWO PLACES	INCH	1/64	0.015625
THREE PLACES	INCH	1/128	0.0078125
ANGLES	DEGREES	1/16	0.625
SI METRIC		US CUSTOMARY	
DESIGN UNITS		WEIGHT	

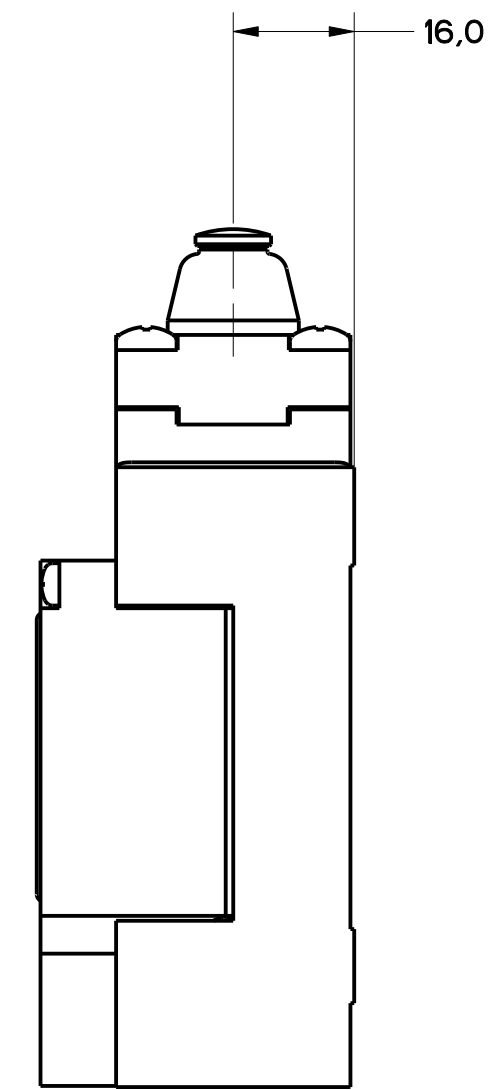


STEEL ROLLER

Ø 12,4

50,5

Technical drawing of a lamp head (Lampenkopf) showing a side view. The drawing includes two dimensions: a horizontal distance of 4,7 and a total horizontal width of 16,0. The lamp head features a central vertical rod with a small rectangular component at the top, mounted on a tiered base.

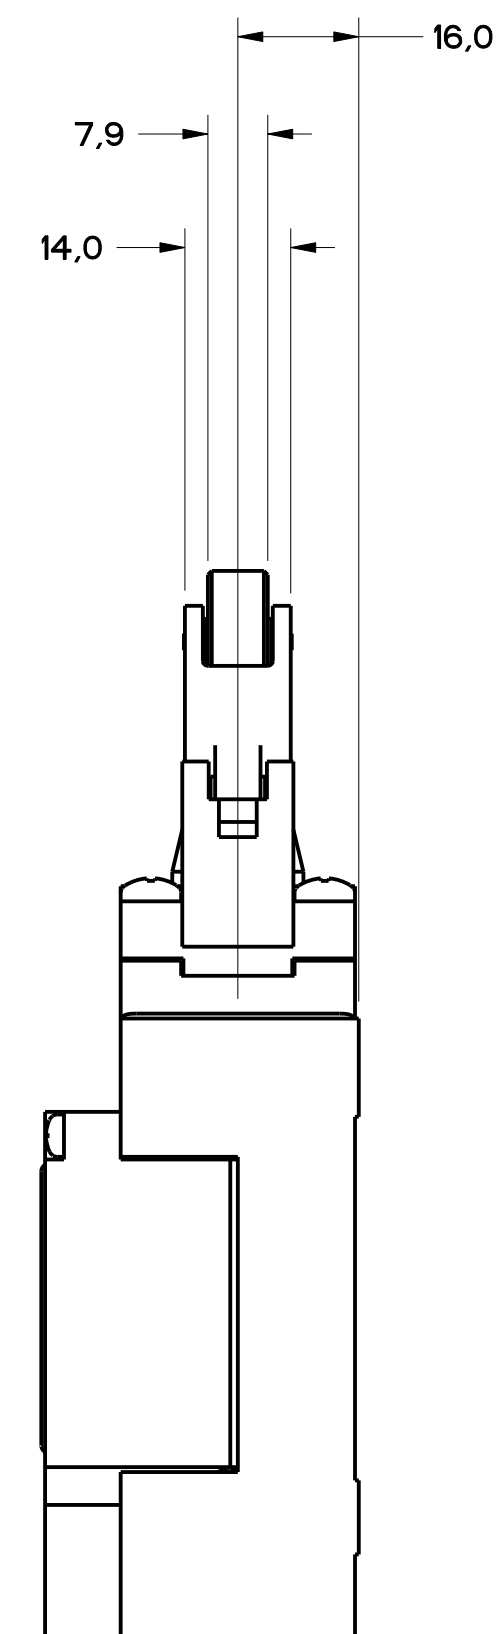

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>1/16</td> <td>0.0010</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4/1016</td> <td>1/32</td> <td>0.0010</td> </tr> <tr> <td>TWO PLACES</td> <td>0.15/008</td> <td>1/64</td> <td>0.0010</td> </tr> <tr> <td>THREE PLACES</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ANGLES</td> <td>± 2</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	1/16	0.0010	ONE PLACE	0.4/1016	1/32	0.0010	TWO PLACES	0.15/008	1/64	0.0010	THREE PLACES				ANGLES	± 2		
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	1/16	0.0010																												
ONE PLACE	0.4/1016	1/32	0.0010																												
TWO PLACES	0.15/008	1/64	0.0010																												
THREE PLACES																															
ANGLES	± 2																														
FED. MFG. CODE 91929	CATALOG LISTING																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED		GL SERIES CHART 2																												
			DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY ☐																												
			WEIGHT																												

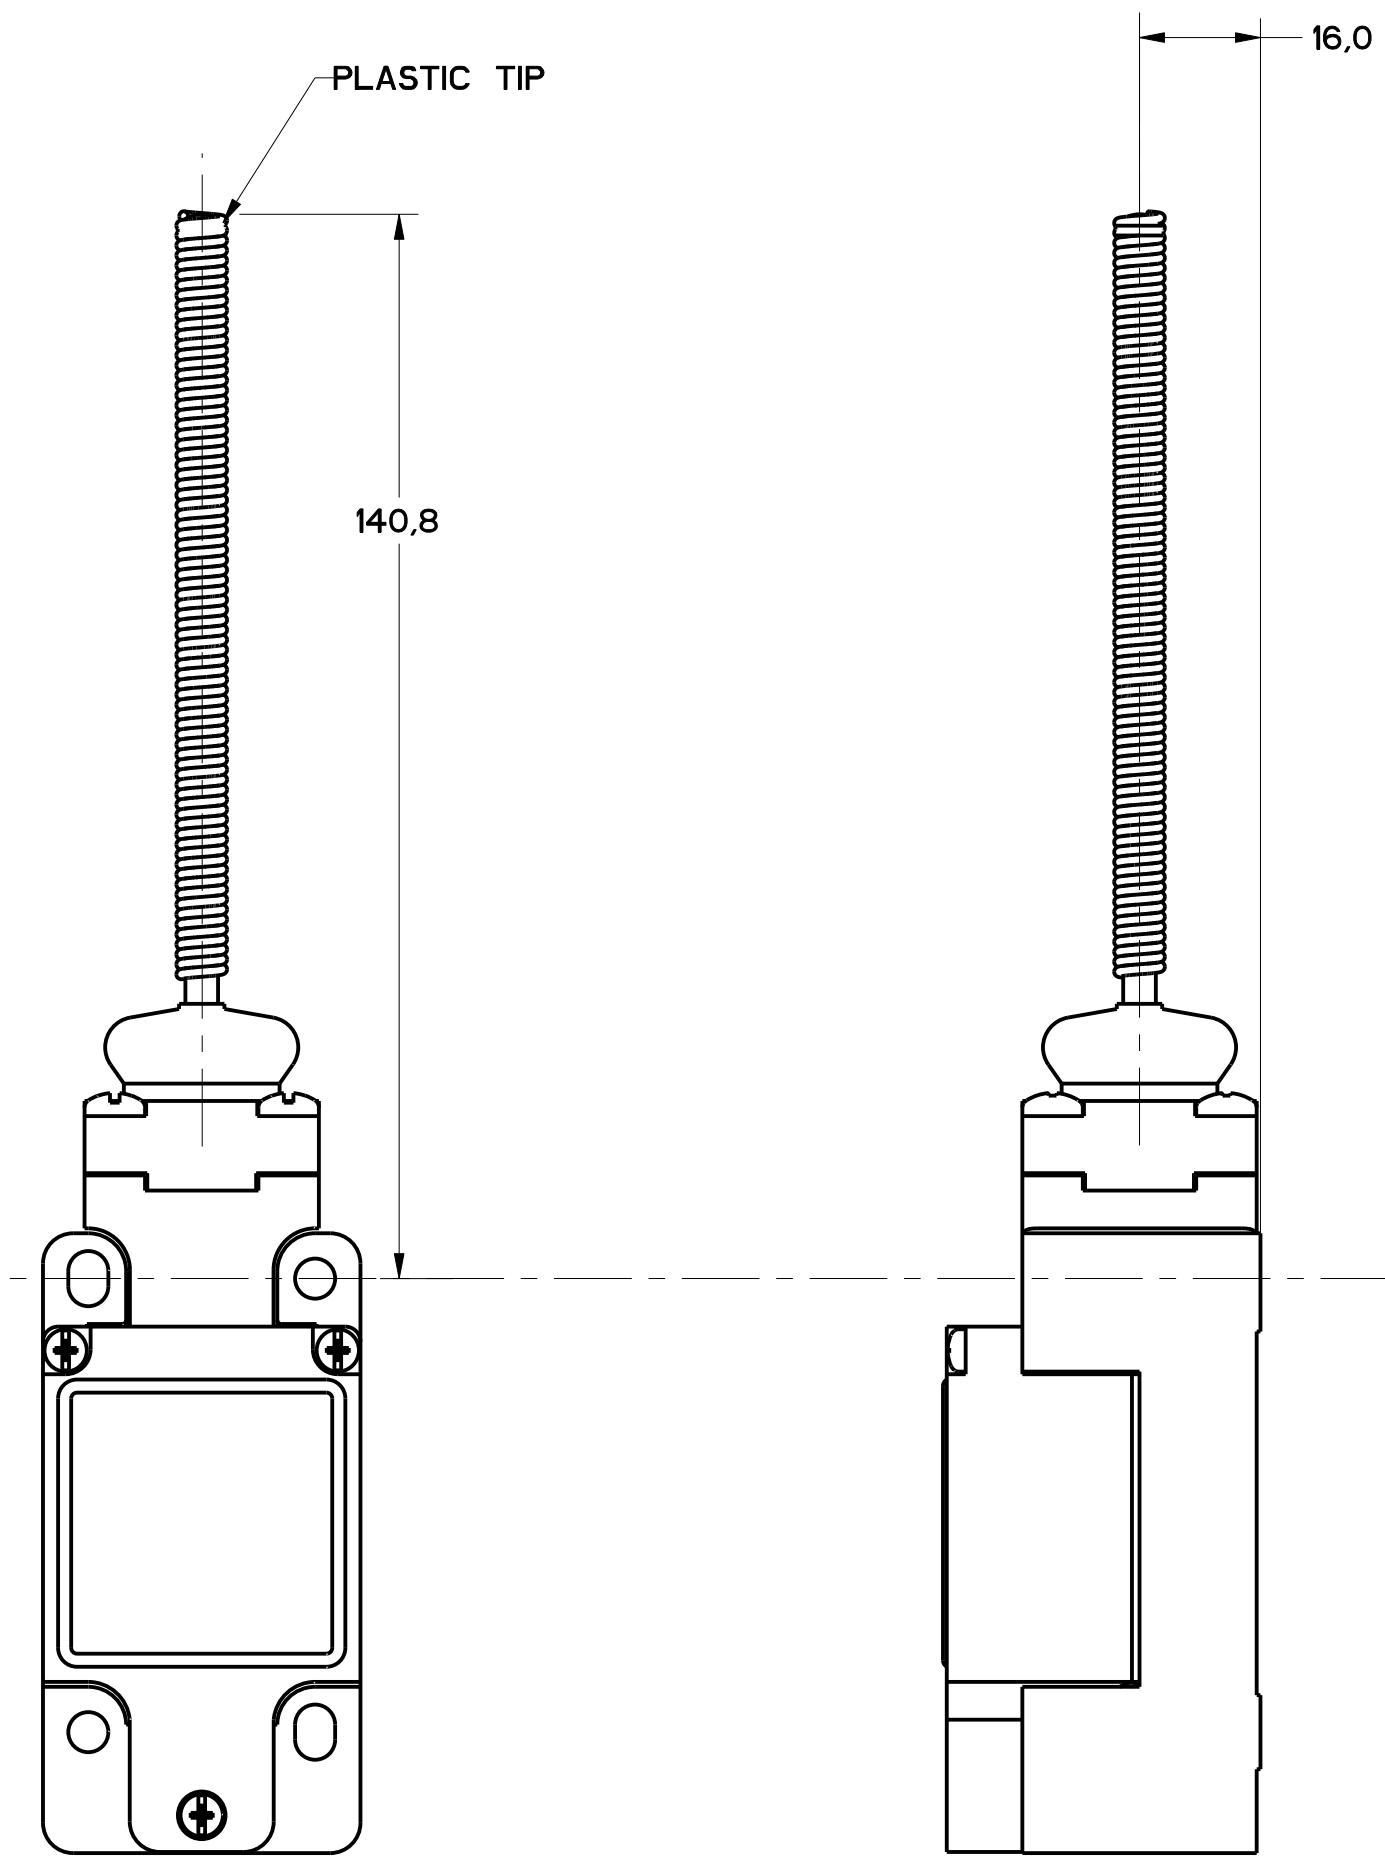


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

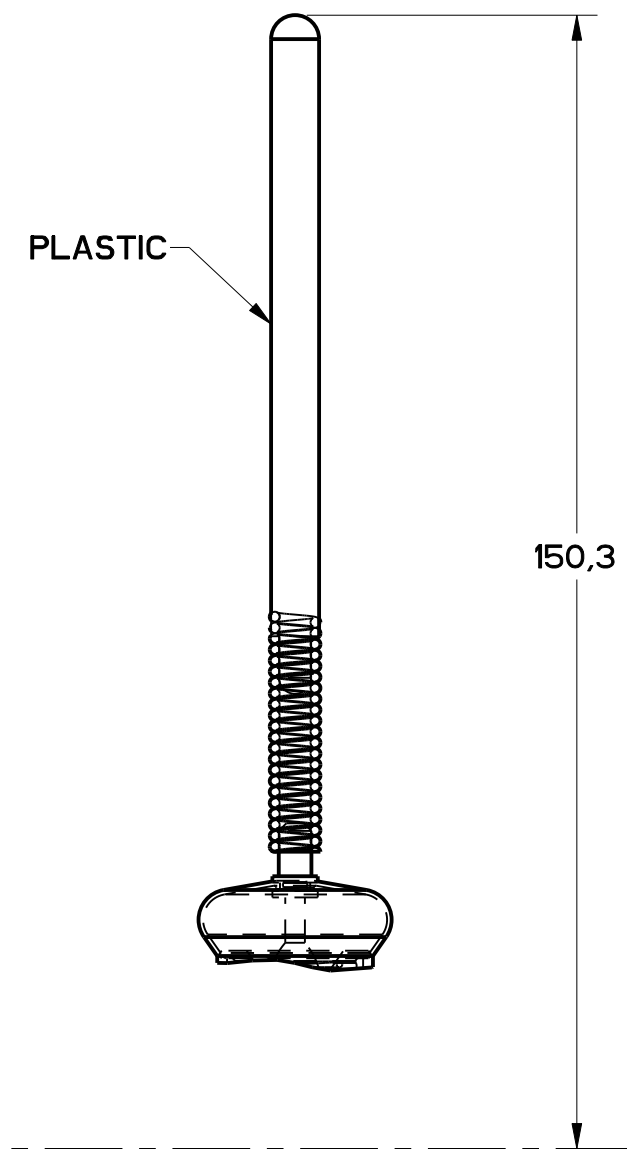


FIGURE 7A -
WOBBLE HEAD,
PLASTIC ACTUATOR,
OTHERWISE SAME AS FIGURE 7

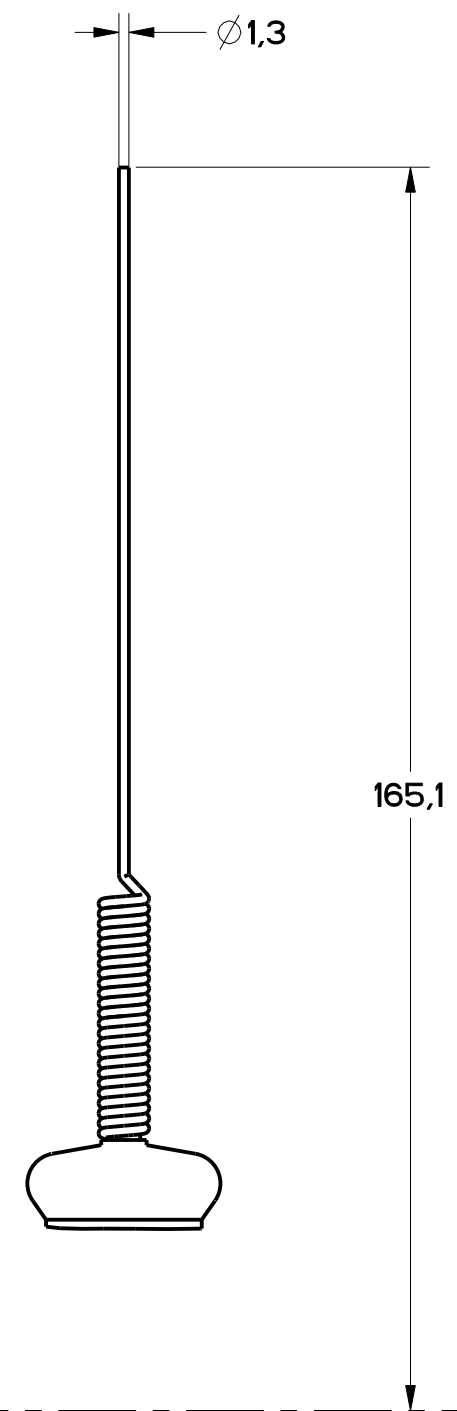


FIGURE 7B -
WOBBLE HEAD
STAINLESS STEEL SPRING
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

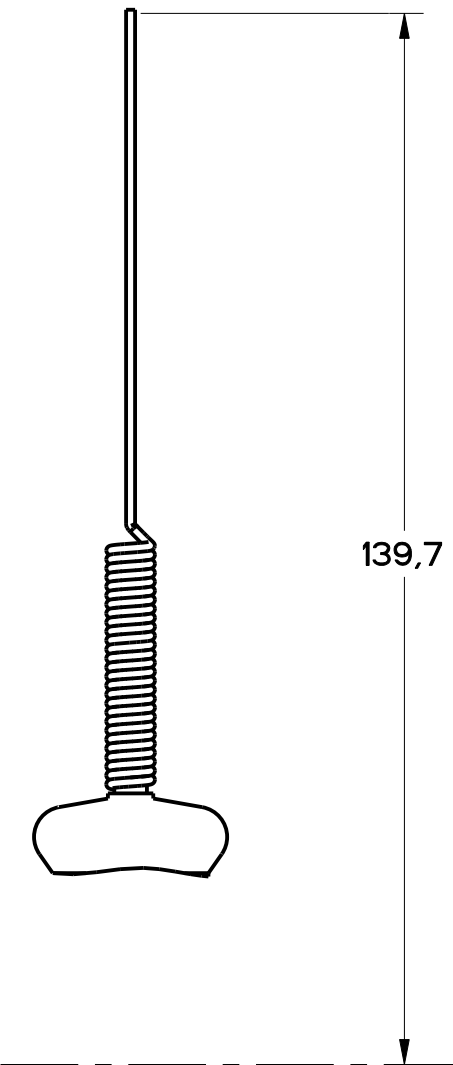


FIGURE 7C -
CAT WHISKER
ACTUATOR STAINLESS
STEEL SPRING
OTHERWISE SAME AS
FIGURE 7

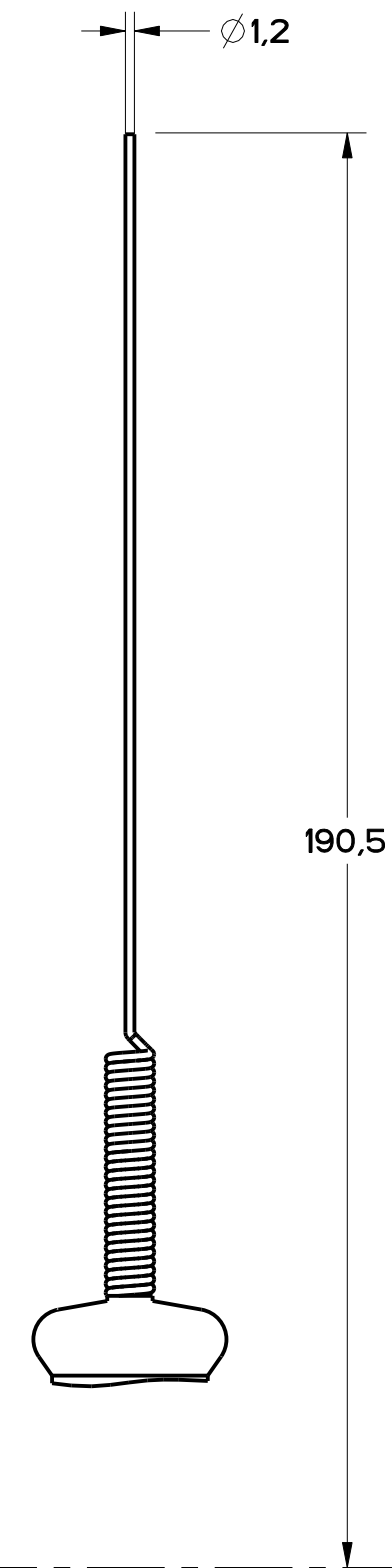


FIGURE 7D -
CAT WHISKER
ACTUATOR, STAINLESS
STEEL SPRING,
OTHERWISE SAME
AS FIGURE 7


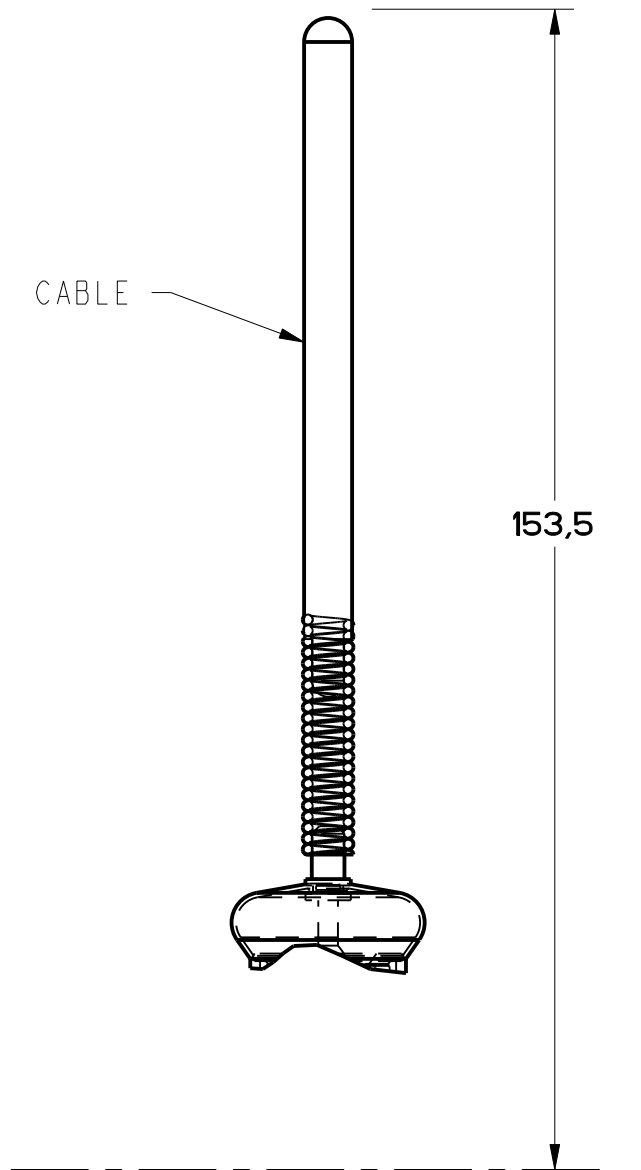


FIGURE 7E -
CABLE WOBBLE
ACTUATOR
OTHERWISE SAME
AS FIGURE 7

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.						<table><tr><td>SUM mm</td><td>TOL mm (+/-)</td><td>SUM in</td><td>TOL in (+/-)</td></tr><tr><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td></tr></table>		SUM mm	TOL mm (+/-)	SUM in	TOL in (+/-)	0.00	0.00	0.00	0.00										
SUM mm	TOL mm (+/-)	SUM in	TOL in (+/-)																						
0.00	0.00	0.00	0.00																						
FED. MFG. CODE 91929		CATALOG LISTING		<table><tr><td>NO PLACES</td><td>X</td><td>0.47 (0.04)</td><td>0.00 (0.01)</td></tr><tr><td>ONE PLACE</td><td>X, Y</td><td>0.47 (0.08)</td><td>0.00 (0.05)</td></tr><tr><td>TWO PLACES</td><td>X, Y, Z</td><td>0.15 (0.00)</td><td>0.00 (0.05)</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td>0.15 (0.00)</td></tr><tr><td>ANGLES</td><td></td><td></td><td></td></tr></table>		NO PLACES	X	0.47 (0.04)	0.00 (0.01)	ONE PLACE	X, Y	0.47 (0.08)	0.00 (0.05)	TWO PLACES	X, Y, Z	0.15 (0.00)	0.00 (0.05)	THREE PLACES			0.15 (0.00)	ANGLES			
NO PLACES	X	0.47 (0.04)	0.00 (0.01)																						
ONE PLACE	X, Y	0.47 (0.08)	0.00 (0.05)																						
TWO PLACES	X, Y, Z	0.15 (0.00)	0.00 (0.05)																						
THREE PLACES			0.15 (0.00)																						
ANGLES																									
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED		GL SERIES CHART 2																					
				<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>		SI METRIC	US CUSTOMARY	☒	☐																
SI METRIC	US CUSTOMARY																								
☒	☐																								
		DESIGN UNITS		WEIGHT																					




CAM ACTUATION PER EN50041, FIGURES 8 AND 9 							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	 NOMINAL TRAVELS AND RELATED TERMINALS  CONTACT CLOSED,  CONTACT OPEN,  CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE  LB	MAXIMUM DISCONNECT FORCE  LB	MAX OPERATE VEL  in/s **	MIN OPERATE VEL  in/s **	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				<table><tr><td>Q'W</td><td>TOL</td><td>Q'W</td><td>TOL</td></tr><tr><td>dim</td><td>dim</td><td>"</td><td>"</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>		Q'W	TOL	Q'W	TOL	dim	dim	"	"																													
Q'W	TOL	Q'W	TOL																																							
dim	dim	"	"																																							
FED. MFG. CODE 91929		CATALOG LISTING																																								
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED		GL SERIES CHART 2																																						
		<table><tr><td>NO PLACES</td><td>X</td><td>1/2" (4)</td><td>1.4</td><td>0.85/0.915</td></tr><tr><td>ONE PLACE</td><td>X X</td><td>0.47/0.16</td><td>1.1X1</td><td>0.98/1.015</td></tr><tr><td>TWO PLACES</td><td>X X X</td><td>0.15/0.08</td><td>1.1X1</td><td>1.15/1.095</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td></td><td></td></tr><tr><td>ANGLES</td><td></td><td>± 1/2°</td><td></td><td></td></tr></table>		NO PLACES	X	1/2" (4)	1.4	0.85/0.915	ONE PLACE	X X	0.47/0.16	1.1X1	0.98/1.015	TWO PLACES	X X X	0.15/0.08	1.1X1	1.15/1.095	THREE PLACES					ANGLES		± 1/2°			<table><tr><td>SI METRIC</td><td>☒</td><td>US CUSTOMARY</td><td>☐</td></tr><tr><td>DESIGN UNITS</td><td></td><td></td><td></td></tr><tr><td>WEIGHT</td><td></td><td></td><td></td></tr></table>		SI METRIC	☒	US CUSTOMARY	☐	DESIGN UNITS				WEIGHT			
NO PLACES	X	1/2" (4)	1.4	0.85/0.915																																						
ONE PLACE	X X	0.47/0.16	1.1X1	0.98/1.015																																						
TWO PLACES	X X X	0.15/0.08	1.1X1	1.15/1.095																																						
THREE PLACES																																										
ANGLES		± 1/2°																																								
SI METRIC	☒	US CUSTOMARY	☐																																							
DESIGN UNITS																																										
WEIGHT																																										



FIGURE 12



FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{MM/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

THIRD ANGLE PROJECTION



SCALE

FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE: 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH

a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING

GL SERIES CHART 2

NO PLACES

ONE PLACE

TWO PLACES

THREE PLACES

ANGLES

X

X

X, XX

X, XX

± 2

DIM.

DIM.

DIM.

DIM.

DIM.

TOL.

TOL.

TOL.

TOL.

TOL.

0.0103

0.0103

0.00103

0.000103

0.131°/0.05

SI METRIC

US CUSTOMARY

☒



☐

DESIGN UNITS

ANSL X14 FM 1000 APR 1965

REVISIONS		
A	CO	78529
B	CS	81101
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

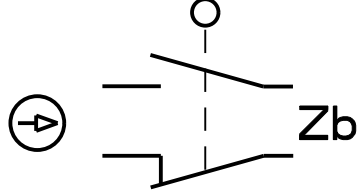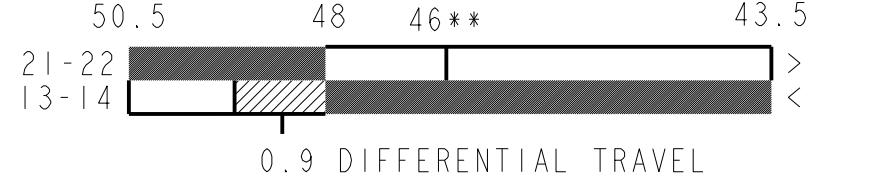CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04	250

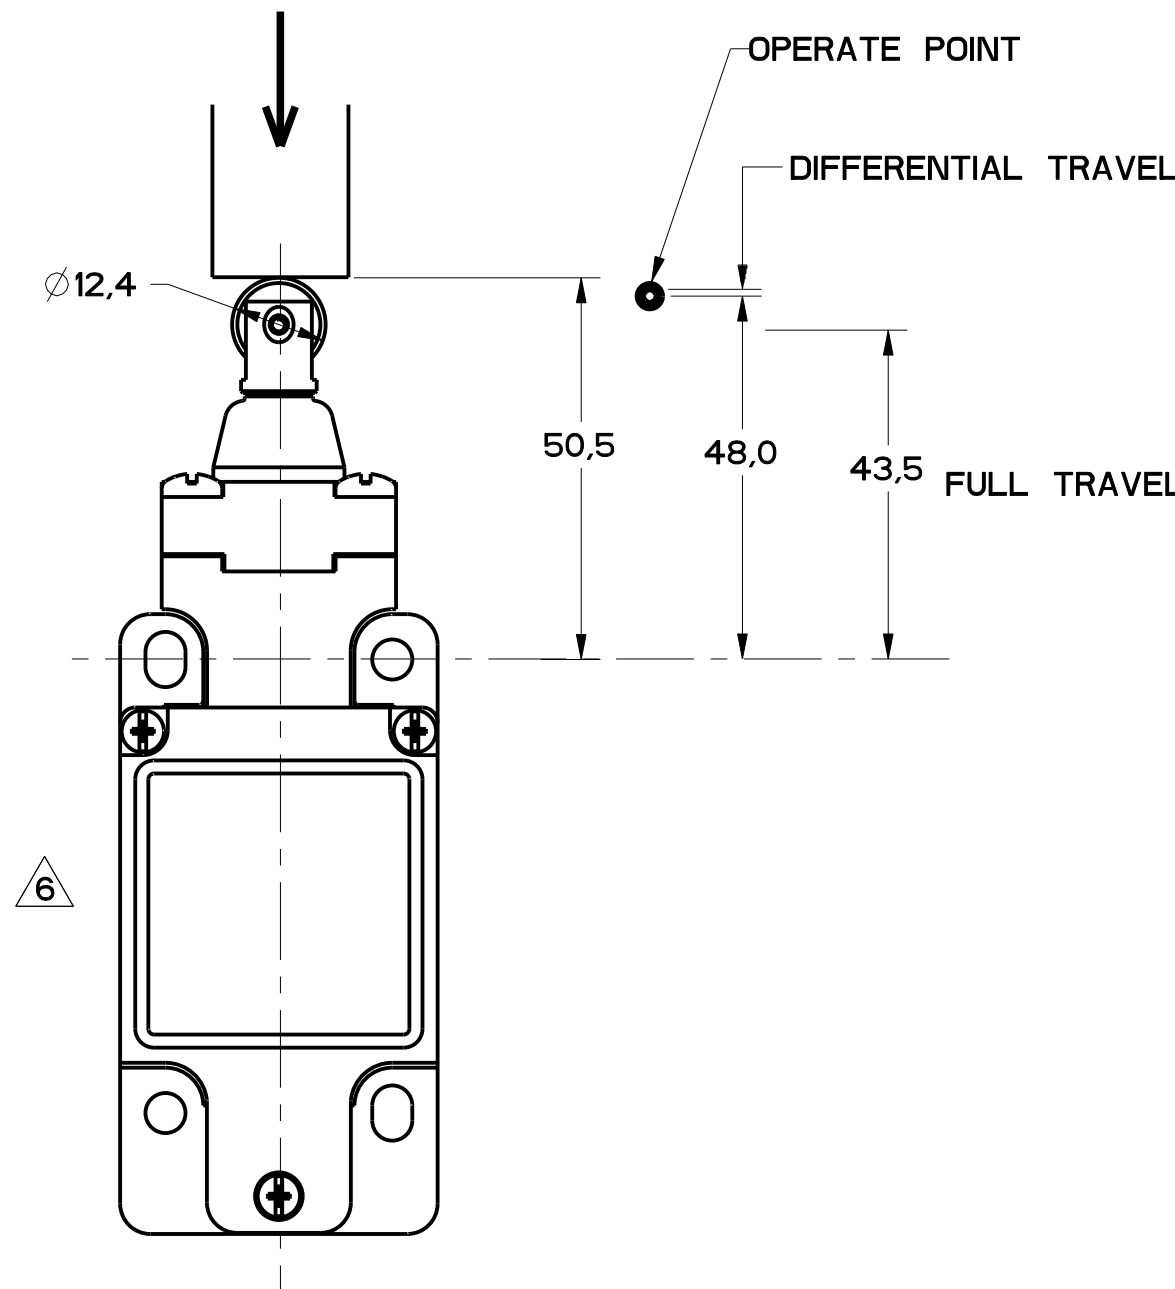


FIGURE 13A

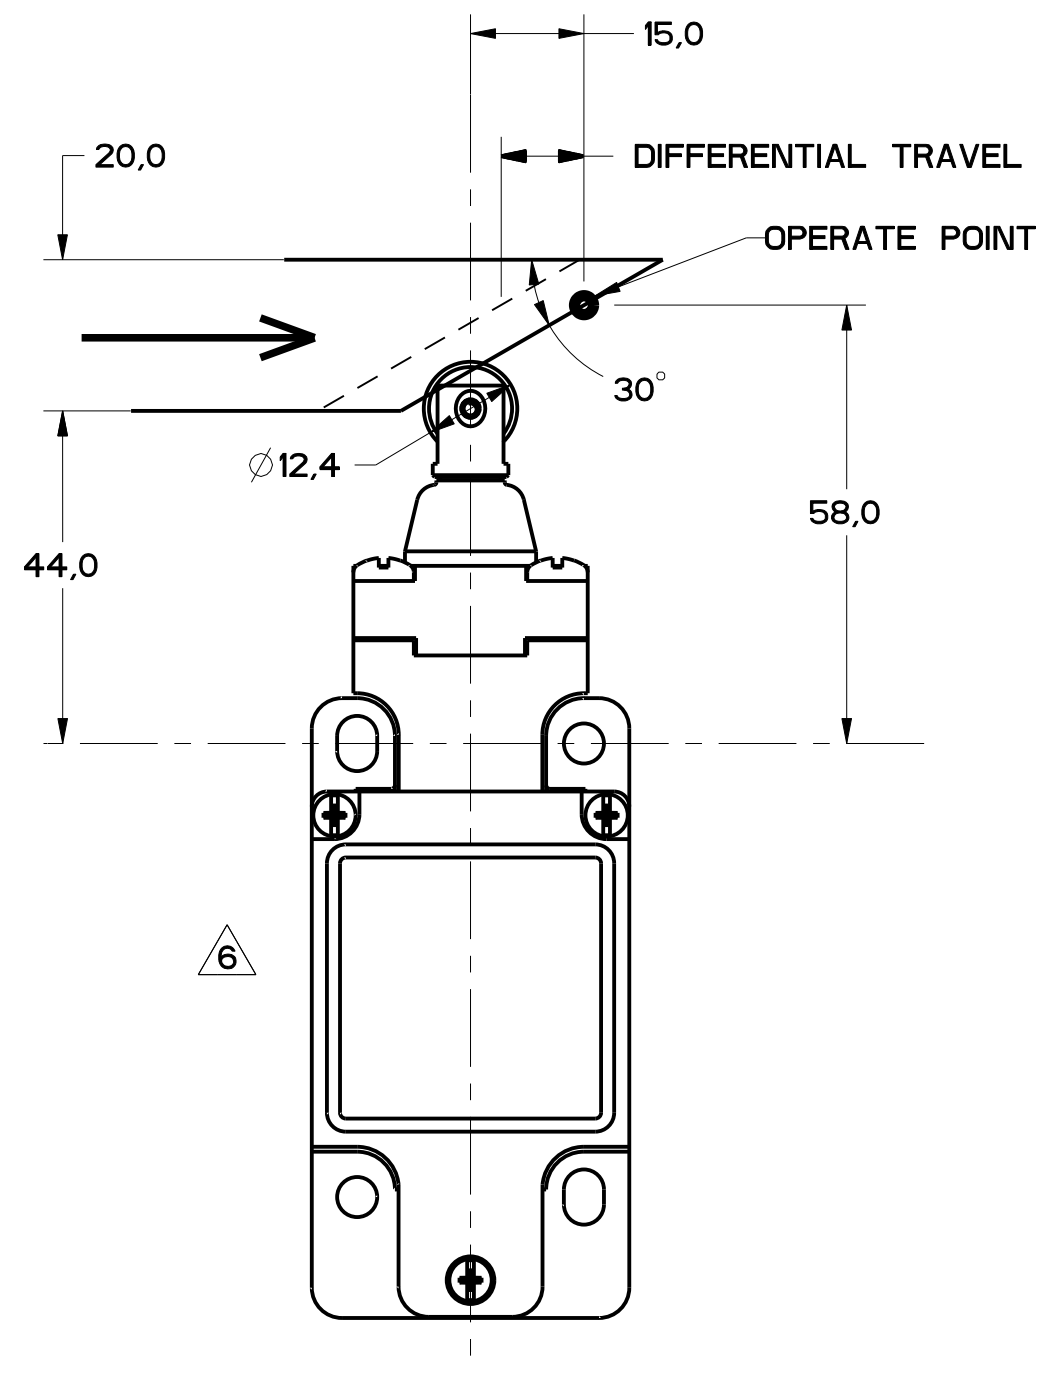
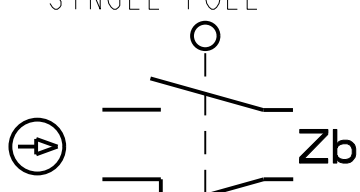
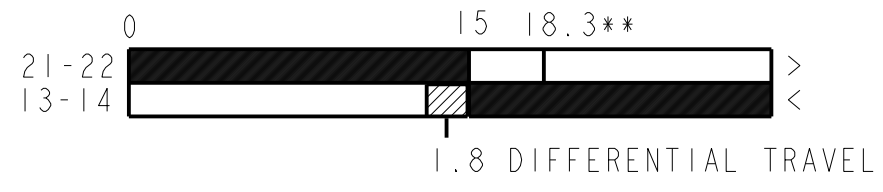



FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	1/32	1/64
ONE PLACE	1/16	1/32	1/64
TWO PLACES	1/16	1/32	1/64
THREE PLACES	1/16	1/32	1/64
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

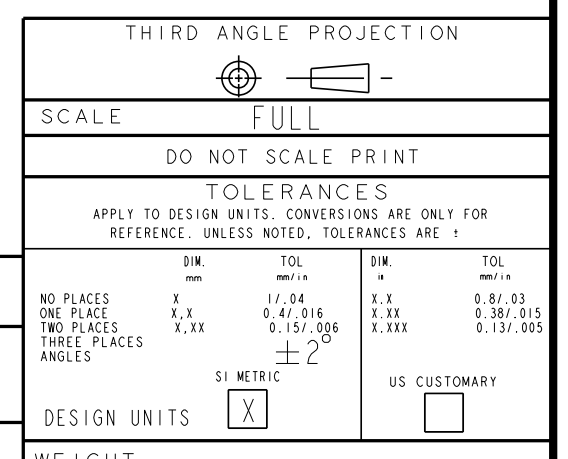


FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{M/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{mm/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING

GL SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

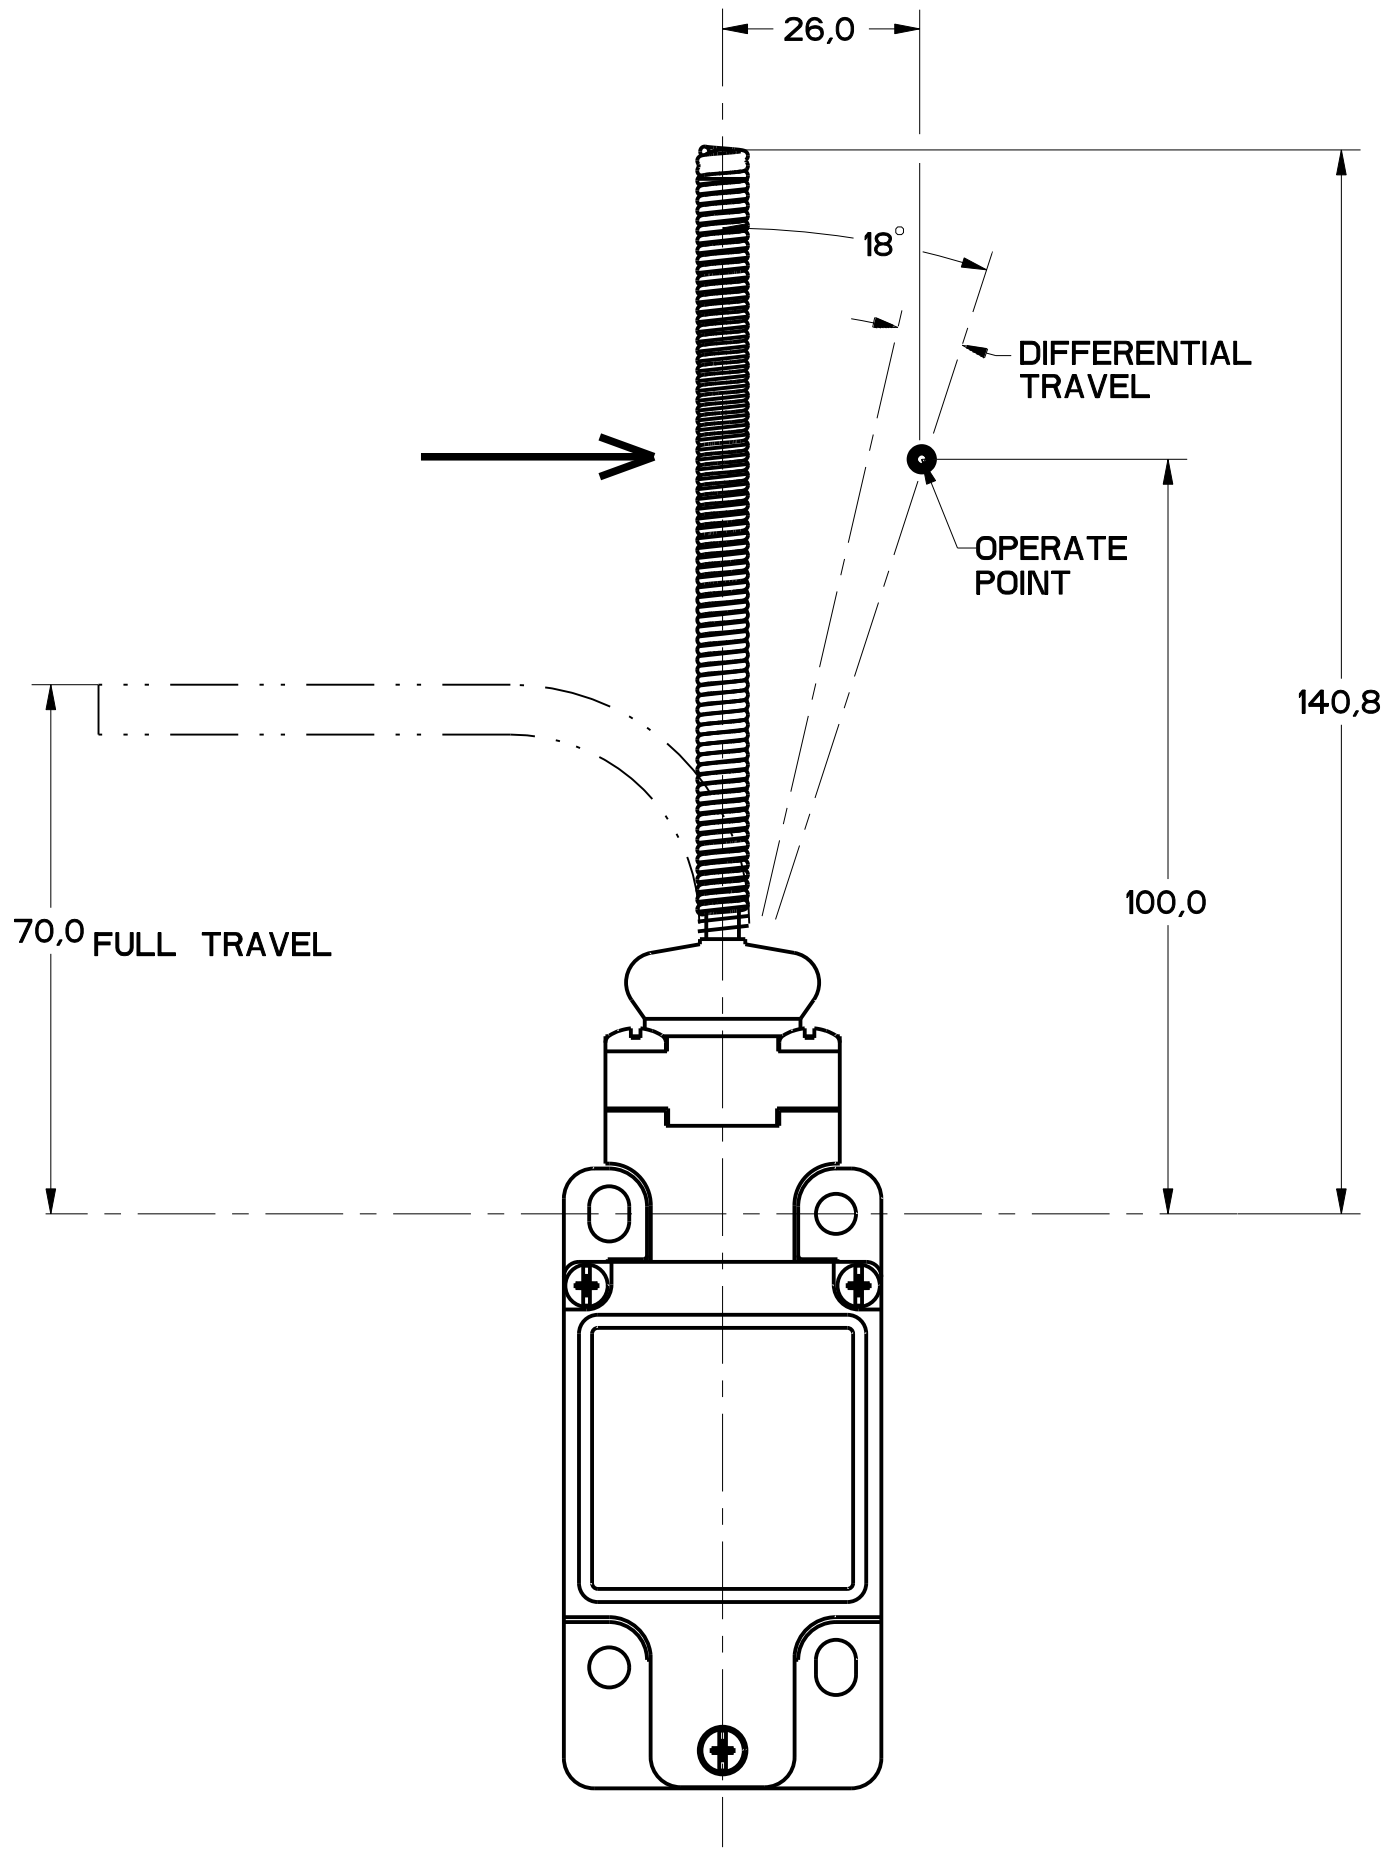


FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE LB-IN	MAXIMUM DISCONNECT TORQUE LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL IN/S	MIN OPERATE VEL IN/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9