

SIDE ROTARY

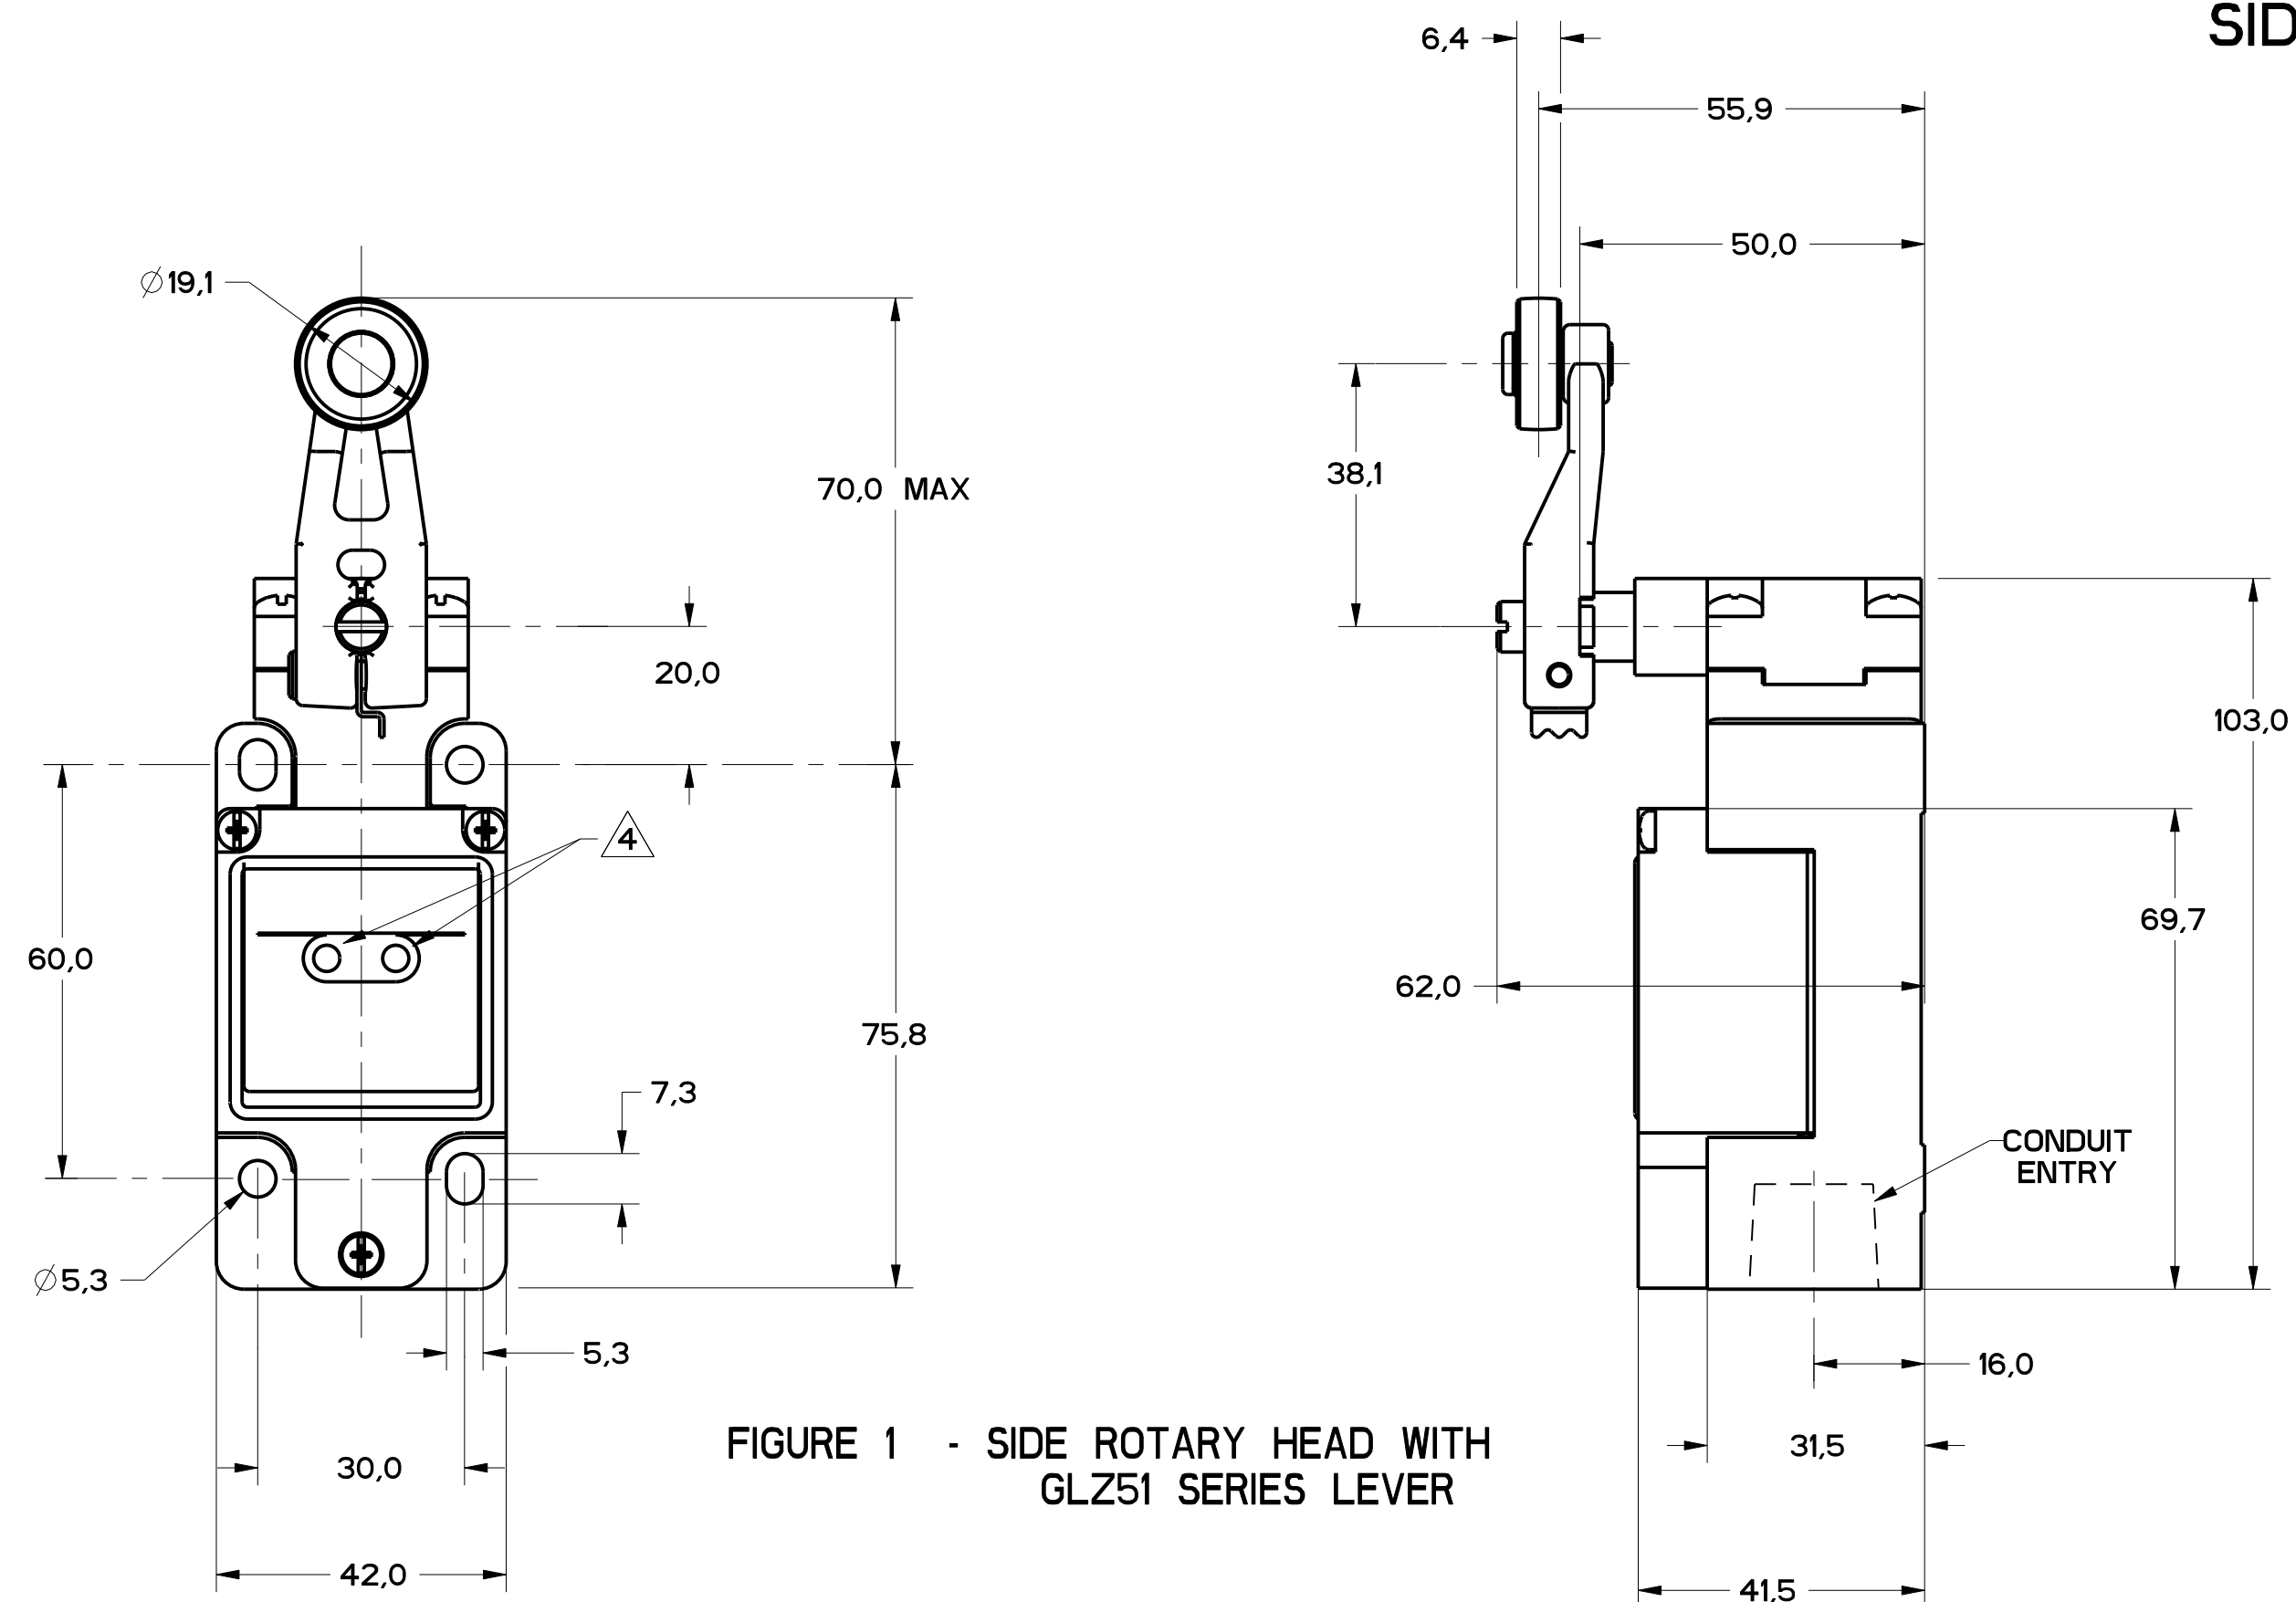


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

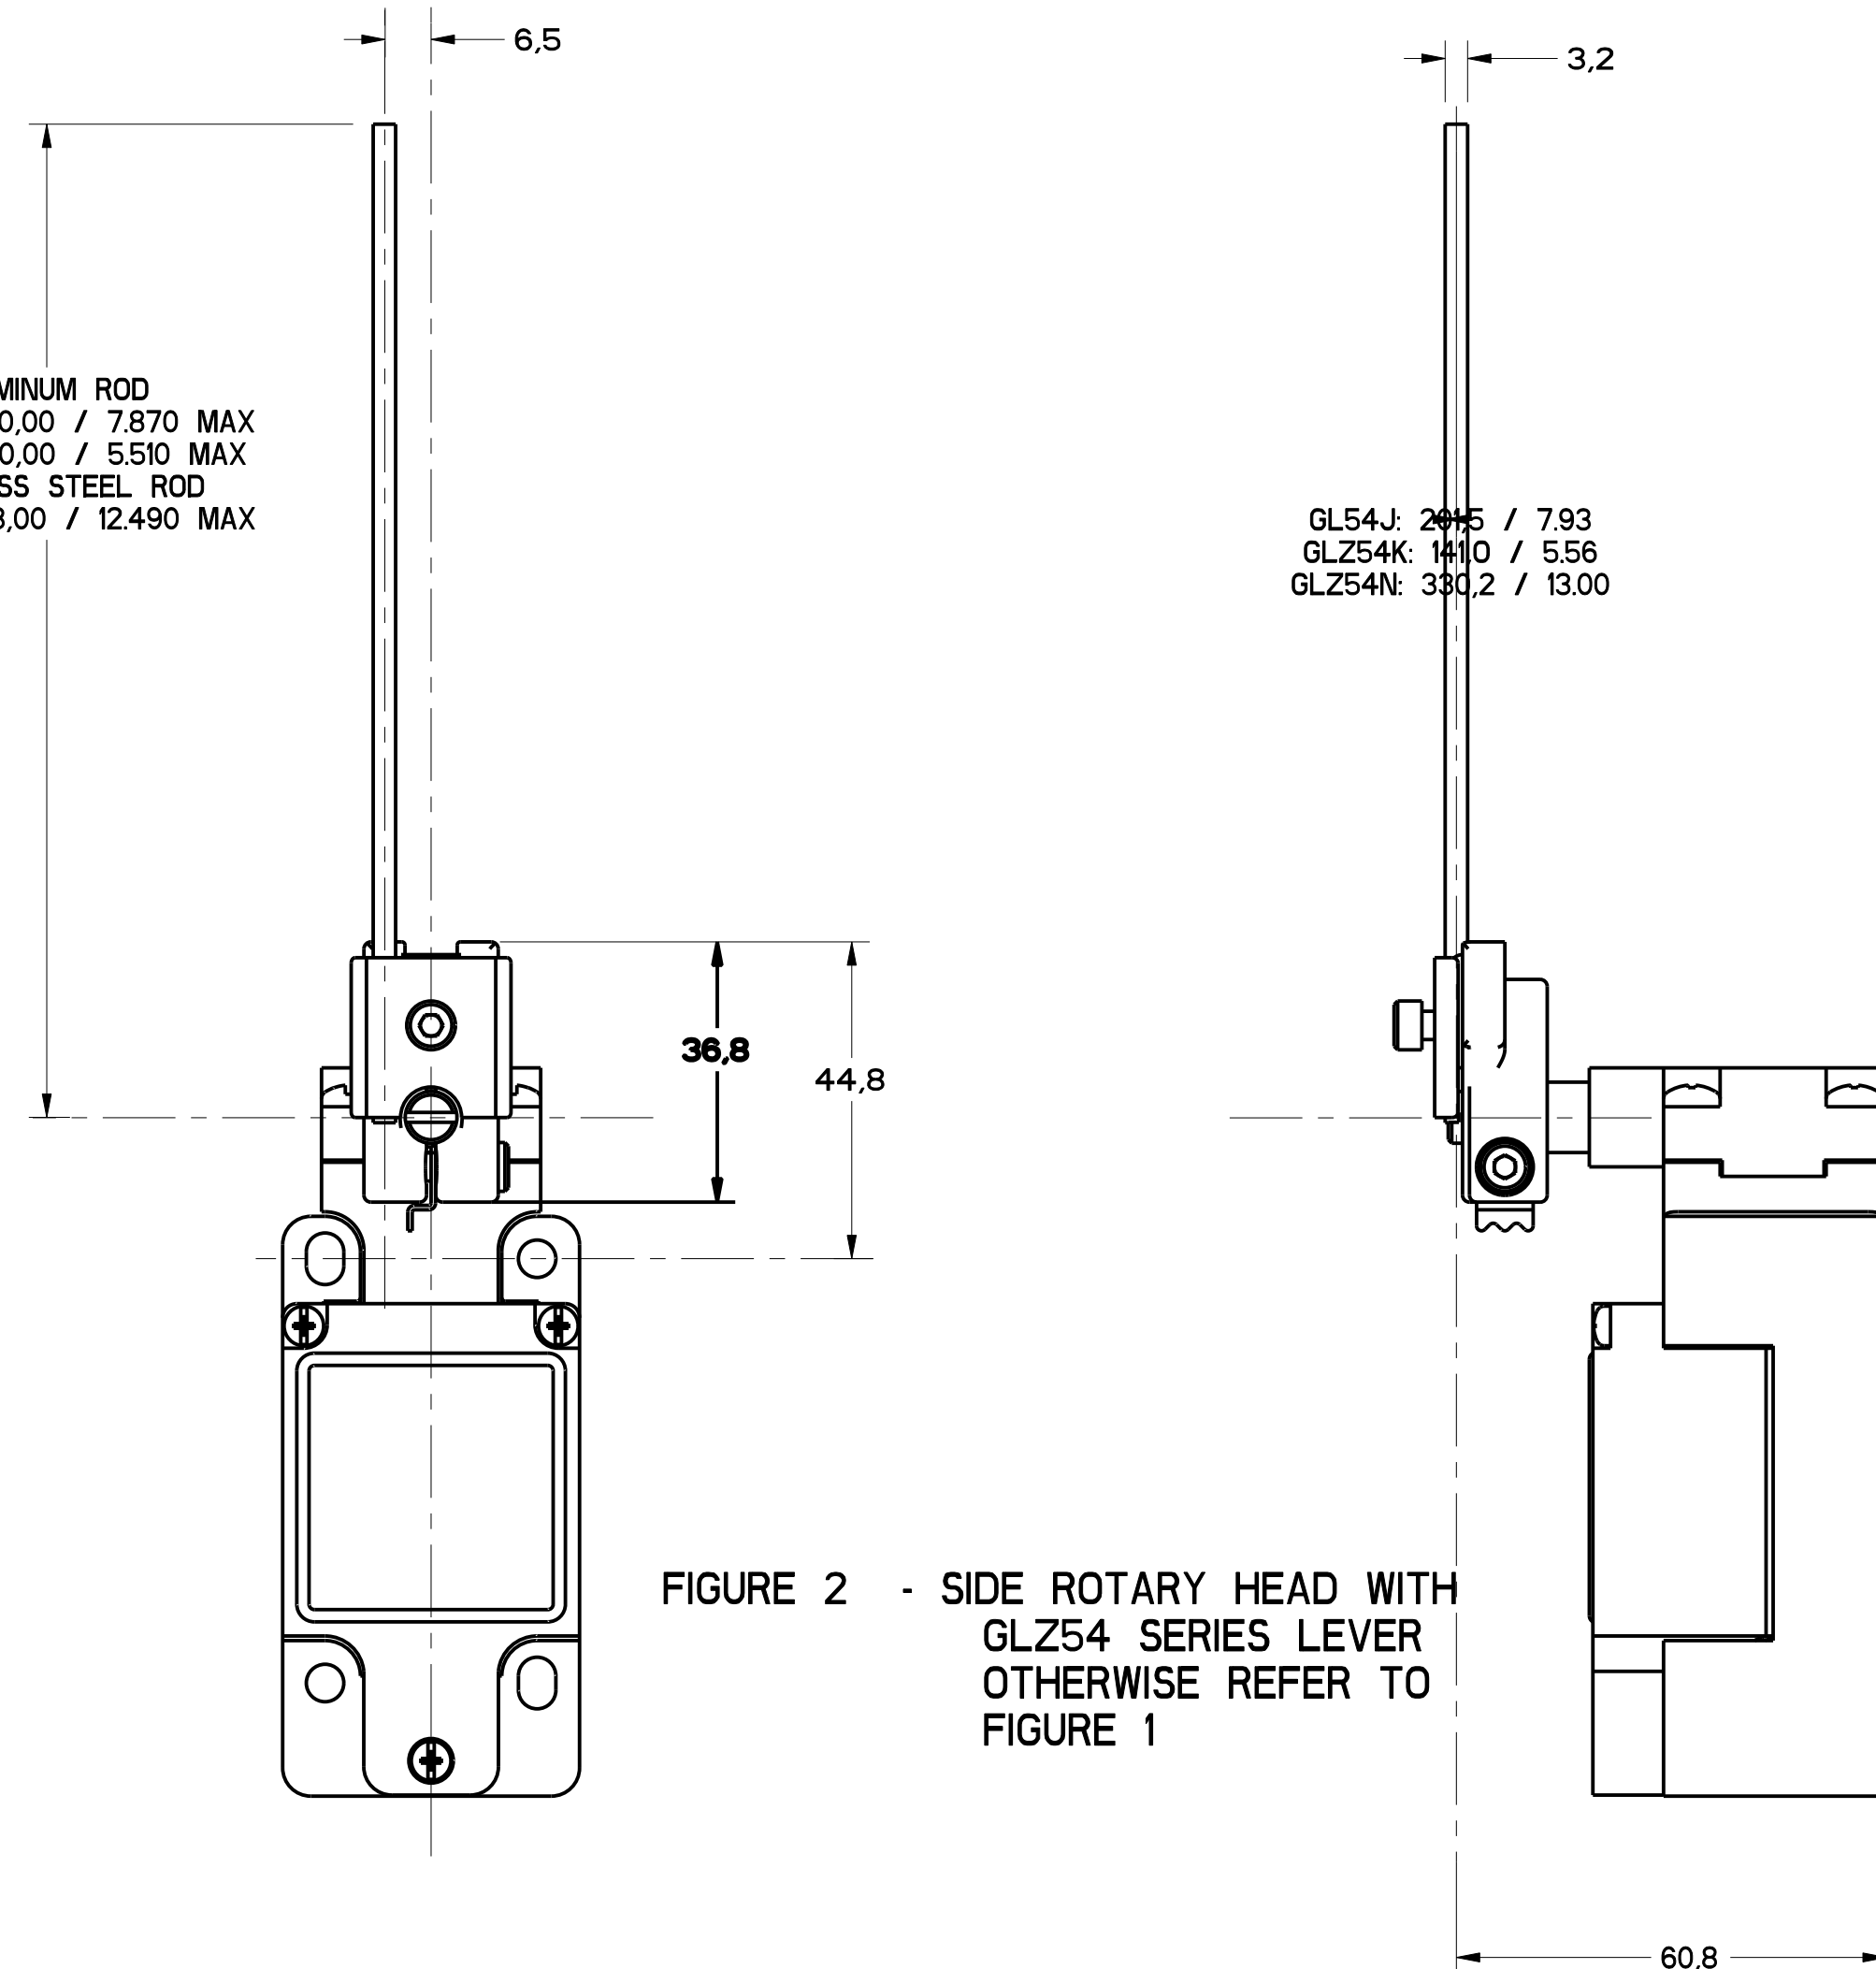


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

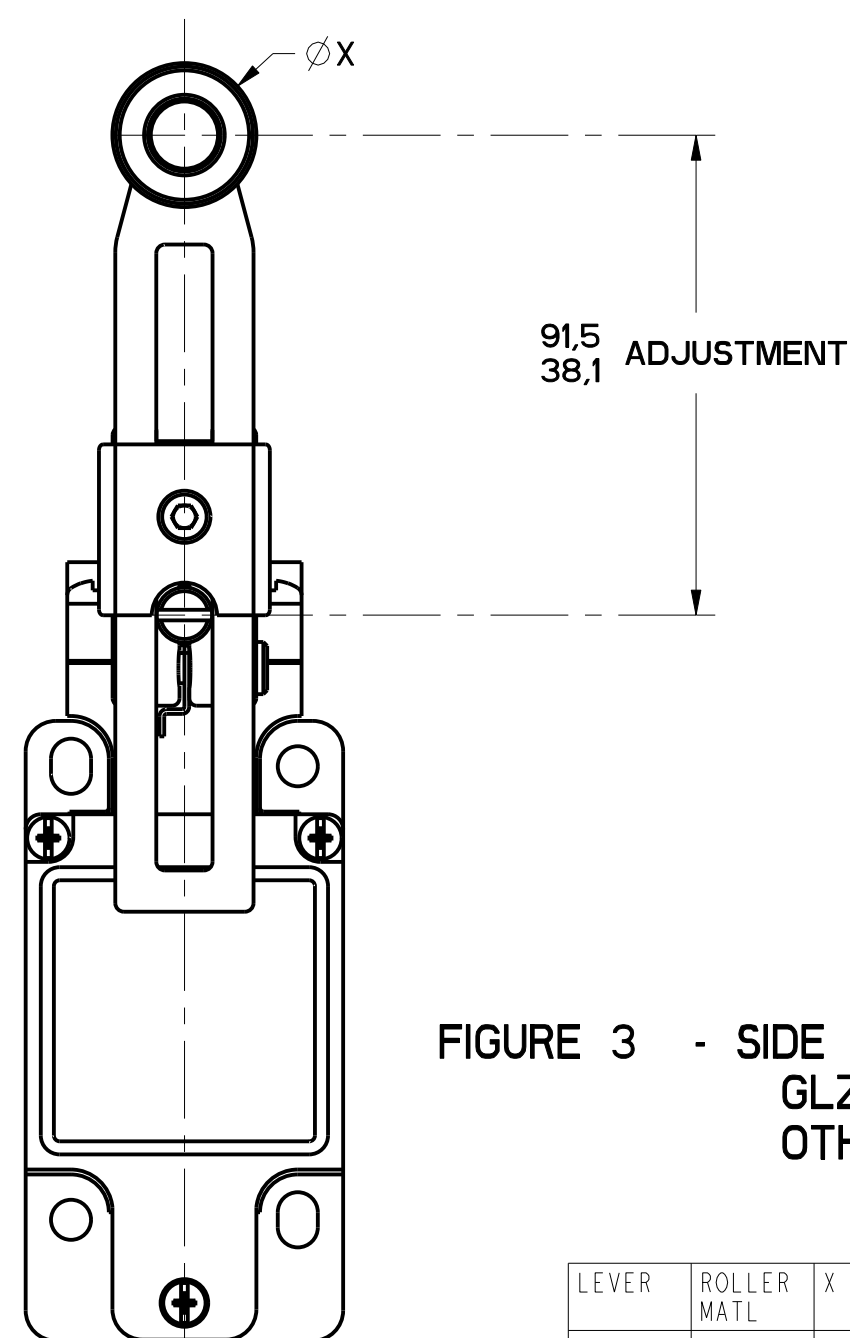



FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		SWITCH, ENCLOSED	
MICRO SWITCH a Honeywell Division		GL SERIES CHART 2	
DESIGN UNITS		WEIGHT	

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	INCH	TOL.	INCH
ONE PLACE	INCH	0.001	0.001
TWO PLACES	INCH	0.0005	0.0005
THREE PLACES	INCH	0.0001	0.0001
ANGLES	DEGREES	±0.001	±0.001
SI METRIC		US CUSTOMARY	
DESIGN UNITS		WEIGHT	

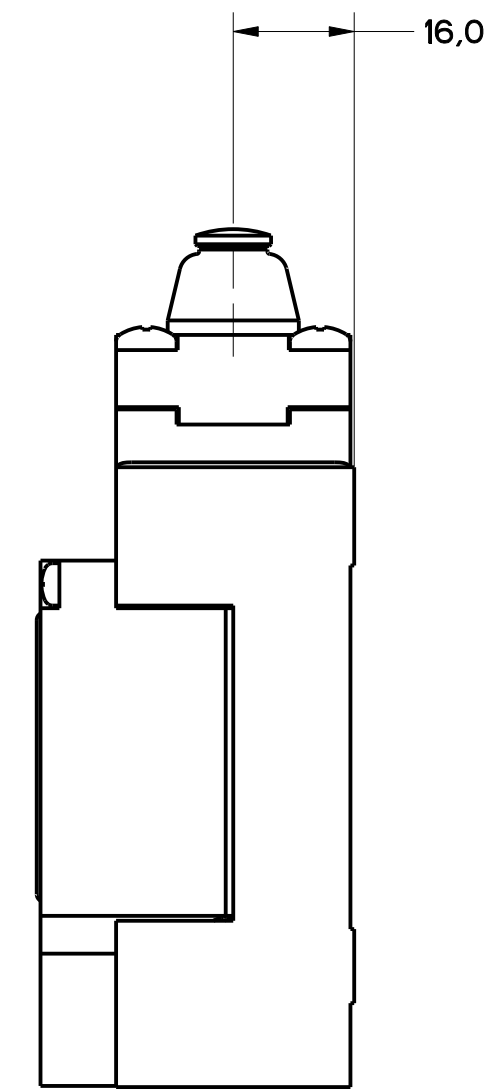


STEEL ROLLER

Ø12,4

50,5

Technical drawing of a lamp head (Lampenkopf) showing a side view. The drawing includes two dimensions: 4,7 (width of the base) and 16,0 (width of the top section).

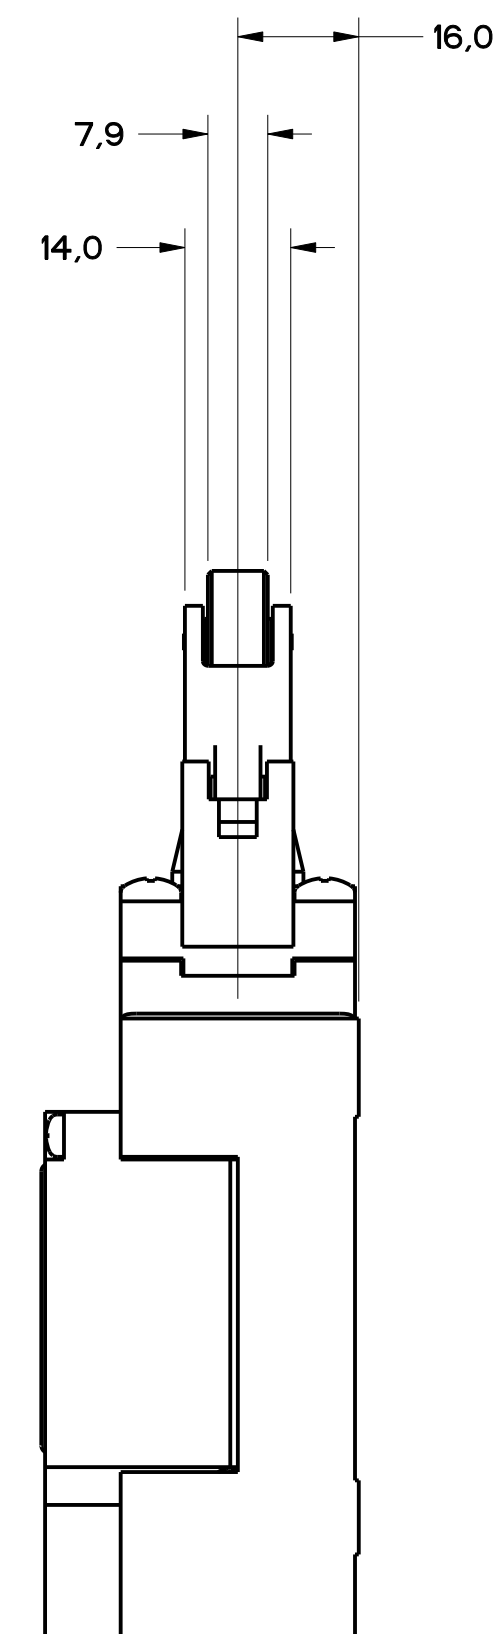

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>TWO PLACES</td> <td>0.004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>THREE PLACES</td> <td>0.0004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ANGLES</td> <td>± 1</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	0.01	0.01	ONE PLACE	0.4	0.01	0.01	TWO PLACES	0.004	0.01	0.01	THREE PLACES	0.0004	0.01	0.01	ANGLES	± 1		
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	0.01	0.01																												
ONE PLACE	0.4	0.01	0.01																												
TWO PLACES	0.004	0.01	0.01																												
THREE PLACES	0.0004	0.01	0.01																												
ANGLES	± 1																														
FED. MFG. CODE 91929		CATALOG LISTING																													
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED																													
		GL SERIES CHART 2																													
		<table border="1"> <tr> <td>DESIGN UNITS</td> <td> ☒ SI METRIC </td> <td> ☐ US CUSTOMARY </td> </tr> </table>		DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY																									
DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY																													
		WEIGHT																													

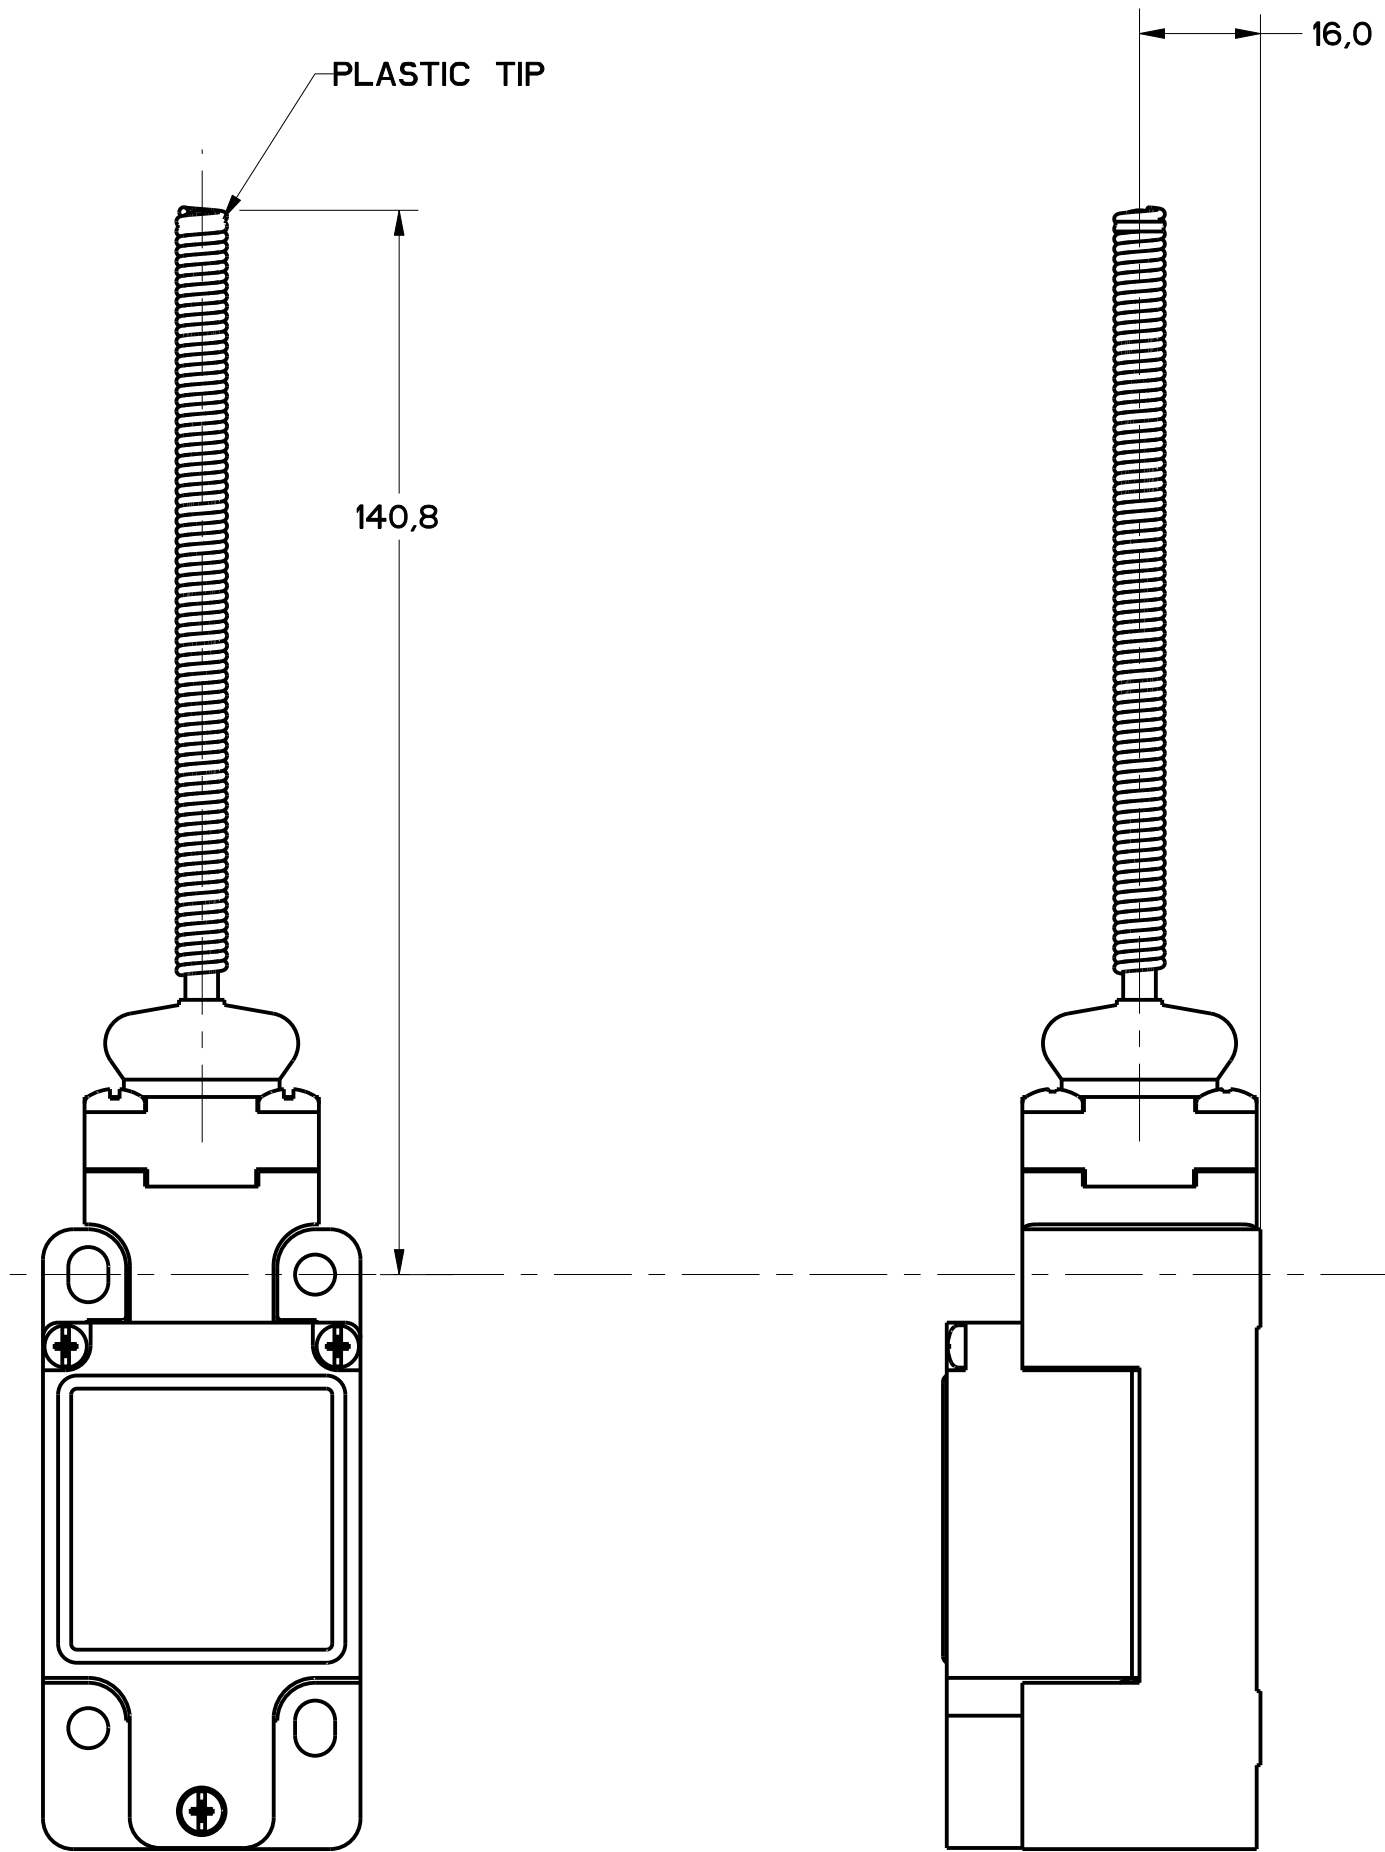


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

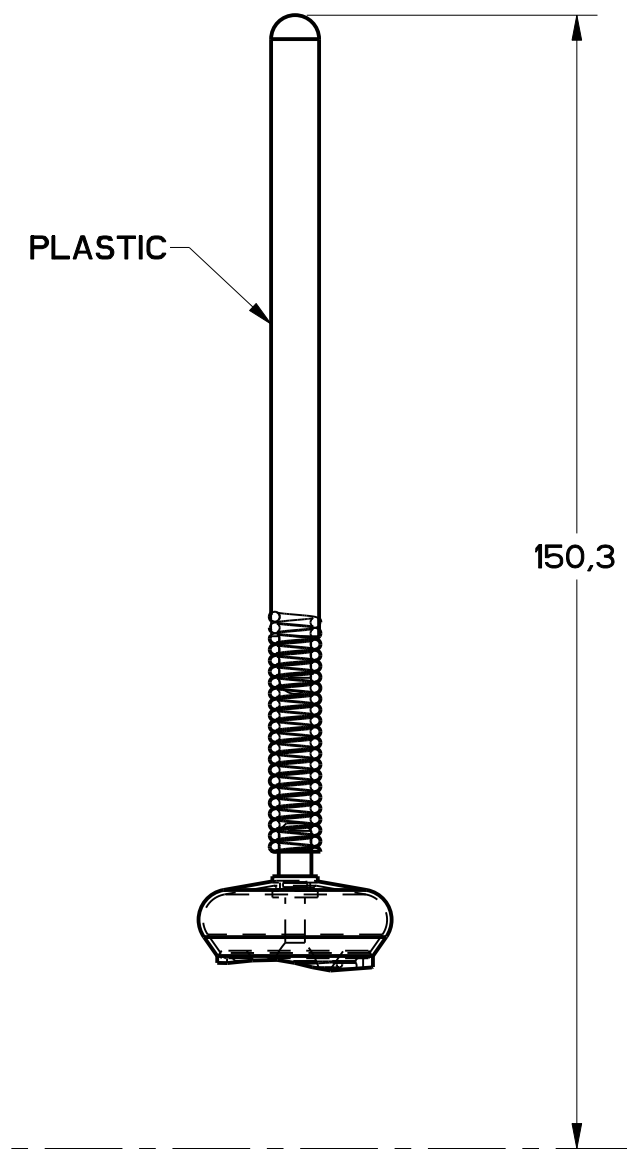


FIGURE 7A -
WOBBLE HEAD,
PLASTIC ACTUATOR,
OTHERWISE SAME AS FIGURE 7

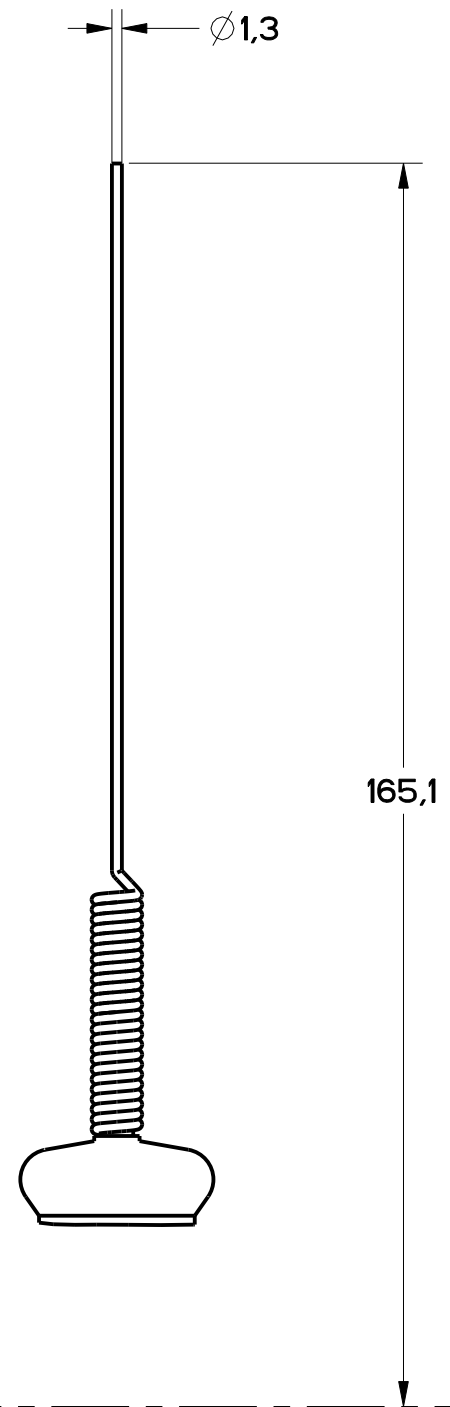


FIGURE 7B -
WOBBLE HEAD
STAINLESS STEEL SPRING
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

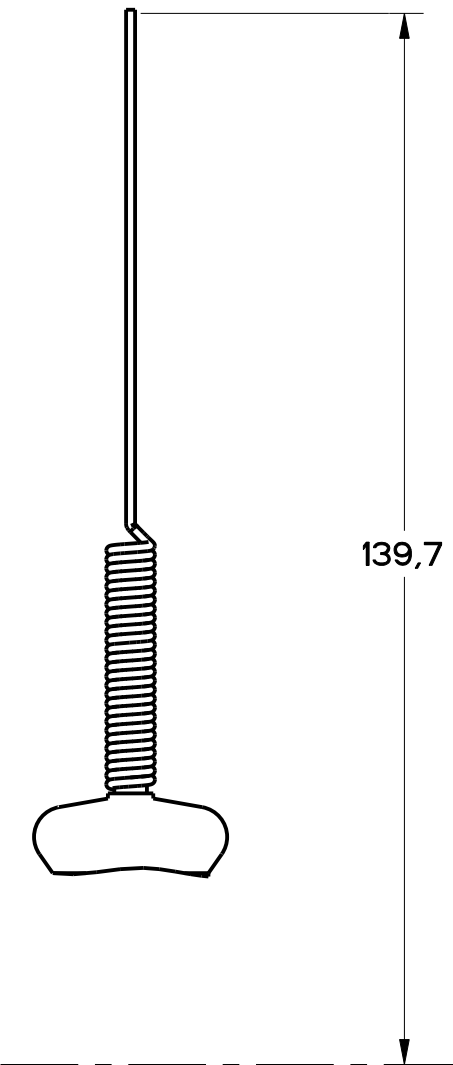


FIGURE 7C -
CAT WHISKER
ACTUATOR STAINLESS
STEEL SPRING
OTHERWISE SAME AS
FIGURE 7

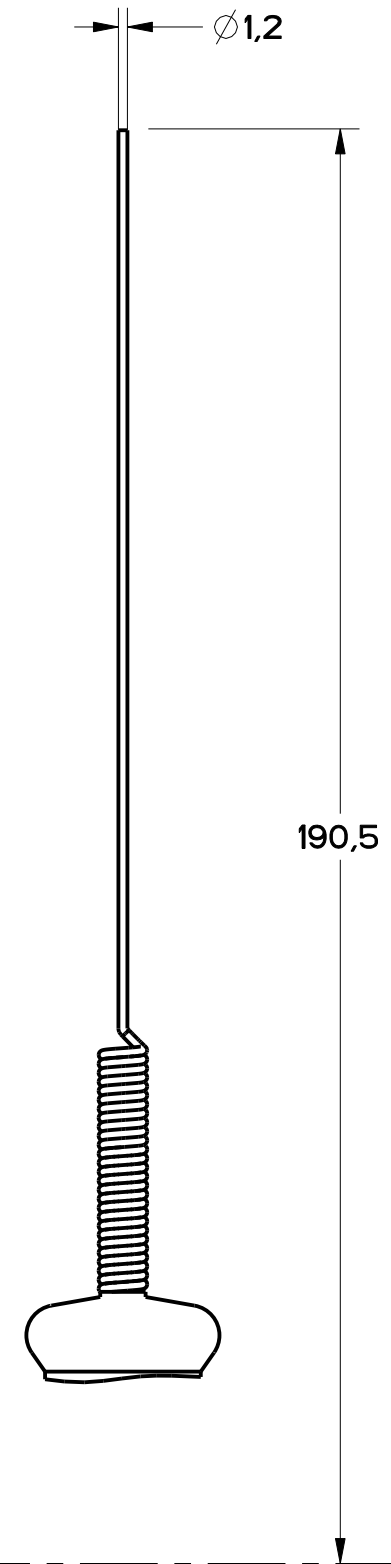


FIGURE 7D -
CAT WHISKER
ACTUATOR, STAINLESS
STEEL SPRING,
OTHERWISE SAME
AS FIGURE 7

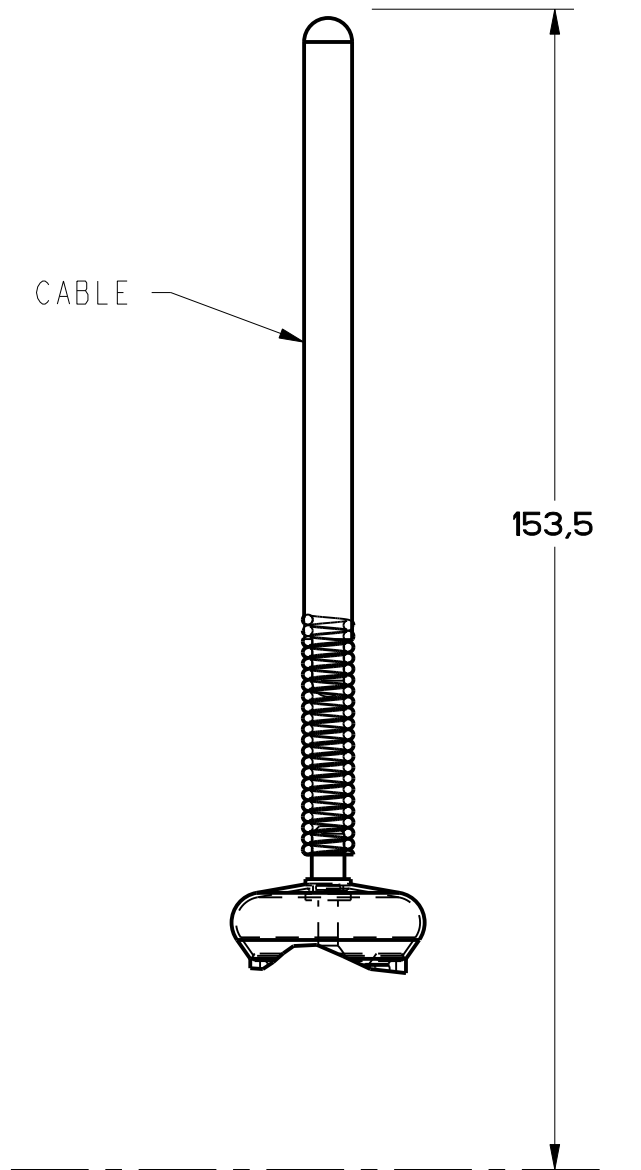


FIGURE 7E -
CABLE WOBBLE
ACTUATOR
OTHERWISE SAME
AS FIGURE 7

PTC/CAD		DRAWN		M		GL SERIES CHART 2	
				DRAWING NUMBER		PAGE 3 OF 8	
				ISSUE 11			
				REVISIONS			
		A		21557			
		B		A V			
		C		CO			
		D		21558			
		E		0017532			
		F		02DEC05			
		G		0000286			
		H		21JUN03			
		I		0000401			
		J		0000401			
		K		0000401			
		L		0000401			
		M		0000401			
		N		0000401			
		O		0000401			
		P		0000401			
		Q		0000401			
		R		0000401			
		S		0000401			
		T		0000401			
		U		0000401			
		V		0000401			
		W		0000401			
		X		0000401			
		Y		0000401			
		Z		0000401			
		AA		0000401			
		AB		0000401			
		AC		0000401			
		AD		0000401			
		AE		0000401			
		AF		0000401			
		AG		0000401			
		AH		0000401			
		AI		0000401			
		AJ		0000401			
		AK		0000401			
		AL		0000401			
		AM		0000401			
		AN		0000401			
		AO		0000401			
		AP		0000401			
		AQ		0000401			
		AR		0000401			
		AS		0000401			
		AT		0000401			
		AU		0000401			
		AV		0000401			
		AW		0000401			
		AX		0000401			
		AY		0000401			
		AZ		0000401			
		BA		0000401			
		BB		0000401			
		BC		0000401			
		BD		0000401			
		BE		0000401			
		BF		0000401			
		BG		0000401			
		BH		0000401			
		BI		0000401			
		BJ		0000401			
		BK		0000401			
		BL		0000401			
		BM		0000401			
		BN		0000401			
		BO		0000401			
		BP		0000401			
		BQ		0000401			
		BR		0000401			
		BS		0000401			
		BT		0000401			
		BU		0000401			
		BV		0000401			
		BW		0000401			
		BX		0000401			
		BY		0000401			
		BZ		0000401			
		CA		0000401			
		CB		0000401			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.					
FED. MFG. CODE 91929		CATALOG LISTING		DIM mm TOL mil / % NO PLACES ± .0008 / .0008 ONE PLACE X .X TWO PLACES X.X THREE PLACES ANGLES SI METRIC DESIGN UNITS ☒ DIM in TOL mil / % NO PLACES ± .0008 / .0008 ONE PLACE X .X TWO PLACES X.X THREE PLACES ANGLES US CUSTOMARY ☐	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED		GL SERIES CHART 2	
				WEIGHT	

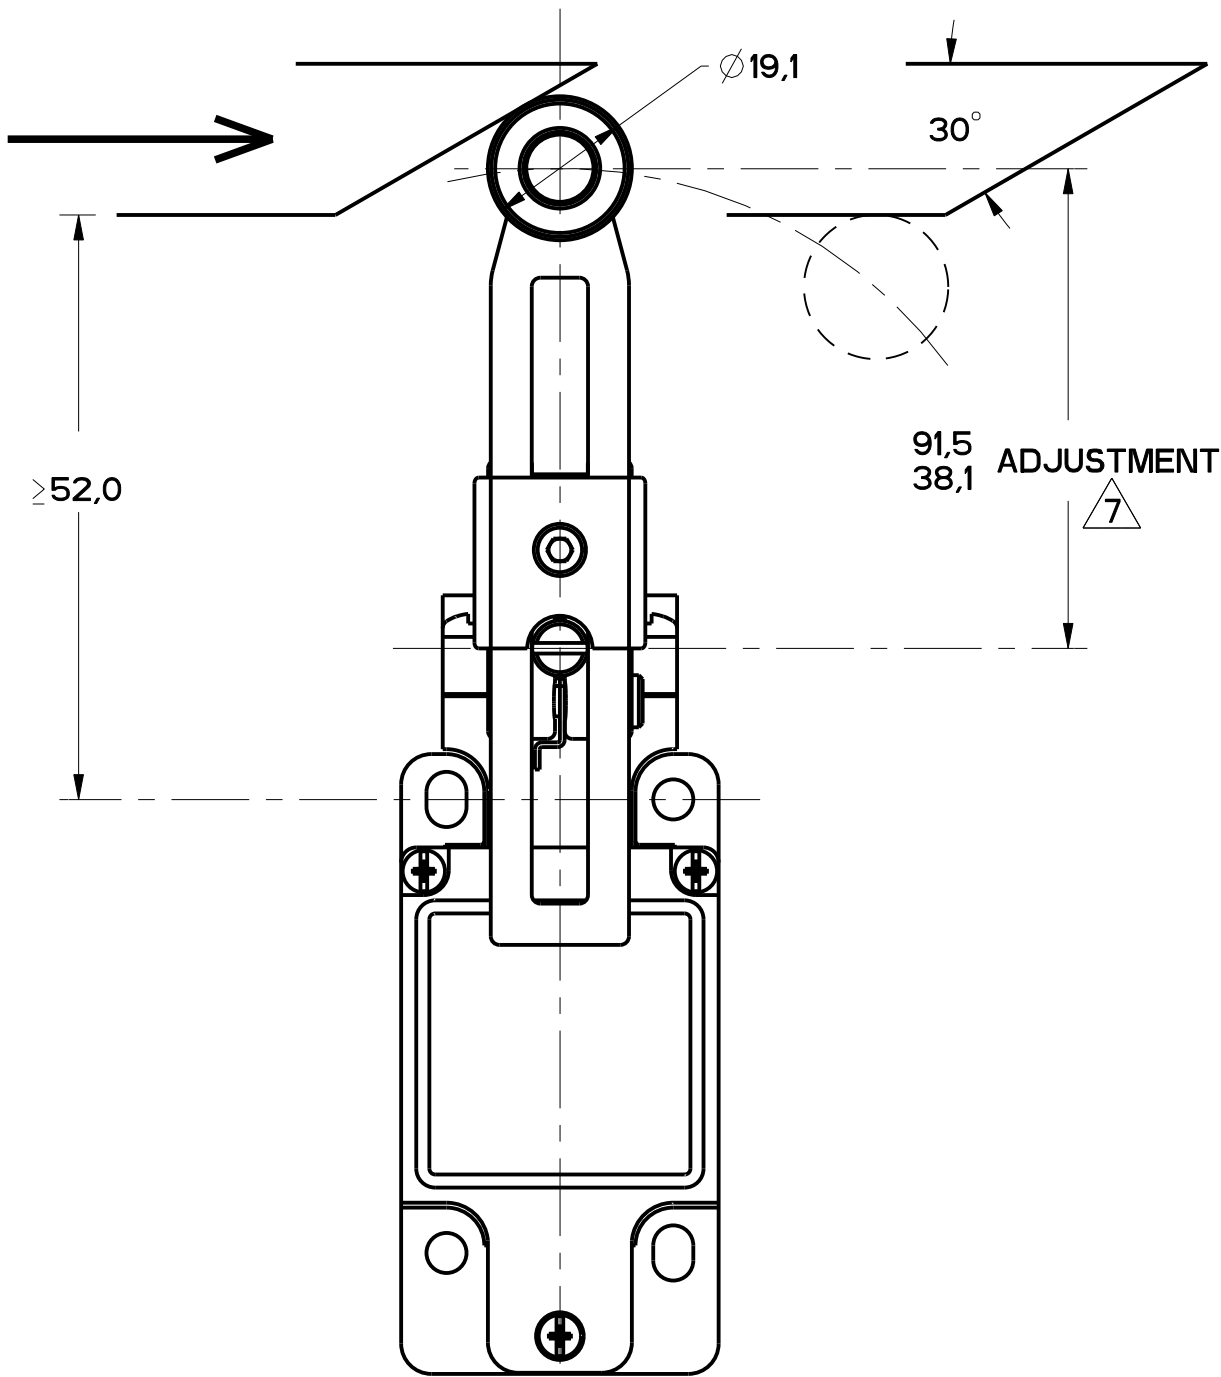


FIGURE 9

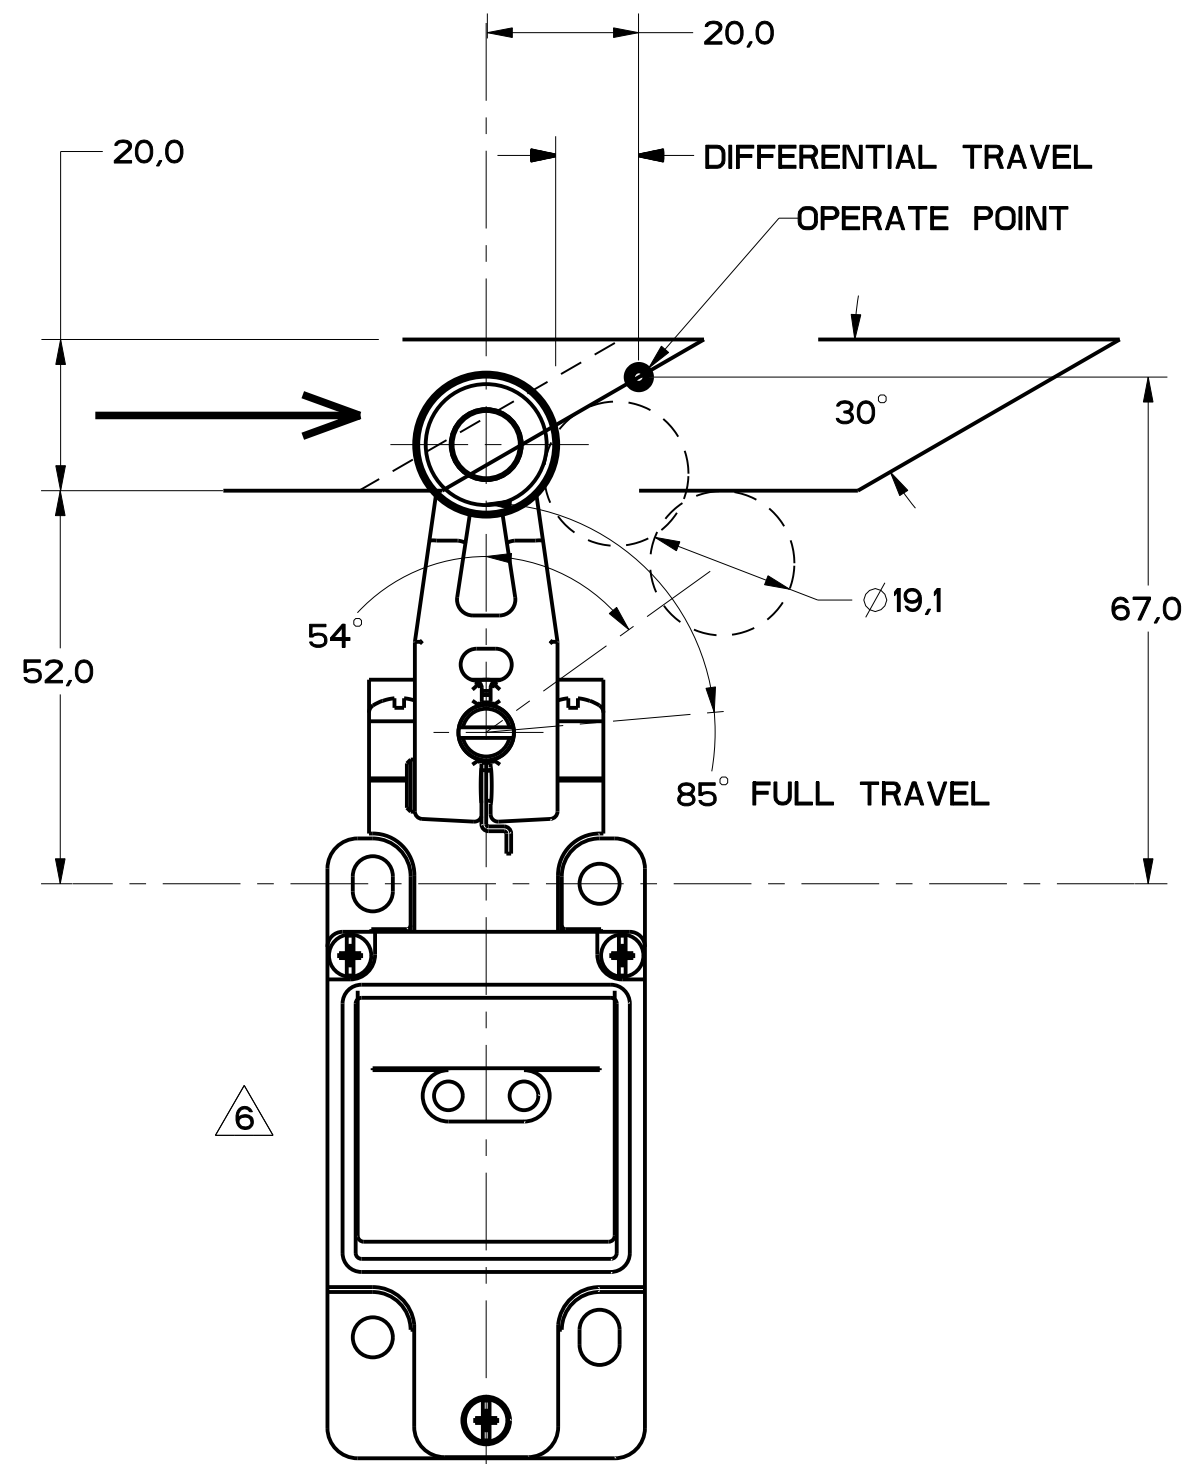


FIGURE 8

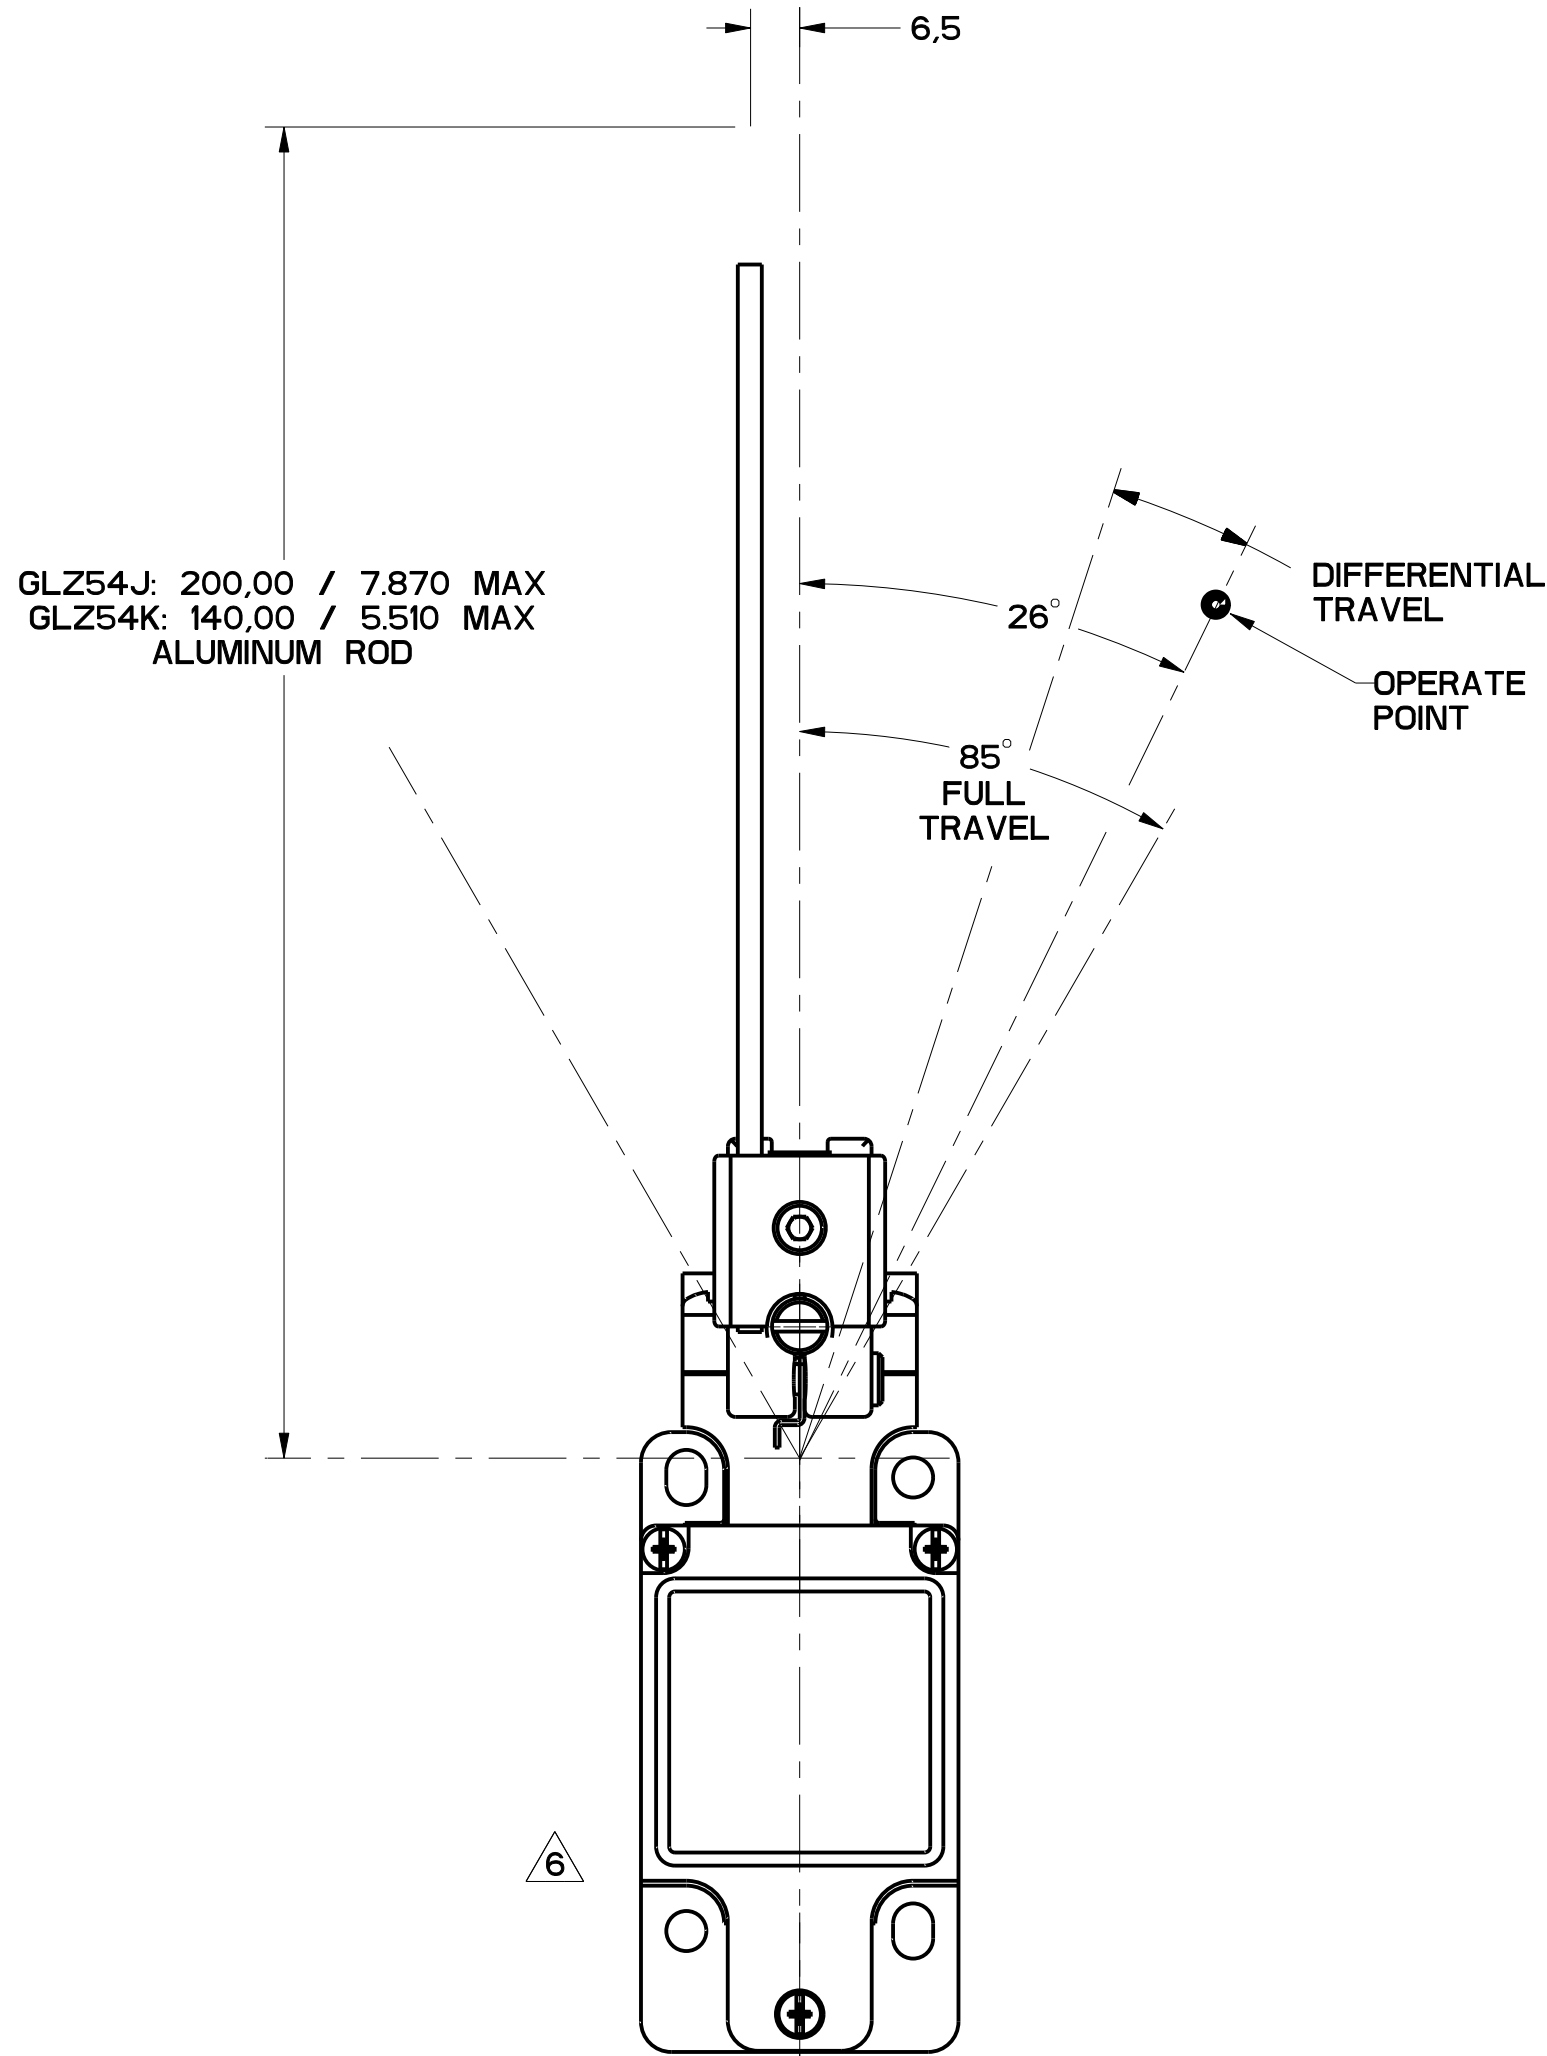


FIGURE 10

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

FIGURES 8, 9, 10 ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE $\frac{N}{LB-IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N}{LB-IN}$	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13

CAM ACTUATION PER EN50041, FIGURES 8 AND 9						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$



FIGURE 12

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 26 12 DIFFERENTIAL TRAVEL	$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <th>DIM</th> <th>TOL</th> <th>DIM</th> <th>TOL</th> </tr> <tr> <td>mm</td> <td>mm / in.</td> <td>mm</td> <td>mm / in.</td> </tr> <tr> <td>1</td> <td>1.64</td> <td>1</td> <td>0.81 / 0</td> </tr> <tr> <td>2</td> <td>0.41 / 0.06</td> <td>2</td> <td>0.13</td> </tr> <tr> <td>3</td> <td>0.15 / 0.06</td> <td>3</td> <td>0.13 / 0.05</td> </tr> <tr> <td colspan="2" style="text-align: center;">± 2</td> <td colspan="2"></td> </tr> </table>		DIM	TOL	DIM	TOL	mm	mm / in.	mm	mm / in.	1	1.64	1	0.81 / 0	2	0.41 / 0.06	2	0.13	3	0.15 / 0.06	3	0.13 / 0.05	± 2			
DIM	TOL	DIM	TOL																								
mm	mm / in.	mm	mm / in.																								
1	1.64	1	0.81 / 0																								
2	0.41 / 0.06	2	0.13																								
3	0.15 / 0.06	3	0.13 / 0.05																								
± 2																											
FED. MFG. CODE 91929	CATALOG LISTING																										
MICRO SWITCH a Honeywell Division	GL SERIES CHART 2																										
	SWITCH, ENCLOSED																										
		SI METRIC ☒	US CUSTOMARY ☐																								
		DESIGN UNITS ☒																									

REVISIONS		
A	CO	78529
B	CS	81101
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

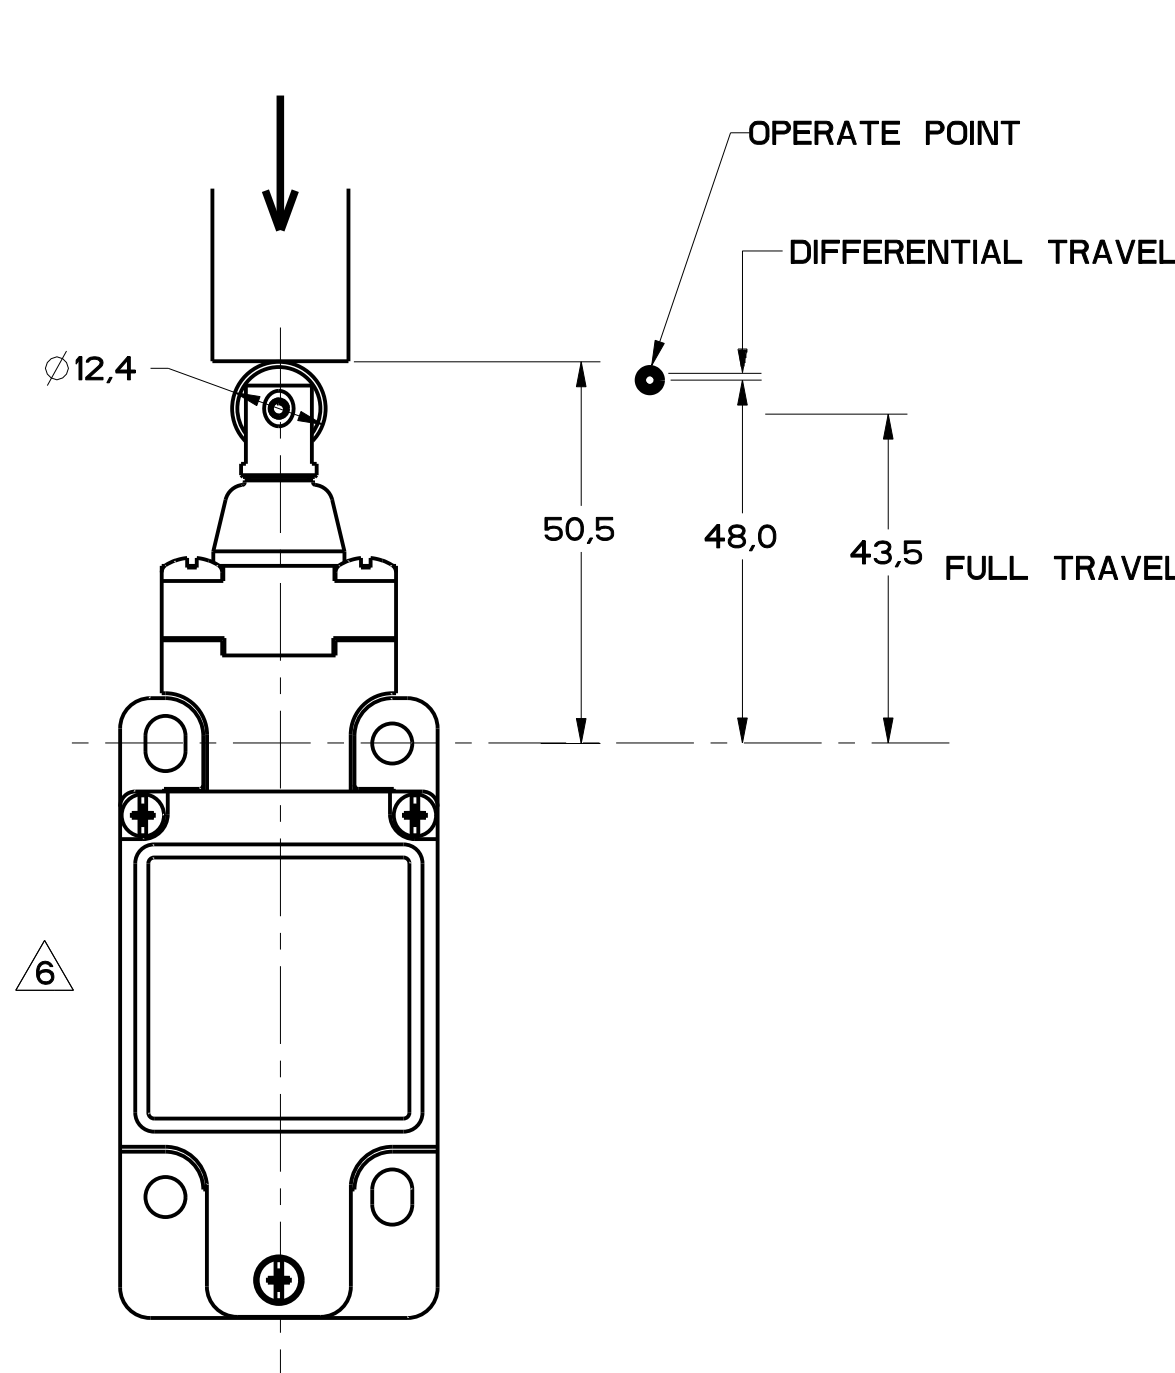


FIGURE 13A

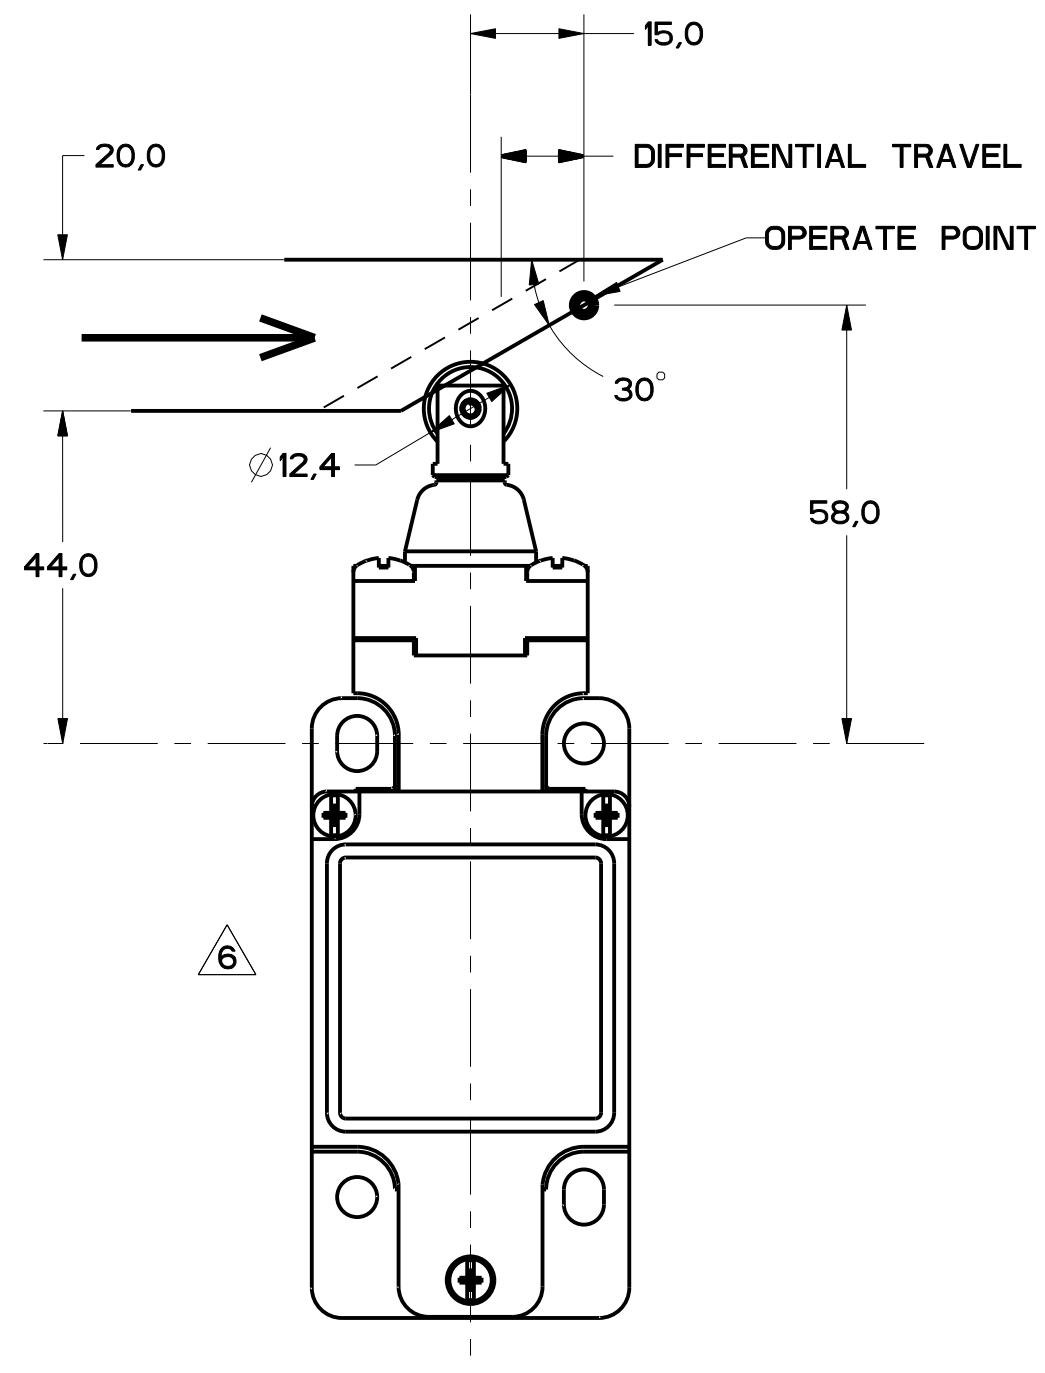


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	$\frac{9.3}{2.1}$	$\frac{15.6}{3.5}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	IN	TOL	MM	TOL
NO PLACES	X	1/16	1.0	0.05
ONE PLACE	X.X	0.0156	0.4	0.0125
TWO PLACES	X.XX	0.0031	0.1	0.005
THREE PLACES	X.XXX	0.0008	0.025	0.00125

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

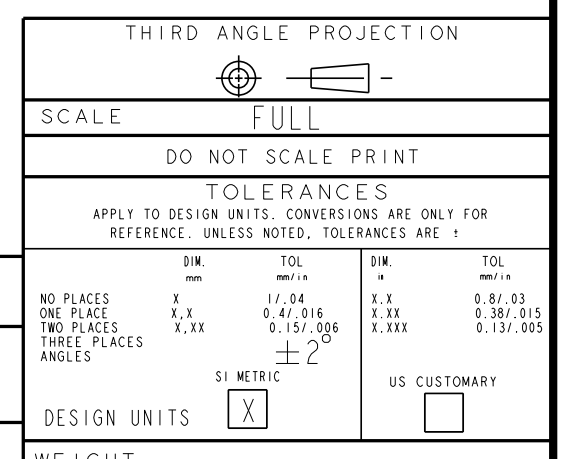


FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{M/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{mm/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING

GL SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

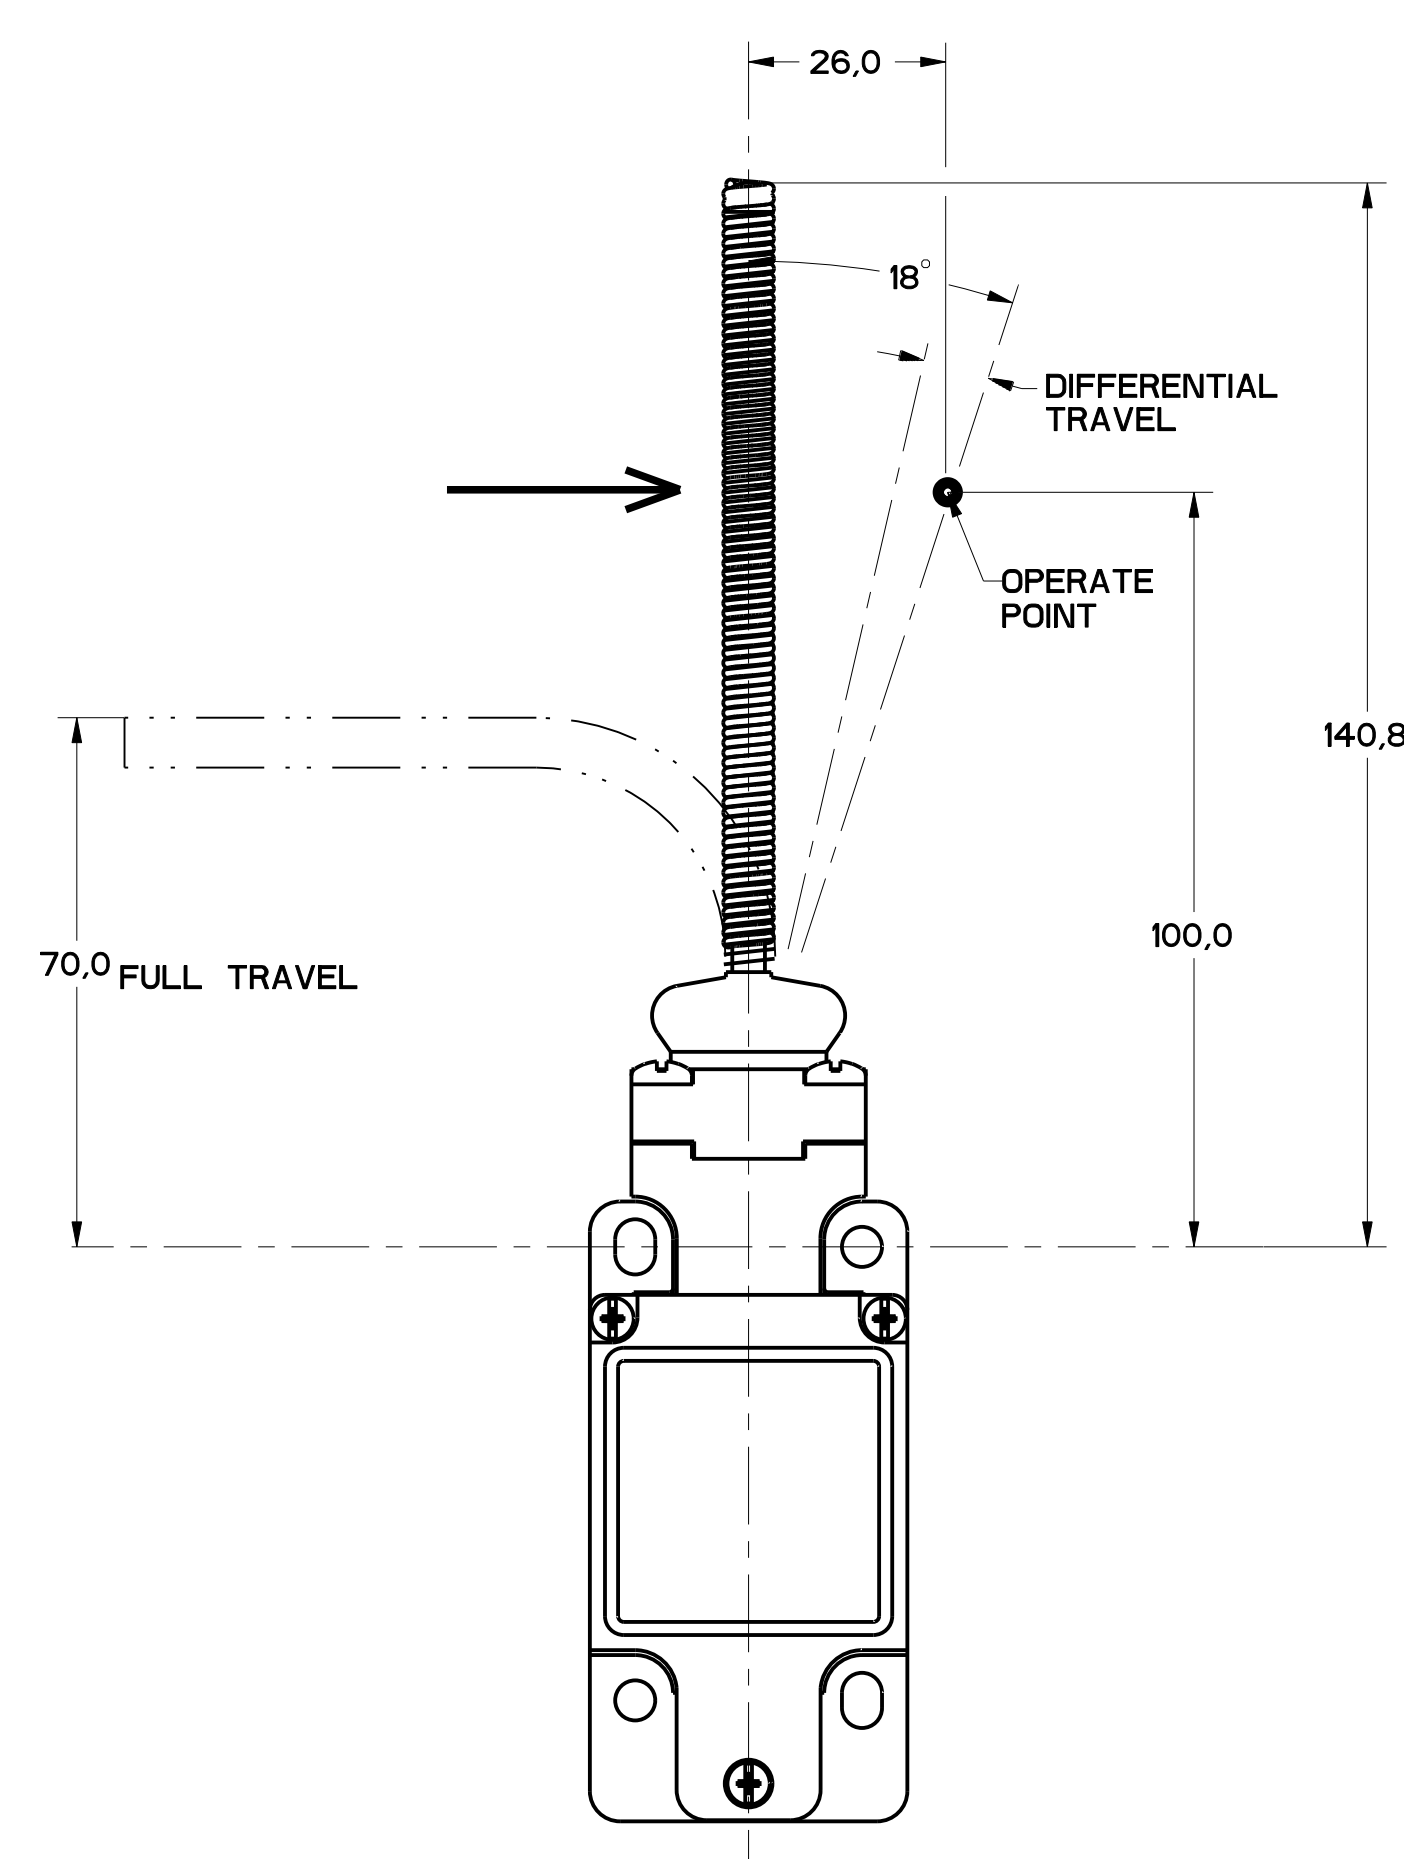


FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE LB-IN	MAXIMUM DISCONNECT TORQUE LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 18° 8° DIFFERENTIAL TRAVEL	0.1 .9	N/A	360	8

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL IN/S	MIN OPERATE VEL IN/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 26 12 DIFFERENTIAL TRAVEL	1.3 .3	N/A	.5 19.7	11 .43

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9