# PCB terminal block - FFKDSA1/V1-5,08-8 BD:9-16Q - 1711037

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

The figure shows a 1-pos. version of the product

PCB terminal block, nominal current: 15 A, nom. voltage: 320 V, pitch: 5.08 mm, number of positions: 8, connection method: Push-in spring connection, mounting: Soldering, color: green. The article can be aligned to create different nos. of positions!

## Your advantages

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive use through colour coded actuation lever
- Operation and conductor connection from one direction enable integration into front of device
- Two solder pins reduce the mechanical strain on the soldering spots
- The latching on the side enables various numbers of positions to be combined
- Vertical connection enables multi-row arrangement on the PCB

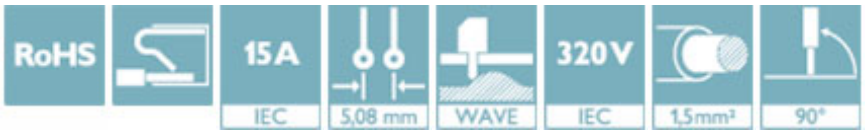


## Key Commercial Data

| | |
|---|---|
| Packing unit | 50 pc |
| Minimum order quantity | 250 pc |
| GTIN | 4 055626 255859 |
| GTIN | 4055626255859 |

## Technical data

### Dimensions

| | |
|---|---|
| Length [ l ] | 12.7 mm |
| Pitch | 5.08 mm |
| Dimension a | 5.08 mm |
| Height | 14 mm |
| Solder pin [P] | 3.4 mm |
| Hole diameter | 1.3 mm |

### General

# PCB terminal block - FFKDSA1/V1-5,08-8 BD:9-16Q - 1711037

## Technical data

### General

| | |
|---|---|
| Range of articles | FFKDS(A)/V1 |
| Insulating material group | I |
| Rated voltage (III/2) | 320 V |
| Nominal current $I_N$ | 15 A |
| Nominal cross section | 1.5 mm² |
| Flammability rating according to UL 94 | V0 |
| Number of positions | 8 |

### Standards and Regulations

| | |
|---|---|
| Flammability rating according to UL 94 | V0 |

### Environmental Product Compliance

| | |
|---|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2018 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

**Данный компонент на территории Российской Федерации**

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9