



8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
BY TCYO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		20	
(C) COPYRIGHT 20			
ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER		PART NUMBER	REVISION
		2151096-1	F
		2151096-2	F
		2151096-5	F
		2151096-6	F
		2151096-7	F
		7-2151096-7	D
		DESCRIPTION	
		FINE CRIMP HEIGHT ADJUST	
		FINE CRIMP HEIGHT ADJUST	
		FINE CRIMP HEIGHT ADJUST	
		NON-CRIMP HEIGHT ADJUST	
		FINE CRIMP HEIGHT ADJUST	
		CRIMP TOOLING KIT	
APPLICATOR DATA			
CRIMP	SIZE	TYPE	
WIRE	1.57 mm [.062]	F	
INSUL	3.18 mm [1.25]	F	
APPLICATOR INSTRUCTIONS 408-10389			

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: VAL-U-LOK PIN CONTACT			
WIRE STRIP LENGTH 3.00-3.50 mm[.118-.138 IN]		INSULATION DIAMETER RANGE Ø 1.50-3.30 mm[.059-.130 IN]	
TERMINAL APPLICATION SPECIFICATION	114-13172	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
794955-1	794955-2	794955-3	794955-4
794956-1	794956-2	794956-3	794956-4
794956-5			

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
22 AWG + 20 AWG		1.22+/-0.05 [.048+/- .002]		4.1
18 AWG OR 0.87mm2		1.12+/-0.05 [.044+/- .002]		5.1
2 X 22 AWG		1.07+/-0.05 [.042+/- .002]		6.1
20 AWG OR 0.50mm2		0.99+/-0.05 [.039+/- .002]		6.3
22 AWG OR 0.35mm2		0.89+/-0.05 [.035+/- .002]		7.3
24 AWG OR 0.20mm2		0.81+/-0.05 [.032+/- .002]		8.2

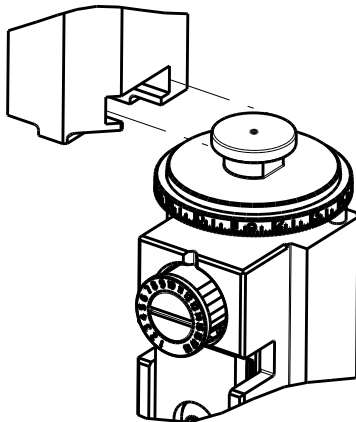

1. RECOMMENDED SPARE PARTS
2. GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
 - MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
 - PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
 - SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151096-5
 - SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151096-6
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37 & 242.
7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
8. MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
10. SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
11. TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
12. WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT
13. INSTALL ITEM 3 AS SHOWN FOR TERMINALS 2238016 AND 2238017.
14. INSTALL ITEM 3 WITH RELIEF INWARDS AGAINST ITEM 1 FOR TERMINALS 794955 AND 794956.

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: VAL-U-LOK PIN CONTACT			
WIRE STRIP LENGTH 		INSULATION DIAMETER RANGE	
3.00-3.50 mm [.118-.138 IN]		Ø 1.50-3.30 mm [.059-.130 IN]	
TERMINAL APPLICATION 		-	
SPECIFICATION		-	
TERMINALS APPLIED 			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
2238016-1	2238017-1	-	-

WIRE SIZE			CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
22 AWG + 20 AWG			1.22+/-0.05 [0.048+/- .002]		4.1
18 AWG OR 0.87mm2			1.12+/-0.05 [0.044+/- .002]		5.1
2 X 22 AWG			1.07+/-0.05 [0.042+/- .002]		5.6
20 AWG OR 0.50mm2			0.99+/-0.05 [0.039+/- .002]		6.3
22 AWG OR 0.35mm2			0.89+/-0.05 [0.035+/- .002]		7.3

```
*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO
LARGEST WIRE SIZE SETTING. USE OF SETTINGS
BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING
WILL CAUSE DAMAGE TO CRIMP TOOLING.
```

-	-	1	-	-	-	2119957-2	APPLICATOR SHIM PACK	260
-	1	-	1	1	1	8-21084-0	O-RING, .676 ID, .070 DIA. MAT.	252
-77	-7	-6	-5	-2	-1	PART NO	DESCRIPTION	ITEM NO




ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

				2						
SET UP GAUGE 2119599-1				LOC A	DIST 66	REVISIONS				
		P	LT#			DESCRIPTION		DATE	DWN	APVD
		E		ECR-14-004245						
		F		ECR-14-009348				23JUN2014	KH	TE

PNEUMATIC


SERVO
LATCH PLATE


CAM POSITIONS

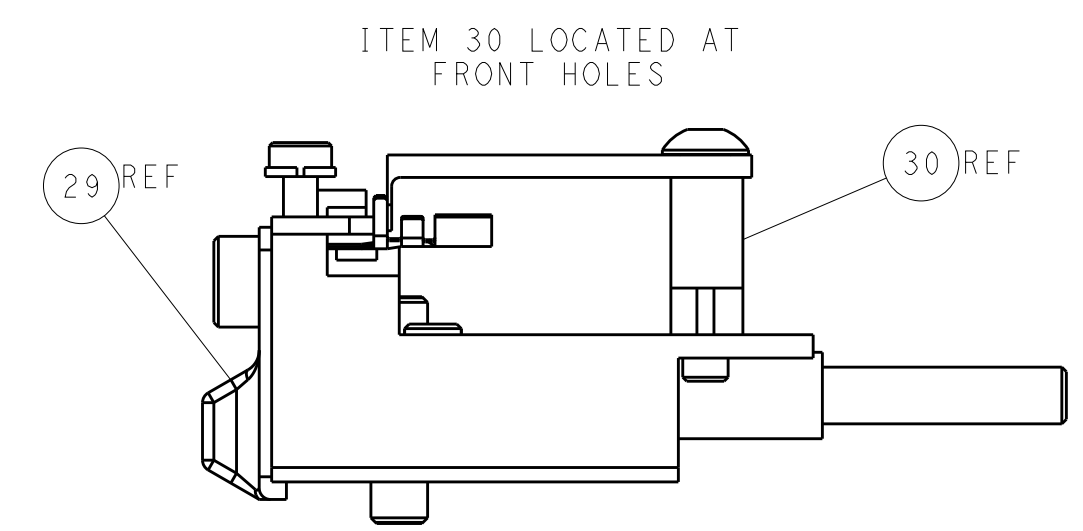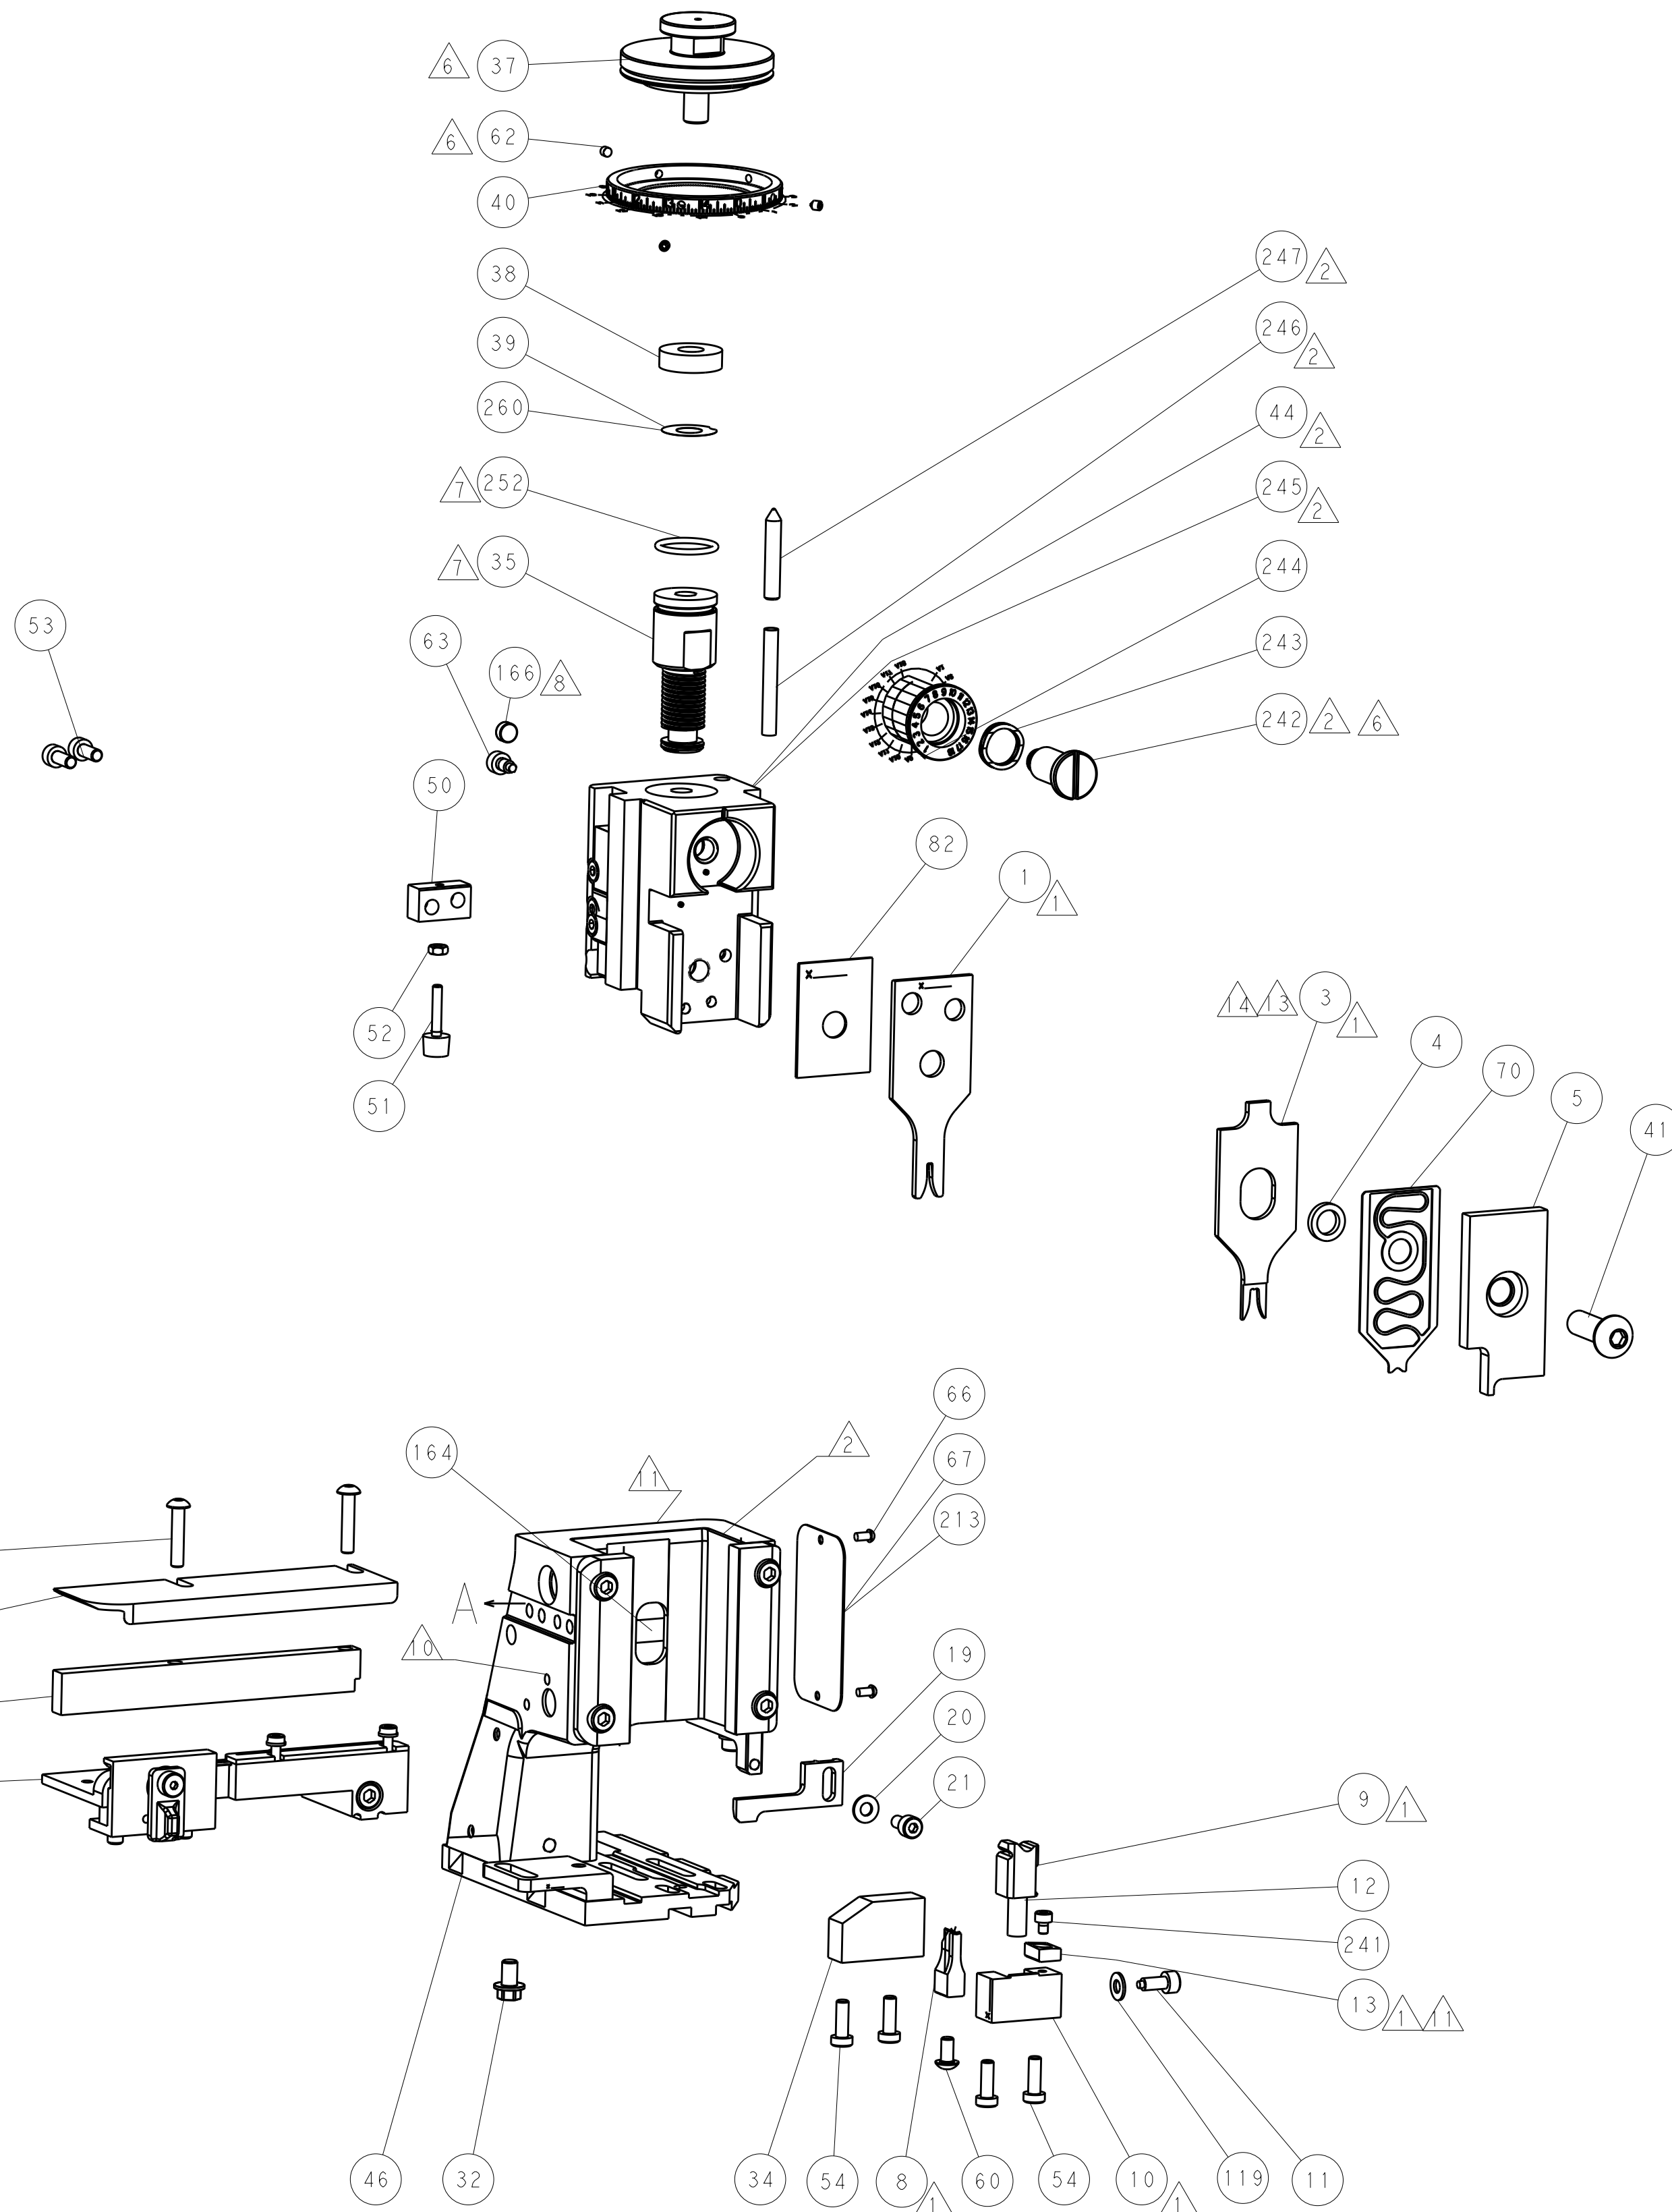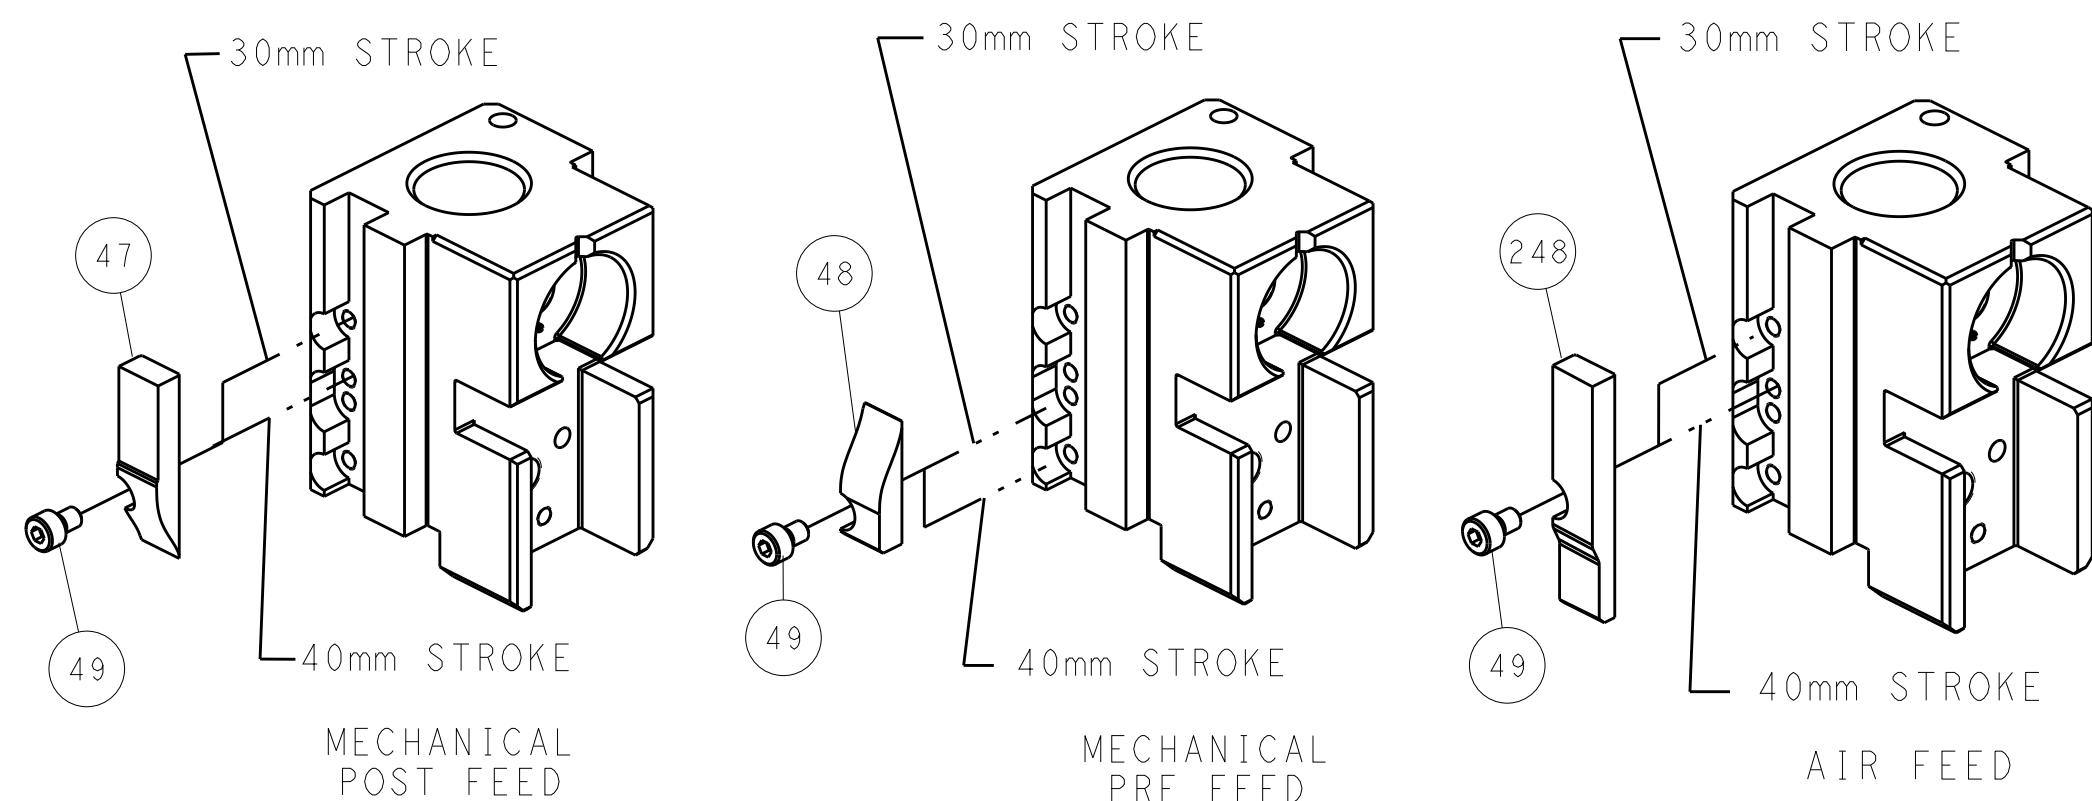

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TPO ELECTRONICS CORPORATION IT IS DERIVED FROM THE LATEST REVISION		DWN 10NOV2011 CHR 10NOV2011 L. ZHANG 10NOV2011 APVD S.XI 10NOV2011		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±. 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES		Ocean Side Feed Applicator	
		PRODUCT SPEC		SIZE	
		APPLICATION SPEC		CAGE CODE	
MATERIAL		FINISH		DRAWING NO	
-		-		A1 00779 C=251096	
		WEIGHT		RESTRICTED TO	
		-		-	
Customer Accessible Production Drawing				SCALE	1:2
				SHEET	2 OF 4
				REV	F

8		7		6		5		4		3	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20							
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.									
PACIFIC VERSION TERMINATOR INTERFACE ADAPTER 	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
					CONVERT TO	PART NUMBERS REQUIRED					
	PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1				
		SERVO LATCH PLATE	2119951-1	-	8-2151096-5	1901094-3	-	2168400-6 (QUANTITY 2)			
	SMART APPLICATOR	2161326-1	-	8-2151096-4	-	-	-				
	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-				
	SERVO LATCH PLATE	2119951-1	1338685-1	8-2151096-5	1901094-3	-	2168400-6 (QUANTITY 2)				
	SMART APPLICATOR	2161326-1	-	8-2151096-4	-	-	-				
	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-				
	PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1				
						-	-	-	-	-	-
						-	-	-	-	-	-
						-	-	-	-	-	-

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	1.57 mm [.062]	F
INSUL	3.18 mm [1.25]	F
APPLICATOR INSTRUCTIONS 408-10389		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: VAL-U-LOK PIN CONTACT			
WIRE STRIP LENGTH 3.00-3.50 mm [.118-.138 IN]		INSULATION DIAMETER RANGE Ø 1.50 -3.30 mm [.059-.130 IN]	
TERMINAL APPLICATION SPECIFICATION  114-13172		- -	
TERMINALS APPLIED 			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
794955-1	794955-2	794955-3	794955-4
794956-1	794956-2	794956-3	794956-4
794956-5			

WIRE SIZE			CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING	
22 AWG + 20 AWG			1.22+/-0.05 [1.048+/- .002]		4.1	
18 AWG OR 0.87mm2			1.12+/-0.05 [1.044+/- .002]		5.1	
2 X 22 AWG			1.07+/-0.05 [1.042+/- .002]		6.1	
20 AWG OR 0.50mm2			0.99+/-0.05 [1.039+/- .002]		6.3	
22 AWG OR 0.35mm2			0.89+/-0.05 [1.035+/- .002]		7.3	
24 AWG OR 0.20mm2			0.81+/-0.05 [1.032+/- .002]		8.2	



1 RECOMMENDED SPARE PARTS

2 GREASE BEARING SURFACES LIGHTLY

3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4 APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151096-5

5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6 APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37 & 242.

7 GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8 MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9 CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10 SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET
FOR ADDITIONAL INFORMATION

11 TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

3 INSTALL ITEM 3 AS SHOWN FOR TERMINALS 2238016 AND 2238017.

4 INSTALL ITEM 3 WITH RELIEF INWARDS AGAINST ITEM 1
FOR TERMINALS 794955 AND 794956.

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: VAL-U-LOK PIN CONTACT			
WIRE STRIP LENGTH 3.00-3.50 mm [.118-.138 IN]		INSULATION DIAMETER RANGE Ø 1.50 - 3.30 mm [.059 -.130 IN]	
TERMINAL APPLICATION 		114-13172 - -	
SPECIFICATION		- -	
TERMINALS APPLIED 			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
2238016-1	2238017-1	-	-

WIRE SIZE			CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
22 AWG + 20 AWG			1.22+/-0.05 [0.048+/- .002]		4.1
18 AWG OR 0.87mm2			1.12+/-0.05 [0.044+/- .002]		5.1
2 X 22 AWG			1.07+/-0.05 [0.042+/- .002]		5.6
20 AWG OR 0.50mm2			0.99+/-0.05 [0.039+/- .002]		6.3
22 AWG OR 0.35mm2			0.89+/-0.05 [0.035+/- .002]		7.3

```
*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO
LARGEST WIRE SIZE SETTING. USE OF SETTINGS
BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING
WILL CAUSE DAMAGE TO CRIMP TOOLING.
```

PACIFIC VERSION
 Shown on sheets 3 of 4 & 4 of 4
 (Atlantic version shown on sheets 1 of 4 & 2 of 4)

2				I			
SET UP GAUGE 2119599-1		LOC A	QIST 66	REVISIONS			
		P	LTR	DESCRIPTION	DATE	OWN	APVD
		-	-	SEE SHEET 1	-	-	-

6	-	1	1	1	1	2119782-1	LINE ADJUST HEAD ASM, PACIFIC STYLE	251
	-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
	-	-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249
	-	1	1	1	1	1-22279-3	SPRING, COMPRESSION	246
	-	1	1	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
	-	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
	-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
	-	-	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
	-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
-	-	-	-	1	2063440-1	AIR FEED MODULE	238	
-	-	1	-	-	2119740-2	TAG, IDENTIFICATION	213	
-	-	1	-	-	1901094-3	SPACER, FEEDER	198	
-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172	
-	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166	
-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164	
-	-	-	1	-	240638-1	SPRING, FEED FINGER	163	
-	1	1	1	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	152	
-	-	-	1	-	2119641-2	FEED CAM, AIR FEED	151	
-	1	1	1	1	2119798-2	DETENT PIN	145	
-	1	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144	
-	4	4	4	4	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	143	
-	-	-	-	1	2119653-2	FEED CAM, POST FEED	142	
-	1	1	1	1	1-2119656-0	APPLICATOR BASIC ASSEMBLY, SF	141	
-	1	1	1	1	2119650-1	RAM, ASIAN STYLE, SIDE FEED	140	
-	1	1	1	1	2119092-2	BOLT, ADJUSTMENT	139	
-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137	
-	-	-	1	-	2119799-1	HOLDER, FEED FINGER, AF	136	
-	-	REF	-	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135	
-	-	1	-	-	1633743-1	SERVO FEED LATCH ASM	133	
-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119	
-	-	REF	-	-	2119944-1	FEED FINGER ASSEMBLY, SF	117	
-	1	1	1	1	455888-8	SPACER, CRIMPER	82	
-	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71	
-	1	1	1	1	2119791-5	DEPRESSOR, WIRE	70	
-	1	-	1	1	2119740-1	TAG, IDENTIFICATION	67	
-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66	
-	1	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63	
6	-	3	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
	-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
	-	-	-	1	1	1338685-1	PAWL, FEED	56
	-	2	2	2	2	1-2168083-0	SCR, SKT HD CAP, RoHS, M4 X 10	53
	-	1	1	1	1	5018030-1	NUT, HEX, REG, RoHS, M3	52
	-	1	1	1	1	811242-5	BUMPER, HOLD DOWN	51
	-	1	1	1	1	690753-2	SPACER, TONKER	50
	-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
	-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
	-	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
-	1	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40	
-	1	1	1	1	2119957-1	APPLICATOR SHIM PACK	39	
-	1	1	1	1	2119644-1	RAM WASHER, PRECISION	38	
-	1	1	1	1	1752356-1	SUPPORT, TERMINAL	34	
-	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33	
-	1	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32	
-	1	1	1	1	1320908-6	SPACER, STRIP GUIDE	30	
-	1	1	1	1	2119959-1	ASSEMBLY, STRIP GUIDE	29	
-	1	1	1	1	1320928-2	STRIP GUIDE	24	
-	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21	
-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20	
1	-	1	1	1	1	2119533-1	STRIPPER, SIDE FEED	19
	-	1	1	1	1	2119806-1	INSERT, SHEAR	13
	-	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
1	-	1	1	1	1	1-356885-4	STOP, SHEAR	11
	-	1	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10
	-	1	1	1	1	1803095-1	FLOATING SHEAR, FRONT	9
1	1	1	1	1	1	7-1333202-5	ANVIL, COMBINATION	8
	-	-	-	-	-	-	-	7
	-	-	-	-	-	-	-	6
-	1	1	1	1	2119757-4	DEPRESSOR, SHEAR	5	
1	-	1	1	1	1	1-238011-7	BLOCK, CRIMPER SPACER	4
	1	1	1	1	1	9-2119582-0	CRIMPER, INSULATION F PREMIUM	3
	-	-	-	-	-	-	-	2
1	1	1	1	1	1	1-456403-6	CRIMPER, WIRE PREMIUM	1

THIS DRAWING IS THE PROPERTY OF TPC AND NOT BE LOANED, REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TPC. IT SHALL BE RETURNED TO TPC FOR THE LATEST VERSION.						OWN Zhang		10NOV2011		TE Connectivity	
						CHK Zhang		10NOV2011		Harrisburg, PA 17105-3608	
DIMENSIONS: mm						TOLERANCES UNLESS OTHERWISE SPECIFIED:					
						APPROVED S. Li		10NOV2011		NAME Ocean Side Feed Applicator	
						PRODUCT SPEC					
						APPLICATION SPEC					
MATERIAL -						WEIGHT -		SIZE / CAGE CODE / DRAWING NO. A 00779 / C=2151096		RESTRICTED TO -	
FINISH -						Customer Accessible Production Drawing		SCALE 1:2		SHEET 3 of 4 REV F	

LOC		DIST		REVISIONS			
A		66		P	LTR	DESCRIPTION	DATE
				-		SEE SHEET 1	-

D

C

B

A


D

C


B

A


FEED TYPE MECHANICAL

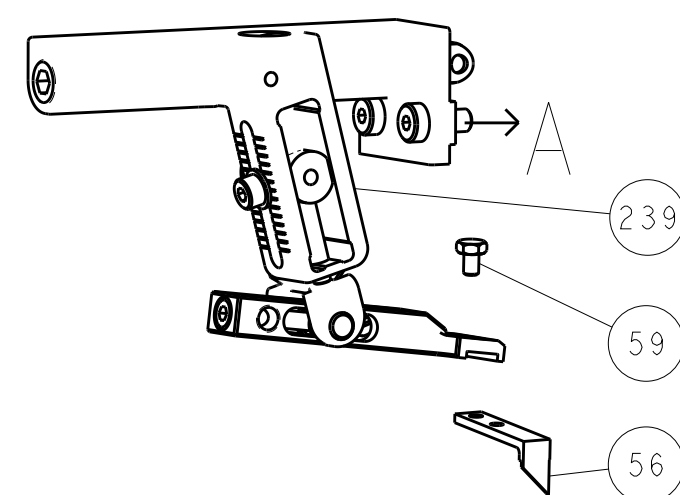




PNEUMATIC

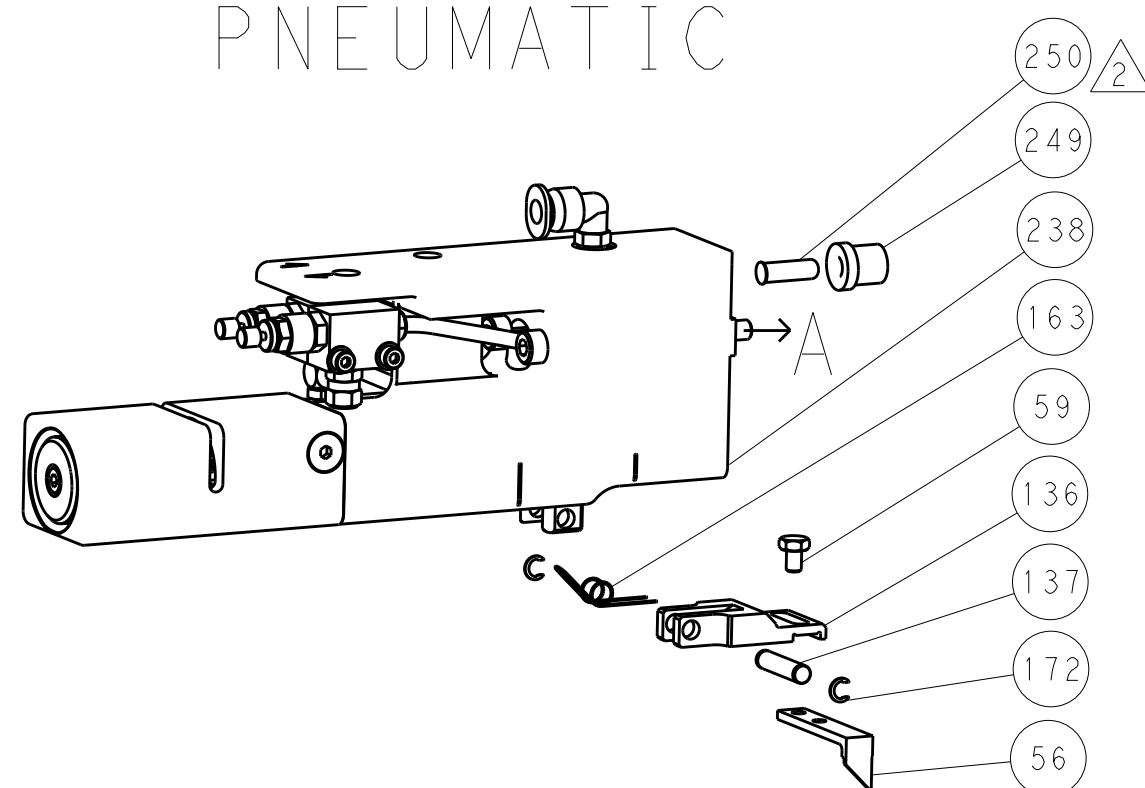

SERVO LATCH PLATE

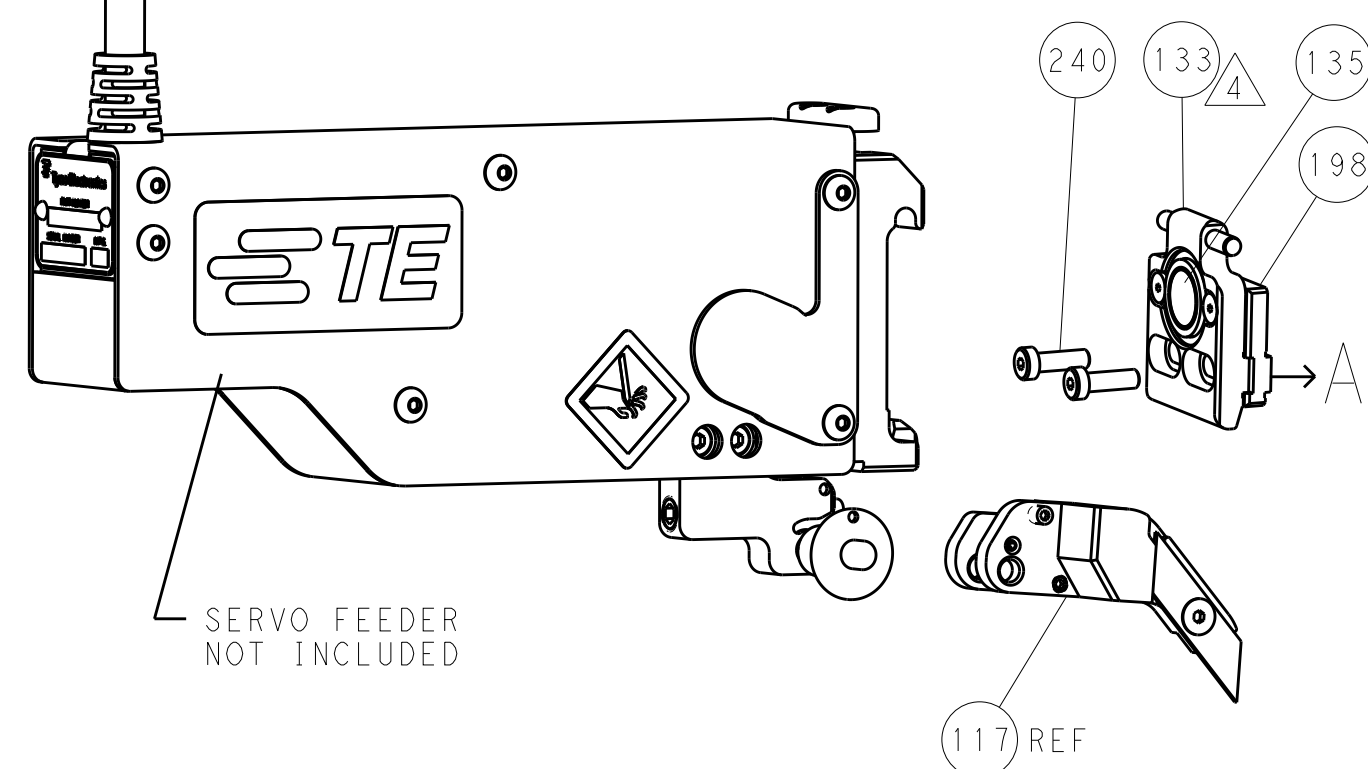

CAM POSITIONS

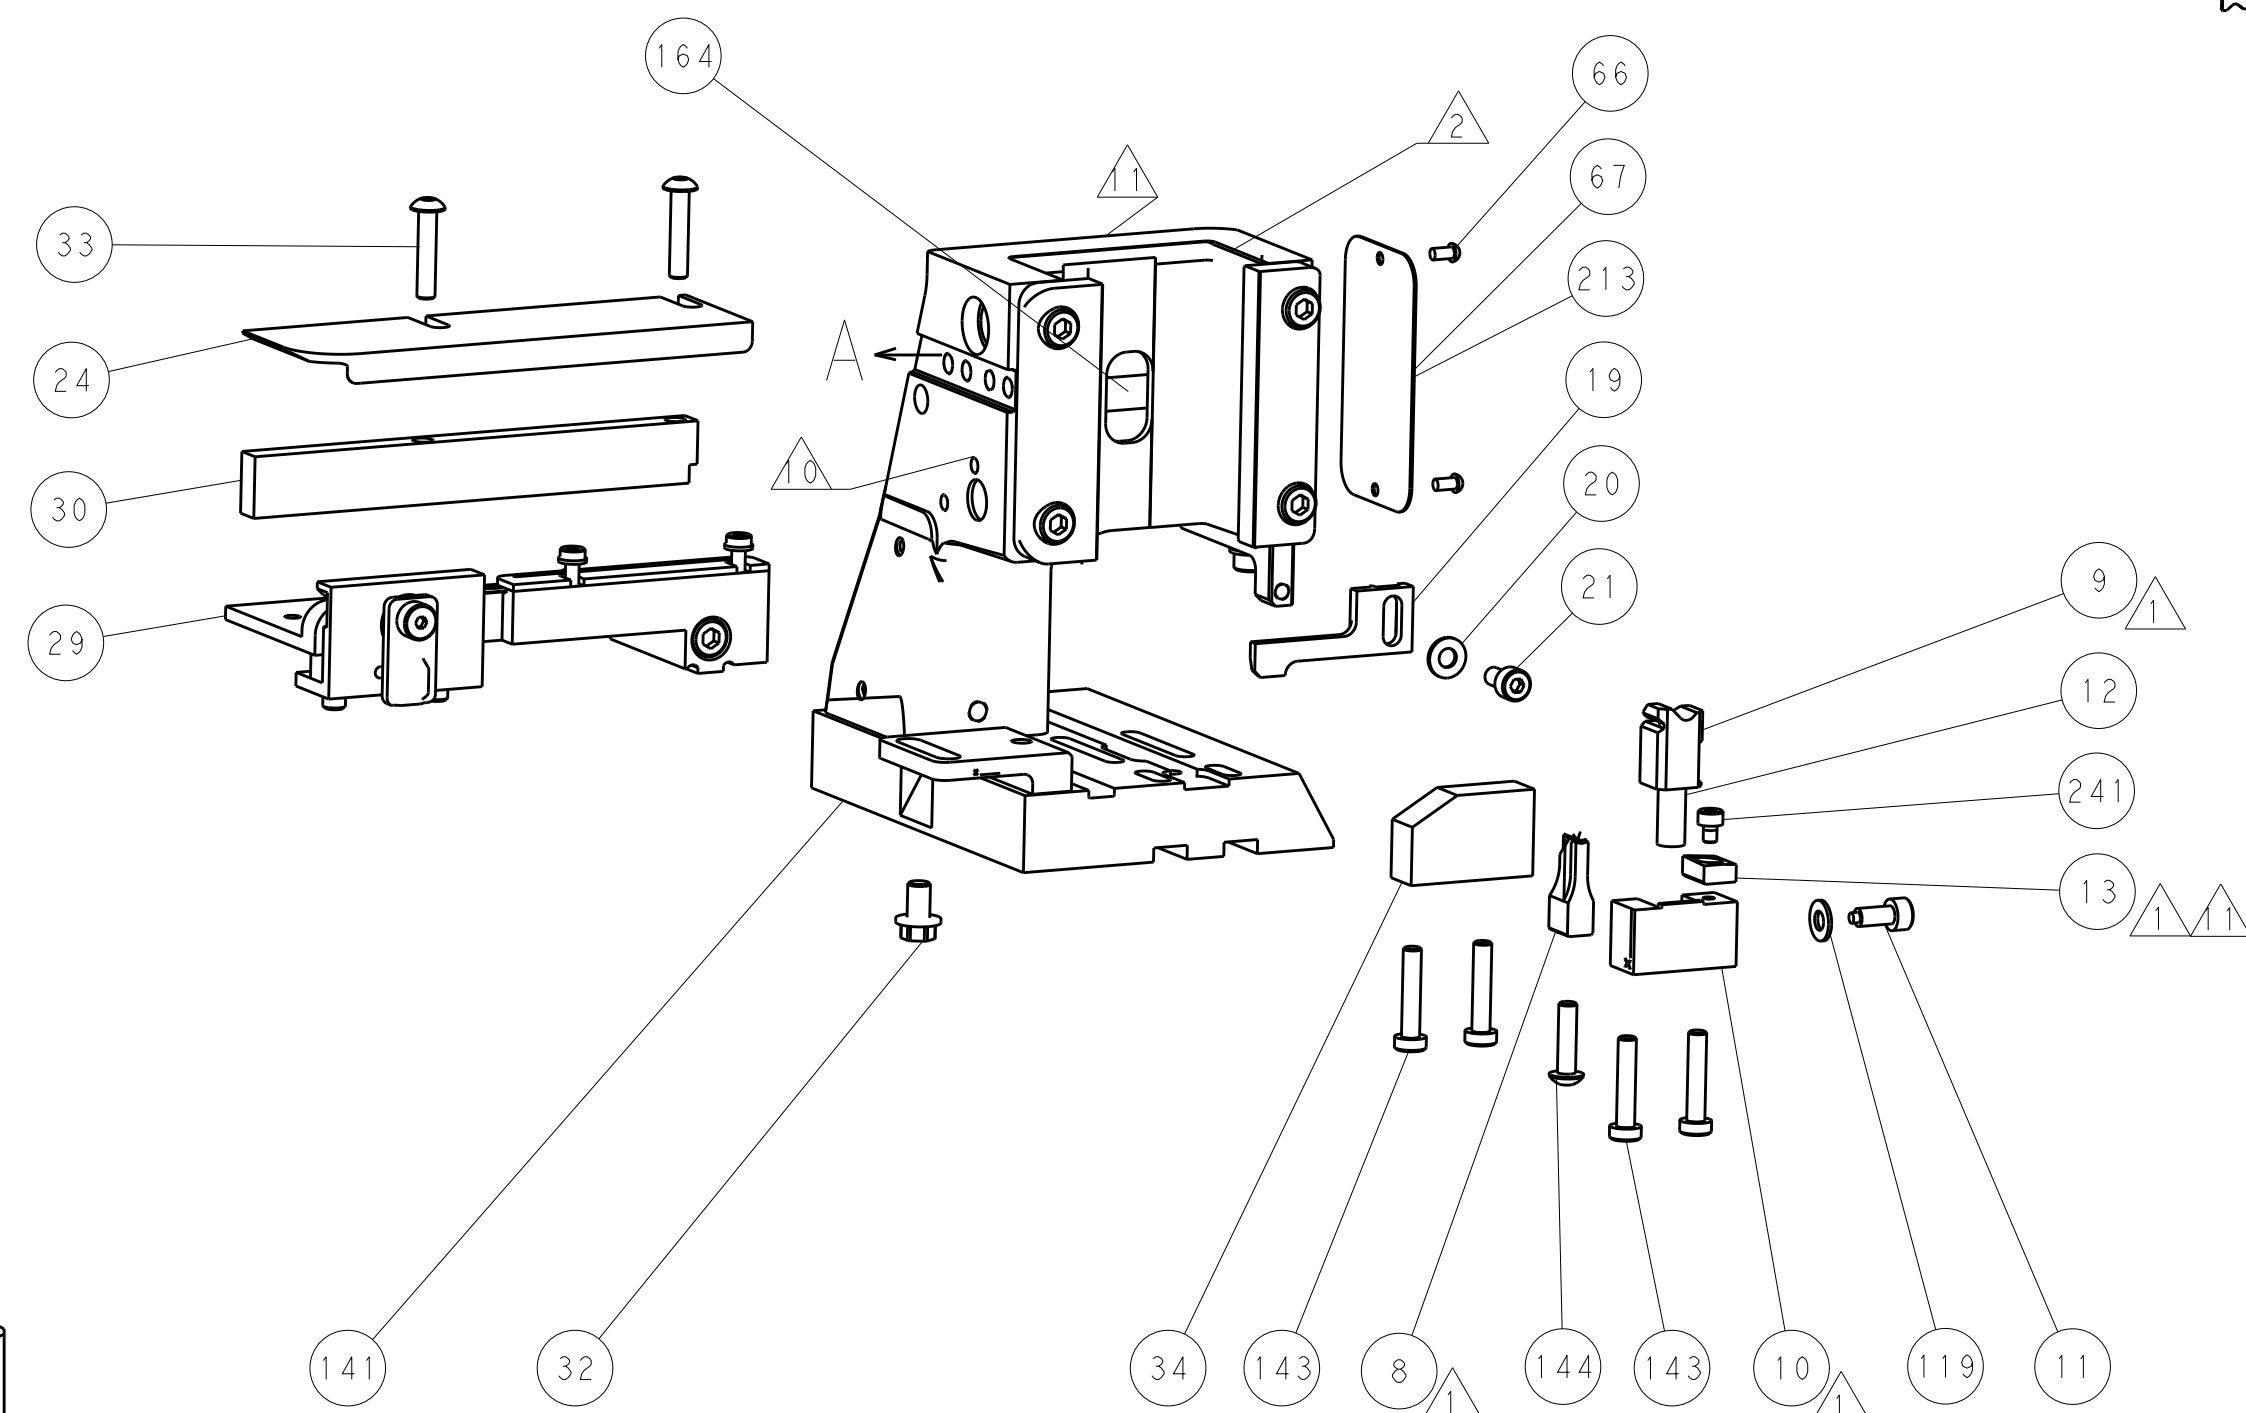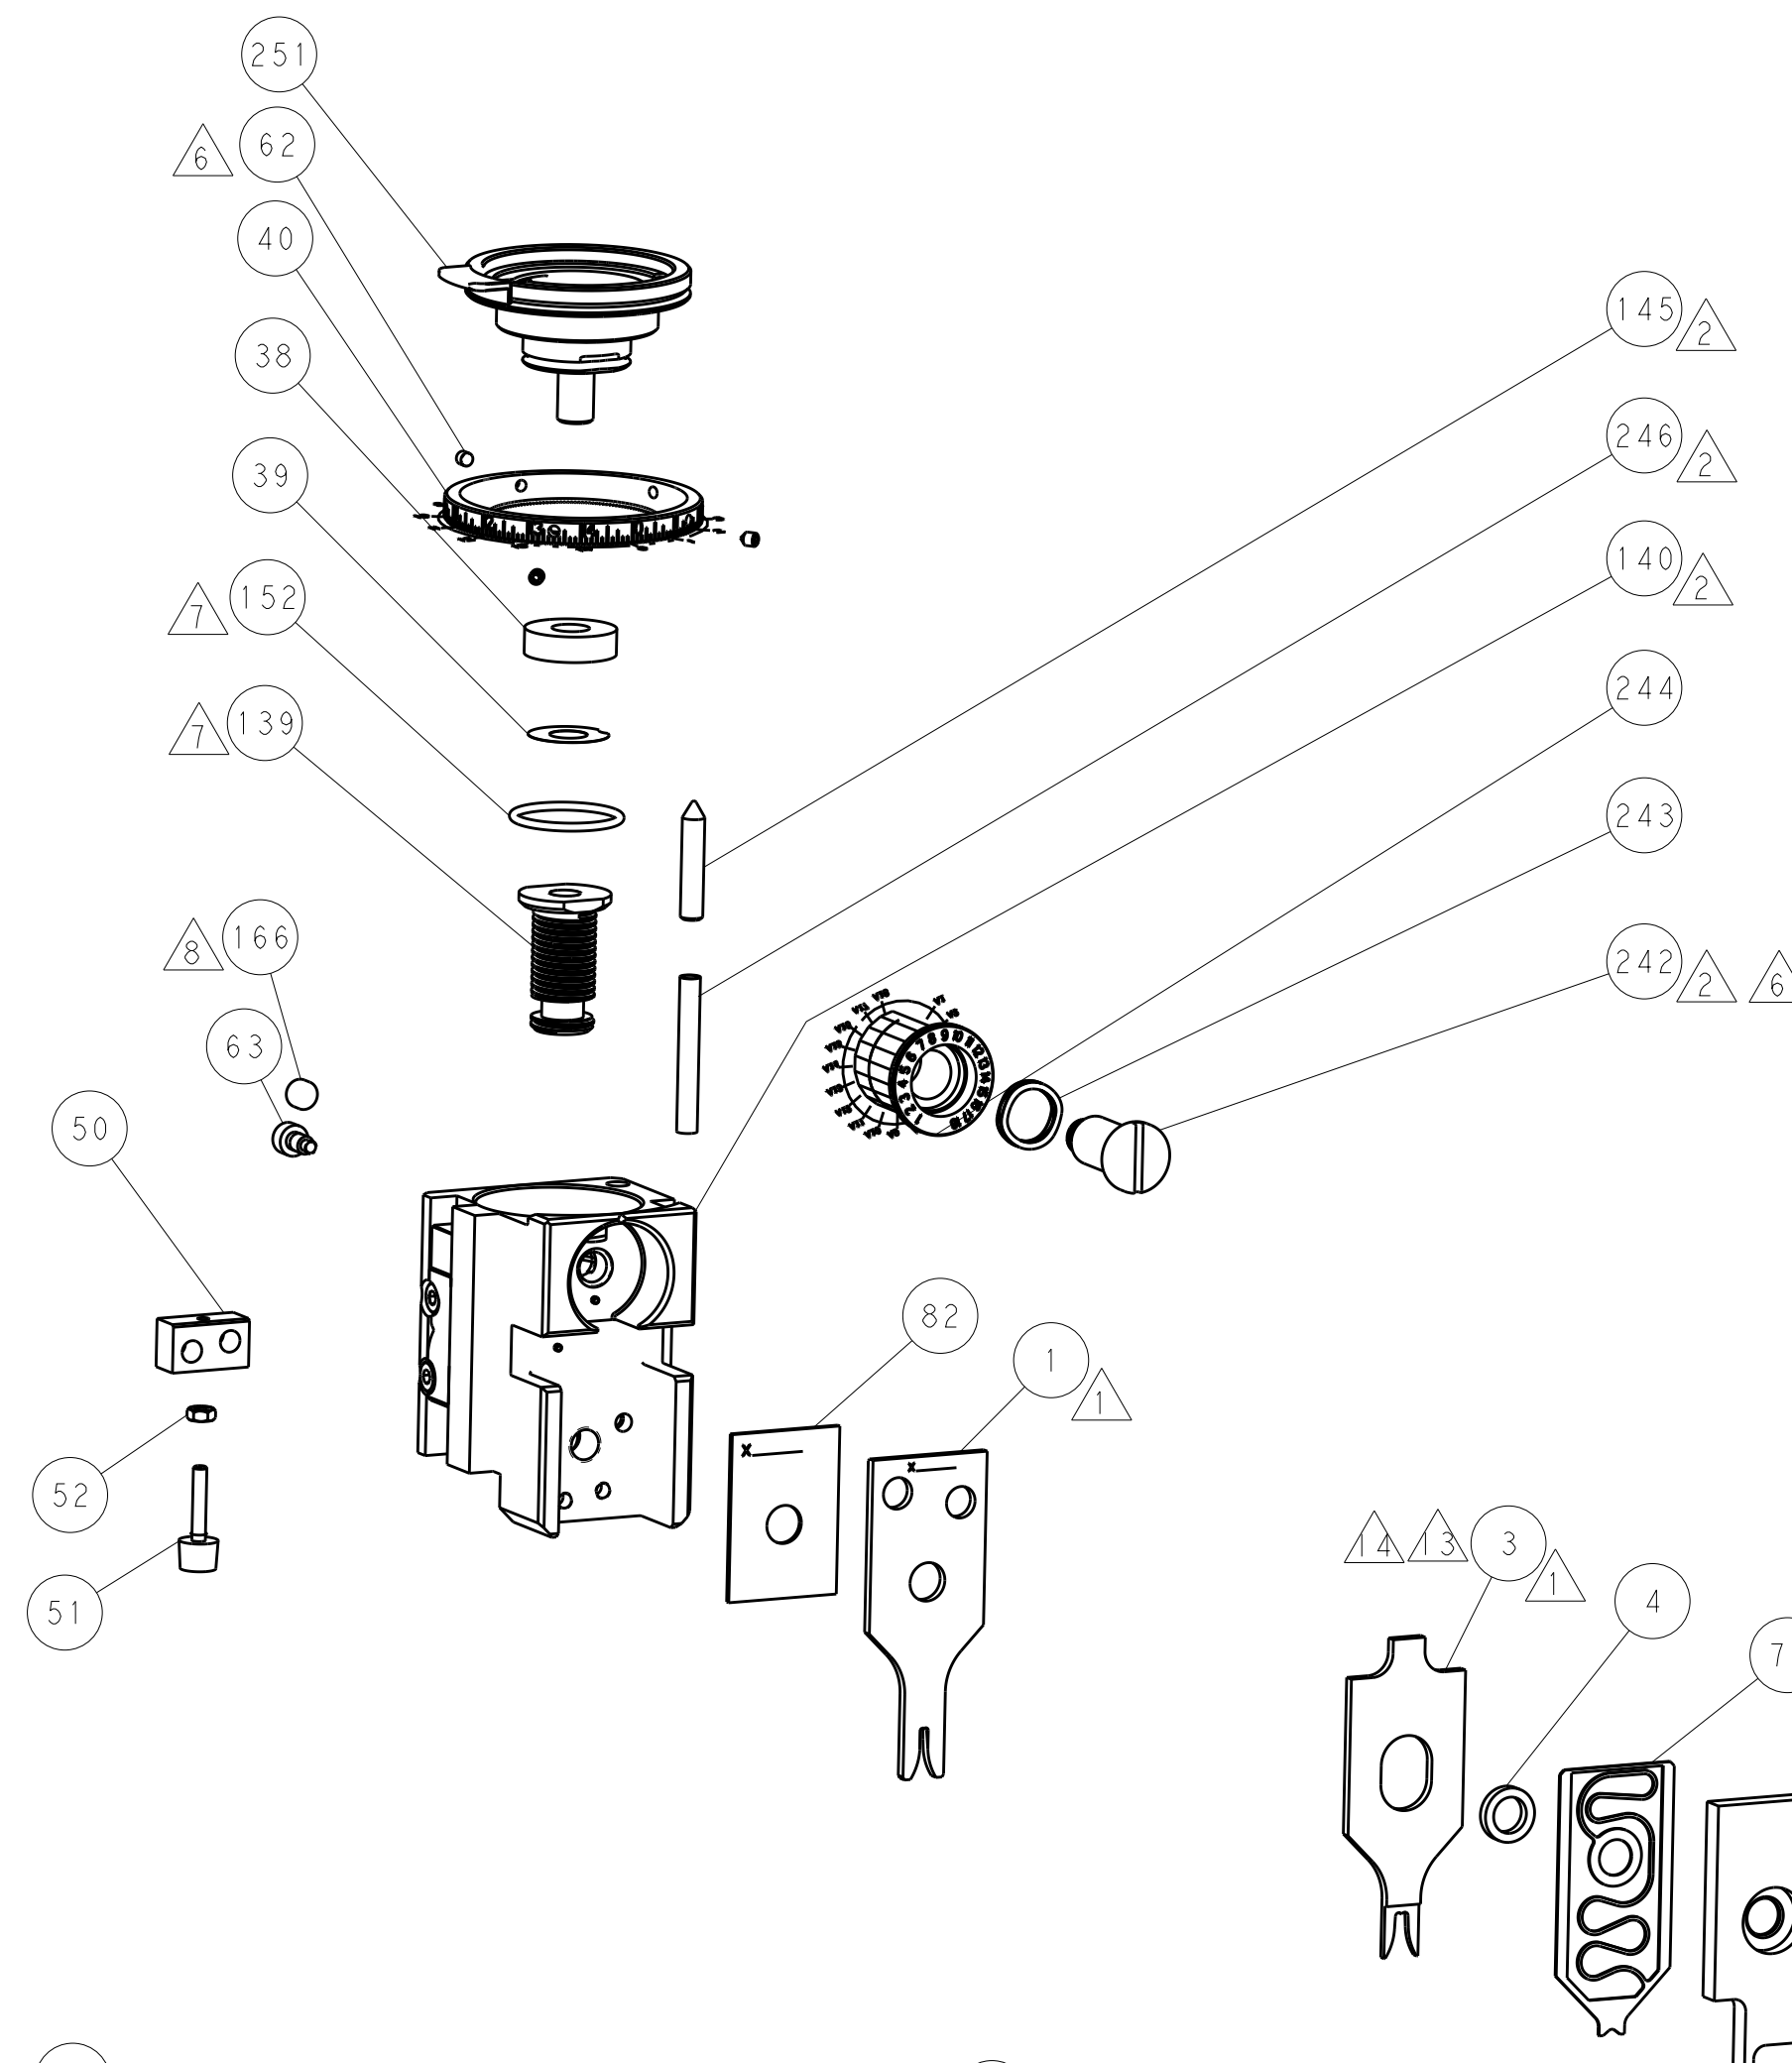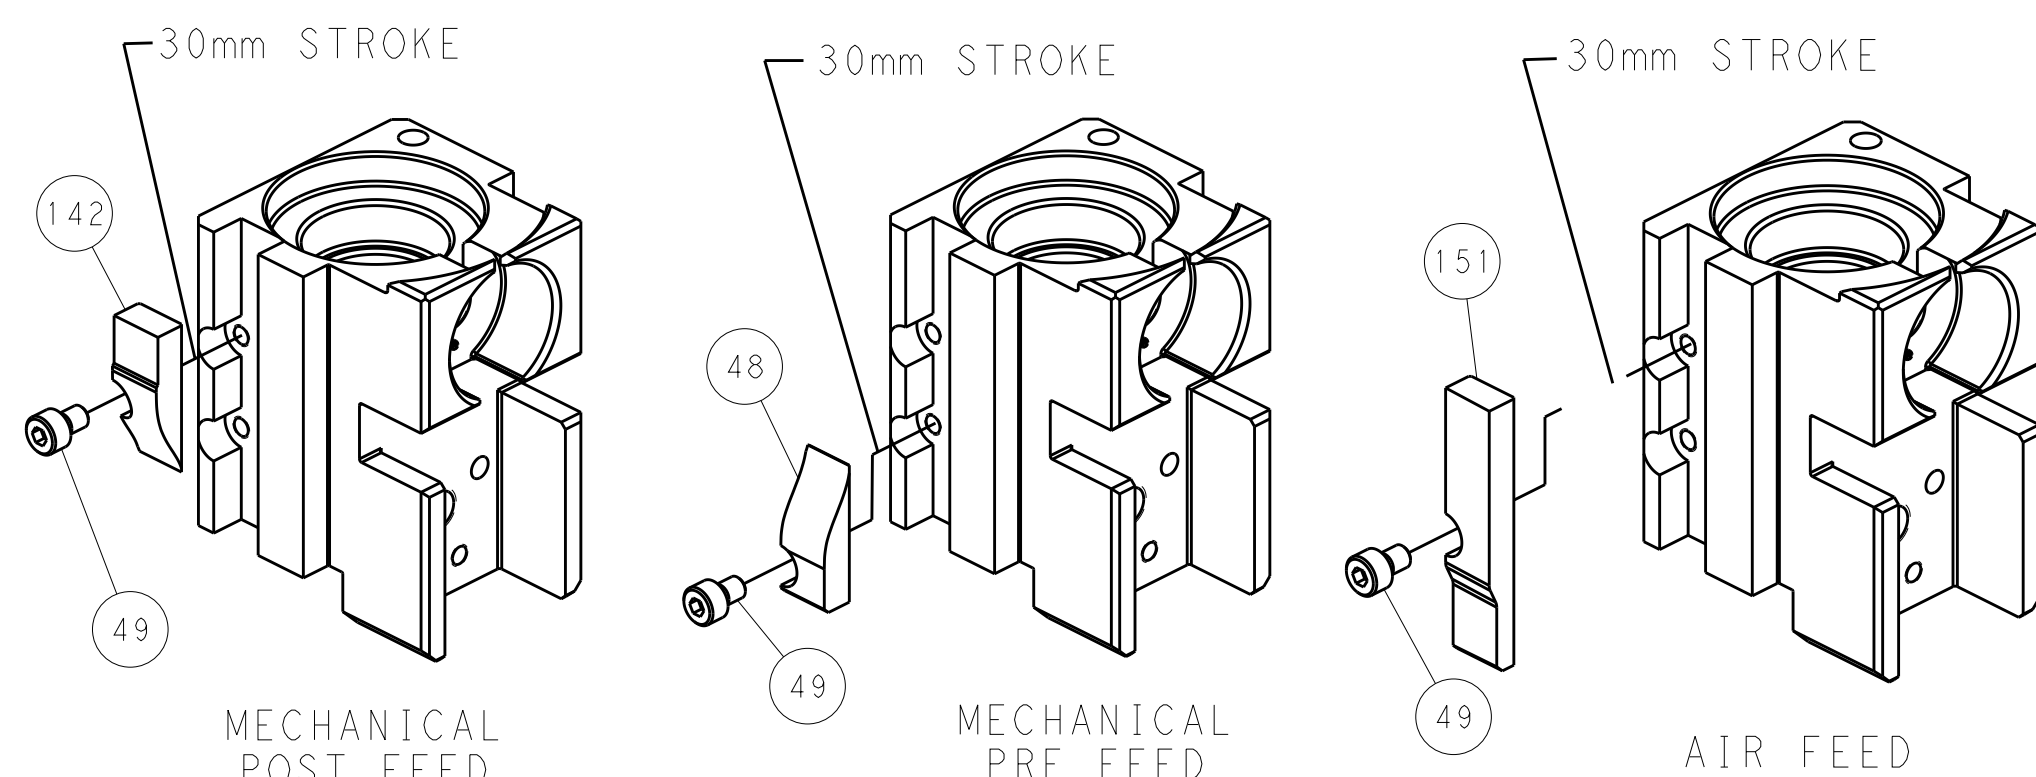

TERMINAL SUPPORT LOCATION

ITEM 30 LOCATED AT
FRONT HOLES

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		10NOV2011		STE		TE Connectivity	
mm		0 PLC ±.5		CHK		10NOV2011		Harrisburg, PA 17105-3608			
FINISH		1 PLC ±0.13		APVD		10NOV2011		NAME		Ocean Side Feed	
MATERIAL		2 PLC ±0.013		S		X1		PRODUCT SPEC		-	
		3 PLC ±0.001		APVD		X1		APPLICATION SPEC		-	
		4 PLC ±0.001		S		X1		WEIGHT		-	
		ANGLES		S		X1		SIZE		CAGE CODE	
				S		X1		DRAWING NO		RESTRICTED TO	
				S		X1		00779		-	
				S		X1		Customer Accessible Production Drawing		SCALE	
				S		X1		1:2		SHEET	
				S		X1		4		OF	
				S		X1		4		REV	
				S		X1		F			

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9