

8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
BY TCYO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		20	
(C) COPYRIGHT 20			
ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER		PART NUMBER	REVISION
		2151096-1	F
		2151096-2	F
		2151096-5	F
		2151096-6	F
		2151096-7	F
		7-2151096-7	D
		DESCRIPTION	
		FINE CRIMP HEIGHT ADJUST	
		FINE CRIMP HEIGHT ADJUST	
		FINE CRIMP HEIGHT ADJUST	
		NON-CRIMP HEIGHT ADJUST	
		FINE CRIMP HEIGHT ADJUST	
		CRIMP TOOLING KIT	
APPLICATOR DATA			
CRIMP	SIZE	TYPE	
WIRE	1.57 mm [.062]	F	
INSUL	3.18 mm [1.25]	F	
APPLICATOR INSTRUCTIONS			
408-10389			

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: VAL-U-LOK PIN CONTACT			
WIRE STRIP LENGTH 3.00-3.50 mm[.118-.138 IN]		INSULATION DIAMETER RANGE Ø 1.50-3.30 mm[.059-.130 IN]	
TERMINAL APPLICATION SPECIFICATION	114-13172	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
794955-1	794955-2	794955-3	794955-4
794956-1	794956-2	794956-3	794956-4
794956-5			

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
22 AWG + 20 AWG		1.22+/-0.05 [.048+/- .002]		4.1
18 AWG OR 0.87mm2		1.12+/-0.05 [.044+/- .002]		5.1
2 X 22 AWG		1.07+/-0.05 [.042+/- .002]		6.1
20 AWG OR 0.50mm2		0.99+/-0.05 [.039+/- .002]		6.3
22 AWG OR 0.35mm2		0.89+/-0.05 [.035+/- .002]		7.3
24 AWG OR 0.20mm2		0.81+/-0.05 [.032+/- .002]		8.2



1. RECOMMENDED SPARE PARTS
2. GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
 - MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
 - PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
 - SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151096-5
 - SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151096-6
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37 & 242.
7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
8. MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
10. SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
11. TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
12. WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT
13. INSTALL ITEM 3 AS SHOWN FOR TERMINALS 2238016 AND 2238017.
14. INSTALL ITEM 3 WITH RELIEF INWARDS AGAINST ITEM 1 FOR TERMINALS 794955 AND 794956.

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: VAL-U-LOK PIN CONTACT			
WIRE STRIP LENGTH 3.00-3.50 mm [.118-.138 IN]		INSULATION DIAMETER RANGE Ø 1.50-3.30 mm [.059-.130 IN]	
TERMINAL APPLICATION 		114-13172	
SPECIFICATION		-	
TERMINALS APPLIED 			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
2238016-1	2238017-1	-	-

WIRE SIZE			CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
22 AWG + 20 AWG			1.22+/-0.05 [0.048+/- .002]		4.1
18 AWG OR 0.87mm2			1.12+/-0.05 [0.044+/- .002]		5.1
2 X 22 AWG			1.07+/-0.05 [0.042+/- .002]		5.6
20 AWG OR 0.50mm2			0.99+/-0.05 [0.039+/- .002]		6.3
22 AWG OR 0.35mm2			0.89+/-0.05 [0.035+/- .002]		7.3

```
*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO
LARGEST WIRE SIZE SETTING. USE OF SETTINGS
BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING
WILL CAUSE DAMAGE TO CRIMP TOOLING.
```


-	-	1	-	-	-	2119957-2	APPLICATOR SHIM PACK	260
-	1	-	1	1	1	8-21084-0	O-RING, .676 ID, .070 DIA. MAT.	252
-77	-7	-6	-5	-2	-1	PART NO	DESCRIPTION	ITEM NO

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)


				2						
SET UP GAUGE 2119599-1				LOC A	DIST 66	REVISIONS				
		P	LT#			DESCRIPTION		DATE	DWN	APVD
		E		ECR-14-004245				20MAR2014	RK	GB
		F		ECR-14-009348				23JUN2014	KH	TE

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


FEED TYPE
MECHANICAL

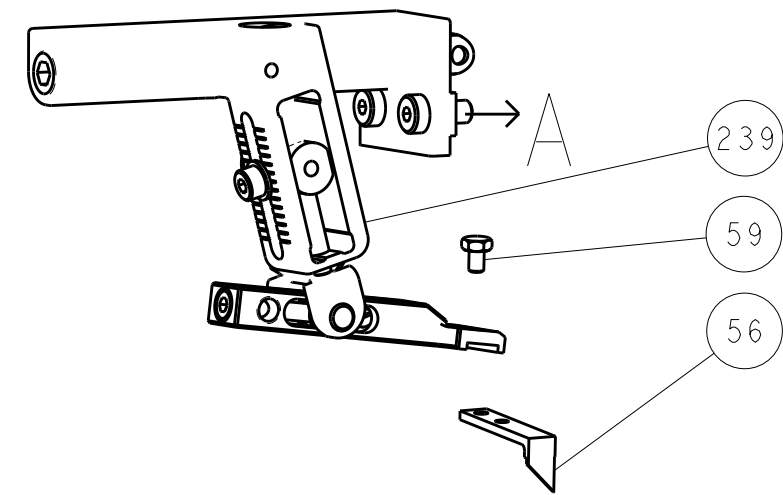


PNEUMATIC

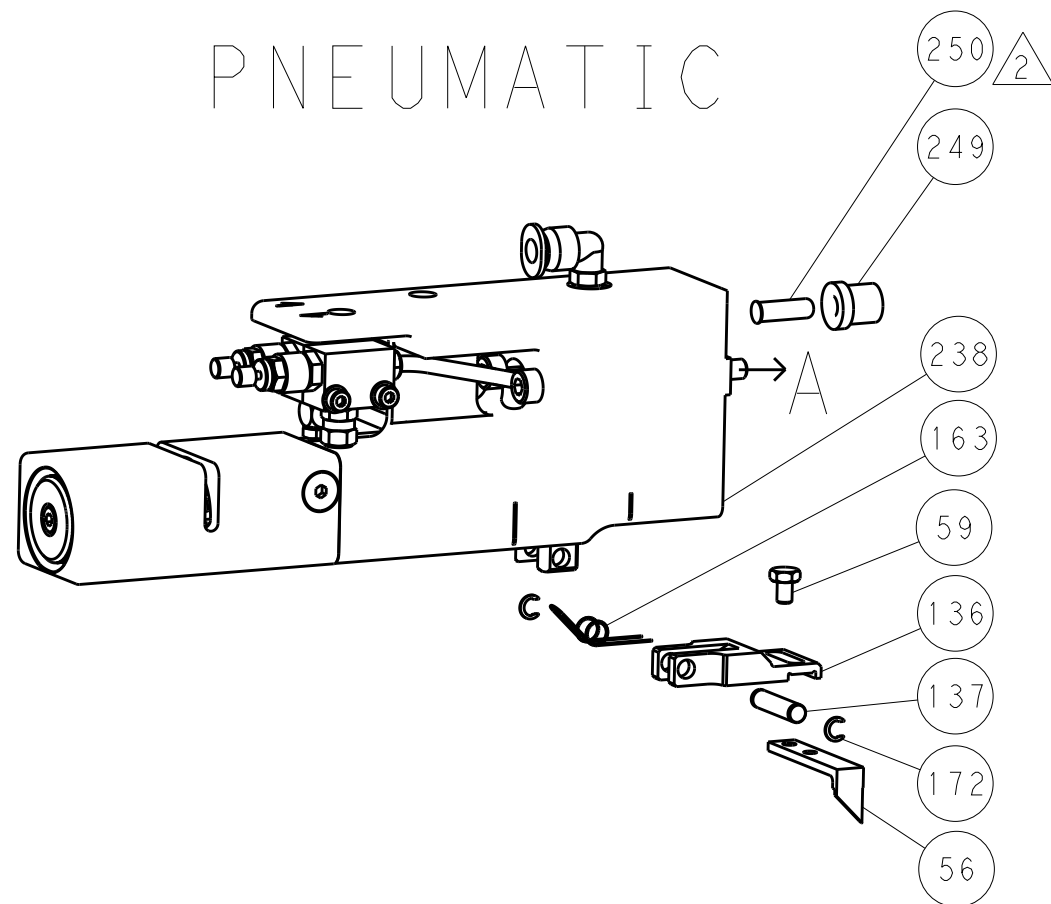



SERVO
LATCH PLATE

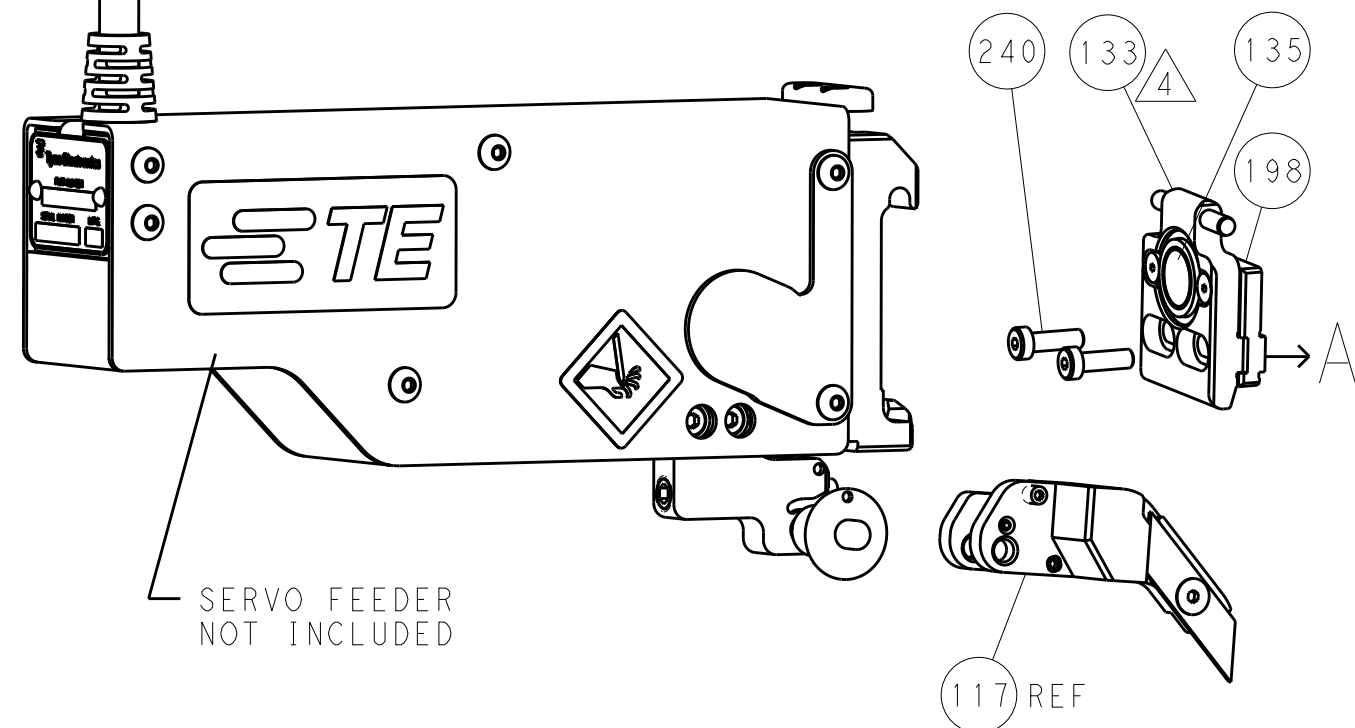


CAM POSITIONS

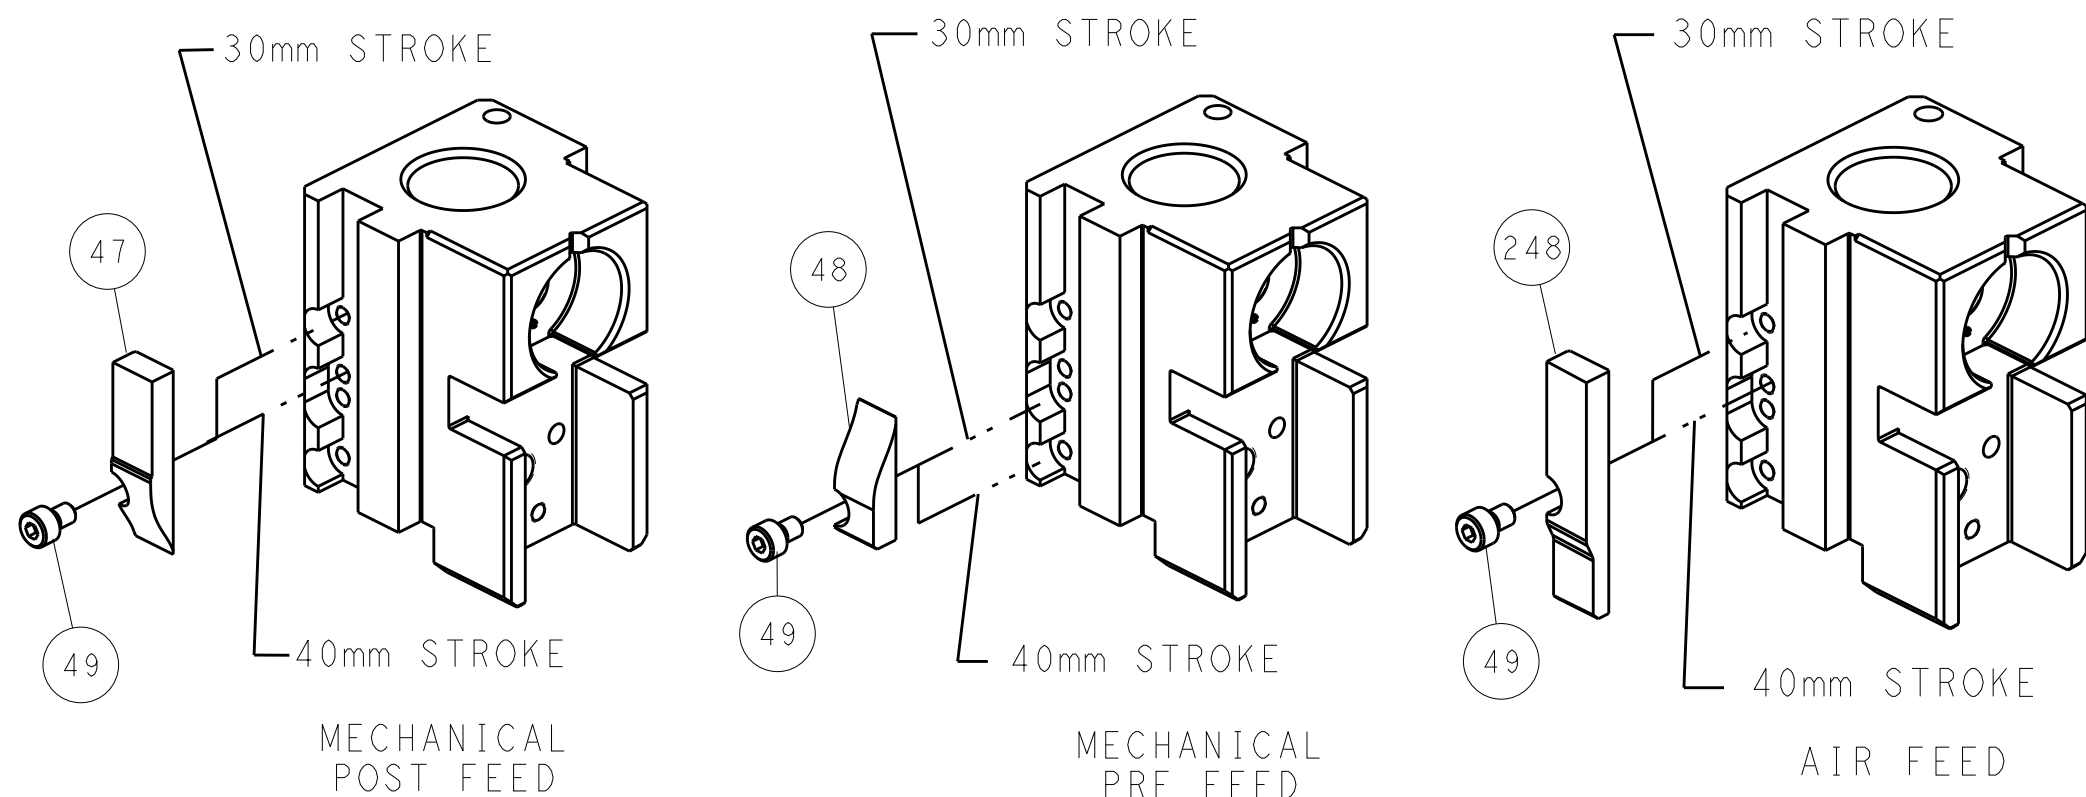

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

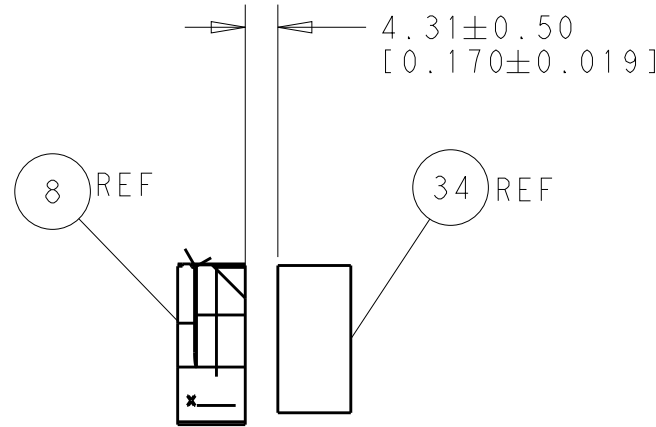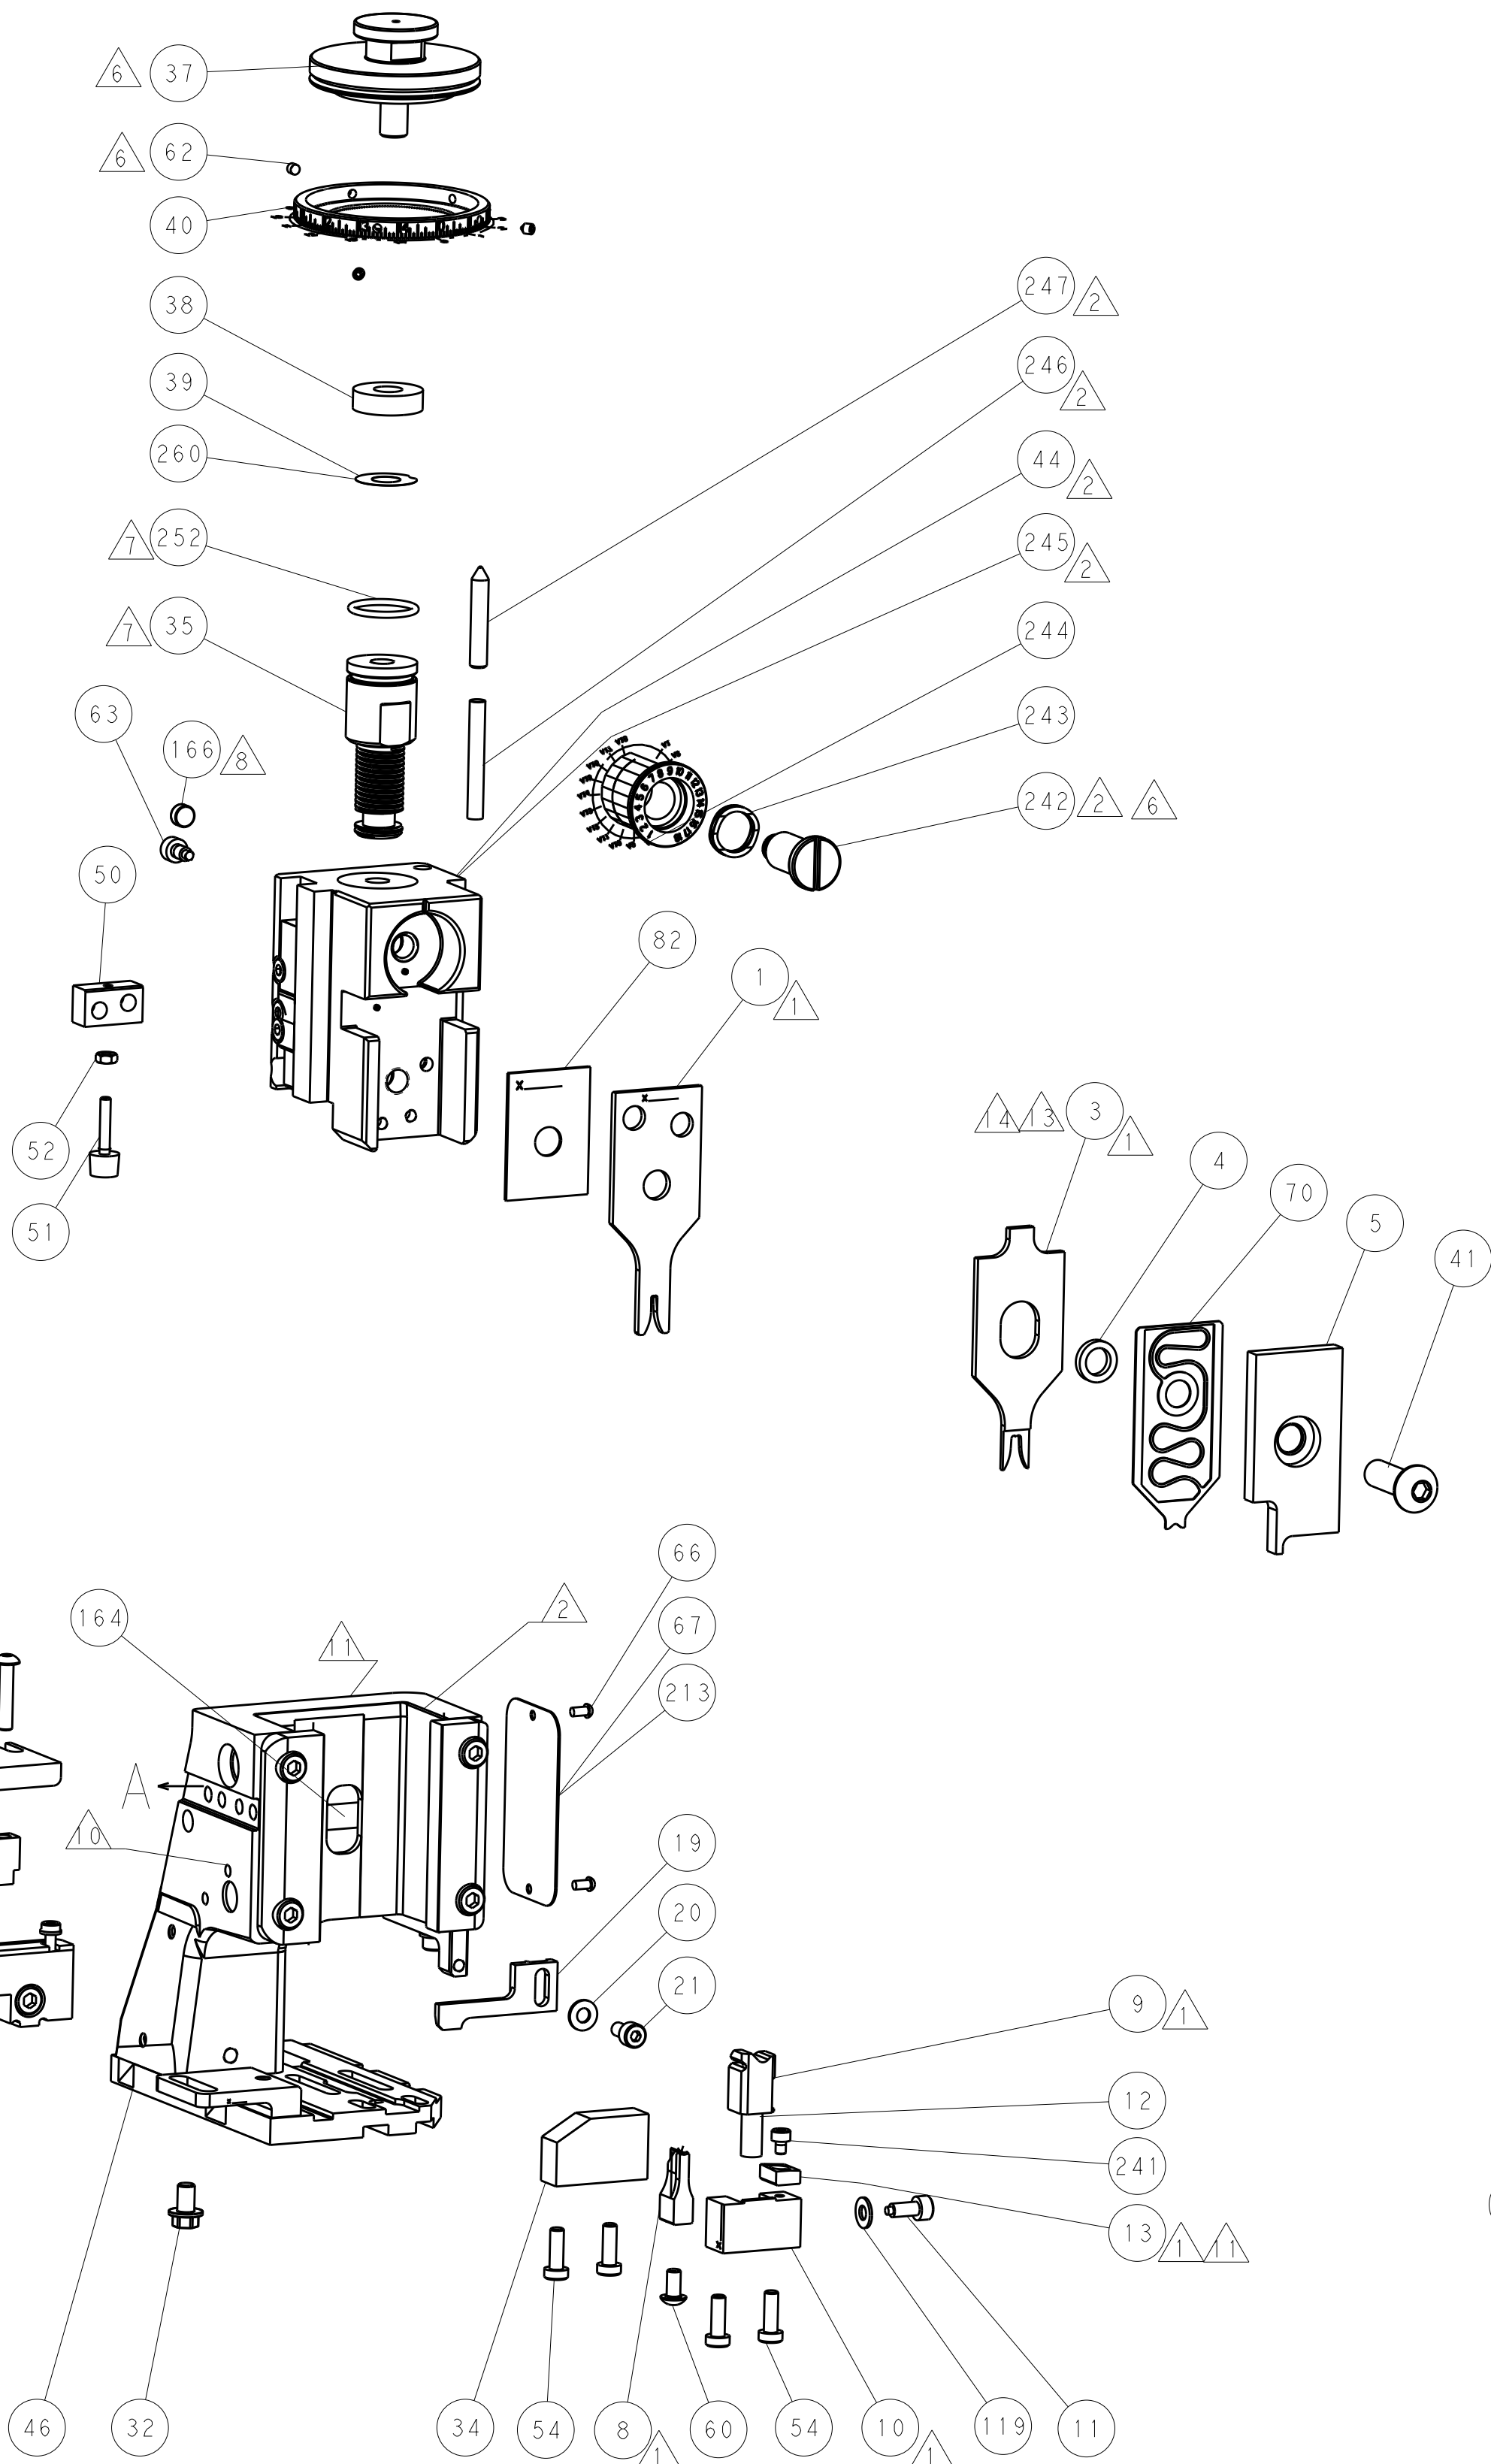

TERMINAL SUPPORT LOCATION

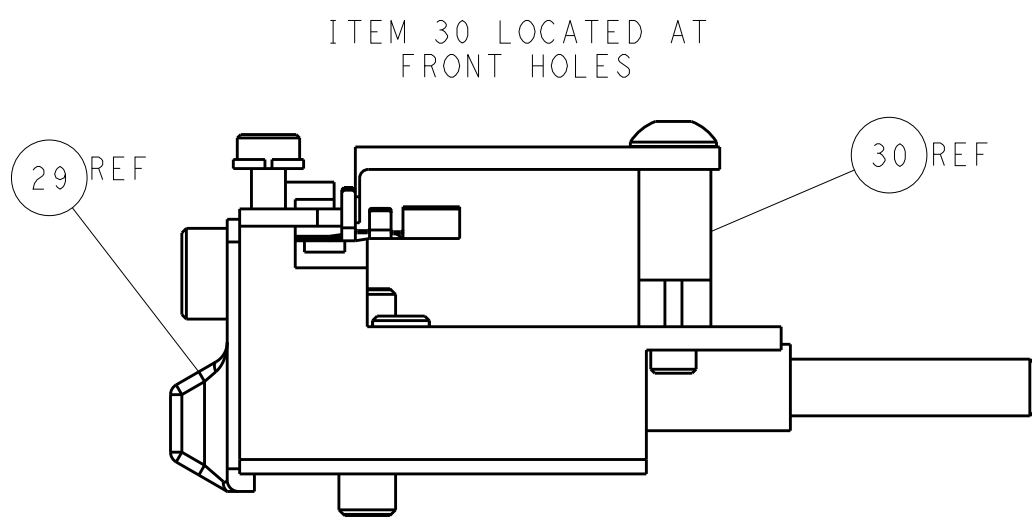

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

1ST PUBLISHED BY: COMPANY/ISSUE/REVISION FOR: THIS ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE/ISSUE/REVISION FOR THE LATEST POSITION. SHOULD BE CONTACTED FOR THE LATEST POSITION.		DWN L. ZHANG 10NOV2011	TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK L. ZHANG 10NOV2011	NAME Ocean Side Feed Applicator	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.5 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±0.0001		APVD S. XI 10NOV2011	SIZE A1	
MATERIAL -		FINISH -	CAGE CODE 00779	
Customer Accessible Production Drawing		SCALE 1:2	SHEET 2 of 4	
			REV F	

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

PACIFIC VERSION
TERMINATOR
INTERFACE ADAPTER

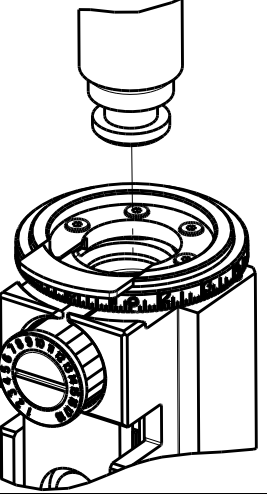

PART
NUMBER

2-2151096-1

REVISION

F

DESCRIPTION

FINE CRIMP HEIGHT ADJUST

FEED TYPE

MECHANICAL

CONVERT TO

PNEUMATIC FEED

PART NUMBERS REQUIRED

2119950-1

2-2151096-1

F

FINE CRIMP HEIGHT ADJUST

MECHANICAL

PNEUMATIC FEED

2119950-1

2-2151096-2

F

FINE CRIMP HEIGHT ADJUST

PNEUMATIC

MECHANICAL FEED

2119949-1

2-2151096-5

F

FINE CRIMP HEIGHT ADJUST

SERVO LATCH PLATE⁴

MECHANICAL FEED

2119949-1

2-2151096-7

F

FINE CRIMP HEIGHT ADJUST

NONE

PNEUMATIC FEED

2119950-1

7-2151096-7

D

CRIMP TOOLING KIT

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.57 mm [.062]

F

INSUL

3.18 mm [.125]

F

APPLICATOR INSTRUCTIONS

408-10389




TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: VAL-U-LOK PIN CONTACT

WIRE STRIP LENGTH



INSULATION DIAMETER RANGE

3.00-3.50 mm [.118-.138 IN]

Ø 1.50 -3.30 mm [.059-.130 IN]

TERMINAL APPLICATION SPECIFICATION

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

794955-1

794955-2

794955-3

794955-4

794956-1

794956-2

794956-3

794956-4

794956-5

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

6.1

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

24 AWG OR 0.20mm2

0.81+/-0.05 [.032+/- .002]

8.2



RECOMMENDED SPARE PARTS

GREASE BEARING SURFACES LIGHTLY

3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151096-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151096-5

5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOC TITE TO THREADS OF ITEMS 62 & 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOC TITE TO THREADS OF ITEMS 37 & 242.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8

MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

13

INSTALL ITEM 3 AS SHOWN FOR TERMINALS 2238016 AND 2238017.

14

INSTALL ITEM 3 WITH RELIEF INWARDS AGAINST ITEM 1 FOR TERMINALS 794955 AND 794956.

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PART NUMBERS REQUIRED

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

SERVO LATCH PLATE

2119951-1

-

8-2151096-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151096-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

SERVO LATCH PLATE

2119951-1

1338685-1

8-2151096-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151096-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.57 mm [.062]

F

INSUL

3.18 mm [.125]

F

APPLICATOR INSTRUCTIONS

408-10389



TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: VAL-U-LOK PIN CONTACT

WIRE STRIP LENGTH



INSULATION DIAMETER RANGE

3.00-3.50 mm [.118-.138 IN]

Ø 1.50 - 3.30 mm [.059 -.130 IN]

TERMINAL APPLICATION SPECIFICATION

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

5.6

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

6

1

1

1

1

2119782-1

FINE ADJUST HEAD ASM, PACIFIC STYLE

251

6

1

1

1

1

2119640-1

PUSH ROD, AIR FEED

250

6

1

1

1

1

2079988-1

BUSHING, LCH5-12, MISUMI

249

6

1

1

1

1

1-22279-3

SPRING, COMPRESSION

246

6

1

1

1

1

2119082-9

CAM, SNAIL, INSULATION ADJUSTMENT

244

6

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

6

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

6

1

1

1

1

7-18023-7

SCR, SKT HD CAP M3 X 4.0

241

6

1

1

1

1

2168400-6

SHCS, LOW HEAD, RoHS, M5 X 16

240

6

1

1

1

1

2119580-1

MECHANICAL FEED ASSEMBLY

239

6

1

1

1

1

2063440-1

AIR FEED MODULE

238

6

1

1

1

1

2119740-2

TAG, IDENTIFICATION

213

6

1

1

1

1

1901094-3

SPACER, FEEDER

198

6

1

1

1

1

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

6

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

6

1

1

1

1

994970-2

COUNTER, MAGNETIC

164

6

1

1

1

1

240638-1

SPRING, FEED FINGER

163

6

1

1

1

1

8-21084-1

O-RING, .801 ID, .070 DIA. MAT.

152

6

1

1

1

1

2119641-2

FEED CAM, AIR FEED

151

6

1

1

1

1

2119798-2

DETENT PIN

145

6

1

1

1

1

2079383-8

SCR, BHSC, RoHS (M4 X 16)

144

6

1

1

1

1

2168400-5

SHCS, LOW HEAD, RoHS, M4 X 20

143

6

1

1

1

1

2119653-2

FEED CAM, POST FEED

142

6

1

1

1

1

1-2119656-0

APPLICATOR BASIC ASSEMBLY, SF

141

6

1

1

1

1

2119650-1

RAM, ASIAN STYLE, SIDE FEED

140

6

1

1

1

1

2119092-2

BOLT, ADJUSTMENT

139

6

1

1

1

1

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

6

1

1

1

1

2119799-1

HOLDER, FEED FINGER, AF

136

6

1

1

1

1

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

6

1

1

1

1

1633743-1

SERVO FEED LATCH ASM

133

6

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

119

6

1

1

1

1

2119944-1

FEED FINGER ASSEMBLY, SF

117

6

1

1

1

1

455888-8

SPACER, CRIMPER

82

6

1

1

1

1

2119956-1

DOCUMENTATION PACKAGE

71

6

1

1

1

1

2119791-5

DEPRESSOR, WIRE

70

6

1

1

1

1

2119740-1

TAG, IDENTIFICATION

67

6

1

1

1

1

2168078-1

SCREW, DRIVE, RH, RoHS, 2 x .188

66

6

1

1

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

6

1

1

1

1

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

6

1

1

1

1

5-18022-5

SCR, HEX HD CAP, M4 X 6.0

59

6

1

1

1

1

1338685-1

PAWL, FEED

56

6

1

1

1

1

1-2168083-0

SCR, SKT HD CAP, RoHS, M4 X 10

53

6

1

1

1

1

5018030-1

NUT, HEX, REG, RoHS, M3

52

6

1

1

1

1

811242-5

BUMPER, HOLD DOWN

51

6

1

1

1

1

690753-2

SPACER, TONKER

50

6

1

1

1

2

18023-9

SCR, SKT HD CAP M4 X 6.0

49

6

1

1

1

1

2119652-1

FEED CAM, PRE FEED

48

6

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

6

1

1

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

6

1

1

1

1

2119957-1

APPLICATOR SHIM PACK

39

6

1

1

1

1

2119644-1

RAM WASHER, PRECISION

38

6

1

1

1

1

1752356-1

SUPPORT, TERMINAL

34

6

1

1

1

1

2079383-5

SCR, BHSC, RoHS (M4 X 20)

33

6

1

1

1

1

2161328-1

HEX HEAD, FLANGED, M5 x 8mm LONG

32

6

1

1

1

1

1320908-6

SPACER, STRIP GUIDE

30

6

1

1

1

1

2119959-1

ASSEMBLY, STRIP GUIDE

29

6

1

1

1

1

1320928-2

STRIP GUIDE

24

6

1

1

1

1

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

21

6

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

20

6

1

1

1

1

2119533-1

STRIPPER, SIDE FEED

19

6

1

1

1

1

2119806-1

INSERT, SHEAR

13

6

1

1

1

1

3-22280-3

SPRING, COMPRESSION

12

6

1

1

1

1

1-356885-4

STOP, SHEAR

11

6

1

1

1

1

2119805-1

SHEAR HOLDER, FRONT

10

6

1

1

1

1

1803095-1

FLOATING SHEAR, FRONT

9

6

1

1

1

1

7-1333202-5

ANVIL, COMBINATION

8

6

1

1

1

1

-

-

7

6

1

1

1

1

-

-

6

6

1

1

1

1

2119757-4

DEPRESSOR, SHEAR

5

6

1

1

1

1

1-238011-7

BLOCK, CRIMPER SPACER

4

6

1

1

1

1

9-2119582-0

CRIMPER, INSULATION F PREMIUM

3

6

1

1

1

1

-

-

2

6

1

1

1

1

1-456403-6

CRIMPER, WIRE PREMIUM

1

6

1

1

1

1

-77

-27

-25

-22

-21

PART NO

DESCRIPTION

ITEM NO

114-13172

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

5.6

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

114-13172

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

5.6

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

114-13172

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

5.6

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

114-13172

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

5.6

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

114-13172

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1

18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]

5.1

2 X 22 AWG

1.07+/-0.05 [.042+/- .002]

5.6

20 AWG OR 0.50mm2

0.99+/-0.05 [.039+/- .002]

6.3

22 AWG OR 0.35mm2

0.89+/-0.05 [.035+/- .002]

7.3

114-13172

114-13172

-

-

TERMINALS APPLIED⁴

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

2238016-1

2238017-1

-

-

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING

22 AWG + 20 AWG

1.22+/-0.05 [.048+/- .002]

4.1


18 AWG OR 0.87mm2

1.12+/-0.05 [.044+/- .002]


5

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


FEED TYPE MECHANICAL

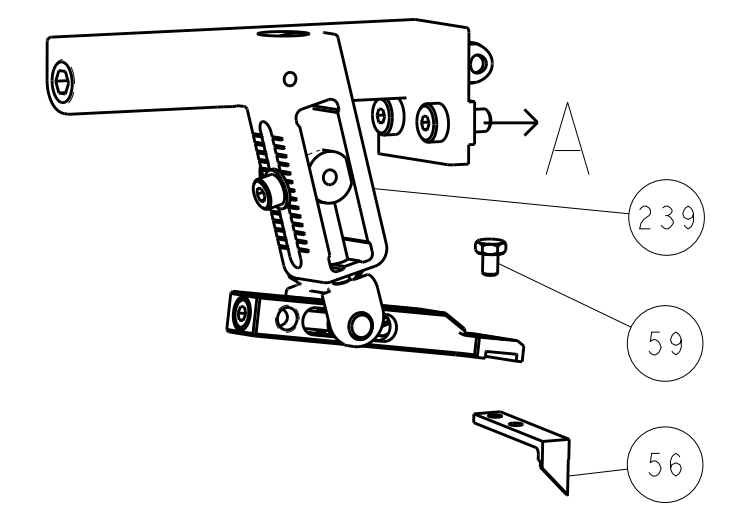






PNEUMATIC

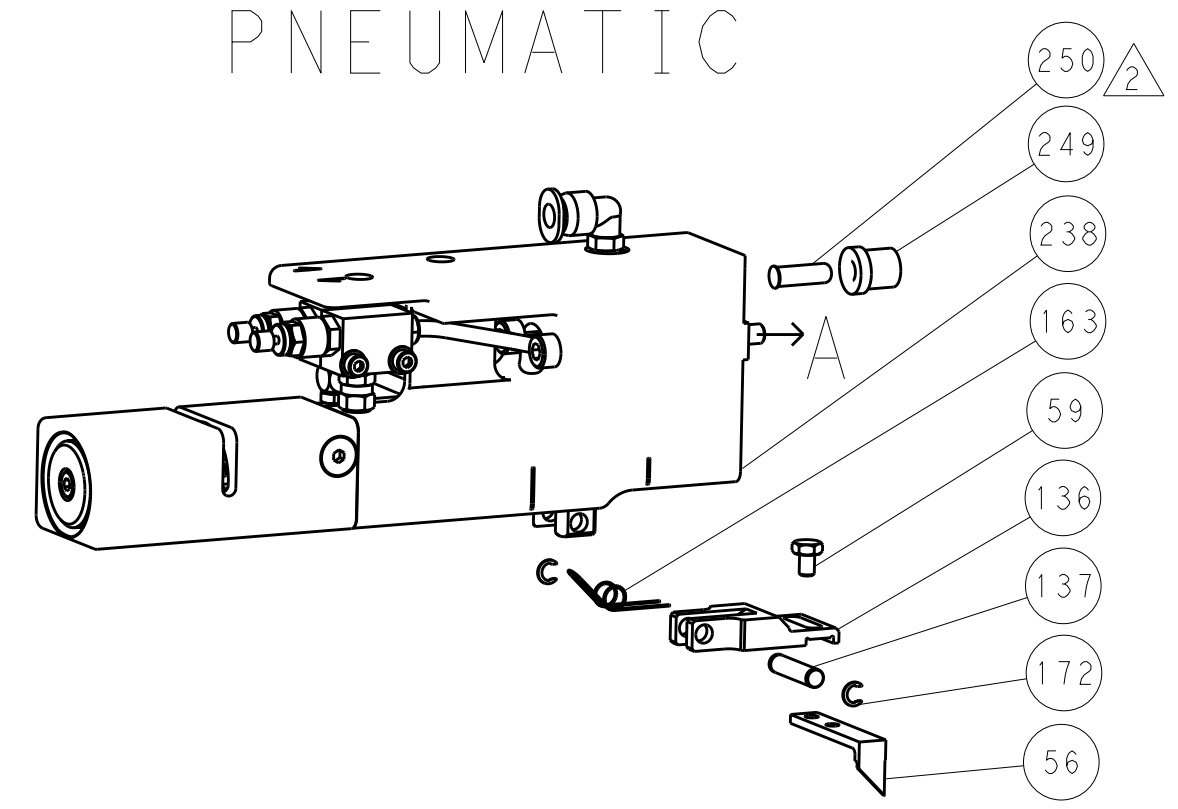

SERVO LATCH PLATE

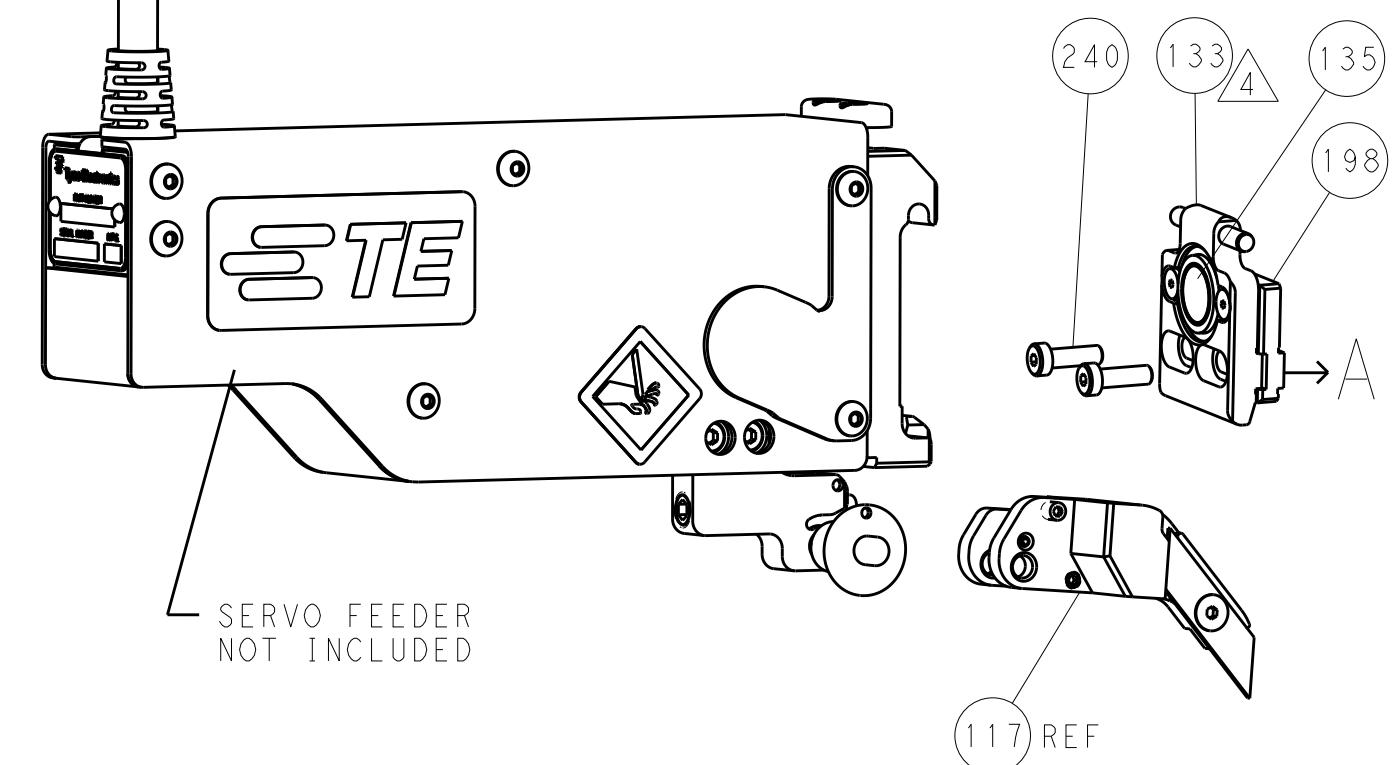

CAM POSITIONS

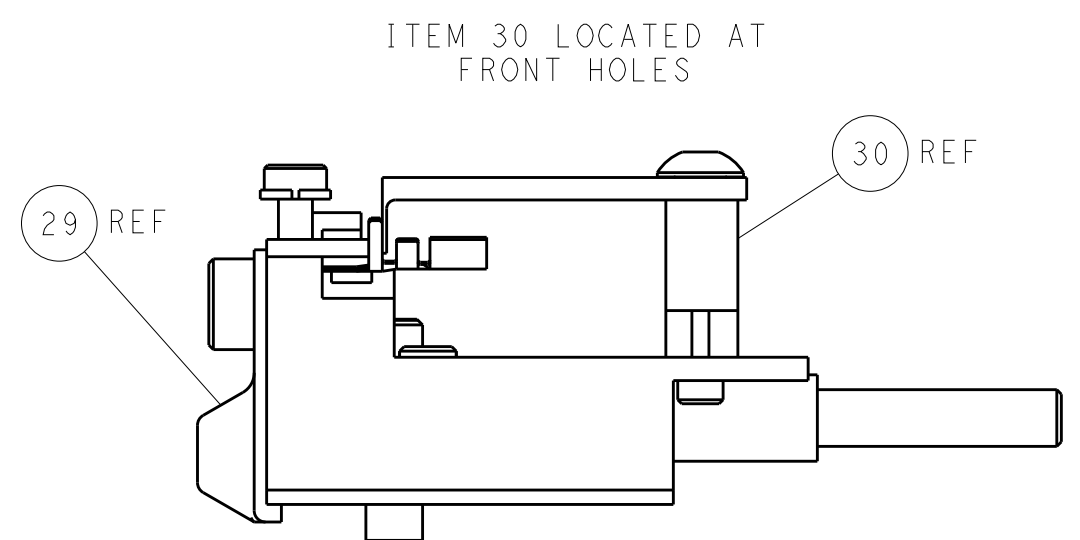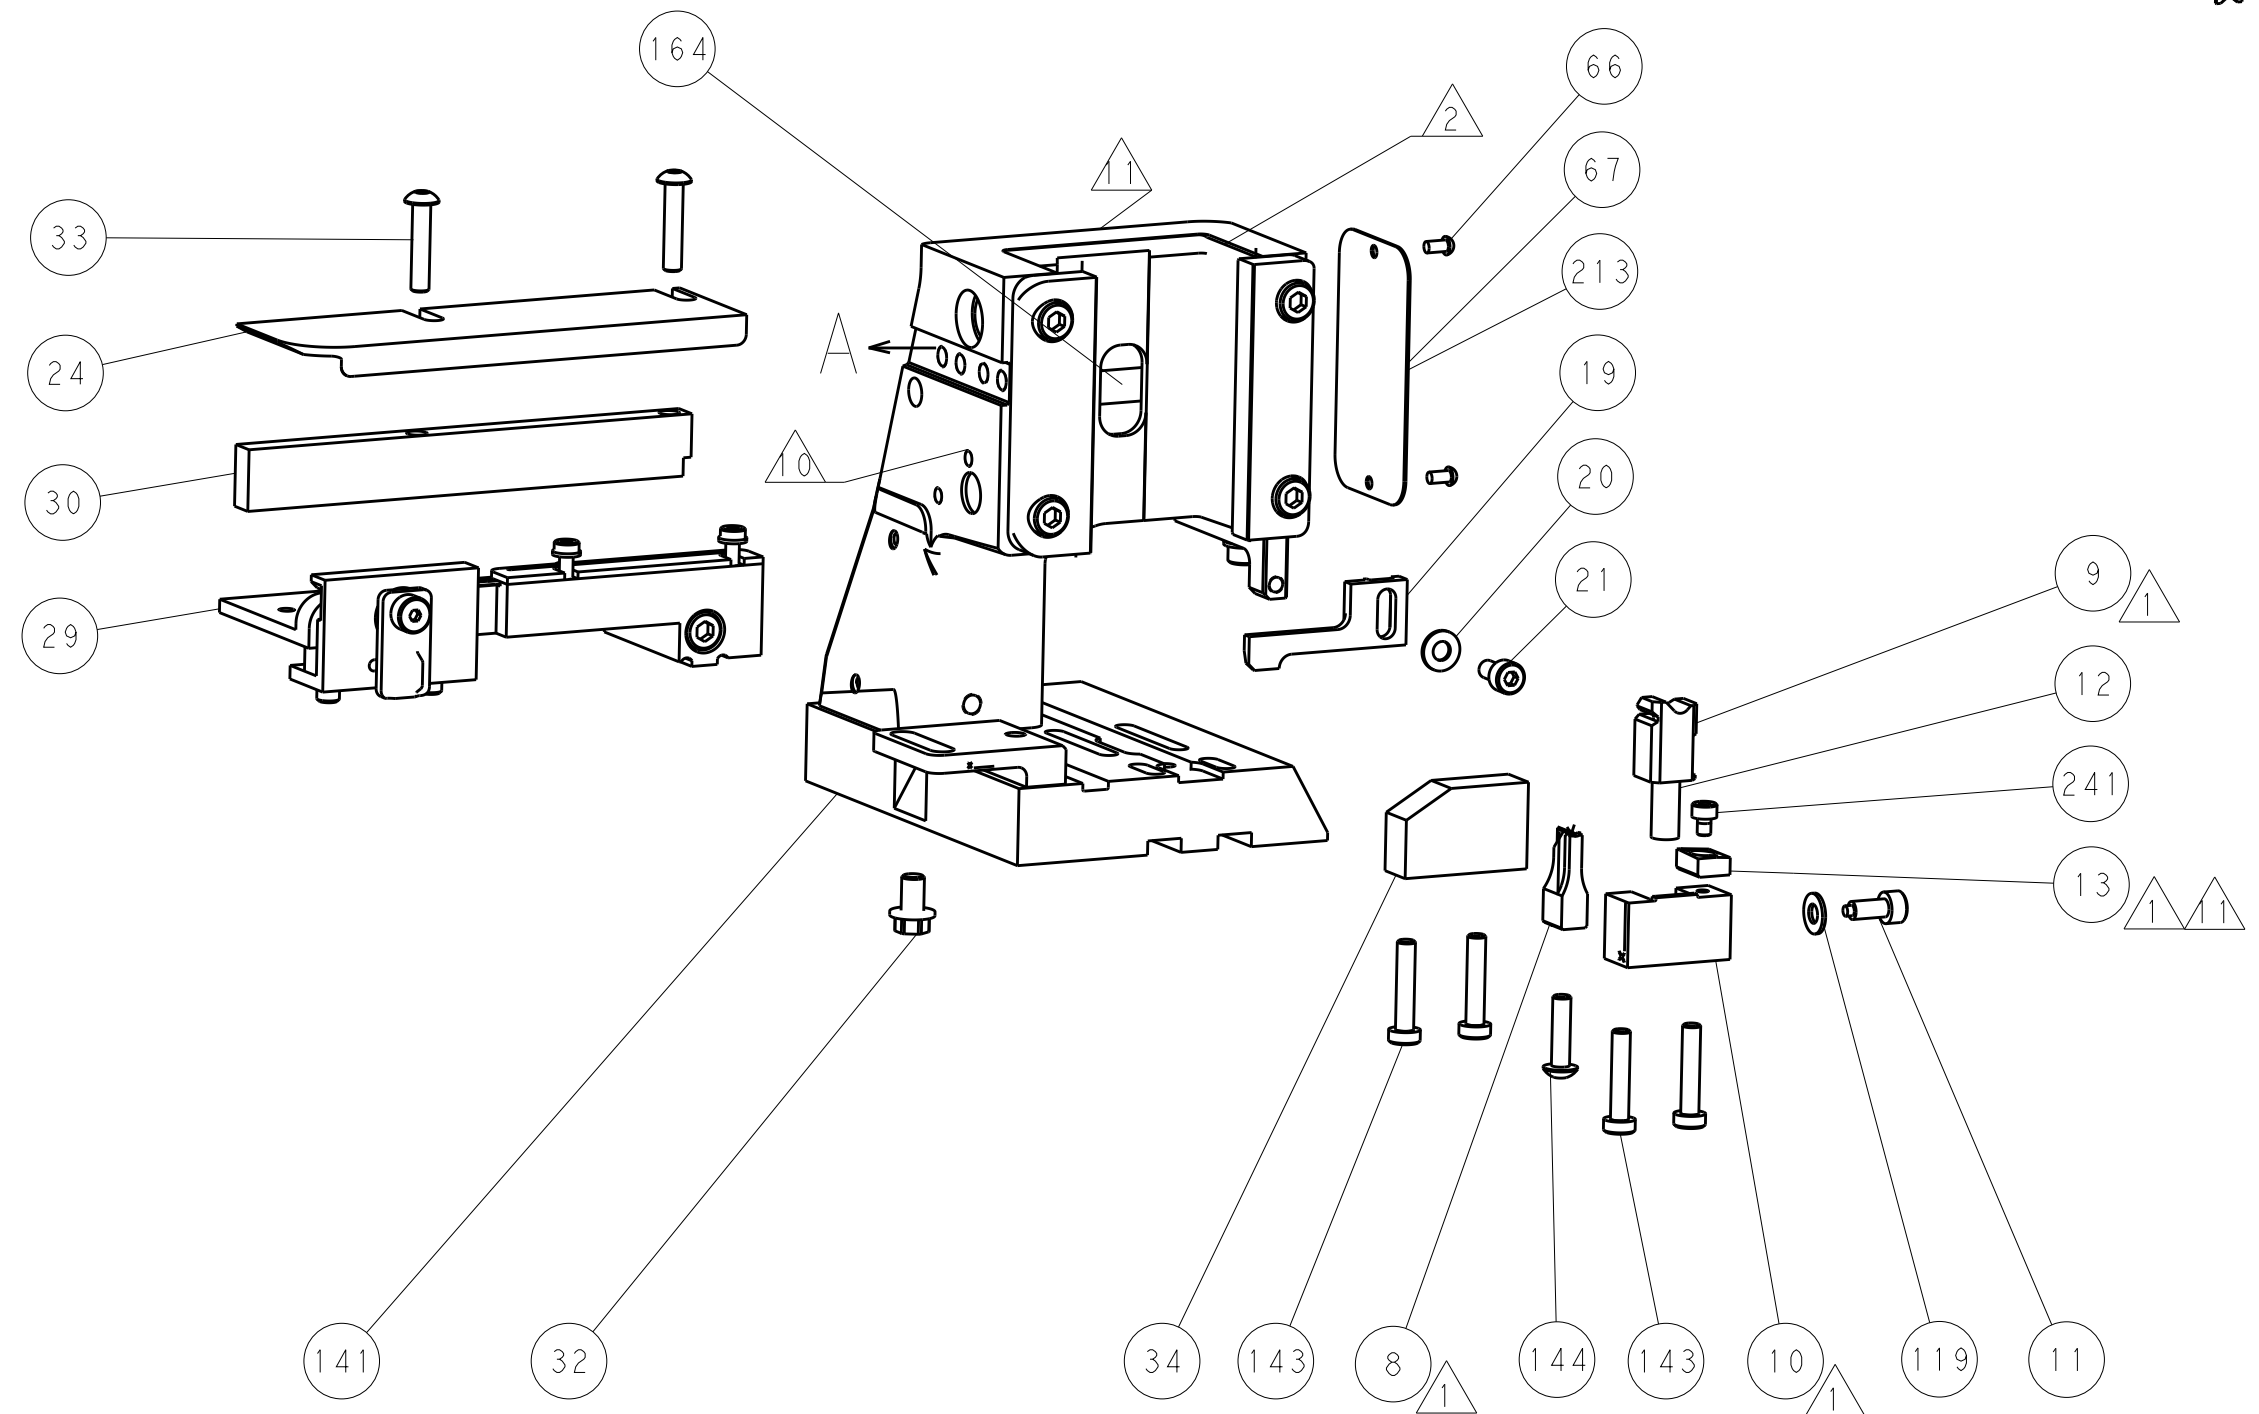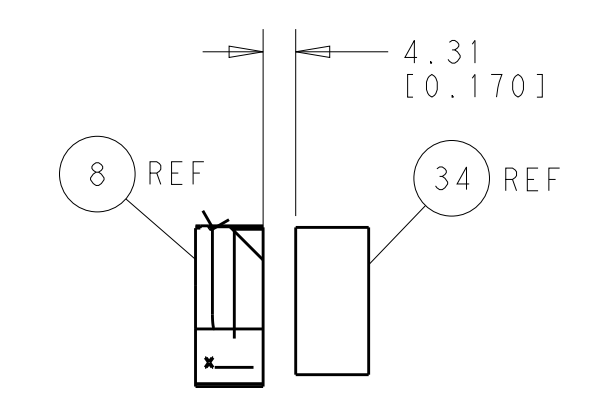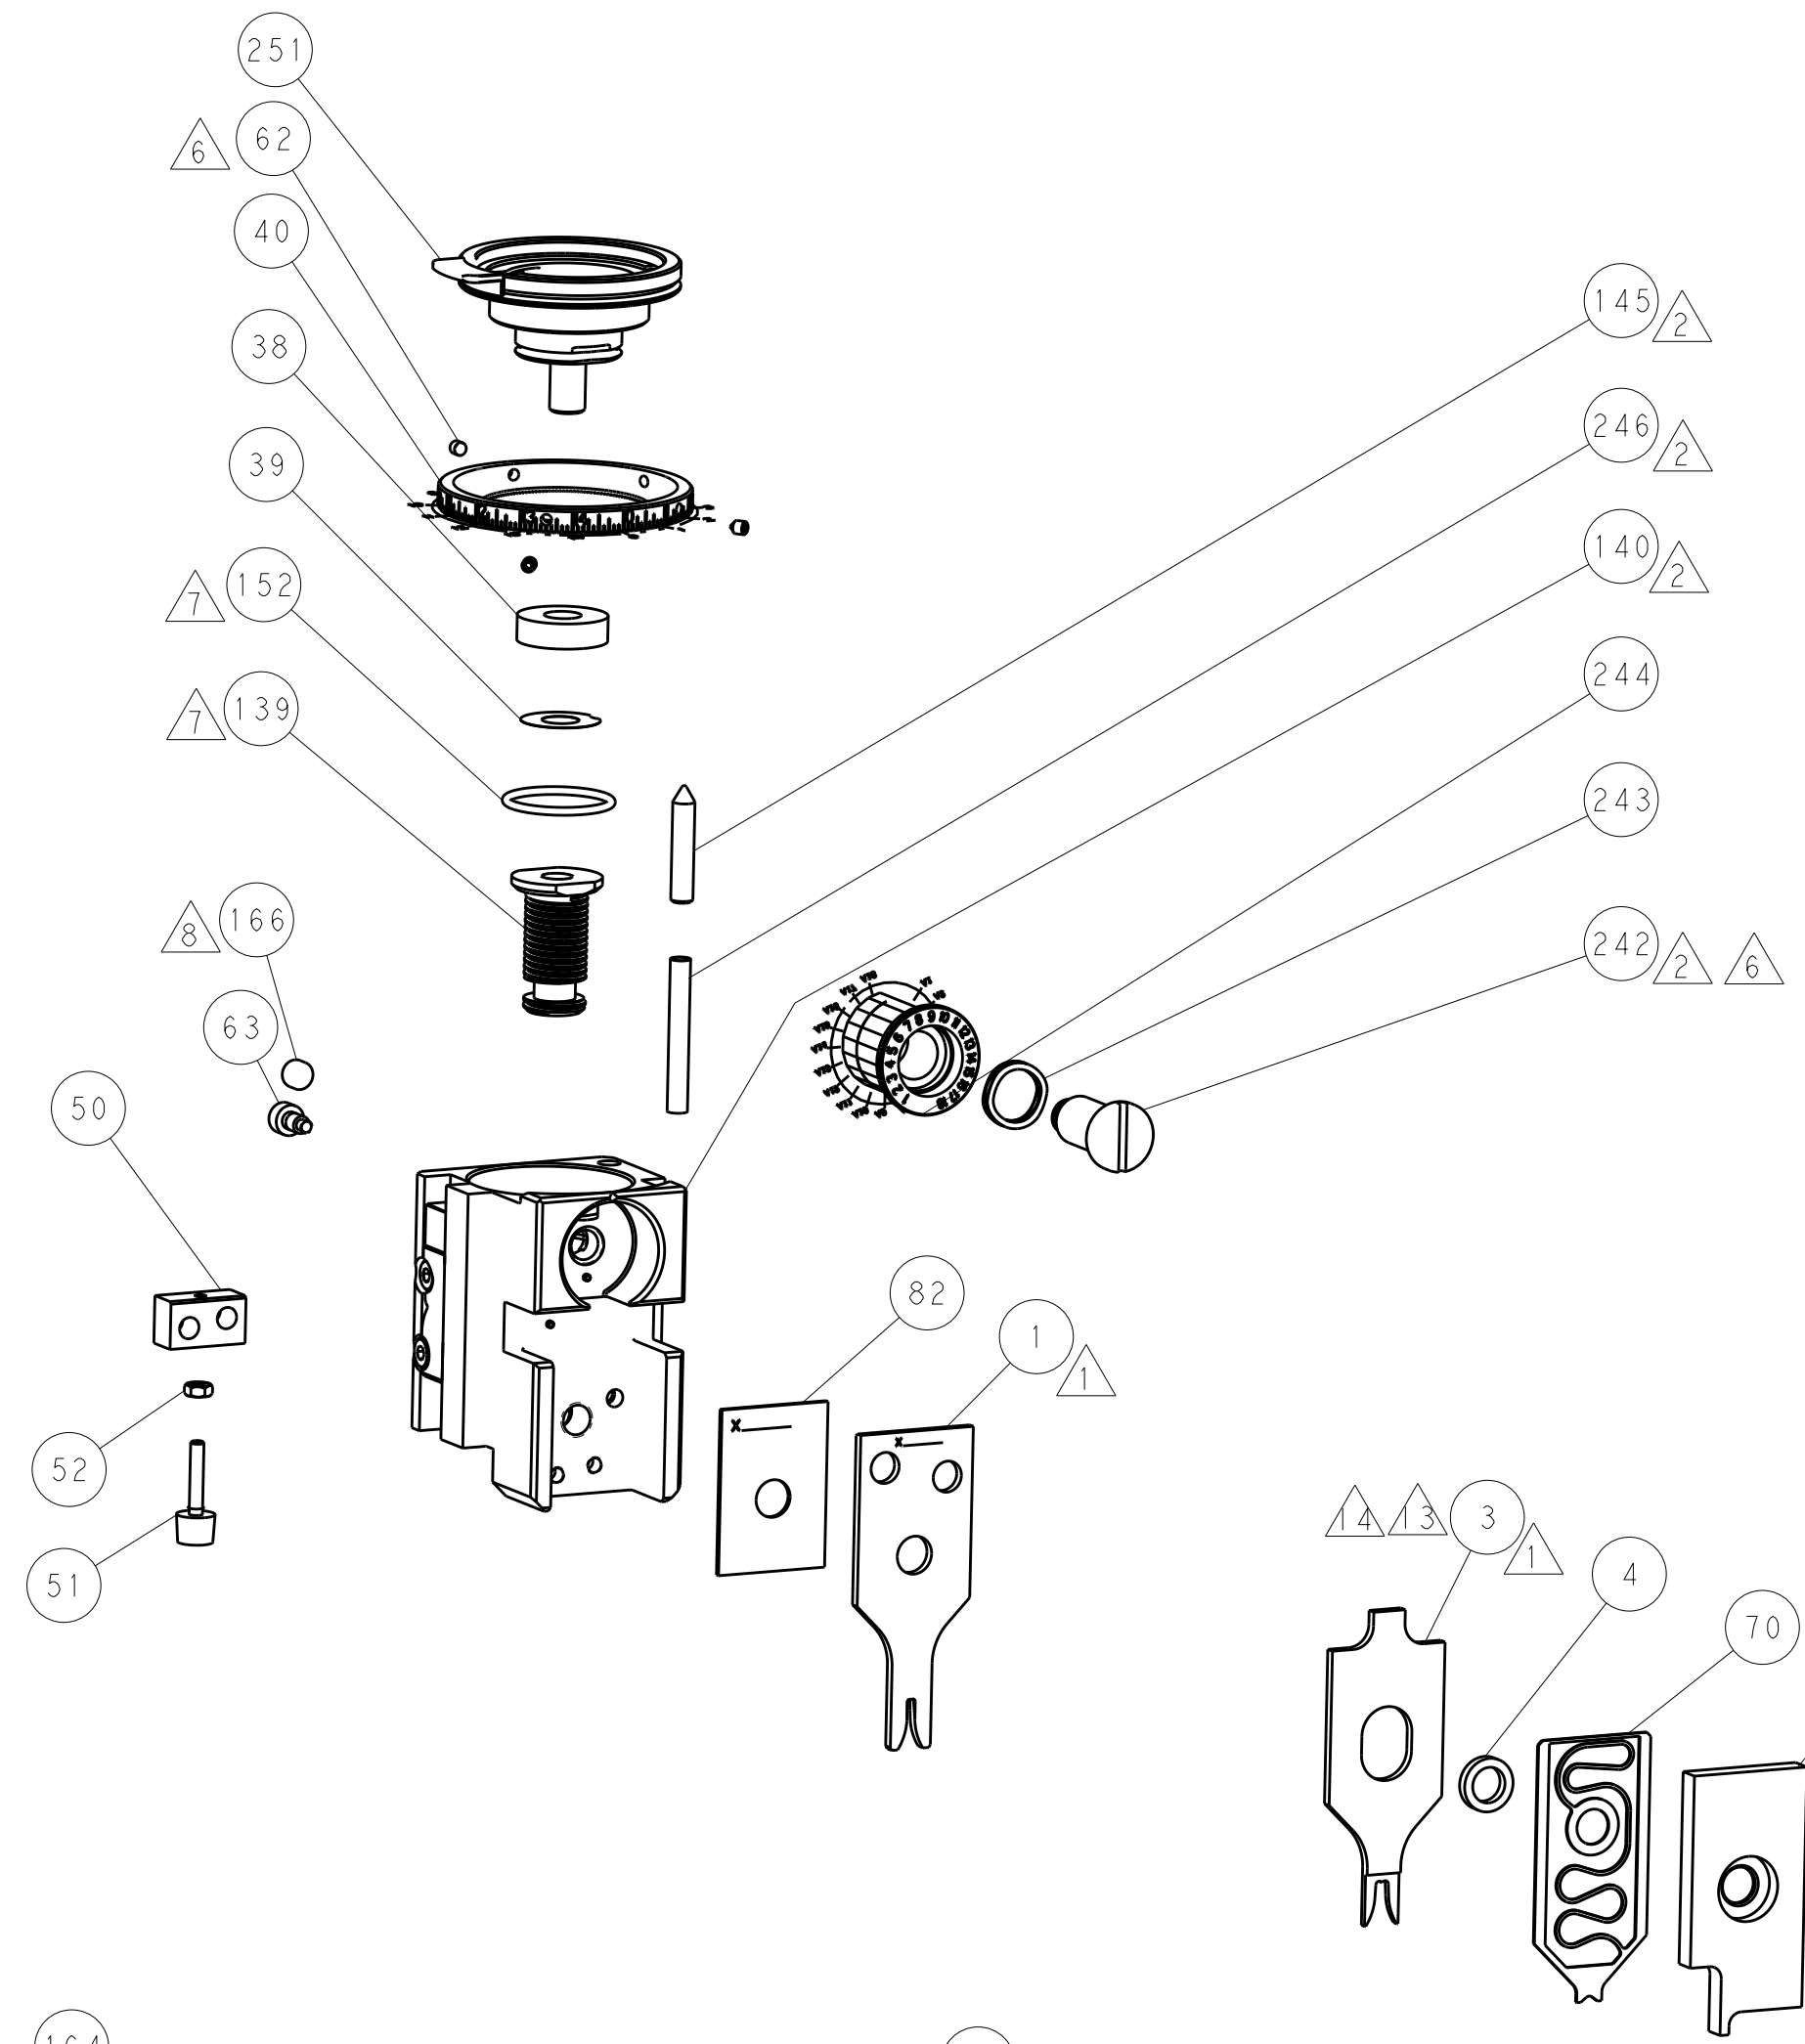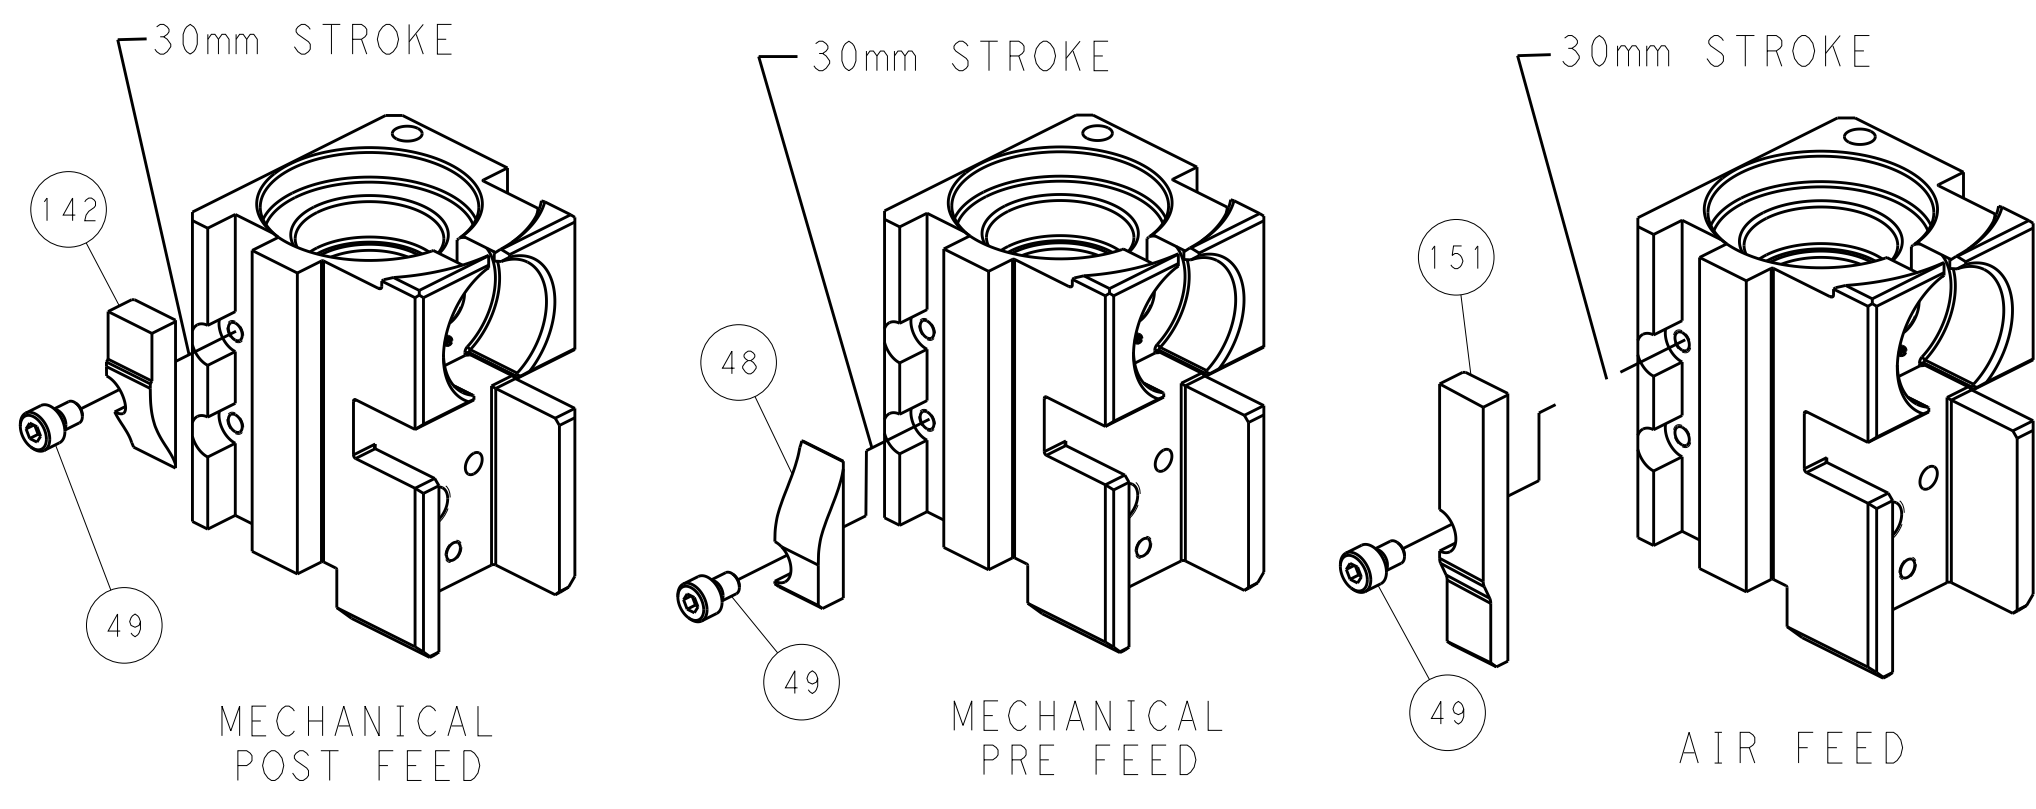

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		CHK		APVD		NAME	
mm		0 PLC ±.5		L. ZHANG		L. ZHANG		S. XI		Ocean Side Feed Applicator	
1 PLC ±0.5		2 PLC ±0.13		10NOV2011		10NOV2011		10NOV2011		SIZE	
3 PLC ±0.13		4 PLC ±0.013		PRODUCT SPEC		APPLICATION SPEC		CAGE CODE		DRAWING NO	
ANGLES		FINISH		WEIGHT		Customer Accessible Production Drawing		SCALE		SHEET	
-		-		-		-		1:2		4 OF 4	
-		-		-		-		REV		F	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9