



## Product Brief

# 800 V CoolSET™

## AC-DC integrated power stage

### Quasi resonant CoolSET™

The quasi resonant CoolSET™ series continues to deliver design agility and miniaturization. Upon the successful F3 CoolSET™, it offers the possibility of higher efficiency and better EMI performance. The digital frequency reduction feature scores a very stable operation with decreasing load change.

### Fixed frequency CoolSET™

Infineon's AC-DC integrated power stage 800 V CoolSET™ fixed frequency offers lowest standby power consumption < 300 mW at no load condition and lowest on-resistance for record efficiency levels. 650 V or 800 V avalanche rugged CoolMOS™ Power MOSFET is integrated optionally.

### Quasi-resonant CoolSET™ 800 V

| $P_{out}^{1)}$<br>85 V <sub>AC</sub> ... 265 V <sub>AC</sub> | 18 W                     | 24 W                         | 37 W        | 47 W        |
|--------------------------------------------------------------|--------------------------|------------------------------|-------------|-------------|
| $R_{DS(on)}$                                                 | 4.7 Ω                    | 2.2 Ω                        | 1.0 Ω       | 0.6 Ω       |
| Package                                                      | 800 V depletion CoolMOS™ |                              |             |             |
| DIP-7                                                        | ICE2QR4780Z              | ICE2QR2280Z<br>ICE2QR2280Z-1 |             | ICE2QR0680Z |
| DSO-12                                                       | ICE2QR4780G              | ICE2QR2280G<br>ICE2QR2280G-1 | ICE2QR1080G | ICE2QR0680Z |

<sup>1)</sup> Output power assume 78–83% efficiency.  $T_a = 50^\circ\text{C}$ ,  $T_j = 125^\circ\text{C}$  and no copper area for 650 V device and 232 mm<sup>2</sup> copper area for 800 V device.

### Fixed frequency PWM IC and CoolSET™ 800 V

| $P_{out}^{2)}$<br>85 V <sub>AC</sub> ... 265 V <sub>AC</sub> | 11 W                            | 16 W                                           | 22 W                                                                             | 30 W          | 37 W          | 43 W                                          |
|--------------------------------------------------------------|---------------------------------|------------------------------------------------|----------------------------------------------------------------------------------|---------------|---------------|-----------------------------------------------|
| $R_{DS(on)}$                                                 | 10.0 Ω                          | 4.7 Ω                                          | 2.2 Ω                                                                            | 1.5 Ω         | 1.0 Ω         | 0.6 Ω                                         |
| Package                                                      | 800 V depletion CoolMOS™        |                                                |                                                                                  |               |               |                                               |
| DIP-7                                                        | ICE3AR10080JZ<br>ICE3AR10080CJZ | ICE3AR4780JZ<br>ICE3AR4780VJZ<br>ICE3AR4780CJZ | ICE3AR2280JZ<br>ICE3AR2280JZ-T<br>ICE3AR2280CJZ<br>ICE3AR2280VJZ<br>ICE3BR2280JZ | ICE3AR1580VJZ | ICE3AR1080VJZ | ICE3AR0680JZ<br>ICE3AR0680VJZ<br>ICE3BR0680JZ |
| DSO-12                                                       |                                 | ICE3AR4780JG                                   | ICE3AR2280JG                                                                     |               | ICE3AR1080JG  |                                               |

<sup>2)</sup> Output power assume 76–83% efficiency.  $T_a = 50^\circ\text{C}$ ,  $T_j = 125^\circ\text{C}$  and no copper area

### Product highlights

#### 800 V quasi-resonant CoolSET™

- > Digital frequency reduction with decreasing load
- > Cycle-by-cycle current limitation with fold-back correction
- > Built-in digital soft-start
- > Active burst mode for lowest standby power < 50 mW
- > Latch-off mode for short-winding and output voltage
- > Enhanced integrated protection functions

#### 800 V fixed frequency CoolSET™


- > 800 V avalanche rugged CoolMOS™ with startup cell
- > Active burst mode to reach the lowest standby power < 100 mW
- > Selectable enter and exit burst mode level
- > Adjustable blanking window for high load jumps
- > Frequency jitter and soft driving for low EMI




# 800 V CoolSET™

## AC-DC integrated power stage

### Application diagram – 800 V quasi-resonant CoolSET™

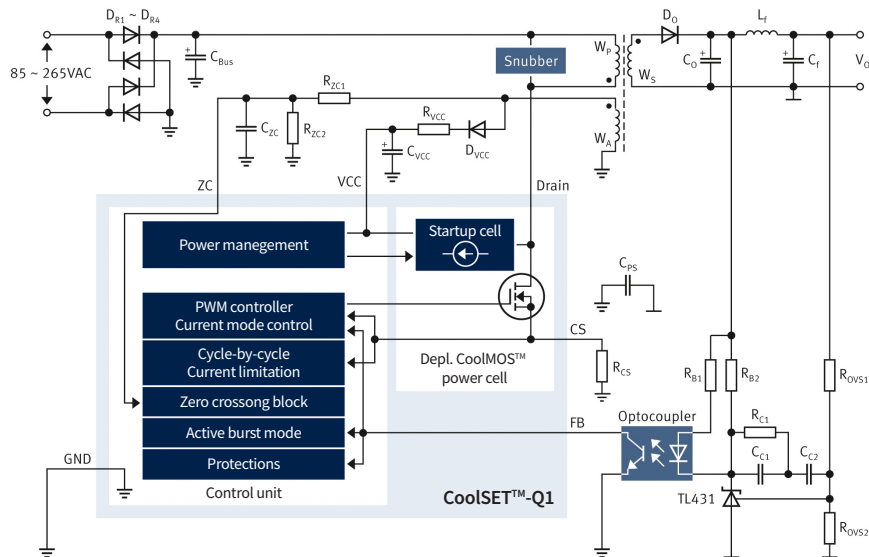

### Application diagram – 800 V fixed frequency CoolSET™

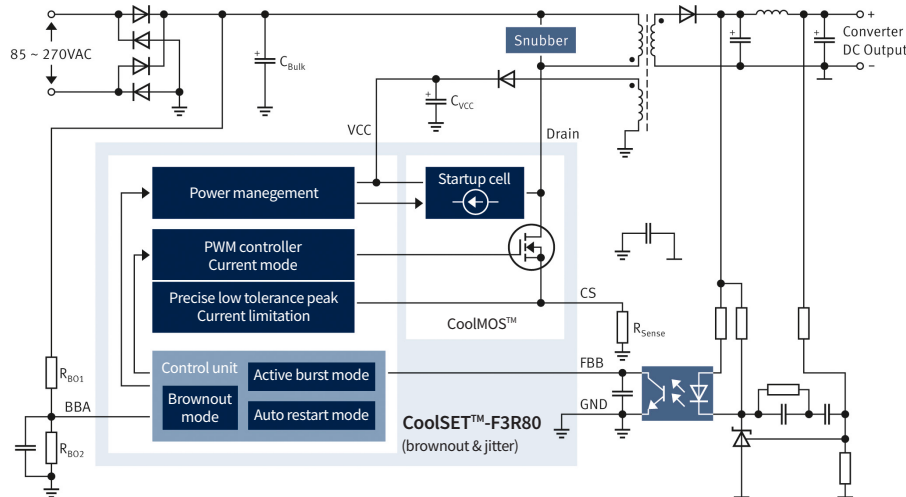

Published by  
Infineon Technologies AG  
85579 Neubiberg, Germany

© 2016 Infineon Technologies AG.  
All Rights Reserved.

Visit us:  
[www.infineon.com](http://www.infineon.com)

Order Number: B121-H9546-V1-7600-EU-EC-P  
Date: 05/2016

#### Please note!

THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY AND ANY INFORMATION GIVEN HEREIN SHALL IN NO EVENT BE REGARDED AS A WARRANTY, GUARANTEE OR DESCRIPTION OF ANY FUNCTIONALITY, CONDITIONS AND/OR QUALITY OF OUR PRODUCTS OR ANY SUITABILITY FOR A PARTICULAR PURPOSE. WITH REGARD TO THE TECHNICAL SPECIFICATIONS OF OUR PRODUCTS, WE KINDLY ASK YOU TO REFER TO THE RELEVANT PRODUCT DATA SHEETS PROVIDED BY US. OUR CUSTOMERS AND THEIR TECHNICAL DEPARTMENTS ARE REQUIRED TO EVALUATE THE SUITABILITY OF OUR PRODUCTS FOR THE INTENDED APPLICATION.

WE RESERVE THE RIGHT TO CHANGE THIS DOCUMENT AND/OR THE INFORMATION GIVEN HEREIN AT ANY TIME.

#### Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

#### Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9