


2

1

| THIS DRAWING AND THE INFORMATION SET FORTH HERE-<br>ON ARE THE PROPERTY OF TYCO ELECTRONICS<br>AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUB-<br>LICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY<br>PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY<br>TYCO ELECTRONICS IS PROHIBITED. | REVISIONS |                           |           |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------------|-----------|----------|
|                                                                                                                                                                                                                                                                                           | LTR       | DESCRIPTION               | DATE      | APPROVED |
|                                                                                                                                                                                                                                                                                           | G         | REVISED PER ECO-13-003640 | 03/1/2013 | -        |



### CODE 18 STRAIGHT ADAPTER


#### NOTES:

1. THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
2. SEE CH00-0250-008 FOR ORDERING INFORMATION, MODIFICATIONS AND ADDITIONAL DIMENSIONS.
3. SEE DRAWING "TR" FOR DETAIL ON TINEL-LOCK RING. RINGS ARE DESIGNED TO BE HEATED ELECTRICALLY. ALL RINGS ARE MARKED WITH THERMOCHROMIC PAINT WHICH CHANGES COLOR WHEN INSTALLATION TEMPERATURE IS REACHED.
4. ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENT. NO. AND PART NO. LESS RING DESIGNATOR (E.G.: 06090-TXR18AB00-1406). RINGS SHALL BEAR NO MARKING.
5. FOR LARGER ENTRY SIZES, A 2 PIECE ADAPTER (TYPE II) IS SUPPLIED.
6. ADAPTER MATES TO MIL-C-5015D, CLASS A, E & R, MS3100, MS3101 & MS3106. RESILIENT INSERT, SOLDER TYPE & BENDIX 10-214, CANNON CA-RX COMMERCIAL CRIMP TYPE.
7. ADDITIONAL PIECE(S) SUPPLIED WHEN CONNECTOR MANUFACTURER IS UNKNOWN ("D" IN TABLE III) AND ENTRY SIZE DOES NOT EXCEED VALUE IN TABLE I. SEE FIGURE A PAGE 2 OF 4.
8. ALL THREAD SIZES FOR ORDER NO. APPLY.
9. ANTI-ROTATIONAL SET SCREW, 3 THREADED HOLES  $120^{\circ} \pm 5^{\circ}$  APART, SINGLE MATING SET SCREW SUPPLIED: AN565DC4H2. NOT REQUIRED FOR TYPE II ADAPTERS.

If this document is printed it becomes uncontrolled. Check for the latest revision

©2005-2013 Tyco Electronics Corporation All rights reserved.

Raychem Adapters  
CUSTOMER DRAWING

|                                                                                                                                 |                                                                                                            |            |          |                                                                                                     |                          |                   |          |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------|----------|-----------------------------------------------------------------------------------------------------|--------------------------|-------------------|----------|
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES.<br>.XXX ± 0.005<br>.XX ± 0.01<br>.X ± 0.1<br><br>ANGLES<br>.X ± 0.5 DEG | DRAWN                                                                                                      | R. RAMIREZ | 04-19-93 |  TE Connectivity |                          |                   |          |
|                                                                                                                                 | CHECKED                                                                                                    | ---        | ---      |                                                                                                     |                          |                   |          |
|                                                                                                                                 | APPROVED                                                                                                   | W.C.GAY    | 04-19-93 | TITLE<br><br>TINEL-LOCK ADAPTER                                                                     |                          |                   |          |
|                                                                                                                                 | THIRD ANGLE PROJECTION  |            |          |                                                                                                     |                          |                   |          |
| MATERIAL<br>—                                                                                                                   | CAD NAME: TXR18_CD                                                                                         |            |          | SIZE<br>A                                                                                           | CODE IDENT. NO.<br>06090 | DWG. NO.<br>TXR18 | REV<br>G |
| FINISH<br>—                                                                                                                     | RPN:<br>—                                                                                                  |            |          | DO NOT SCALE THIS DRAWING                                                                           |                          | SHEET 1 OF 4      |          |

2








1

2

1

If this document is printed it becomes uncontrolled. Check for the latest revision

SEE SHEET 1 FOR REVISIONS

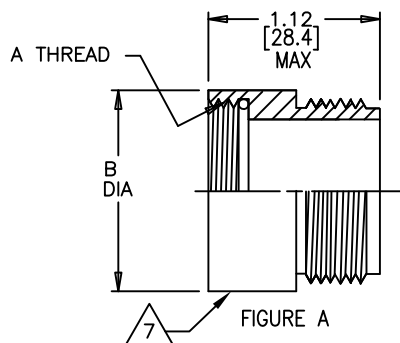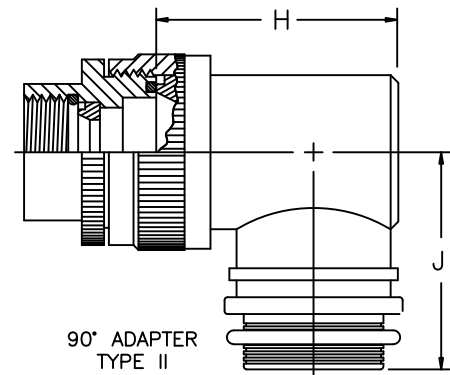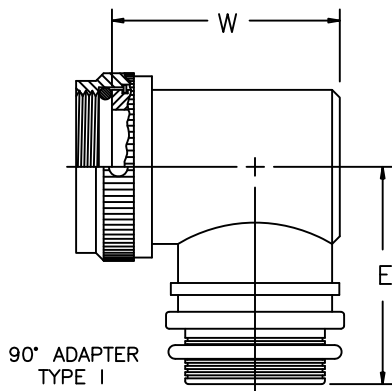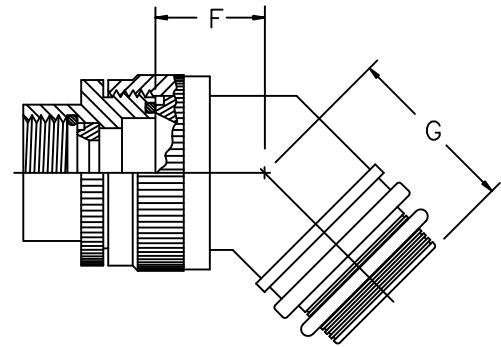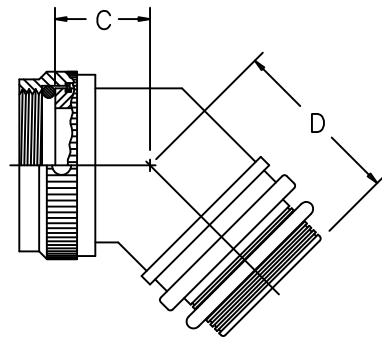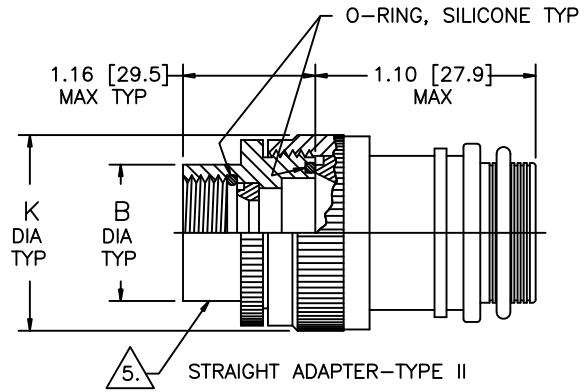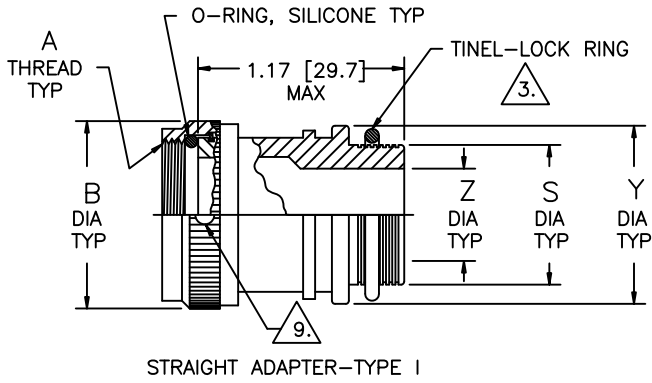

# Raychem Adapters CUSTOMER DRAWING

| SIZE                      | CODE IDENT. NO. | DWG. NO.          | REV          |
|---------------------------|-----------------|-------------------|--------------|
| A                         | 06090           | TXR18             | G            |
| DO NOT SCALE THIS DRAWING |                 | CAD NAME:TXR18_CD | SHEET 2 OF 4 |

2

1

TABLE I

| ORDER NO. | SHELL SIZE<br>△ | MFR CODE TABLE III | MAX ENTRY SIZE TYPE I<br>△ | A<br>THREAD CLASS 2B | B<br>DIA MAX | C<br>MAX    | D<br>MAX    | E<br>MAX    | W<br>MAX    |
|-----------|-----------------|--------------------|----------------------------|----------------------|--------------|-------------|-------------|-------------|-------------|
| 08        | 8S              | B                  | 04                         | .375-32 UNEF         | .73 [18.5]   | .80 [20.3]  | .92 [23.4]  | 1.23 [31.2] | .931 [23.6] |
|           |                 | C                  |                            | .438-28 UNEF         |              |             |             |             | .994 [25.2] |
|           |                 | A,R                |                            | .438-27 UNS          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
| 10        | 10S             | —                  | 06                         | .500-28 UNEF         | .79 [20.1]   | .83 [21.1]  | .95 [24.1]  | 1.23 [31.2] | 1.06 [26.8] |
| 11        | 10SL            | C                  | 07                         | .562-24 UNEF         | .85 [21.6]   | .83 [21.1]  | .95 [24.1]  | 1.23 [31.2] | 1.12 [28.4] |
|           |                 | A,B,R              |                            | .625-24 UNEF         | .92 [23.4]   |             |             |             | 1.18 [30.0] |
|           |                 | D △                |                            | △                    | .92 [23.4]   |             |             |             | 1.12 [28.4] |
|           |                 | B,C                |                            | .625-24 UNEF         | .92 [23.4]   | .83 [21.1]  | .95 [24.1]  | 1.23 [31.2] | 1.18 [30.0] |
| 12        | 12 & 12S        | A,R                | 08                         | .688-24 UNEF         | .98 [24.9]   | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.24 [31.6] |
|           |                 | D △                |                            | △                    | .98 [24.9]   | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.18 [30.0] |
|           |                 | —                  |                            | .750-20 UNEF         | 1.04 [26.4]  | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.31 [33.2] |
|           |                 | —                  |                            | .875-20 UNEF         | 1.23 [31.2]  | .89 [22.6]  | 1.02 [25.9] | 1.42 [36.1] | 1.43 [36.3] |
| 14        | 14 & 14S        | —                  | 10                         | .750-20 UNEF         | 1.04 [26.4]  | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.31 [33.2] |
| 16        | 16 & 16S        | —                  | 12                         | .875-20 UNEF         | 1.23 [31.2]  | .89 [22.6]  | 1.02 [25.9] | 1.42 [36.1] | 1.43 [36.3] |
| 18        | 18              | —                  | 12                         | 1.000-20 UNEF        | 1.35 [34.3]  | .92 [23.4]  | 1.05 [26.7] | 1.48 [37.6] | 1.49 [37.9] |
| 20        | 20              | A,B,C              | 16                         | 1.125-18 UNEF        | 1.48 [37.6]  | .95 [24.1]  | 1.08 [27.4] | 1.55 [39.4] | 1.68 [42.7] |
|           |                 | R                  |                            | 1.125-24 UNS         |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 1.250-18 UNEF        | 1.60 [40.6]  | .98 [24.9]  | 1.11 [28.2] | 1.61 [40.9] | 1.81 [45.9] |
| 22        | 22              | —                  | 18                         | 1.375-18 UNEF        | 1.73 [43.9]  | .98 [24.9]  | 1.11 [28.2] | 1.67 [42.4] | 1.93 [49.0] |
| 24        | 24              | —                  | 20                         | 1.625-18 UNEF        | 2.10 [53.3]  | 1.08 [27.4] | 1.17 [29.7] | 1.86 [47.2] | 2.06 [52.2] |
| 32        | 32              | B,C                | 24                         | 1.875-16 UN          | 2.23 [56.6]  | 1.11 [28.2] | 1.23 [31.2] | 1.92 [48.8] | 2.31 [58.6] |
|           |                 | A,R                |                            | 1.906-18 UN          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 2.062-16 UNS         |              |             |             |             |             |
| 36        | 36              | R                  | 24                         | 2.062-20 UNS         | 2.48 [63.0]  | 1.23 [31.2] | 1.27 [32.3] | 2.05 [52.1] | 2.56 [64.9] |
|           |                 | C                  |                            | 2.125-16 UN          |              |             |             |             |             |
|           |                 | A                  |                            | 2.125-18 UNS         |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
| 40        | 40              | B                  | 24                         | 2.312-16 UNS         | 2.73 [69.3]  | 1.27 [32.3] | 1.30 [33.0] | 2.17 [55.1] | 2.81 [71.3] |
|           |                 | A,C,R              |                            | 2.375-16 UN          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 2.625-16 UN          | 3.23 [82.0]  | 1.34 [34.0] | 1.36 [34.5] | 2.42 [61.5] | 3.06 [77.6] |
| 44        | 44              | —                  | 24                         | 2.625-16 UN          | 3.23 [82.0]  | 1.34 [34.0] | 1.36 [34.5] | 2.42 [61.5] | 3.06 [77.6] |
| 48        | 48              | C                  | 24                         | 2.812-18 UNS         | 3.23 [82.0]  | 1.34 [34.0] | 1.36 [34.5] | 2.42 [61.5] | 3.31 [84.0] |
|           |                 | A,R                |                            | 2.875-16 UN          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 2.875-16 UN          |              |             |             |             |             |

If this document is printed it becomes uncontrolled. Check for the latest revision

## Raychem Adapters CUSTOMER DRAWING

| SIZE                      | CODE IDENT. NO. | DWG. NO.          | REV          |
|---------------------------|-----------------|-------------------|--------------|
| A                         | 06090           | TXR18             | G            |
| DO NOT SCALE THIS DRAWING |                 | CAD NAME:TXR18_CD | SHEET 3 OF 4 |

TABLE II

| ENTRY<br>SIZE | Z<br>+.010<br>-.020 | S<br>DIA                       | Y<br>$\pm .015$<br>[ $\pm 0.38$ ] | F<br>MAX       | G<br>MAX       | J<br>MAX       | H<br>MAX       | K<br>MAX       |
|---------------|---------------------|--------------------------------|-----------------------------------|----------------|----------------|----------------|----------------|----------------|
| 04            | .250<br>[6.35]      | .376 [9.56]<br>.370 [9.39]     | .550<br>[13.97]                   | N/A            | N/A            | N/A            | N/A            | N/A            |
| 05            | .312<br>[7.92]      | .438 [11.13]<br>.432 [10.97]   | .612<br>[15.54]                   | .77<br>[19.6]  | .93<br>[23.6]  | 1.16<br>[29.5] | 1.19<br>[30.2] | .80<br>[20.3]  |
| 06            | .375<br>[9.52]      | .501 [12.73]<br>.495 [12.57]   | .675<br>[17.14]                   | .77<br>[19.6]  | .93<br>[23.6]  | 1.16<br>[29.5] | 1.19<br>[30.2] | .80<br>[20.3]  |
| 07            | .437<br>[11.09]     | .563 [14.31]<br>.556 [14.12]   | .737<br>[18.71]                   | .80<br>[20.3]  | .95<br>[24.1]  | 1.22<br>[31.0] | 1.38<br>[35.1] | .92<br>[23.4]  |
| 08            | .500<br>[12.70]     | .626 [15.91]<br>.619 [15.72]   | .800<br>[20.32]                   | .80<br>[20.3]  | .95<br>[24.1]  | 1.22<br>[31.0] | 1.38<br>[35.1] | .92<br>[23.4]  |
| 10            | .625<br>[15.87]     | .752 [19.11]<br>.742 [18.84]   | .925<br>[23.49]                   | .84<br>[21.3]  | 1.00<br>[25.4] | 1.35<br>[34.3] | 1.51<br>[38.4] | 1.18<br>[30.0] |
| 12            | .750<br>[19.05]     | .877 [22.28]<br>.867 [22.02]   | 1.050<br>[26.67]                  | .86<br>[21.8]  | 1.01<br>[25.7] | 1.40<br>[35.6] | 1.63<br>[41.4] | 1.35<br>[34.3] |
| 14            | .875<br>[22.23]     | 1.002 [25.46]<br>.991 [25.17]  | 1.175<br>[29.84]                  | .88<br>[22.4]  | 1.04<br>[26.4] | 1.46<br>[37.1] | 1.78<br>[45.2] | 1.41<br>[35.8] |
| 16            | 1.000<br>[25.40]    | 1.127 [28.63]<br>1.116 [28.34] | 1.300<br>[33.02]                  | .91<br>[23.1]  | 1.06<br>[26.9] | 1.53<br>[38.9] | 1.88<br>[47.8] | 1.60<br>[40.6] |
| 18            | 1.125<br>[28.57]    | 1.252 [31.81]<br>1.241 [31.52] | 1.425<br>[36.19]                  | .93<br>[23.6]  | 1.09<br>[27.7] | 1.59<br>[40.4] | 2.01<br>[51.1] | 1.66<br>[42.2] |
| 20            | 1.250<br>[31.75]    | 1.377 [34.98]<br>1.366 [34.69] | 1.550<br>[39.37]                  | .98<br>[24.9]  | 1.13<br>[28.7] | 1.78<br>[45.2] | 2.13<br>[54.1] | 2.04<br>[51.8] |
| 22            | 1.375<br>[34.93]    | 1.502 [38.15]<br>1.488 [37.79] | 1.675<br>[42.55]                  | 1.03<br>[26.2] | 1.38<br>[35.1] | 1.85<br>[47.0] | 2.29<br>[58.2] | 2.23<br>[56.6] |
| 24            | 1.500<br>[38.10]    | 1.627 [41.33]<br>1.613 [40.97] | 1.800<br>[45.72]                  | 1.08<br>[27.4] | 1.44<br>[36.6] | 1.92<br>[48.8] | 2.42<br>[61.5] | 2.23<br>[56.6] |

TABLE III

| MFR<br>CODE | CONNECTOR MANUFACTURER<br>(MS 3100, MS 3101 & MS 3106) |
|-------------|--------------------------------------------------------|
| A           | AMPHENOL—CLASS A                                       |
| B           | BENDIX—CLASS A, E & R                                  |
| C           | CANNON—CLASS A, E & R                                  |
| D           | MFR UNKNOWN, CLASS A, E & R                            |
| R           | AMPHENOL—CLASS R                                       |
| —           | MFR CODE NOT REQUIRED                                  |

# Raychem Adapters CUSTOMER DRAWING

If this document is printed it becomes uncontrolled. Check for the latest revision

| SIZE                      | CODE IDENT. NO. | DWG. NO.          | REV          |
|---------------------------|-----------------|-------------------|--------------|
| A                         | 06090           | TXR18             | G            |
| DO NOT SCALE THIS DRAWING |                 | CAD NAME:TXR18_CD | SHEET 4 OF 4 |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9