

## E4D20120A

### Silicon Carbide Schottky Diode E-Series Automotive



#### Features

- 4th Generation SiC Merged PIN Schottky Technology
- Zero Reverse Recovery Current
- High-Frequency Operation
- Temperature-Independent Switching Behavior
- AEC-Q101 Qualified and PPAP Capable
- Humidity Resistant


#### Benefits

- Replace Bipolar with Unipolar Rectifiers
- Essentially No Switching Losses
- Higher Efficiency
- Reduction of Heat Sink Requirements
- Parallel Devices Without Thermal Runaway
- Ideal for Outdoor Environments

#### Applications

- Boost diodes in PFC or DC/DC stages
- Free Wheeling Diodes in Inverter stages
- AC/DC converters
- Automotive and Traction Power Conversion
- PV Inverters

#### Package



TO-220-2



| Part Number | Package  | Marking  |
|-------------|----------|----------|
| E4D20120A   | TO-220-2 | E4D20120 |

#### Maximum Ratings ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

| Symbol         | Parameter                                  | Value            | Unit                 | Test Conditions                                                                                                 | Note   |
|----------------|--------------------------------------------|------------------|----------------------|-----------------------------------------------------------------------------------------------------------------|--------|
| $V_{RRM}$      | Repetitive Peak Reverse Voltage            | 1200             | V                    |                                                                                                                 |        |
| $V_R$          | DC Peak Reverse Voltage                    | 1200             | V                    |                                                                                                                 |        |
| $I_F$          | Continuous Forward Current                 | 54.5<br>26<br>20 | A                    | $T_c=25^\circ\text{C}$<br>$T_c=135^\circ\text{C}$<br>$T_c=150^\circ\text{C}$                                    | Fig. 3 |
| $P_{tot}$      | Power Dissipation                          | 250<br>112.5     | W                    | $T_c=25^\circ\text{C}$<br>$T_c=110^\circ\text{C}$                                                               | Fig. 4 |
| $I_{FRM}$      | Repetitive Peak Forward Surge Current      | 91<br>61         | A                    | $T_c=25^\circ\text{C}$ , $t_p=10$ ms, Half Sine Pulse<br>$T_c=110^\circ\text{C}$ , $t_p=10$ ms, Half Sine Pulse |        |
| dV/dt          | Diode dV/dt ruggedness                     | 250              | V/ns                 | $V_R=0-960\text{V}$                                                                                             |        |
| $\int i^2 dt$  | $i^2t$ value                               | 84.5<br>60.5     | $\text{A}^2\text{s}$ | $T_c=25^\circ\text{C}$ , $t_p=10$ ms<br>$T_c=110^\circ\text{C}$ , $t_p=10$ ms                                   |        |
| $T_J, T_{stg}$ | Operating Junction and Storage Temperature | -55 to<br>+175   | $^\circ\text{C}$     |                                                                                                                 |        |
|                | TO-220 Mounting Torque                     | 1<br>8.8         | Nm<br>lbf-in         | M3 Screw<br>6-32 Screw                                                                                          |        |

## Electrical Characteristics

| Symbol | Parameter                 | Typ.             | Max. | Unit          | Test Conditions                                                                                                                                                                                                    | Note   |
|--------|---------------------------|------------------|------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| $V_F$  | Forward Voltage           | 1.5<br>2.2       | 1.8  | V             | $I_F = 20\text{ A}$ $T_J = 25^\circ\text{C}$<br>$I_F = 20\text{ A}$ $T_J = 175^\circ\text{C}$                                                                                                                      | Fig. 1 |
| $I_R$  | Reverse Current           | 35<br>65         | 200  | $\mu\text{A}$ | $V_R = 1200\text{ V}$ $T_J = 25^\circ\text{C}$<br>$V_R = 1200\text{ V}$ $T_J = 175^\circ\text{C}$                                                                                                                  | Fig. 2 |
| $Q_c$  | Total Capacitive Charge   | 99               |      | nC            | $V_R = 800\text{ V}$ , $I_F = 20\text{ A}$<br>$di/dt = 200\text{ A}/\mu\text{s}$<br>$T_J = 25^\circ\text{C}$                                                                                                       | Fig. 5 |
| C      | Total Capacitance         | 1500<br>93<br>67 |      | pF            | $V_R = 0\text{ V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{ MHz}$<br>$V_R = 400\text{ V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{ MHz}$<br>$V_R = 800\text{ V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{ MHz}$ | Fig. 6 |
| $E_c$  | Capacitance Stored Energy | 28               |      | $\mu\text{J}$ | $V_R = 800\text{ V}$                                                                                                                                                                                               | Fig. 7 |

Note: This is a majority carrier diode, so there is no reverse recovery charge.

## Thermal Characteristics

| Symbol          | Parameter                                | Typ. | Unit                      | Note   |
|-----------------|------------------------------------------|------|---------------------------|--------|
| $R_{\theta JC}$ | Thermal Resistance from Junction to Case | 0.6  | $^\circ\text{C}/\text{W}$ | Fig. 9 |

## Typical Performance

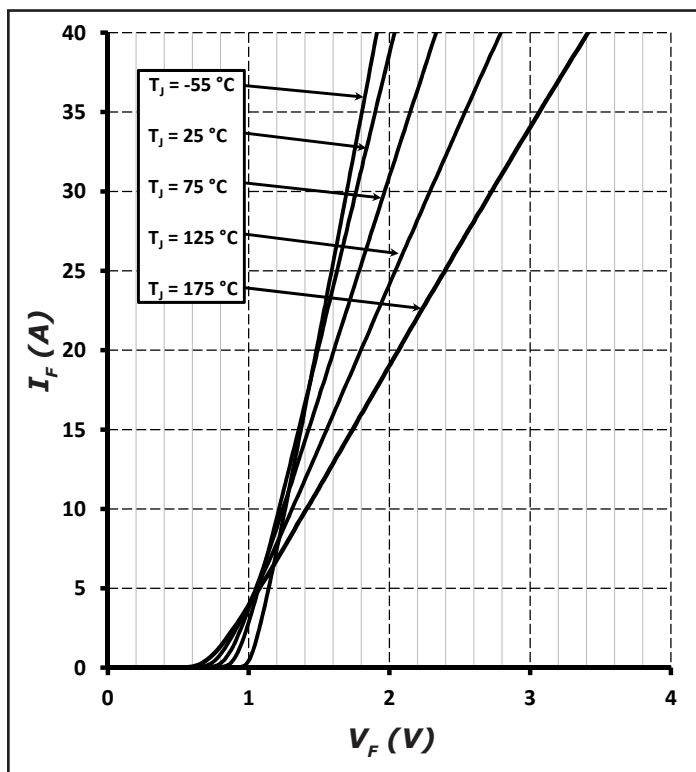


Figure 1. Forward Characteristics

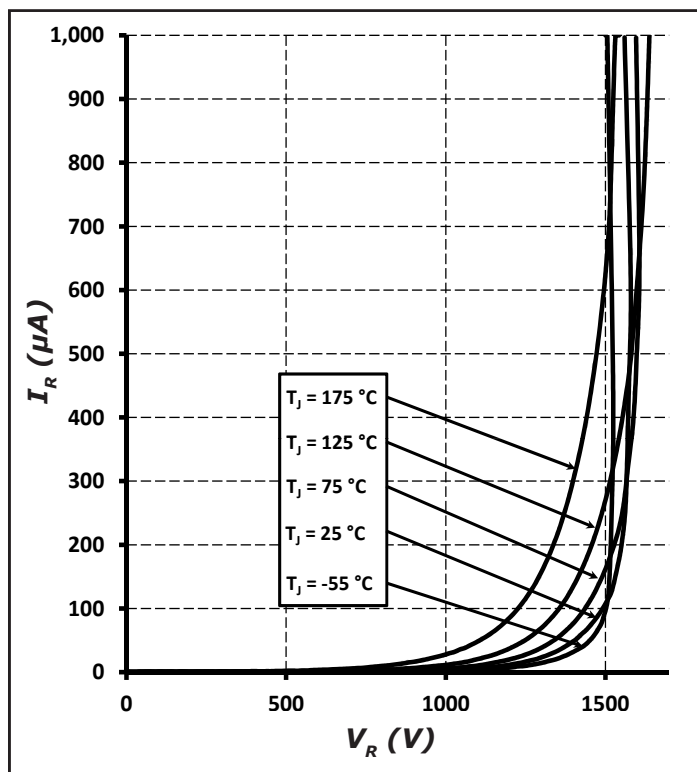


Figure 2. Reverse Characteristics

## Typical Performance

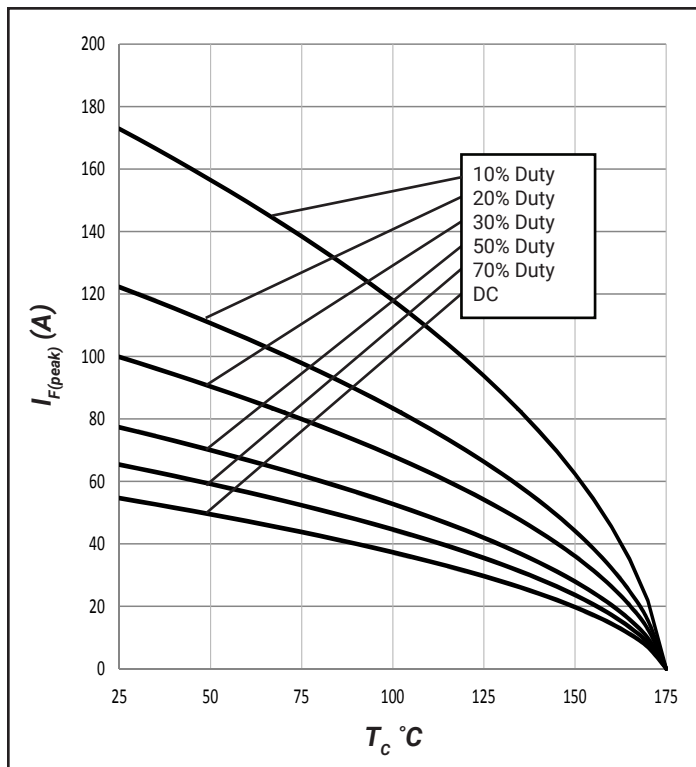


Figure 3. Current Derating

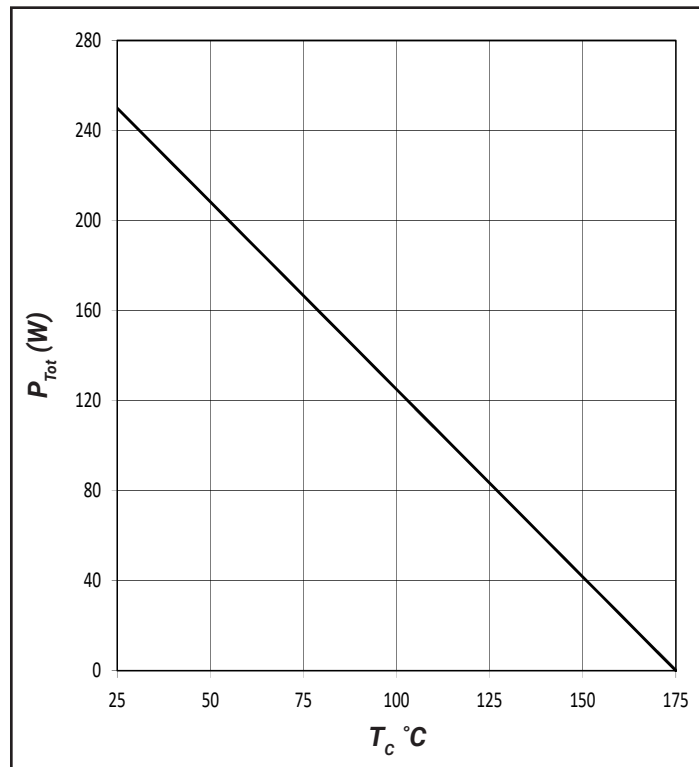


Figure 4. Power Derating

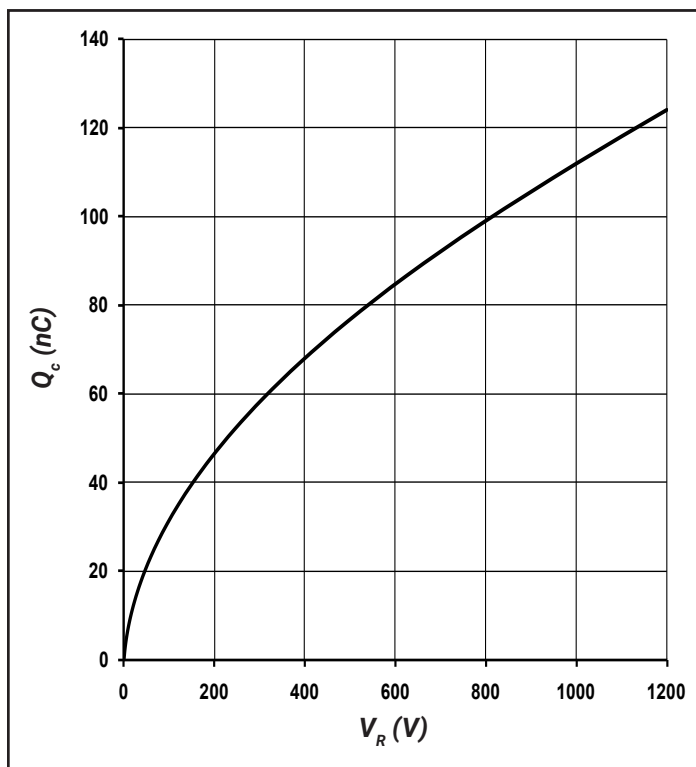


Figure 5. Recovery Charge vs. Reverse Voltage

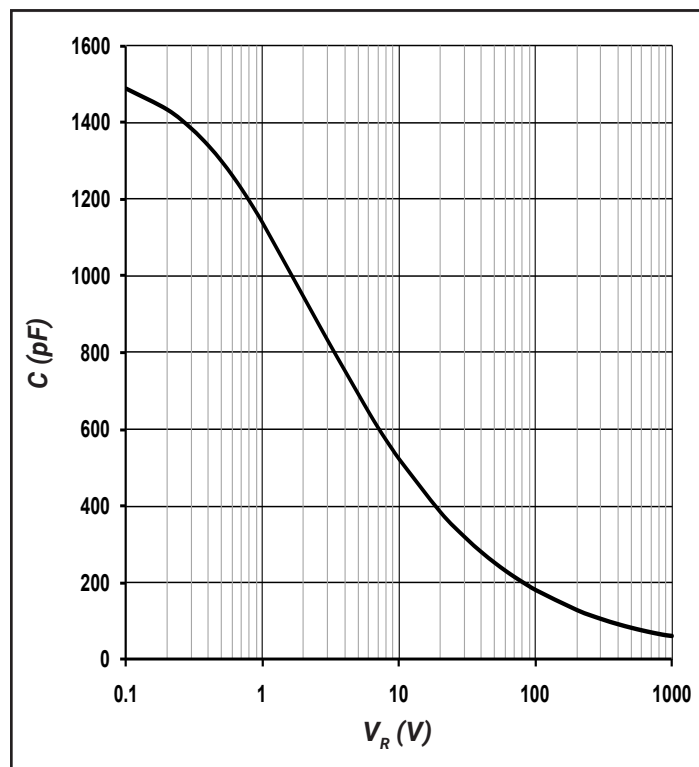


Figure 6. Capacitance vs. Reverse Voltage

## Typical Performance

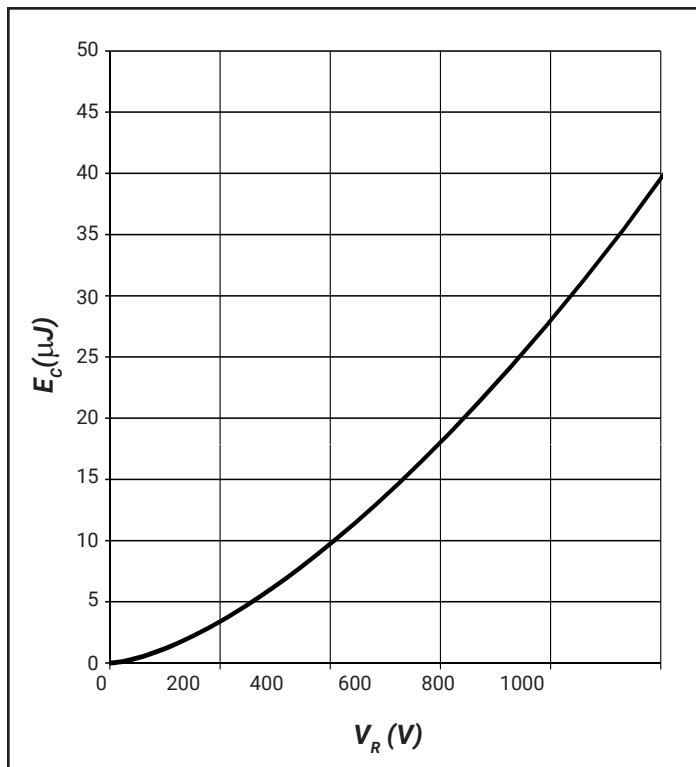


Figure 7. Typical Capacitance Stored Energy

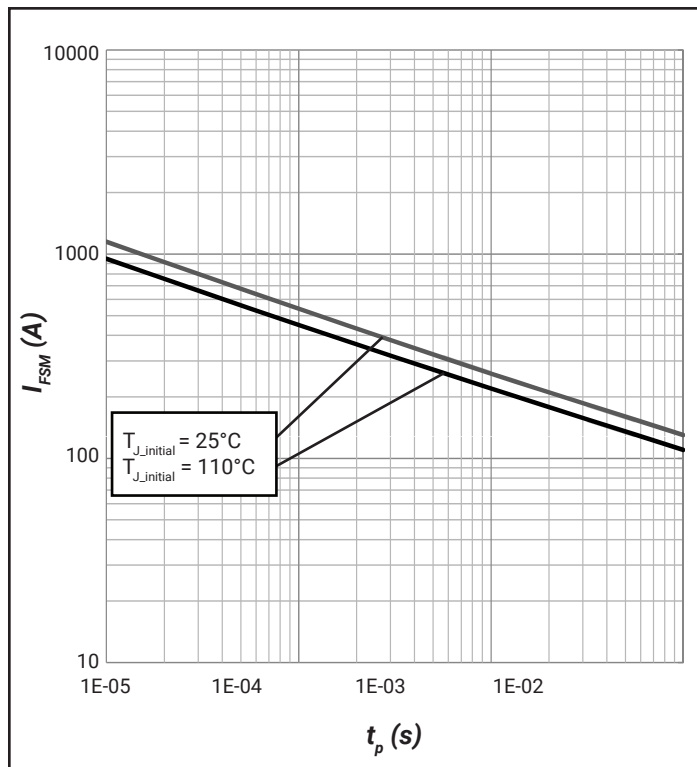


Figure 8. Non-Repetitive Peak Forward Surge Current versus Pulse Duration (sinusoidal waveform)


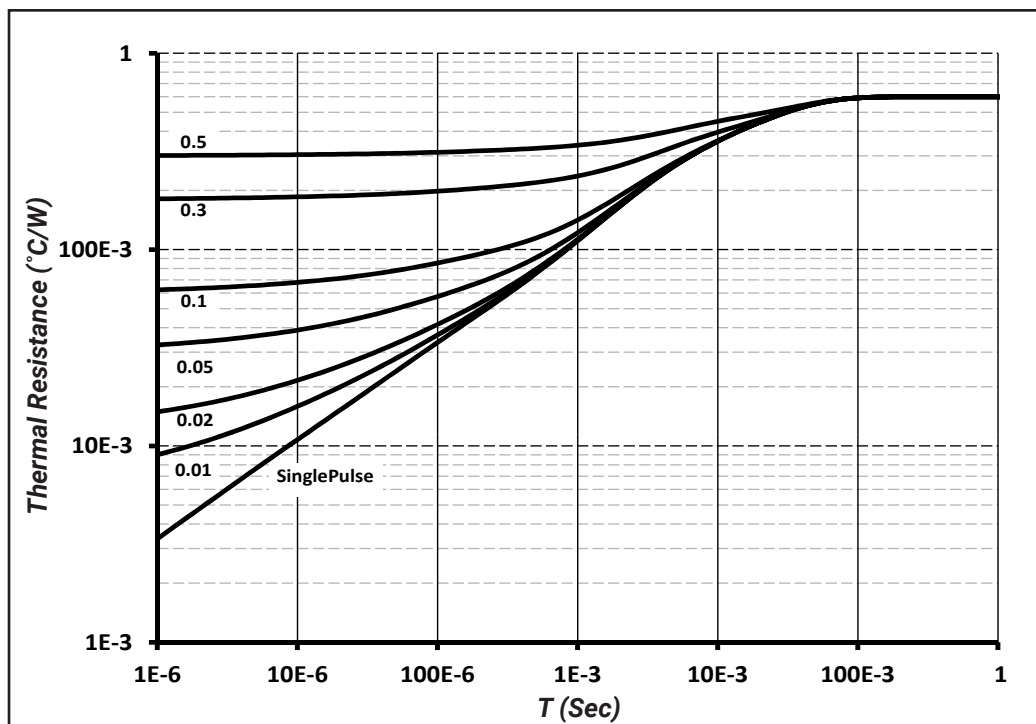


Figure 9. Transient Thermal Impedance

## **Package Dimensions**

### Package TO-220-2

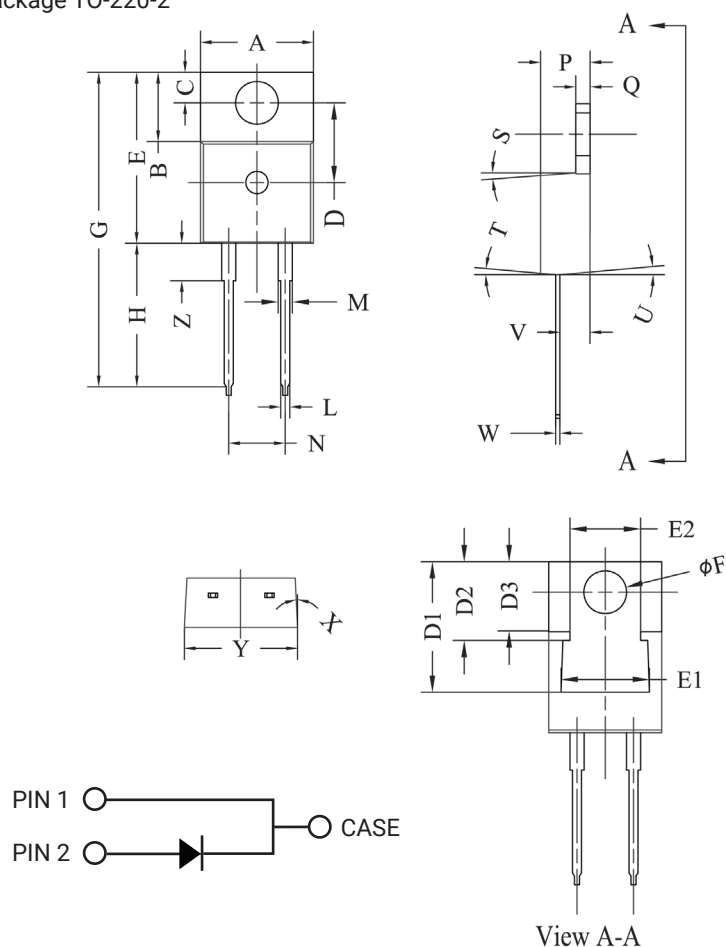


| POS | Inches        |       | Millimeters     |        |
|-----|---------------|-------|-----------------|--------|
|     | Min           | Max   | Min             | Max    |
| A   | .381          | .410  | 9.677           | 10.414 |
| B   | .235          | .255  | 5.969           | 6.477  |
| C   | .100          | .120  | 2.540           | 3.048  |
| D   | .223          | .337  | 5.664           | 8.560  |
| D1  | .457-.490     |       | 11.60-12.45 typ |        |
| D2  | .277-.303 typ |       | 7.04-7.70 typ   |        |
| D3  | .244-.252 typ |       | 6.22-6.4 typ    |        |
| E   | .590          | .615  | 14.986          | 15.621 |
| E1  | .302          | .326  | 7.68            | 8.28   |
| E2  | .227          | .251  | 5.77            | 6.37   |
| F   | .143          | .153  | 3.632           | 3.886  |
| G   | 1.105         | 1.147 | 28.067          | 29.134 |
| H   | .500          | .550  | 12.700          | 13.970 |
| L   | .025          | .036  | .635            | .914   |
| M   | .045          | .055  | 1.143           | 1.550  |
| N   | .195          | .205  | 4.953           | 5.207  |
| P   | .165          | .185  | 4.191           | 4.699  |
| Q   | .048          | .054  | 1.219           | 1.372  |
| S   | 3°            | 6°    | 3°              | 6°     |
| T   | 3°            | 6°    | 3°              | 6°     |
| U   | 3°            | 6°    | 3°              | 6°     |
| V   | .094          | .110  | 2.388           | 2.794  |
| W   | .014          | .025  | .356            | .635   |
| X   | 3°            | 5.5°  | 3°              | 5.5°   |
| Y   | .385          | .410  | 9.779           | 10.414 |
| z   | .130          | .150  | 3.302           | 3.810  |

NOTE:

1. Dimension L, M, W apply for Solder Dip Finish

## **Recommended Solder Pad Layout**




TO-220-2

| Part Number | Package  | Marking  |
|-------------|----------|----------|
| E4D20120A   | TO-220-2 | E4D20120 |

Note: Recommended soldering profiles can be found in the applications note here:  
[http://www.wolfspeed.com/power\\_app\\_notes/soldering](http://www.wolfspeed.com/power_app_notes/soldering)



## Diode Model

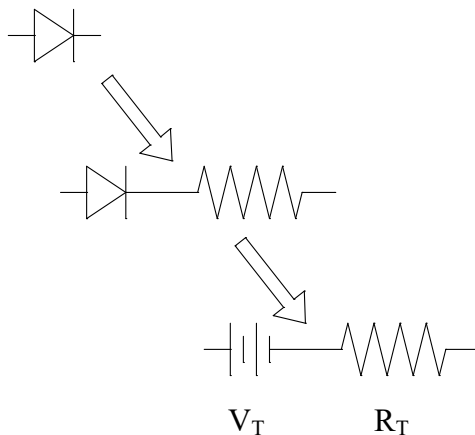

$$V_{fT} = V_T + I_f R_T$$

$$V_T = 0.97 + (T_J * -1.40 * 10^{-3})$$

$$R_T = 0.023 + (T_J * 2.71 * 10^{-4})$$

Note:  $T_J$  = Diode Junction Temperature In Degrees Celsius,  
valid from 25°C to 175°C

## Notes

- RoHS Compliance**  
The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Ecology section of our website at <http://www.wolfspeed.com/power/tools-and-support/product-ecology>.
- REACH Compliance**  
REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.
- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control systems.

## Related Links

- Wolfspeed E-Series Family: <http://wolfspeed.com/E-Series>
- Wolfspeed SiC Schottky diode portfolio: <http://www.wolfspeed.com/Power/Products#SiCSchottkyDiodes>
- Schottky diode Spice models: <http://www.wolfspeed.com/power/tools-and-support/DIODE-model-request2>
- SiC MOSFET and diode reference designs: <http://go.pardot.com/l/101562/2015-07-31/349i>

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9