

	9	8	7	6	5	4	3	2	1																																																																																	
	FEMALE PLUG M12 90° ANGLED																																																																																									
E										E																																																																																
D										D																																																																																
C										C																																																																																
B	CONTACTS POSITION FRONT VIEW:									B																																																																																
A	<table border="1"><thead><tr><th colspan="2">3 CONTACTS</th><th colspan="2">4 CONTACTS</th><th colspan="2">5 CONTACTS</th><th colspan="2">8 CONTACTS</th></tr></thead><tbody><tr><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td></tr><tr><td>1</td><td>BROWN</td><td>1</td><td>BROWN</td><td>1</td><td>BROWN</td><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>---</td><td>2</td><td>WHITE</td><td>2</td><td>WHITE</td><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td><td>3</td><td>BLUE</td><td>3</td><td>BLUE</td><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>BLACK or YELLOW/GREEN</td><td>4</td><td>BLACK</td><td>4</td><td>BLACK</td><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>---</td><td>5</td><td>---</td><td>5</td><td>GREY or YELLOW/GREEN</td><td>5</td><td>GREY</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>6</td><td>PINK</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>7</td><td>BLUE</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>8</td><td>RED</td></tr></tbody></table>									3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS		PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE	1	BROWN	1	BROWN	1	BROWN	1	WHITE	2	---	2	WHITE	2	WHITE	2	BROWN	3	BLUE	3	BLUE	3	BLUE	3	GREEN	4	BLACK or YELLOW/GREEN	4	BLACK	4	BLACK	4	YELLOW	5	---	5	---	5	GREY or YELLOW/GREEN	5	GREY							6	PINK							7	BLUE							8	RED	A
3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS																																																																																				
PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE																																																																																			
1	BROWN	1	BROWN	1	BROWN	1	WHITE																																																																																			
2	---	2	WHITE	2	WHITE	2	BROWN																																																																																			
3	BLUE	3	BLUE	3	BLUE	3	GREEN																																																																																			
4	BLACK or YELLOW/GREEN	4	BLACK	4	BLACK	4	YELLOW																																																																																			
5	---	5	---	5	GREY or YELLOW/GREEN	5	GREY																																																																																			
						6	PINK																																																																																			
						7	BLUE																																																																																			
						8	RED																																																																																			
	CODING REQUIRED TO IEC 61076-2-101																																																																																									
	DOCUMENT STATUS	P1	RELEASE DATE	2019/04/16	06:18:09																																																																																					
	9	8	7	6	5	4	3	2	1																																																																																	

RATED VOLTAGE: 3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
PROTECTION CLASS: IP 67
TEMPERATURE: -25°C / +85°C

Thicker Overmold for Cables with bigger Outer Diameter

LENGTH + TOLERANCE

(31.0)

(50)

(27.7)

M12x1

($\varnothing$ 14.5)

45°

For Shielded Cables testing ends are cut off after test

	9	8	7	6	5	4	3	2	1																																																																																	
	FEMALE PLUG M12 90° ANGLED																																																																																									
E										E																																																																																
D										D																																																																																
C										C																																																																																
B	CONTACTS POSITION FRONT VIEW:									B																																																																																
A	<table border="1"><thead><tr><th colspan="2">3 CONTACTS</th><th colspan="2">4 CONTACTS</th><th colspan="2">5 CONTACTS</th><th colspan="2">8 CONTACTS</th></tr></thead><tbody><tr><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td></tr><tr><td>1</td><td>BROWN</td><td>1</td><td>BROWN</td><td>1</td><td>BROWN</td><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>---</td><td>2</td><td>WHITE</td><td>2</td><td>WHITE</td><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td><td>3</td><td>BLUE</td><td>3</td><td>BLUE</td><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>BLACK or YELLOW/GREEN</td><td>4</td><td>BLACK</td><td>4</td><td>BLACK</td><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>---</td><td>5</td><td>---</td><td>5</td><td>GREY or YELLOW/GREEN</td><td>5</td><td>GREY</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>6</td><td>PINK</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>7</td><td>BLUE</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>8</td><td>RED</td></tr></tbody></table>									3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS		PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE	1	BROWN	1	BROWN	1	BROWN	1	WHITE	2	---	2	WHITE	2	WHITE	2	BROWN	3	BLUE	3	BLUE	3	BLUE	3	GREEN	4	BLACK or YELLOW/GREEN	4	BLACK	4	BLACK	4	YELLOW	5	---	5	---	5	GREY or YELLOW/GREEN	5	GREY							6	PINK							7	BLUE							8	RED	A
3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS																																																																																				
PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE																																																																																			
1	BROWN	1	BROWN	1	BROWN	1	WHITE																																																																																			
2	---	2	WHITE	2	WHITE	2	BROWN																																																																																			
3	BLUE	3	BLUE	3	BLUE	3	GREEN																																																																																			
4	BLACK or YELLOW/GREEN	4	BLACK	4	BLACK	4	YELLOW																																																																																			
5	---	5	---	5	GREY or YELLOW/GREEN	5	GREY																																																																																			
						6	PINK																																																																																			
						7	BLUE																																																																																			
						8	RED																																																																																			
	CODING REQUIRED TO IEC 61076-2-101																																																																																									
	DOCUMENT STATUS	P1	RELEASE DATE	2019/04/16	06:18:09																																																																																					
	9	8	7	6	5	4	3	2	1																																																																																	

[illegible]

7	1	LABEL YELLOW	VINYL	---
	-	PRINTING FOR CABLES lxx	---	---
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOLDING BLACK	TPU	---
4	1	COUPLING NUT FEMALE	BRASS	NICKEL
3	1	INSERT FEMALE BLACK	PUR	---
2	1	ORING RED	FPM	---
1	3 / 4 / 5 / 8	CONTACT M12 FEMALE	BRASS	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

	9	8	7	6	5	4	3	2	1																																																																																																																				
FEMALE PLUG M12 90° ANGLED																																																																																																																													
E										E																																																																																																																			
D										D																																																																																																																			
C	NOTES: RATED VOLTAGE: 3, 4 contacts 250V 5 contacts 60V 8 contacts 30V RATED CURRENT: 3, 4, 5 contacts 4A 8 contacts 2A PROTECTION CLASS: IP 67 TEMPERATURE: -25°C / +85°C									C																																																																																																																			
B	CONTACTS POSITION FRONT VIEW: <table><tr><th colspan="2">3 CONTACTS</th><th colspan="2">4 CONTACTS</th><th colspan="2">5 CONTACTS</th><th colspan="2">8 CONTACTS</th></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td><td>PIN</td><td>WIRE</td></tr><tr><td>1</td><td>BROWN</td><td>1</td><td>BROWN</td><td>1</td><td>BROWN</td><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>---</td><td>2</td><td>WHITE</td><td>2</td><td>WHITE</td><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td><td>3</td><td>BLUE</td><td>3</td><td>BLUE</td><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>BLACK or YELLOW/GREEN</td><td>4</td><td>BLACK</td><td>4</td><td>BLACK</td><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>---</td><td>5</td><td>---</td><td>5</td><td>GREY or YELLOW/GREEN</td><td>5</td><td>GREY</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>6</td><td>PINK</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>7</td><td>BLUE</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>8</td><td>RED</td></tr></table>									3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS										PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE	1	BROWN	1	BROWN	1	BROWN	1	WHITE	2	---	2	WHITE	2	WHITE	2	BROWN	3	BLUE	3	BLUE	3	BLUE	3	GREEN	4	BLACK or YELLOW/GREEN	4	BLACK	4	BLACK	4	YELLOW	5	---	5	---	5	GREY or YELLOW/GREEN	5	GREY							6	PINK							7	BLUE							8	RED	B																											
3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS																																																																																																																							
PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE																																																																																																																						
1	BROWN	1	BROWN	1	BROWN	1	WHITE																																																																																																																						
2	---	2	WHITE	2	WHITE	2	BROWN																																																																																																																						
3	BLUE	3	BLUE	3	BLUE	3	GREEN																																																																																																																						
4	BLACK or YELLOW/GREEN	4	BLACK	4	BLACK	4	YELLOW																																																																																																																						
5	---	5	---	5	GREY or YELLOW/GREEN	5	GREY																																																																																																																						
						6	PINK																																																																																																																						
						7	BLUE																																																																																																																						
						8	RED																																																																																																																						
A	FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2 <table><tr><th>ITEM</th><th>QTY.</th><th>DESCRIPTION</th><th>MATERIAL</th><th>FINISH</th></tr><tr><td>7</td><td>1</td><td>LABEL YELLOW</td><td>VINYL</td><td>---</td></tr><tr><td></td><td>-</td><td>PRINTING FOR CABLES lxx</td><td>---</td><td>---</td></tr><tr><td>6</td><td>-</td><td>CABLE</td><td>SEE SHEET 2</td><td>---</td></tr><tr><td>5</td><td>-</td><td>OVERMOLDING BLACK</td><td>TPU</td><td>---</td></tr><tr><td>4</td><td>1</td><td>COUPLING NUT FEMALE</td><td>BRASS</td><td>NICKEL</td></tr><tr><td>3</td><td>1</td><td>INSERT FEMALE BLACK</td><td>PUR</td><td>---</td></tr><tr><td>2</td><td>1</td><td>ORING RED</td><td>FPM</td><td>---</td></tr><tr><td>1</td><td>3 / 4 / 5 / 8</td><td>CONTACT M12 FEMALE</td><td>BRASS</td><td>SELECTIVE Au OVER Ni</td></tr></table> <table><tr><th>Symbols</th><th colspan="4">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</th></tr><tr><td> = 0</td><td>DIMENSION UNITS</td><td>SCALE</td><td colspan="2">CURRENT REV DESC:</td></tr><tr><td> = 0</td><td>mm</td><td>2:1</td><td colspan="2"></td></tr><tr><td> = 0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2"></td></tr><tr><td> = 0</td><td colspan="2">ANGULAR TOL ± 1.0 °</td><td colspan="2"></td></tr><tr><td> = 0</td><td>4 PLACES ±</td><td>EC NO: 615582</td><td colspan="2"></td></tr><tr><td> = 0</td><td>3 PLACES ±</td><td>DRWN: SSM 2019/03/28</td><td colspan="2"></td></tr><tr><td> = 0</td><td>2 PLACES ± 0.05</td><td>CHK'D: RSILLER 2019/04/16</td><td colspan="2"></td></tr><tr><td> = 0</td><td>1 PLACE ± 0.1</td><td>APPR: RSILLER 2019/04/16</td><td colspan="2"></td></tr><tr><td> = 0</td><td>0 PLACES ± 0.2</td><td>INITIAL REVISION:</td><td colspan="2"></td></tr><tr><td> = 0</td><td>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td>DRWN: JMARSZALEK 2016/01/11</td><td colspan="2"></td></tr><tr><td> = 0</td><td>THIRD ANGLE PROJECTION</td><td>APPR: RSILLER 2016/04/08</td><td colspan="2"></td></tr><tr><td></td><td></td><td>DRAWING A3-SIZE</td><td>SERIES 120065</td><td></td></tr><tr><td></td><td></td><td>MATERIAL NUMBER SEE PART LIST</td><td>CUSTOMER GENERAL MARKET</td><td>SHEET NUMBER 1 OF 3</td></tr></table>									ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH	7	1	LABEL YELLOW	VINYL	---		-	PRINTING FOR CABLES lxx	---	---	6	-	CABLE	SEE SHEET 2	---	5	-	OVERMOLDING BLACK	TPU	---	4	1	COUPLING NUT FEMALE	BRASS	NICKEL	3	1	INSERT FEMALE BLACK	PUR	---	2	1	ORING RED	FPM	---	1	3 / 4 / 5 / 8	CONTACT M12 FEMALE	BRASS	SELECTIVE Au OVER Ni	Symbols	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				= 0	DIMENSION UNITS	SCALE	CURRENT REV DESC:		= 0	mm	2:1			= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				= 0	ANGULAR TOL ± 1.0 °				= 0	4 PLACES ±	EC NO: 615582			= 0	3 PLACES ±	DRWN: SSM 2019/03/28			= 0	2 PLACES ± 0.05	CHK'D: RSILLER 2019/04/16			= 0	1 PLACE ± 0.1	APPR: RSILLER 2019/04/16			= 0	0 PLACES ± 0.2	INITIAL REVISION:			= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRWN: JMARSZALEK 2016/01/11			= 0	THIRD ANGLE PROJECTION	APPR: RSILLER 2016/04/08					DRAWING A3-SIZE	SERIES 120065				MATERIAL NUMBER SEE PART LIST	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 3	A
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH																																																																																																																									
7	1	LABEL YELLOW	VINYL	---																																																																																																																									
	-	PRINTING FOR CABLES lxx	---	---																																																																																																																									
6	-	CABLE	SEE SHEET 2	---																																																																																																																									
5	-	OVERMOLDING BLACK	TPU	---																																																																																																																									
4	1	COUPLING NUT FEMALE	BRASS	NICKEL																																																																																																																									
3	1	INSERT FEMALE BLACK	PUR	---																																																																																																																									
2	1	ORING RED	FPM	---																																																																																																																									
1	3 / 4 / 5 / 8	CONTACT M12 FEMALE	BRASS	SELECTIVE Au OVER Ni																																																																																																																									
Symbols	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																												
= 0	DIMENSION UNITS	SCALE	CURRENT REV DESC:																																																																																																																										
= 0	mm	2:1																																																																																																																											
= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																																																												
= 0	ANGULAR TOL ± 1.0 °																																																																																																																												
= 0	4 PLACES ±	EC NO: 615582																																																																																																																											
= 0	3 PLACES ±	DRWN: SSM 2019/03/28																																																																																																																											
= 0	2 PLACES ± 0.05	CHK'D: RSILLER 2019/04/16																																																																																																																											
= 0	1 PLACE ± 0.1	APPR: RSILLER 2019/04/16																																																																																																																											
= 0	0 PLACES ± 0.2	INITIAL REVISION:																																																																																																																											
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRWN: JMARSZALEK 2016/01/11																																																																																																																											
= 0	THIRD ANGLE PROJECTION	APPR: RSILLER 2016/04/08																																																																																																																											
		DRAWING A3-SIZE	SERIES 120065																																																																																																																										
		MATERIAL NUMBER SEE PART LIST	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 3																																																																																																																									
DOCUMENT STATUS P1 RELEASE DATE 2019/04/16 06:18:09																																																																																																																													
	9	8	7	6	5	4	3	2	1																																																																																																																				

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Others on request).




OPTIONS

H= 2 pcs. of I/D Carrier _____
PVC Transparent
(Cables 1xx & P82 always
with 2 pcs. of I/D Carrier
even if no H in
Engineering No.)


Overmold color:
Blank (Standard)=Black TPU
Blank=Yellow TPU for cables A09,S19,S20,S26
Blank=Yellow TPE-E for cables K03,K05
A=Grey / G=Black / Y=Yellow
Blank=Yellow PVC for cable E13
Coupling Nut:
Blank (Standard) & 3=Knurled Brass Ni Plated
1=Hexagonal Stainless steel
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated
Blank=7 for cables I20, I26, K03, K05, P82, S26
9=Knurled / Hexagonal Brass Ni Plated SW13

COUPLING NUTS

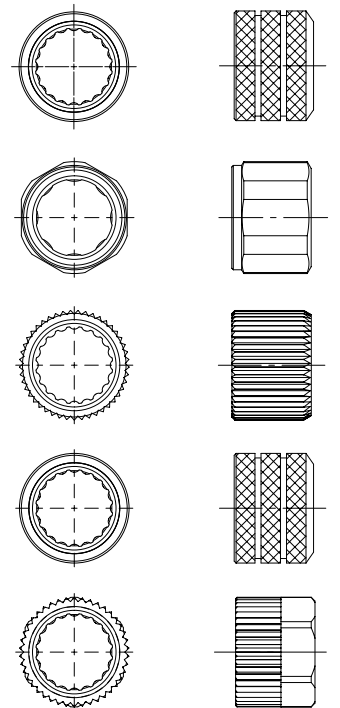

CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELDING
E13	3	18AWG	PVC YELLOW	UL 2661/1731	I/II A/B 80°C/300V	-	-	-	-
E52	3 / 4 / 8	0.34mm²	PVC GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
H12	4	0.50mm²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-50°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000, Temp max 60°C	-
H69	4	0.20mm²	PUR GREY LS0H	-	-	-	-	-	-
I02	3 / 4 / 8	0.25mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
I03	3 / 4 / 5	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
I04	4	0.50mm²	PVC CEI GREY	-	-	-25°C to +70°C	-5°C to +70°C	-	-
I20	3 / 4	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	YES
I26	5	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
K05	3 / 4 / 5	0.34mm²	TPE YELLOW	UL ITC E195601 or PLC	I/II A/B 90°C/300V	-	-	-	-
P12	3 / 5	0.50mm²	PUR BLACK	-	-	-30°C to +90°C	-5°C to +90°C	-	-
P19	8	0.25mm²	PUR BLACK	-	-	-40°C to +90°C, 7.5xO.D.	-15°C to +90°C, 12.5xO.D.	2 000 000 cycles, 15xO.D.	YES
P20	3 / 4 / 5	0.34mm²	PUR BLACK LS0H	-	-	-30°C to +80°C	-	-	YES
P82	3 / 4 / 5	0.34mm²	PUR IRR ORANGE	-	-	-50°C to +105°C, 5xO.D.	-40°C to +105°C, 7.5xO.D.	-	-
S19	8	0.25mm²	PVC YELLOW	UL 2661/1569	C22.2 II A 105°C/300V	-30°C to +105°C, 10xO.D.	-15°C to +105°C, 15xO.D.	-	YES
S20	3 / 4 / 5	0.34mm²	PVC YELLOW	UL 2661/1731	C22.2 II A 105°C/300V	-30°C to +105°C	-	-	YES
S26	5	0.34mm²	PVC YELLOW	UL 2661/1731	C22.2 II A 105°C/300V	-30°C to +105°C	-	-	YES

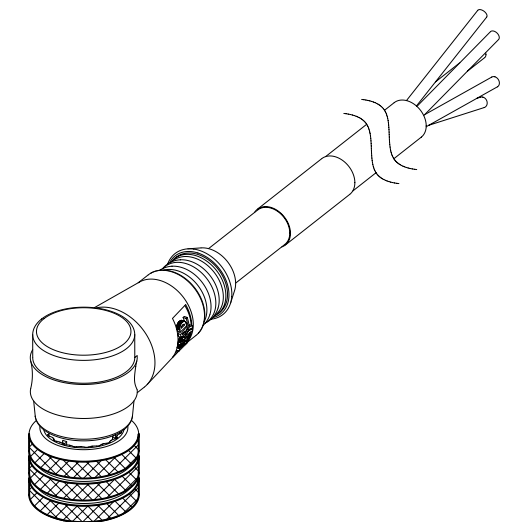

SCALE 1:1

CABLE LENGTH TOLERANCES

OVER	UP TO AND INCLUDING	TOLERANCES
0	305mm	+19mm
305mm	915mm	+45mm
915mm	1830mm	+56mm
1830mm	3660mm	+89mm
3660mm	7320mm	+165mm
7320mm	14640mm	+317mm
14640mm	30500mm	+610mm
30500mm	>	+2% of finished length

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex				
	mm		1:1									
 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 615582			CSE M12 XP AC FE RA XM SE UNSH				
 = 0												
 = 0	ANGULAR TOL ± 1.0 °				DRWN: SSM 2019/03/28							
 = 0	4 PLACES ±		CHK'D: RSILLER 2019/04/16			PRODUCT CUSTOMER DRAWING						
 = 0	3 PLACES ±		APPR: RSILLER 2019/04/16									
 = 0	2 PLACES ± 0.05		INITIAL REVISION:			DOCUMENT NUMBER 1200658471				DOC TYPE PSD	DOC PART 000	REVISION A4
 = 0	1 PLACE ± 0.1		DRWN: JMARSZALEK 2016/01/11									
 = 0	0 PLACES ± 0.2		APPR: RSILLER 2016/04/08			MATERIAL NUMBER SEE PART LIST		CUSTOMER GENERAL MARKET		SHEET NUMBER 2 OF 3		
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION 		DRAWING A3-SIZE							

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9