

### 312/318 Series Lead-Free 3AG, Fast-Acting Fuse



#### Agency Approvals

| Agency | Agency File Number                           | Ampere Range                                                          |
|--------|----------------------------------------------|-----------------------------------------------------------------------|
|        | E10480                                       | 312 Series: 0.062A - 30A<br>318 Series: 0.062A - 10A                  |
|        | 29862                                        | 312 Series: 0.062A - 30A<br>318 Series: 0.062A - 10A                  |
|        | NBK040205-E10480B/F<br>NBK040205-E10480D/H   | 312/318 Series 1A-5A<br>312/318 Series 6A-10A                         |
|        | E10480                                       | 318 Series: 12A - 30A                                                 |
|        | SU05001-6008<br>SU05001-5005<br>SU05001-5006 | 312/318 Series: 1-2A<br>312/318 Series: 3-6A<br>312/318 Series: 7-10A |
|        | N/A                                          | 312 Series: 0.062A - 10A<br>318 Series: 0.062A - 10A                  |

#### Description

The 3AG Fast-Acting Fuse solves a broad range of application requirements while offering reliable performance and cost-effective circuit protection.

#### Features

- In accordance with UL Standard 248-14
- RoHS compliant and Lead-free
- Available in cartridge and axial lead format and with various forming dimensions

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

#### Electrical Characteristics for Series

| % of Ampere Rating | Ampere Rating | Opening Time     |
|--------------------|---------------|------------------|
| 100%               | 0.062A – 35A  | 4 hours, Minimum |
| 135%               | 0.062A – 35A  | 1 hour, Maximum  |
| 200%               | 0.062A – 10A  | 5 sec., Maximum  |
|                    | 12A – 30A     | 10 sec., Maximum |
|                    | 35A           | 20 sec., Maximum |

#### Additional Information



**Datasheet  
312 Series**



**Resources  
312 Series**



**Samples  
312 Series**



**Datasheet  
318 Series**



**Resources  
318 Series**



**Samples  
318 Series**


### Electrical Characteristic Specifications by Item

| Amp Code | Ampere Rating (A) | Voltage Rating (V) | Interrupting Rating        | Nominal Cold Resistance (Ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) | Agency Approvals |       |   |     |    |    |
|----------|-------------------|--------------------|----------------------------|--------------------------------|-------------------------------------------------------|------------------|-------|---|-----|----|----|
|          |                   |                    |                            |                                |                                                       | UL               | cULus | K | PSE | SR | CE |
| .062     | 0.062             | 250                | 35A@250Vac<br>10KA@125Vac  | 24.7000                        | 0.000249                                              | x                |       |   |     | x  | x  |
| .100     | 0.1               | 250                |                            | 11.2800                        | 0.00171                                               | x                |       |   |     | x  | x  |
| .125     | 0.125             | 250                |                            | 7.1450                         | 0.00289                                               | x                |       |   |     | x  | x  |
| .150     | 0.15              | 250                |                            | 5.1300                         | 0.00550                                               | x                |       |   |     | x  | x  |
| .175     | 0.175             | 250                |                            | 3.8750                         | 0.00960                                               | x                |       |   |     | x  | x  |
| .187     | 0.187             | 250                |                            | 3.4200                         | 0.0128                                                | x                |       |   |     | x  | x  |
| .200     | 0.2               | 250                |                            | 3.0200                         | 0.0165                                                | x                |       |   |     | x  | x  |
| .250     | 0.25              | 250                |                            | 2.0100                         | 0.0355                                                | x                |       |   |     | x  | x  |
| .300     | 0.3               | 250                |                            | 1.4050                         | 0.0689                                                | x                |       |   |     | x  | x  |
| .375     | 0.375             | 250                |                            | 0.8250                         | 0.185                                                 | x                |       |   |     | x  | x  |
| .500     | 0.5               | 250                |                            | 0.4980                         | 0.483                                                 | x                |       |   |     | x  | x  |
| .600     | .6                | 250                |                            | 0.3620                         | 0.880                                                 | x                |       |   |     | x  | x  |
| .750     | 0.75              | 250                |                            | 0.2445                         | 1.84                                                  | x                |       |   |     | x  | x  |
| 001.     | 1                 | 250                |                            | 0.1900                         | 0.760                                                 | x                |       | x | x   | x  | x  |
| 1.25     | 1.25              | 250                | 100A@250Vac<br>10KA@125Vac | 0.1385                         | 1.45                                                  | x                |       | x | x   | x  | x  |
| 01.5     | 1.5               | 250                |                            | 0.1036                         | 2.35                                                  | x                |       |   | x   | x  | x  |
| 01.6     | 1.6               | 250                |                            | 0.0934                         | 2.80                                                  | x                |       | x | x   | x  | x  |
| 1.75     | 1.75              | 250                |                            | 0.0856                         | 3.60                                                  | x                |       |   | x   | x  | x  |
| 01.8     | 1.8               | 250                |                            | 0.0825                         | 3.85                                                  | x                |       |   | x   | x  | x  |
| 002.     | 2                 | 250                |                            | 0.0704                         | 5.20                                                  | x                |       | x | x   | x  | x  |
| 2.25     | 2.25              | 250                |                            | 0.0594                         | 7.20                                                  | x                |       | x | x   | x  | x  |
| 02.5     | 2.5               | 250                |                            | 0.0513                         | 9.54                                                  | x                |       | x | x   | x  | x  |
| 003.     | 3                 | 250                |                            | 0.0427                         | 14.0                                                  | x                |       | x | x   | x  | x  |
| 004.     | 4                 | 250                | 200A@250Vac<br>10KA@125Vac | 0.0293                         | 28.5                                                  | x                |       | x | x   | x  | x  |
| 005.     | 5                 | 250                |                            | 0.0224                         | 50.0                                                  | x                |       | x | x   | x  | x  |
| 006.     | 6                 | 250                |                            | 0.0178                         | 118.0                                                 | x                |       | x | x   | x  | x  |
| 007.     | 7                 | 250                |                            | 0.0146                         | 81.0                                                  | x                |       | x | x   | x  | x  |
| 008.     | 8                 | 250                |                            | 0.0122                         | 166.0                                                 | x                |       | x | x   | x  | x  |
| 010.     | 10                | 250                |                            | 0.0093                         | 298.0                                                 | x                |       | x | x   | x  | x  |
| 012.*    | 12                | 32                 | 300A@32 Vac                | 0.0072                         | 234.6                                                 | x                | x**   |   |     | x  |    |
| 015.*    | 15                | 32                 |                            | 0.0052                         | 490.5                                                 | x                | x**   |   |     | x  |    |
| 020.*    | 20                | 32                 |                            | 0.0035                         | 1414                                                  | x                | x**   |   |     | x  |    |
| 025.*    | 25                | 32                 |                            | 0.0024                         | 2041                                                  | x                | x**   |   |     | x  |    |
| 030.*    | 30                | 32                 |                            | 0.0019                         | 3717                                                  | x                | x**   |   |     | x  |    |
| 035.     | 35                | 32                 |                            | 0.0013                         | 7531                                                  |                  |       |   |     |    |    |

NOTES:


\*\* For 318 Series 12A to 30A, the agency approval is only cULus.

### Temperature Re-rating Curve

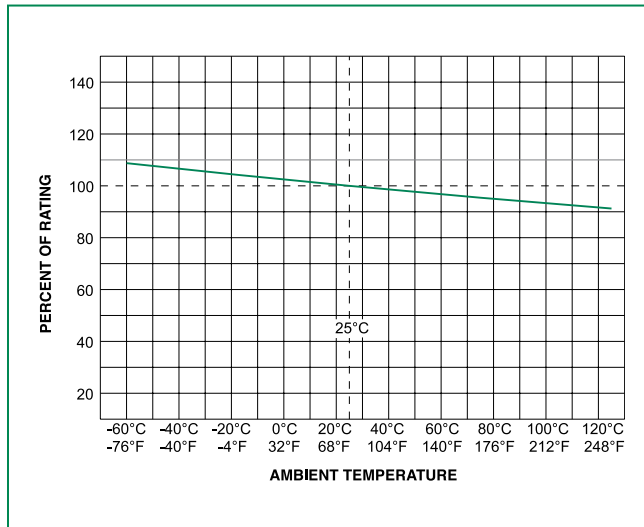


Note:  
Derating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

### Average Time Current Curves

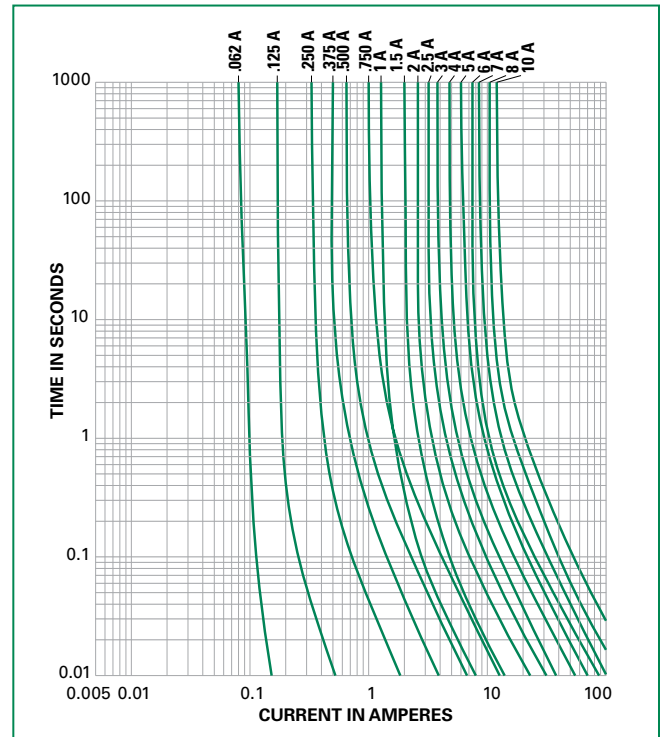

Please contact Littelfuse for more details on those T-C Curves of other ampere ratings which are not published.

### Soldering Parameters - Wave Soldering

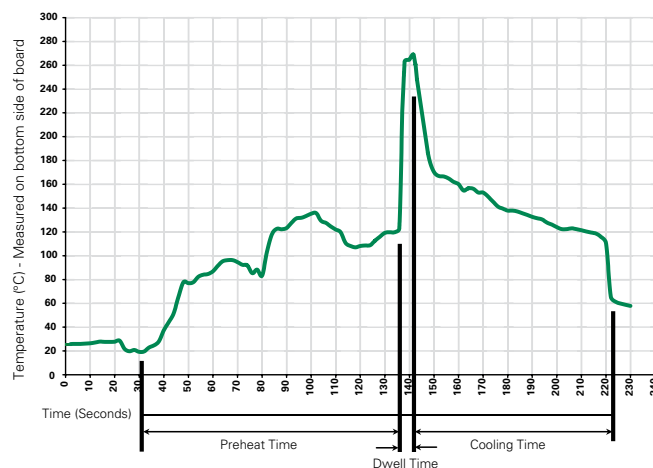

### Recommended Process Parameters:

| Wave Parameter                           | Lead-Free Recommendation          |
|------------------------------------------|-----------------------------------|
| <b>Preheat:</b>                          |                                   |
| (Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                     | 100°C                             |
| Temperature Maximum:                     | 150°C                             |
| Preheat Time:                            | 60-180 seconds                    |
| <b>Solder Pot Temperature:</b>           | 260°C Maximum                     |
| <b>Solder Dwell Time:</b>                | 2-5 seconds                       |

### Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C  
Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process.**


### Product Characteristics

|                          |                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------|
| <b>Materials</b>         | Body: Glass<br>Cap: Nickel-plated brass<br>Leads: Tin-plated Copper                     |
| <b>Terminal Strength</b> | MIL-STD-202, Method 211, Test Condition A                                               |
| <b>Solderability</b>     | MIL-STD-202 method 208                                                                  |
| <b>Product Marking</b>   | Cap1: Brand logo, current and voltage ratings<br>Cap2: Series and agency approval marks |


|                              |                                                                                                         |
|------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature</b> | -55°C to +125°C                                                                                         |
| <b>Thermal Shock</b>         | MIL-STD-202, Method 107, Test Condition B: (5 cycles -65°C to +125°C)                                   |
| <b>Vibration</b>             | MIL-STD-202, Method 201                                                                                 |
| <b>Humidity</b>              | MIL-STD-202, Method 103, Test Condition A: High RH (95%), and Elevated temperature (40°C) for 240 hours |
| <b>Salt Spray</b>            | MIL-STD-202, Method 101, Test Condition B                                                               |

### Dimensions

Measurements displayed in millimeters (inches)

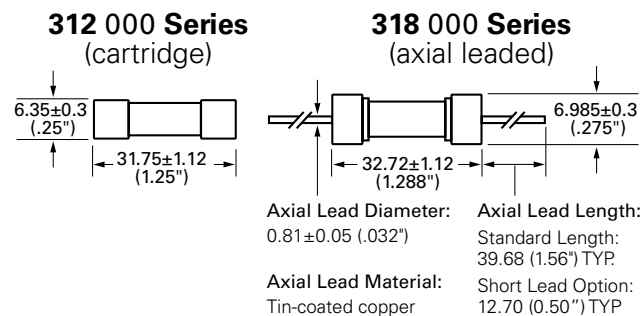

### Part Numbering System

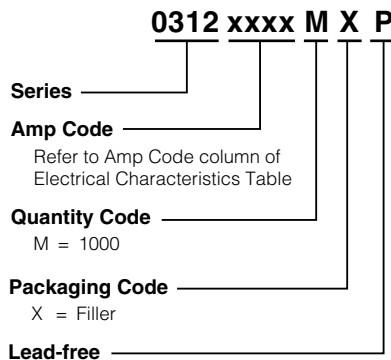

### Packaging

| Packaging Option  | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width |
|-------------------|-------------------------|----------|---------------------------|--------------|
| <b>312 Series</b> |                         |          |                           |              |
| Bulk              | N/A                     | 1000     | MX                        | N/A          |
| Bulk              | N/A                     | 100      | HX                        | N/A          |
| <b>318 Series</b> |                         |          |                           |              |
| Bulk              | N/A                     | 1000     | MX                        | N/A          |
| Bulk              | N/A                     | 100      | HX                        | N/A          |
| Bulk              | N/A                     | 1000     | MXB                       | N/A          |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9