

LT8312
Boundary Mode
PFC Controller**DESCRIPTION**

Demonstration Circuit 2104A is an off-line boundary conduction mode power factor correction (PFC) boost converter featuring the [LT[®]8312](#). Boundary conduction mode offers inherent MOSFET valley switching to reduce the switching loss and the boost diode zero current switching to remove the diode reverse-recovery loss. The demo board provides a 400V/150W single constant-voltage output suitable for applications requiring regulated input voltage.

The DC2104A is optimized to operate over a wide AC input voltage range (90VAC to 265VAC, 47Hz to 63Hz). Output voltage accuracy stays within $\pm 5\%$ over the whole input voltage and load range. It provides a high power factor (>0.95) enabling the design to be used worldwide. It is also designed to comply with the IEC61000-3-2 Class-D harmonics standard and the EN55022 conducted EMI standard.

This DC 2104A evaluation board uses a two-layer printed circuit board (PCB) designed for 150W (400V/0.375A) rated power. It can also be changed for other power level applications. Please refer to the Typical Applications section in the data sheet for more information.

The LT8312 is available in a low profile, thermally enhanced 16-lead MSOP package.

The LT8312 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this demo manual.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2104A>

 , LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IN}	Input Voltage Range	Line Frequency, 47Hz to 63Hz	90	115	265	VAC
V_{OUT}	Output Voltage		380	400	420	V
I_{OUT}	Maximum Output Current		0.375			A
EFE	Efficiency	$I_{OUT} = 0.375\text{A}$ 115VAC 230VAC		96 97.5		%
PF	Power Factor	$I_{OUT} = 0.375\text{A}$ 115VAC 230VAC		0.99 0.98		%

QUICK START PROCEDURE

IMPORTANT NOTE TO CUSTOMERS:

HIGH VOLTAGES ARE PRESENT ON THE DEMO CIRCUIT, AND CAN LEAD TO LETHAL INJURIES TO HUMAN BODY. ONLY QUALIFIED PERSONNEL SHOULD OPERATE IT. IT IS STRONGLY RECOMMENDED TO USE SAFETY GLASSES AND AN ISOLATION TRANSFORMER.

NOTE: Improper components replacement on the demo circuit can cause performance deteriorations, circuit malfunction, property damage, and even life threatening injuries. Contact Linear Technology applications engineers for proper component replacement.

DC2104A is easy to set up to evaluate the performance of the LT8312. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect an adjustable load between + and – output terminals.
2. With power off, connect the input power supply to Line (L) input and Neutral (N) input.
3. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed the maximum input voltage (265VAC).

4. Check for the proper output voltage.

Once the proper output voltage is established, adjust the input voltage and/or the load and observe the output voltage regulation, efficiency, power factor and other parameters.

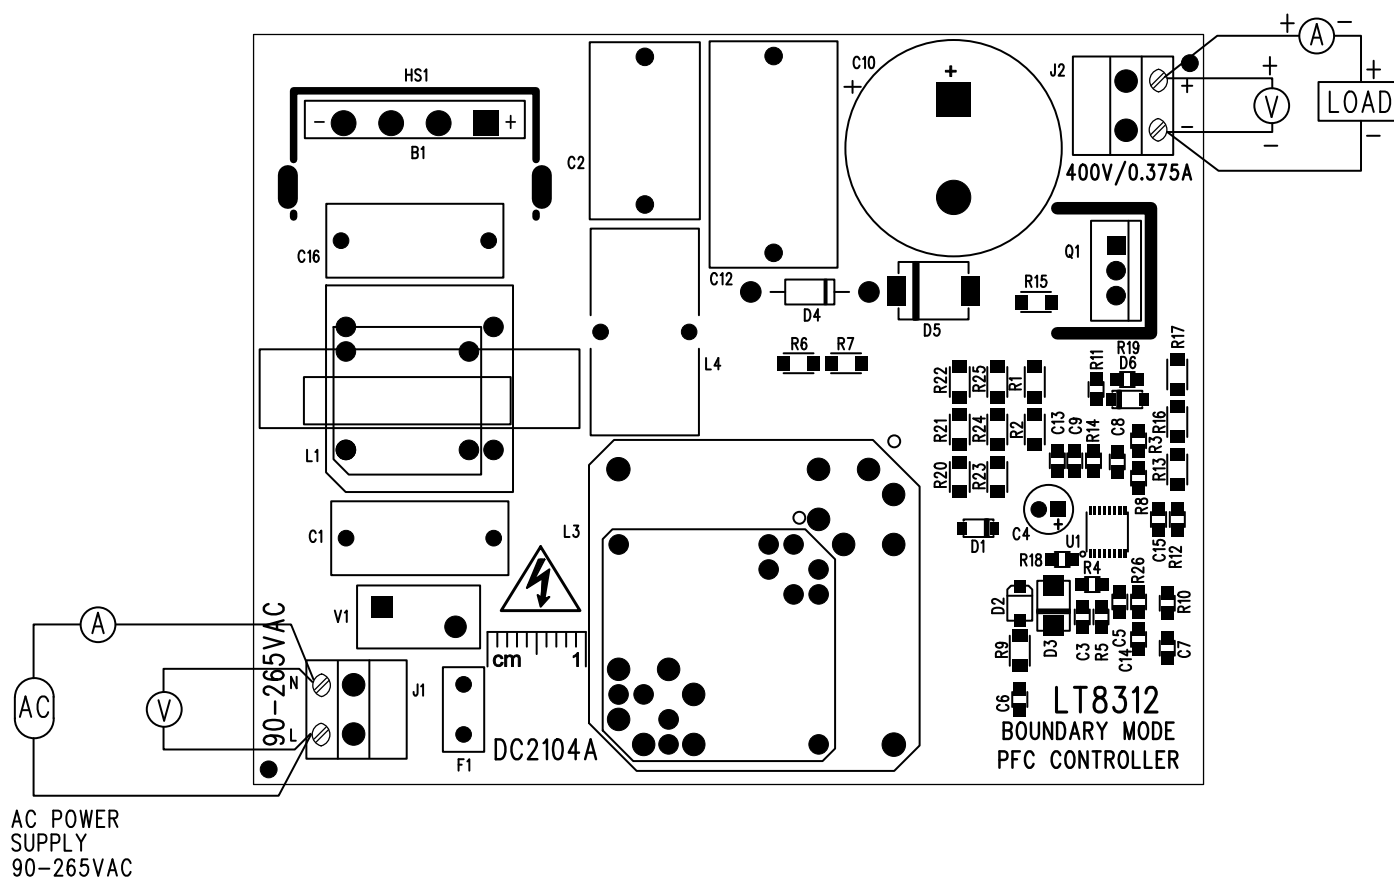


Figure 1. Proper Measurement Equipment Setup

QUICK START PROCEDURE

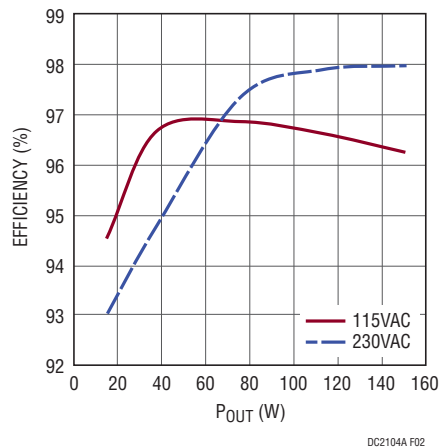


Figure 2. Efficiency vs Load

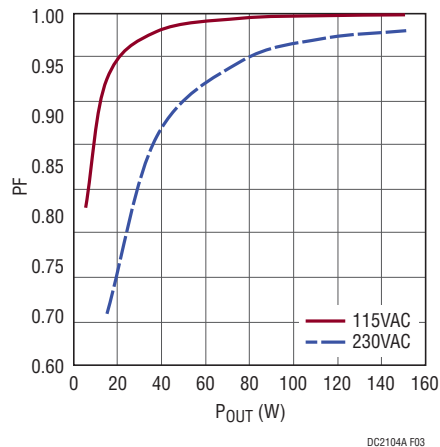


Figure 3. Power Factor vs Load

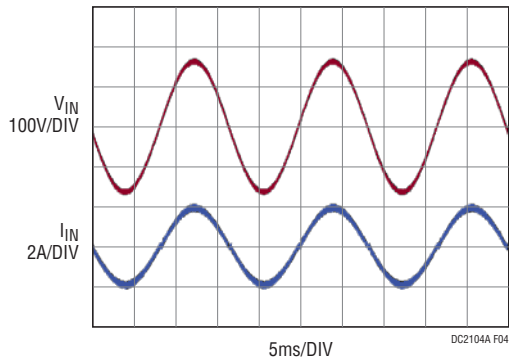


Figure 4. 115VAC Input Voltage and Current

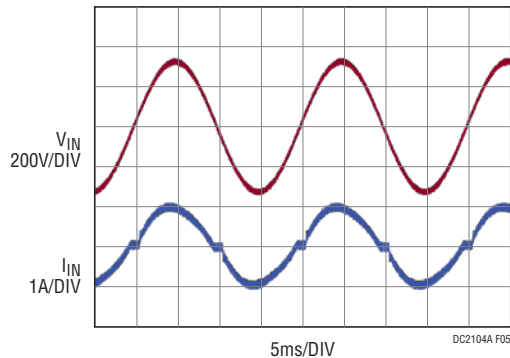


Figure 5. 230VAC Input Voltage and Current

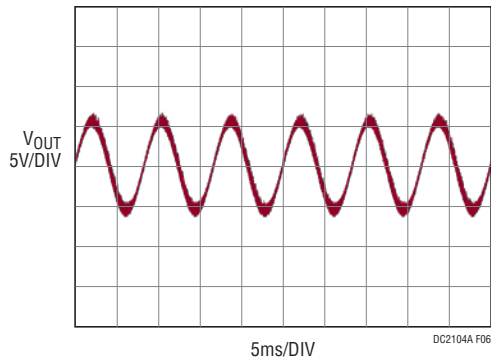


Figure 6. Output Ripple (AC-Coupled), $V_{IN} = 115VAC$

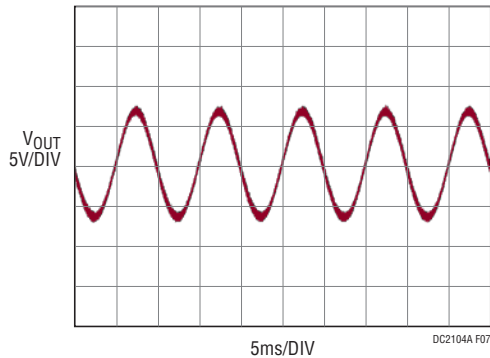


Figure 7. Output Ripple (AC-Coupled), $V_{IN} = 230VAC$

QUICK START PROCEDURE

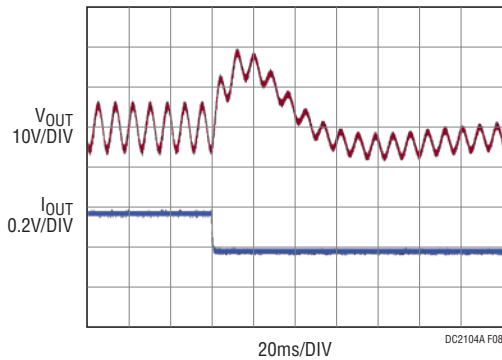


Figure 8. $V_{IN} = 115VAC$, Full Load to Half Load Transient

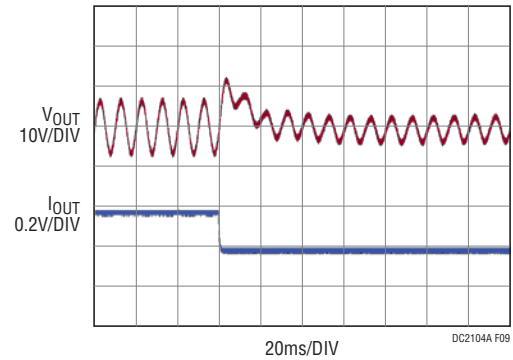


Figure 9. $V_{IN} = 230VAC$, Full Load to Half Load Transient

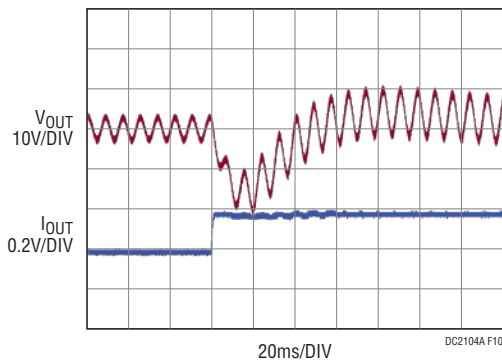


Figure 10. $V_{IN} = 115VAC$, Half Load to Full Load Transient

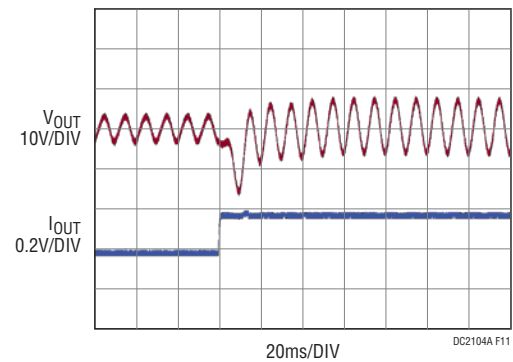


Figure 11. $V_{IN} = 230VAC$, Half Load to Full Load Transient

PARTS LIST


ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	B1	BRIDGE RECTIFIER	DIODES INC., GBU404
2	1	C1	CAP., FILM, 0.22 μ F, 275VAC, 10%	KEMET, R46KI322000M2K
3	1	C2	CAP., FILM, 0.47 μ F, 5%, 400V	PANASONIC, ECWF4474JL
4	1	C4	CAP, 10 μ F 20% 50V ALUM	RUBYCON, 50YXJ10M 5X11
5	1	C5	CAP., X7R, 680nF, 25V, 10%, 0805	AVX, 08053C684KAT2A
6	1	C6	Cap., COG, 4.7nF, 100V, 5% 0805	TDK, C2012C0G2A472J125AA
7	1	C7	Cap., COG, 27pF, 50V, 5% 0805	AVX, 08055A270JAT2A
8	2	C8, C14	CAP., X5R, 4.7 μ F, 20%, 16V, 0805	AVX, 0805YD475MAT2A
9	1	C10	CAP., ALUM, 100 μ F, 450V, 20%	RUBYCON, 450VXH100MEFCSN22X25
10	1	C12	CAP., FILM, 1.0 μ F, 5%, 400V	PANASONIC, ECWF4105JL
11	1	C13	CAP., COG, 1nF, 10%, 25V 0805	AVX, 08053A102KAT2A
12	3	C3, C9, C15	CAP., COG, 100pF, 5%, 25V 0805	AVX, 08055A101JAT2A
13	1	D2	DIODE, 200V, SOD123	DIODES INC., BAV20W
14	1	D3	ZENER DIODE, 24V, SMA	CENTRAL SEMI., CMZ5934B
15	1	D4	DIODE, 1A, 600V, DO-41	DIODES INC., 1N4005
16	1	D5	DIODE, 5A, 600V, SMC	CENTRAL SEMI., CMR5H-06
17	2	D1, D6	DIODE, SWITCH 100V 400mW, SOD123	DIODES INC., 1N4148W-7-F
18	1	F1	FUSE, FAST ACTING, 3.15A	BUSSMAN, SS-5H-3.15A-APH
19	1	L1	CHOKER, 15mH	EPCOS, B82734R2232B030
20	1	L3	PFC CHOKER, 450 μ H	WÜRTH ELECTRONIK, 760802122
21	1	L4	CHOKER, 300 μ H	WÜRTH ELECTRONIK, 7447060
22	1	Q1	N-CH MOSFET, 500V, TO-220	INFINEON, IPA50R190CE
23	2	R1, R2	RES., CHIP., 499K, 1/4W, 1% 1206	VISHAY, CRCW1206499KFKEA
24	1	R3	RES., CHIP., 301K, 1/8W, 1%, 0805	VISHAY, CRCW0805301KFNEA
25	1	R4	RES., CHIP., 11.8K, 1/8W, 1%, 0805	VISHAY, CRCW080511K8FKEA
26	1	R5	RES., CHIP., 24.9K, 1/8W, 1%, 0805	VISHAY, CRCW080524K9FKEA
27	2	R6, R7	RES., CHIP., 150K, 1/4W, 1% 1206	VISHAY, CRCW1206150KFKEA
28	1	R8	RES., CHIP., 2.4M, 1/8W, 5%, 0805	VISHAY, CRCW08052M40JNEA
29	1	R9	RES., CHIP., 47, 1/4W, 5%, 1206	VISHAY, CRCW120647R0JNEA
30	1	R10	RES., CHIP., 2K, 1/8W, 5%, 0805	VISHAY, CRCW08052K00JNEA
31	1	R11	RES., CHIP., 10, 1/8W, 1% 0805	VISHAY, CRCW080510R0FNEA
32	1	R12	RES., CHIP., 9.53K, 1/8W, 1%, 0805	VISHAY, CRCW08059K53FKEA
33	3	R13, R16, R17	RES., CHIP., 1M, 1/4W, 1% 1206	VISHAY, CRCW12061M00FKEA
34	1	R14	RES., CHIP., 100, 1/8W, 1%, 0805	VISHAY, CRCW0805100RJNEA
35	1	R15	RES., CHIP., 0.015, 1W, 1% 1206	VISHAY, WSLP1206R0150FEA
36	1	R18	RES., CHIP., 75K, 1/8W, 1% 0805	VISHAY, CRCW080575K0FKEA
37	1	R19	RES., CHIP., 0, 1/8W, 0805	VISHAY, CRCW08050000Z0EA
38	1	R26	RES., CHIP., 10K, 1/8W, 1% 0805	VISHAY, CRCW080510K0FNEA
39	1	V1	VARISTOR, 300V RMS, 10mm RADIAL	BOURNS, MOV-10D471K
40	1	U1	I.C., PFC CONTROLLER MS-16	LINEAR TECH., LT8312EMS#PBF

DEMO MANUAL DC2104A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Additional Demo Board Circuit Components				
1	0	C16 (OPT)	CAP., FILM, 0.22 μ F, 275VAC, 10%	
2	0	R20-R25 (OPT)	RES., CHIP., 1206	
Hardware: For Demo Board Only				
1	2	J1, J2	CONN., TERM BLOCK PCB 5.0mm 2POS	WEIDMULLER, 1715250000
2	1	HS1	HEAT SINK FOR B1	WAKEFIELD-VETTE, 287-1ABE

SCHEMATIC DIAGRAM

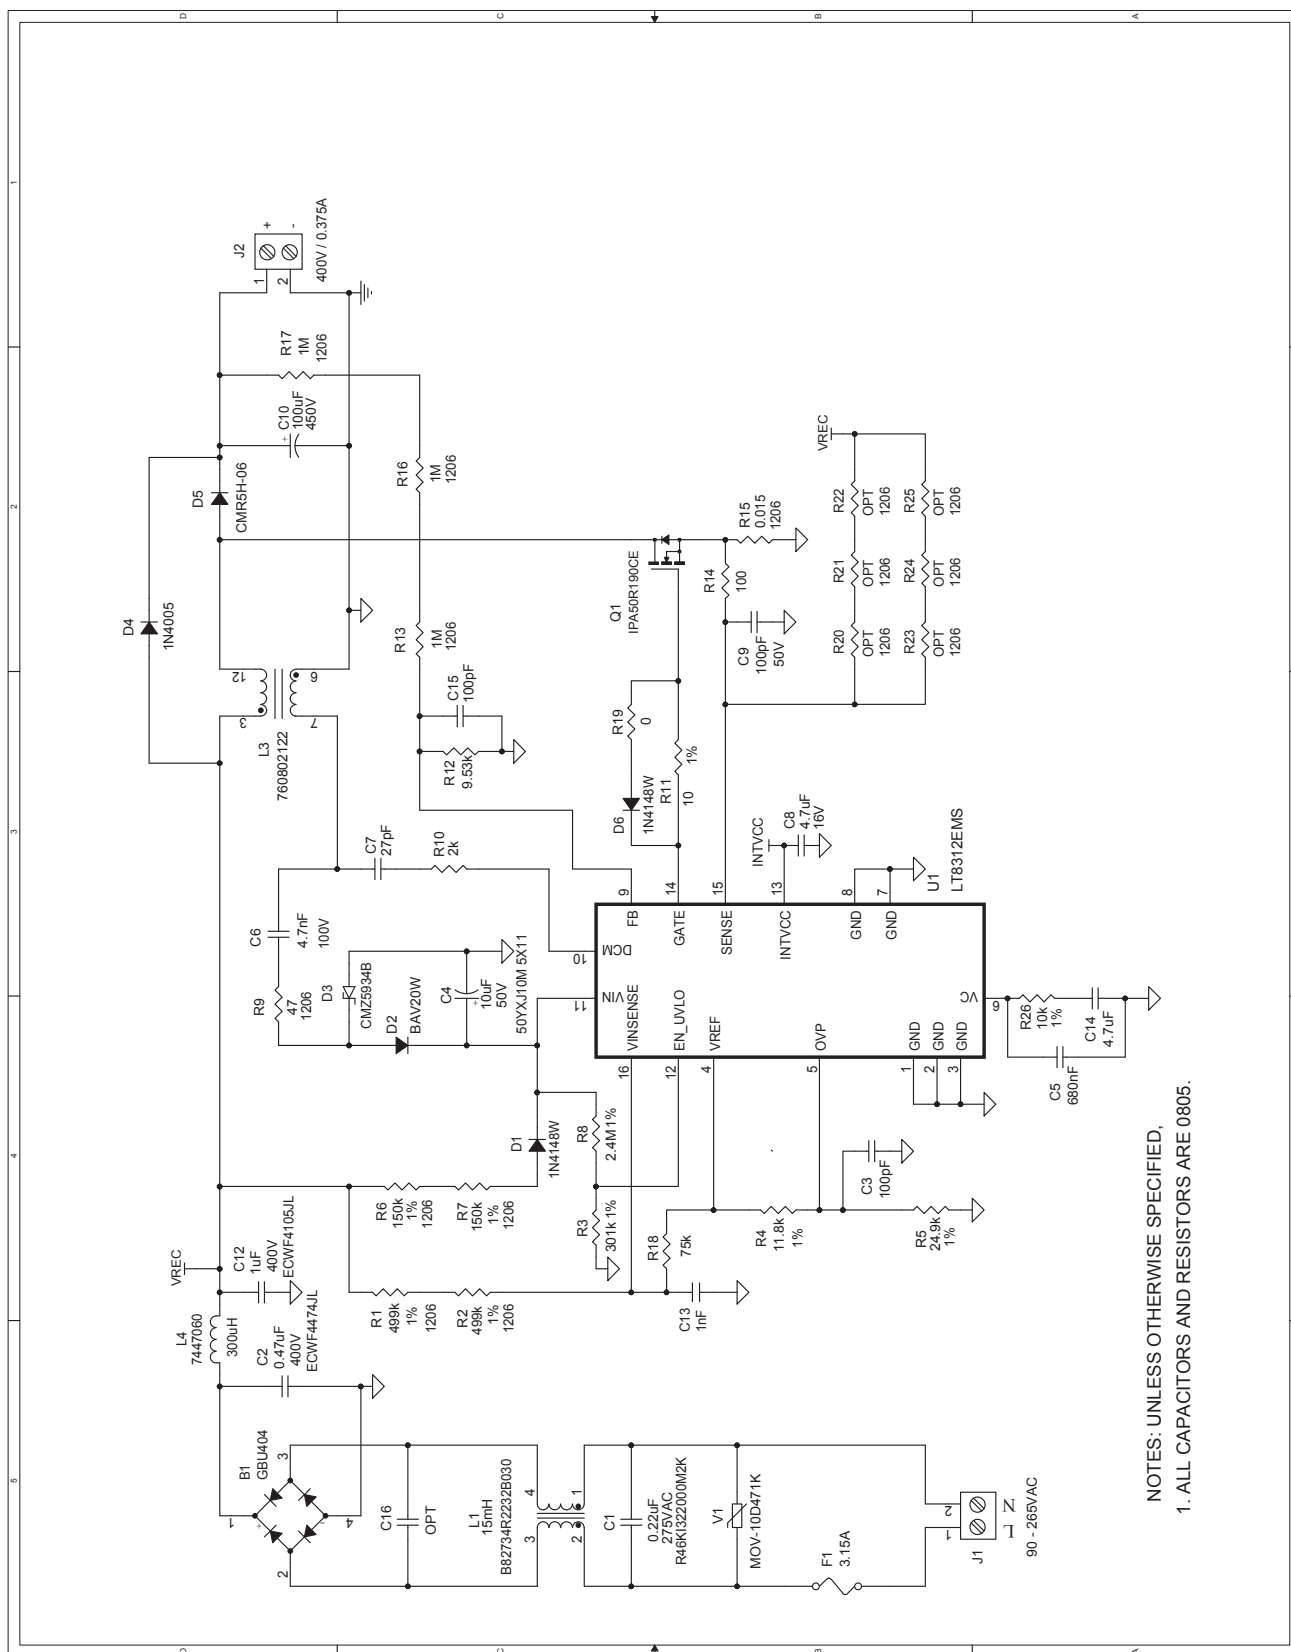

NOTES: UNLESS OTHERWISE SPECIFIED,
1. ALL CAPACITORS AND RESISTORS ARE 0805.

DEMO MANUAL DC2104A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc2104af

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9