
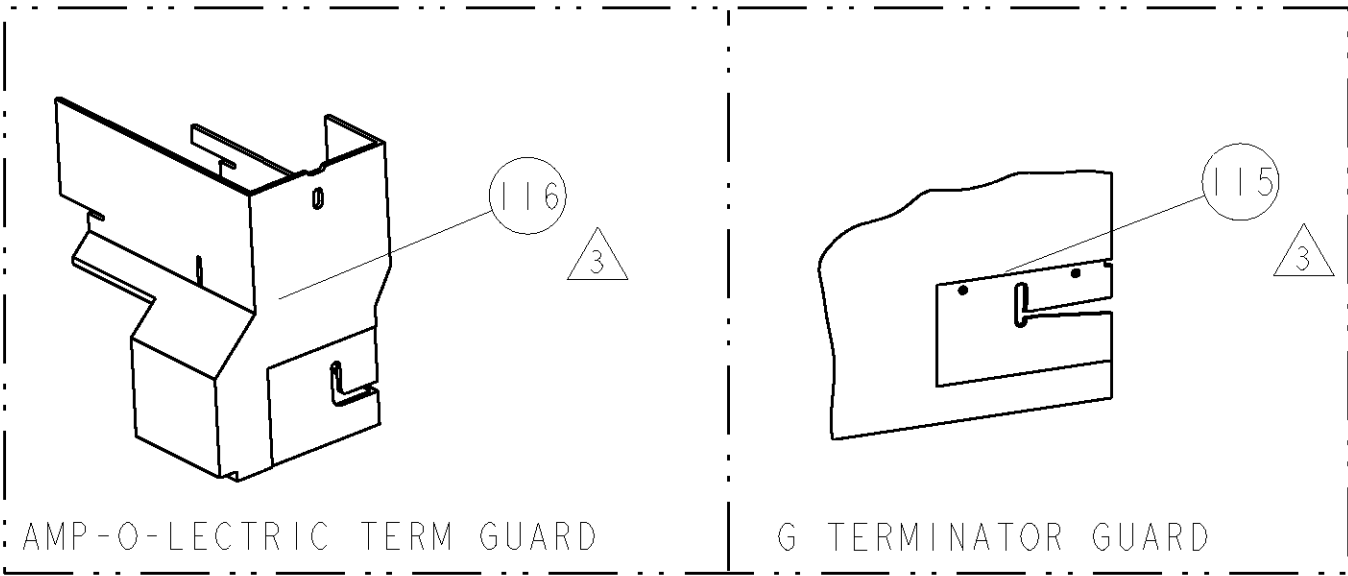
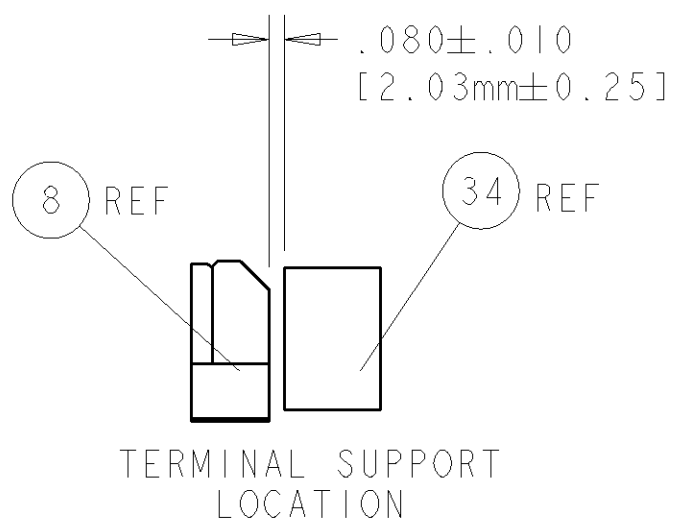



8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
© COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1855334-1	A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER		
1855334-2	A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER		
1855334-3	A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER		
1855334-6	A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER		
7-1855334-7	A	-	-	-	SPARE PARTS		

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ CRIMP DATA CALCULATED BY TYCO ELECTRONICS.
- △ WIRE AND INSULATION RANGE ARE THAT OF THE TERMINAL. APPLICATOR DESIGNED TO APPLY FLRY TYPE INSULATION.
- △ CUT TO LENGTH AT ASSEMBLY.

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

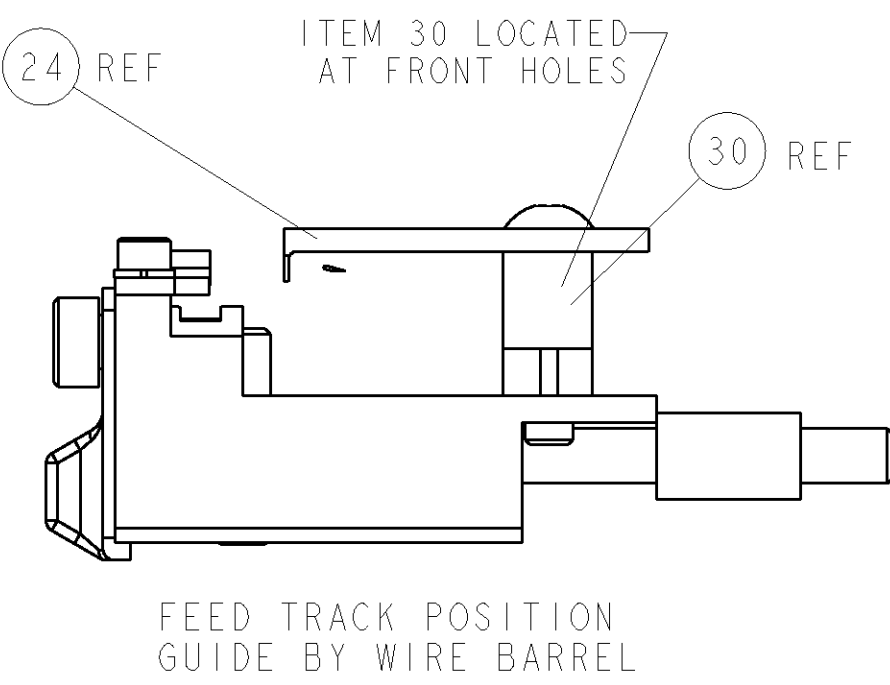

TERMINAL NAME: 2.8 DCSI FEMALE											
TE TERM PN		MANUF PN		FCI TERMINAL - TE CRIMP SPECS							
1949503-1		60010541									
-		-		CRIMP HEIGHT			WIRE SIZE		REF SETTING		
-		-		1.91±0.05mm[.075±.002]			2.5mm2		B 5		
-		-		1.57±0.05mm[.062±.002]			1.5mm2		E 0		
-		-		-			-		-		
-		-		-			-		-		
-		-		CRIMP		SIZE		TYPE		RANGE	
-		-		WIRE		2.54mm[.100]		F		>1.00-2.50	
-		-		INSUL		3.30mm[.130]		F		3.00 MAX	
WIRE STRIP LENGTH 3.80-4.20		TERM APPL SPEC -		FEED 12.5		APPLICATOR INSTRUCTIONS 408-8040				SET UP GAGE 458637-1	

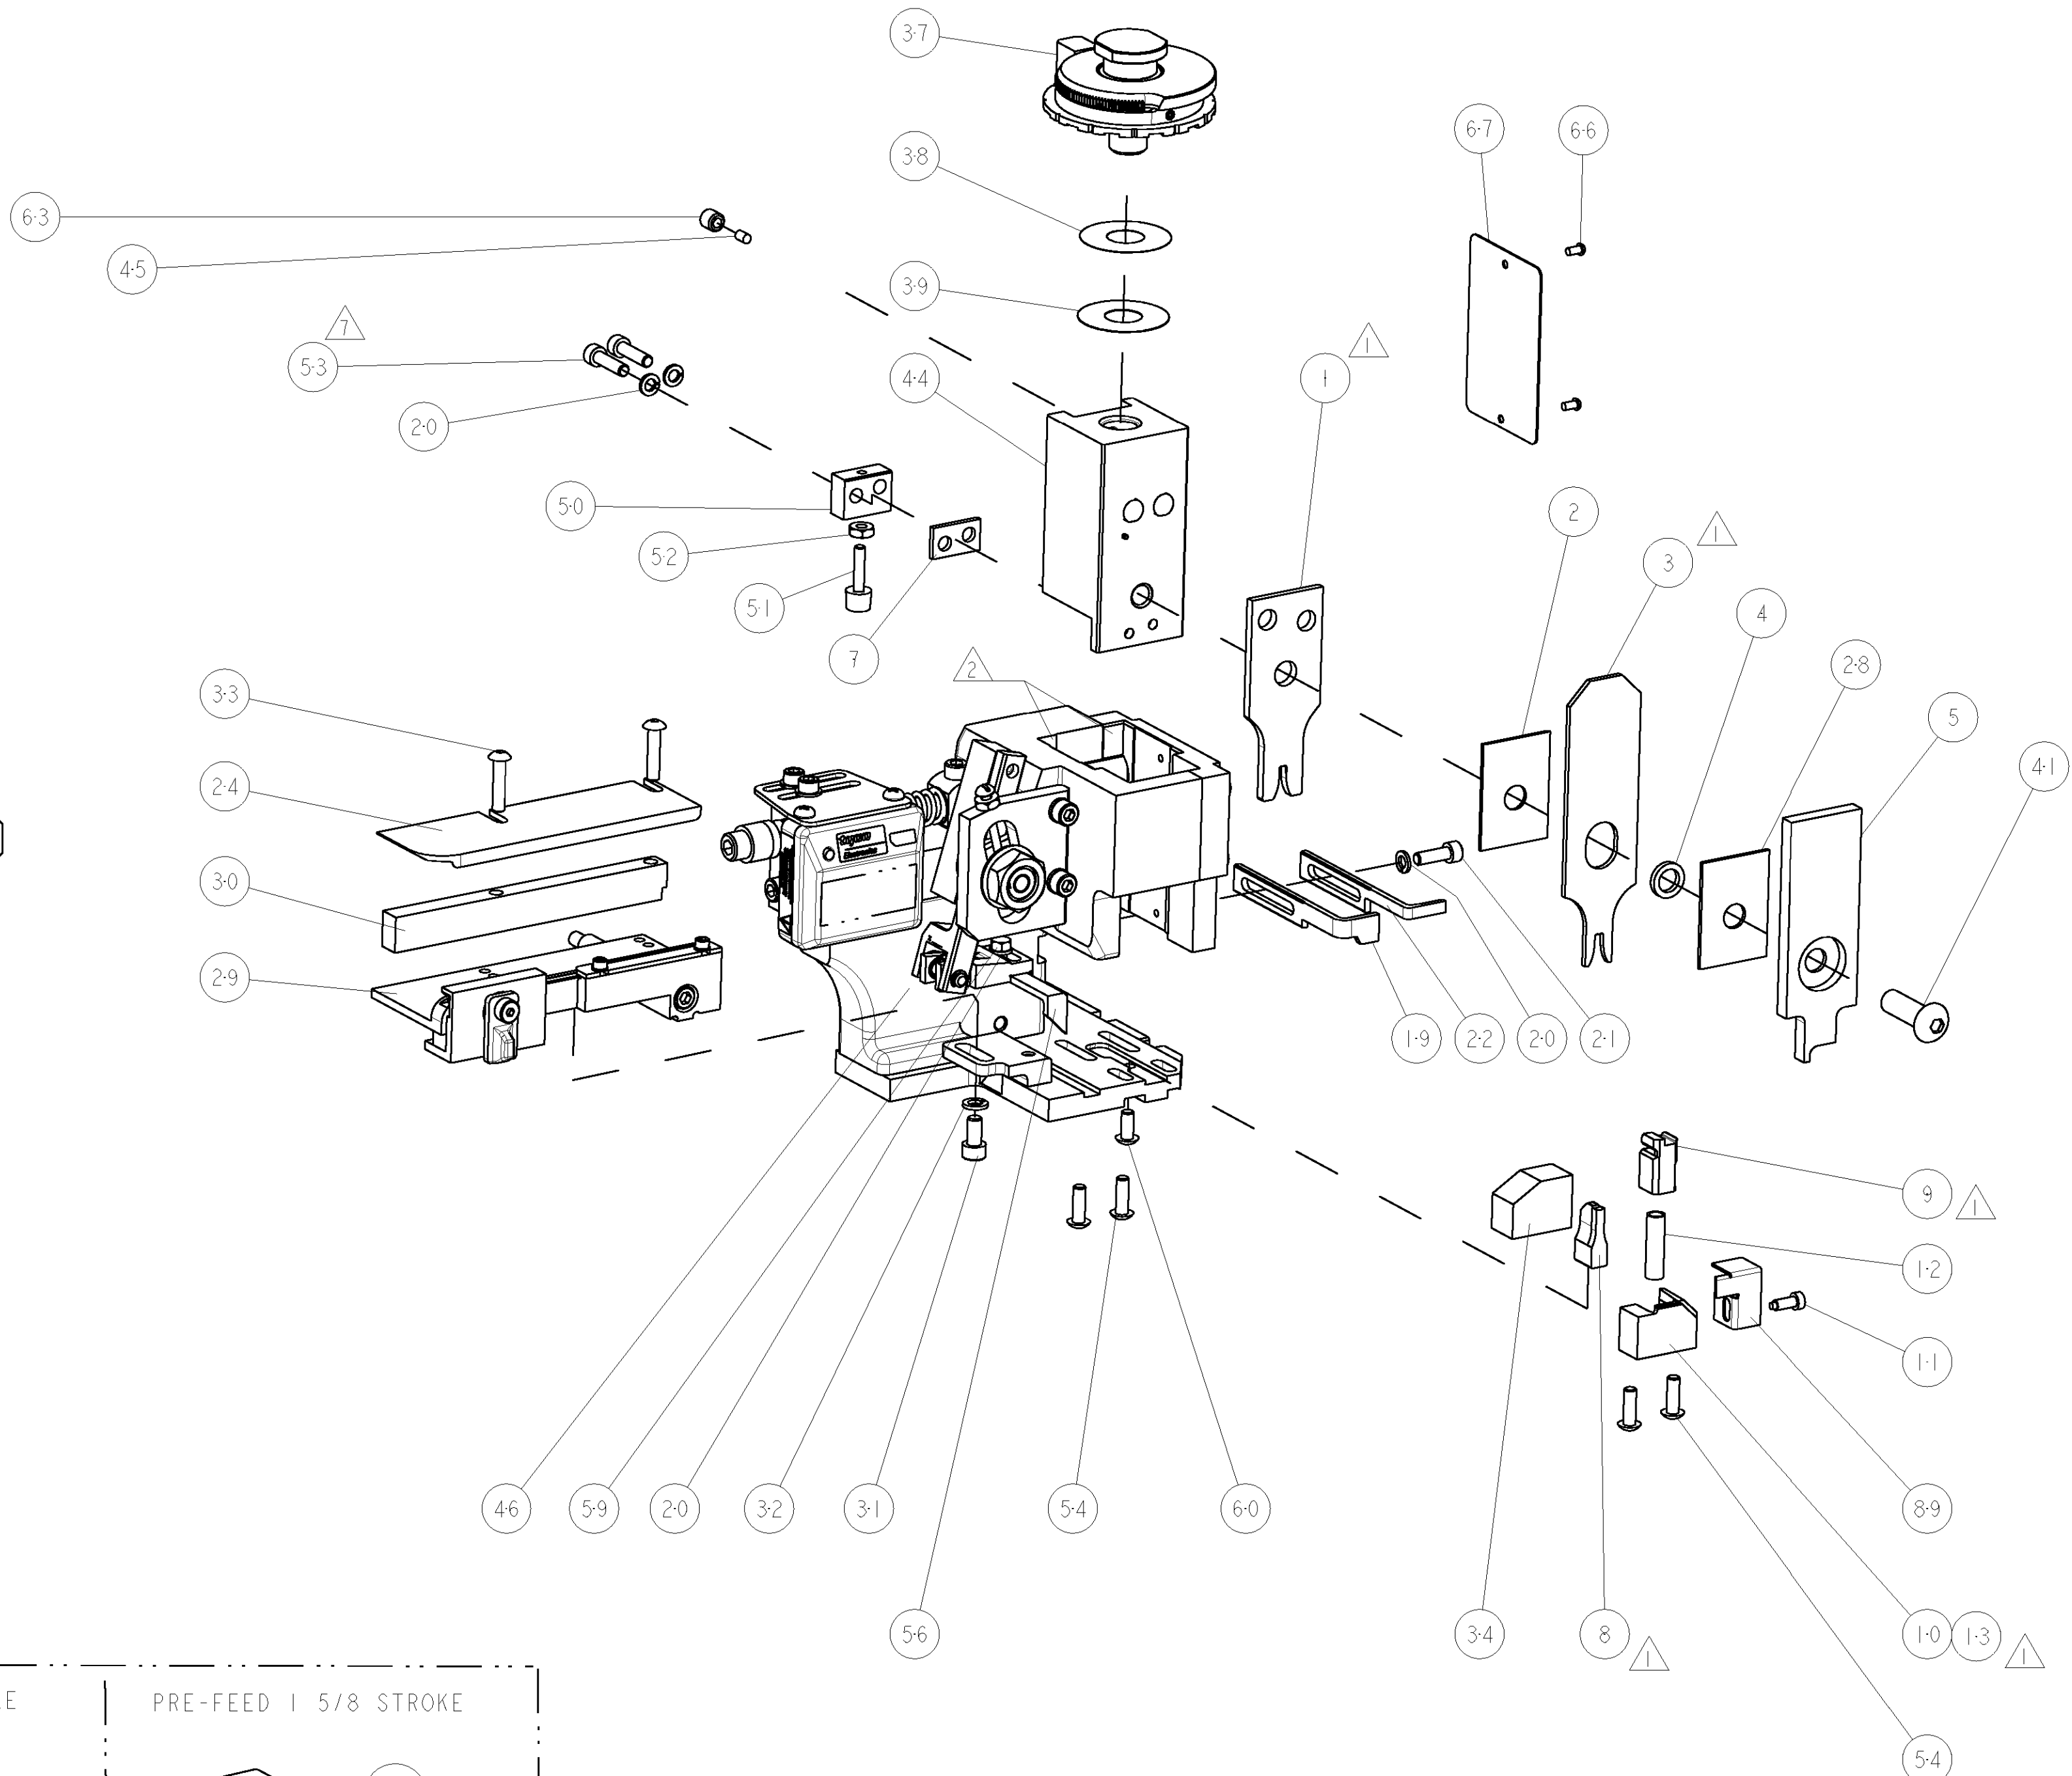

3	-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
3	-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	1	1	1	1	-		1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	1	1	1	1	-		318563-1	GUARD, FRONT CHIP	89
-	1	1	1	1	-		4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-		217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	1	-		461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	2	-		21017-2	SCREW, DRIVE	66
-	1	1	1	1	-		21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-		22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-		2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	1	-		458537-2	PAWL, FEED	56
-	4	4	4	4	-		2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
7	2	2	2	2	-		2-21000-8	SCR, SKT HD CAP 8-32 X .625	53
-	1	1	1	1	-		21018-5	NUT, HEX, REG 6-32	52
-	1	1	1	1	-		811242-2	BUMPER, HOLD DOWN	51
-	1	1	1	1	-		690753-1	SPACER, TONKER	50
-	-	-	-	-	..		690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	-	-	..		690602-5	CAM, PRE FEED, 1 1/8	48
-	1	-	-	-	-		690501-4	CAM, POST FEED, 1 5/8	47
-	1	1	1	1	-		459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
-	1	1	1	1	-		690191-1	PLUG,NYLON	45
-	1	1	1	1	-		455673-1	RAM, SIDE FEED	44
-	1	1	1	1	-		7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-		690125-1	SHIM SUB-ASSY	39
-	1	1	1	1	-		469367-2	SHIM	38
-	1	1	1	1	-		879103-2	FINE ADJUST HEAD ASSEMBLY	37
-	1	1	1	1	-		2-690786-3	TERMINAL SUPPORT	34
-	2	2	2	2	-		2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	1	1	1	1	-		21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-		3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-		1320908-1	SPACER, STRIP GUIDE	30
-	1	1	1	1	-		1633091-3	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	-		1-455888-0	SPACER, CRIMPER	28
-	1	1	1	1	-		1320928-1	PLATE, STRIP GUIDE	24
-	1	-	-	-	-		690472-2	STRIPPER	22
-	1	1	1	1	-		2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	4	4	4	4	-		21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	-	-	-	-		691353-1	STRIPPER	19
1	-	-	-	-	-		679625-1	SHEAR HOLDER, FRONT (NO CUT)	13
-	1	1	1	1	-		3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	-		690461-1	STOP, SHEAR	11
1	-	-	-	-	-		690459-1	SHEAR HOLDER, FRONT	10
1	-	-	-	-	-		454276-1	FLOATING SHEAR, FRONT	9
1	1	1	1	1	-		2-1633111-2	ANVIL, COMBINATION .100	8
-	1	1	1	1	-		1-240641-3	SPACER	7
-	-	-	-	-	..		-	-	6
-	1	1	1	1	-		2-455889-0	DEPRESSOR, SHEAR	5
-	1	1	1	1	-		238011-7	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	-		6-456134-9	CRIMPER, INSULATION F PREMIUM	3
-	1	1	1	1	-		455888-9	SPACER, CRIMPER	2
1	1	1	1	1	-		1-456407-3	CRIMPER, WIRE PREMIUM	1
-77	-6	-3	-2	-1	U/M		PART NO	DESCRIPTION	ITEM NO

THIS IS THE FIRST TO BE RELEASED FOR PUBLICATION. THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST NOTATION.		DWN L LOFTHOUSE	11/SEP/2007	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		APVD T ELBIN	11/SEP/2007	NAME FINE ADJUST SIDE FEED HDM APPLICATOR	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO	
9 PLC ±.01		APPLICATION SPEC		RESTRICTED TO	
2 PLC ±.01		WEIGHT		A 00779 C=1855334	
3 PLC ±.001		CUSTOMER DRAWING		SCALE 3:5 SHEET 1 OF 1 REV A	
4 PLC ±.0001					
ANGLES ±.001					
FINISH					

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9