



Tape is wound on a paper core.

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Protektive Pak letter on-line at ProtektivePak.com.

No sulfur, surfactants or silicone based material (adhesive, film backing, release material) is used in the manufacture of our cellulose tape.

Wescorp Tape Storage and Limited Warranty:

The user must determine the suitability for use of an antistatic tape for his particular application. For best results, tape inventory should be continually replenished. It is recommended that rolls of tape be stored flat and rotated (flipped over to the other side) periodically. Tapes should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Tape should not be stored in ultraviolet sunlight, moisture, or heat. Tape over one year old should be evaluated by the user to determine acceptability for the user's application. Protektive Pak recommends those tracking useful life of product to use shipping/invoice date as Protektive Pak expressly warrants that for a period of one (1) year from the date of purchase, our Wescorp Brand Antistatic Tape will be free of defects in material (parts) and workmanship (labor). See details of Limited Warranty online at <http://www.protektivepak.com/warranty.aspx>

*Wescorp is a Desco Industries brand.

Antistatic Cellulose Tape

For general purpose applications


- 2.4 mil (0.06 mm) total thickness
- Cellulose film resistance 10E10 - 10E11 ohms
- Rubber based adhesive absorbs moisture
- Adhesive surface resistance 10E10 - 10E11 ohms
- Temperature Range -10°C - 71°C (14°F - 160°F); meets MIL-B-81705 of 100°C for 10 min max
- Available in clear, clear with ESD symbols, and clear with ESD symbols with yellow stripe. Marking is approved symbols of Mil STD-1285* and ESD Association.
- Symbols printed in between film and adhesive; will not rub off.

Tape	Width				Core	Length
	0.5"	.75"	1"	2"		
Antistatic Clear Cellulose	46920	46921	46922		1"	36 yds
	46923	46924	46925	46926	3"	72 yds
Antistatic Clear Cellulose with Symbols	46927	46928	46929	46930	3"	72 yds

Width tolerance $\pm 1/32"$

Tape widths are nominal metric ± 0.8 mm ($\pm 1/32"$)

1/4"	is	6 mm nominal or	0.236"
1/2"	is	12 mm nominal or	0.472"
3/4"	is	18 mm nominal or	0.709"
1"	is	24 mm nominal or	0.945"
2"	is	48 mm nominal or	1.890"

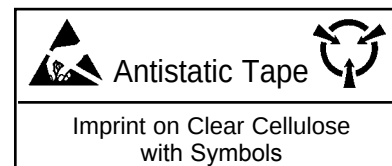

*Military organizations sometimes use MIL-STD-1285 for hardware marking and that document once required the use of the "three arrows in a circle" symbol. That symbol has been changed for consistency with industry marking to the "hand in triangle" ESD Susceptibility symbol. (Ref: TR20.20 section 5.3.14.1)



WESCORP* ANTISTATIC CELLULOSE TAPE ON PAPER CORE

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578, FAX (909) 363-7331
ProtektivePak.com

DRAWING NUMBER
46920

DATE:
March
2010

PROTEKTIVE PAK

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9