

2ch VOLTAGE DETECTOR


■ GENERAL DESCRIPTION

The NJU7712/13 is a 2ch low quiescent current voltage detector featuring high precision detection voltage.

The detection voltage is internally fixed with an accuracy of 1.0%.

NJU7712 is Nch. Open Drain and NJU7713 is a C-MOS output type.

■ PACKAGE OUTLINE



NJU7712/13F




NJU7712/13F3


■ FEATURES

- High Precision detection Voltage $\pm 1.0\%$
- Low Quiescent Current $0.8\mu\text{A typ. (per 1ch)}$
- Detection Voltage Range $1.5 \sim 6.0\text{V (0.1V step)}$ It applies only to 1ch(Over Voltage Detect).
 $1.3 \sim 6.0\text{V (0.1V step)}$ It applies only to 2ch(Low Voltage Detect).
- 1ch: Over Voltage Detect, 2ch: Low Voltage Detect
- Output Configuration
 NJU7712: Nch. Open Drain Type
 NJU7713: C-MOS Output Type
- CMOS Technology
- Package Outline SOT-23-5 / SC88A

■ PIN CONFIGURATION

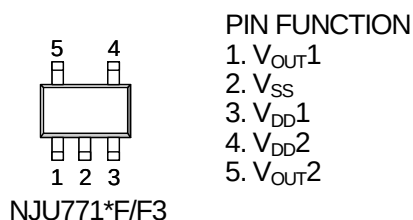

■ EQUIVALENT CIRCUIT

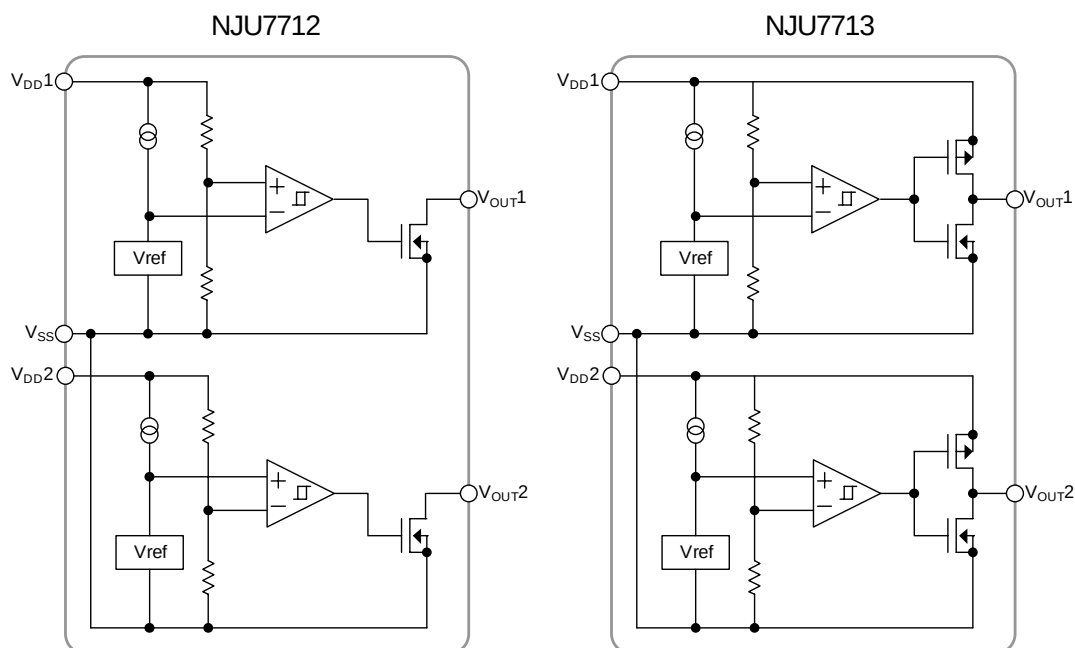

NJU7712/13

■ DETECTION VOLTAGERANK LIST

●NJU7712

Device Name	Package	V _{DET}	
		CH1	CH2
NJU7712F4227	SOT-23-5	4.2V	2.7V
NJU7712F0613		6.0V	1.3V
NJU7712F3-4227	SC88A	4.2V	2.7V
NJU7712F3-0613		6.0V	1.3V

●NJU7713

Device Name	Package	V _{DET}	
		CH1	CH2
NJU7713F0433	SOT-23-5	4.0V	3.3V
NJU7713F4227		4.2V	2.7V
NJU7713F0613		6.0V	1.3V
NJU7713F3-0433	SC88A	4.0V	3.3V
NJU7713F3-4227		4.2V	2.7V
NJU7713F3-0613		6.0V	1.3V

■ NJU7712

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{DD}	+10	V
Output Voltage	V _{OUT}	V _{SS} -0.3 ~ +10	V
Output Current	I _{OUT}	50	mA
Power Dissipation	P _D	SOT-23-5	350(*1)
			200(*2)
		SC88A	250(*1)
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(*1) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*2) : Device itself

■ ELECTRICAL CHARACTERISTICS

(1ch: Over Voltage Detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET1}			-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS1}			V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS1}	V _{DD1} =V _{DET1} +1V	V _{DET1} =1.5V ~ 1.7V Version	—	0.5	1.0	μA
			V _{DET1} =1.8V ~ 6.0V Version	—	0.8	1.6	μA
Output Current	I _{OUT1}	Nch, V _{DS1} =0.5V	V _{DD1} =4.8V(≤4.3V Version)	6	13	—	mA
			V _{DD1} =7.0V	8	18	—	mA
Output Leak Current	I _{LEAK1}	V _{DD1} =1V, V _{OUT1} =9V		—	—	0.1	μA
Detection Voltage Temperature Coefficient	ΔV _{DET1} /ΔTa	Ta=0 ~ +85°C		—	±100	—	ppm/°C
Operating Voltage (*3)	V _{DD1}	R _{L1} =100kΩ		0.8	—	9	V

(*3): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 90% or less of the input voltage(V_{DD}).


(2ch: Low Voltage Detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET2}			-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS2}			V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS2}	V _{DD2} =V _{DET2} +1V	V _{DET2} =1.3V ~ 1.7V Version	—	0.5	1.0	μA
			V _{DET2} =1.8V ~ 6.0V Version	—	0.8	1.6	μA
Output Current	I _{OUT2}	Nch, V _{DS2} =0.5V	V _{DD2} =1.2V	0.75	2.0	—	mA
			V _{DD2} =2.4V (≥2.7V Version)	4.5	7.0	—	mA
Output Leak Current	I _{LEAK2}	V _{DD2} =V _{OUT2} =9V		—	—	0.1	μA
Detection Voltage Temperature Coefficient	ΔV _{DET2} /ΔTa	Ta=0 ~ +85°C		—	±100	—	ppm/°C
Operating Voltage (*4)	V _{DD2}	R _{L2} =100kΩ		0.8	—	9	V


(*4): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT

① COMMON TEST CIRCUIT

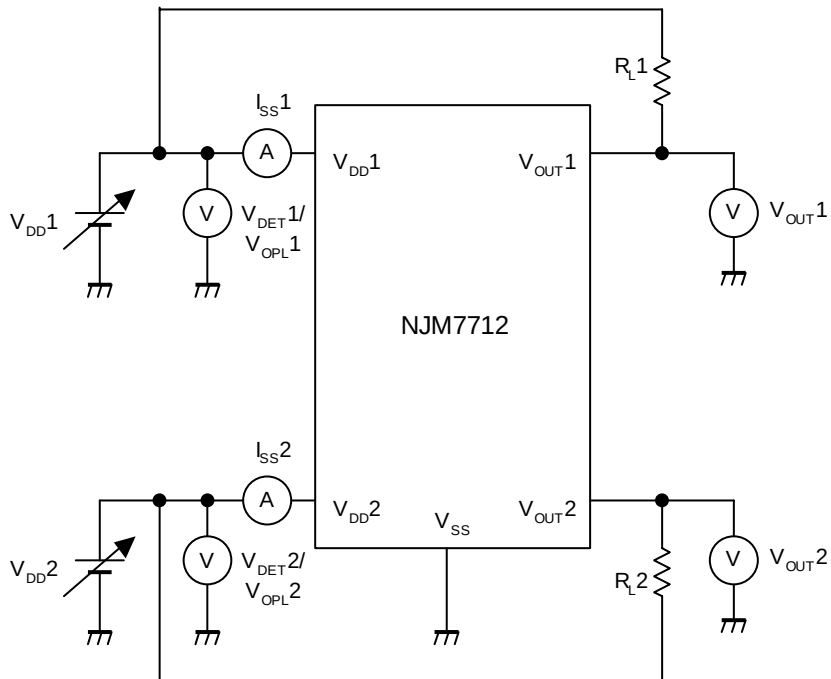


② OUTPUT CURRENT / LEAK CURRENT TEST CIRCUIT

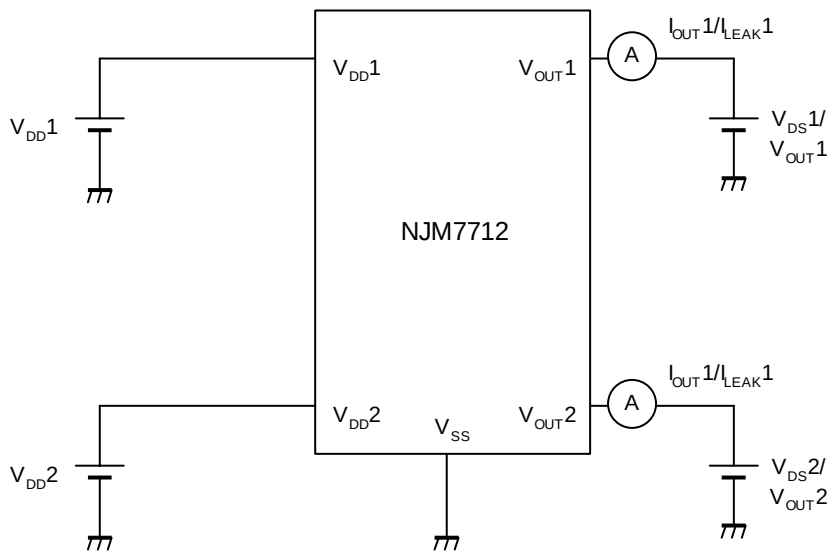


■ TYPICAL APPLICATION

① Battery voltage supervision

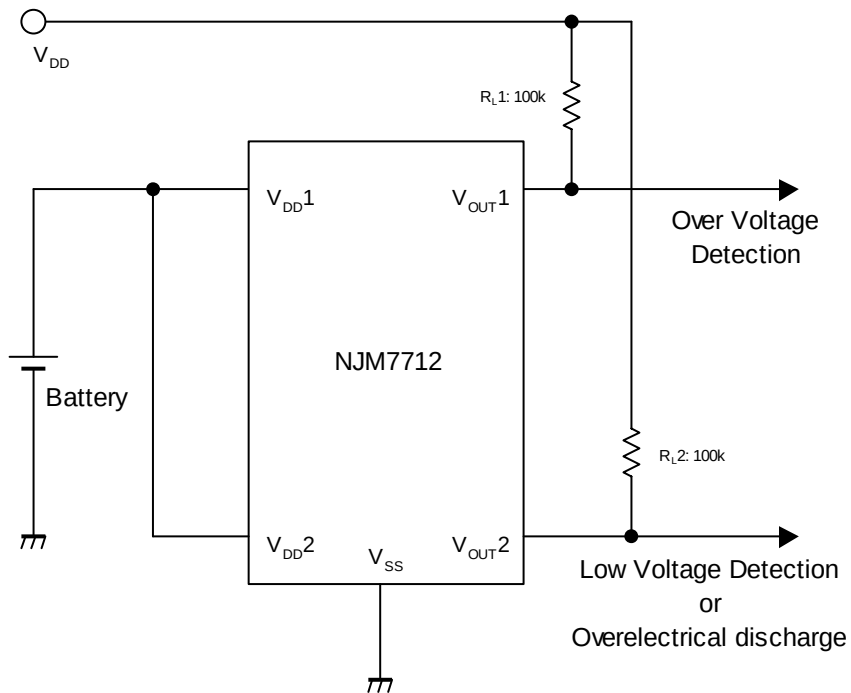

② Window Comparator

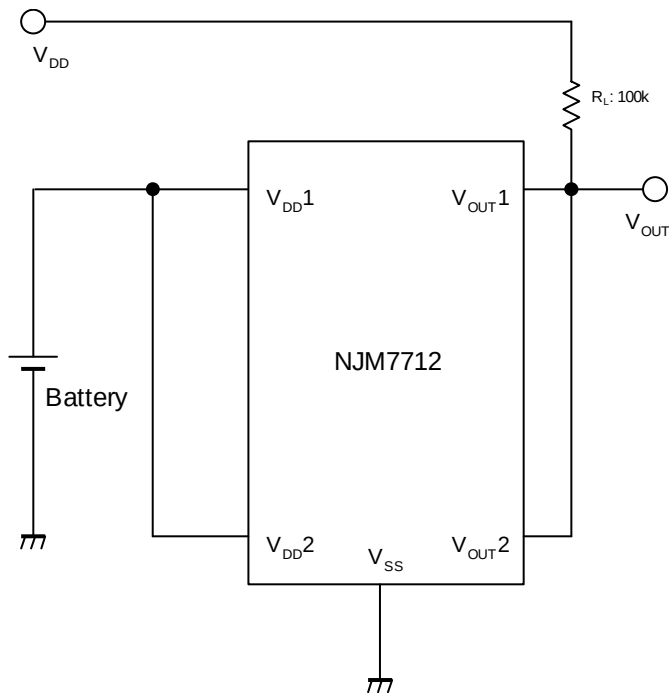

NJU7712/13

■ NJU7713

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{DD}	+10	V
Output Voltage	V _{OUT}	V _{SS} -0.3 ~ +10	V
Output Current	I _{OUT}	50	mA
Power Dissipation	P _D	SOT-23-5	350(*5)
			200(*6)
		SC88A	250(*5)
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(*5) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*6) : Device itself

■ ELECTRICAL CHARACTERISTICS

(1ch: Over Voltage Detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET1}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS1}		V _{DET} x0.03	V _{DET} x0.05	V _{DET} x0.08	V
Quiescent Current	I _{SS1}	V _{DD1} =V _{DET1} +1V	V _{DET1} =1.5V ~ 1.7V Version	—	0.5	μA
			V _{DET1} =1.8V ~ 6.0V Version	—	0.8	μA
Output Current	I _{OUT1}	Nch, V _{DS1} =0.5V	V _{DD1} =4.8V(≤4.3V Version)	6	13	mA
			V _{DD1} =7.0V	8	18	mA
		Pch, V _{DS1} =0.5V	V _{DD1} =1.4V	0.1	0.4	mA
			V _{DD1} =2.4V(≥2.7V Version)	0.6	1.6	mA
Detection Voltage Temperature Coefficient	ΔV _{DET1} /ΔTa	Ta=0 ~ +85°C	—	±100	—	ppm/°C
Operating Voltage (*7)	V _{DD1}	R _{L1} =100kΩ	1.2	—	9	V

(*7): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 90% or less of the input voltage(V_{DD}).


(2ch: Low Voltage detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET2}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS2}		V _{DET} x0.03	V _{DET} x0.05	V _{DET} x0.08	V
Quiescent Current	I _{SS2}	V _{DD2} =V _{DET2} +1V	V _{DET2} =1.3V ~ 1.7V Version	—	0.5	μA
			V _{DET2} =1.8V ~ 6.0V Version	—	0.8	μA
Output Current	I _{OUT2}	Nch, V _{DS2} =0.5V	V _{DD2} =4.8V(≤4.3V Version)	0.75	2.0	mA
			V _{DD2} =7.0V	4.5	7.0	mA
		Pch, V _{DS2} =0.5V	V _{DD2} =1.4V	2.0	3.5	mA
			V _{DD2} =2.4V (4.0V~5.6V Version)	2.5	4.0	mA
			V _{DD2} =8.4V (≥5.7V Version)	3.0	5.0	mA
Detection Voltage Temperature Coefficient	ΔV _{DET2} /ΔTa	Ta=0 ~ +85°C	—	±100	—	ppm/°C
Operating Voltage (*8)	V _{DD2}	R _{L2} =100kΩ	0.8	—	9	V


(*8): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


① COMMON TEST CIRCUIT

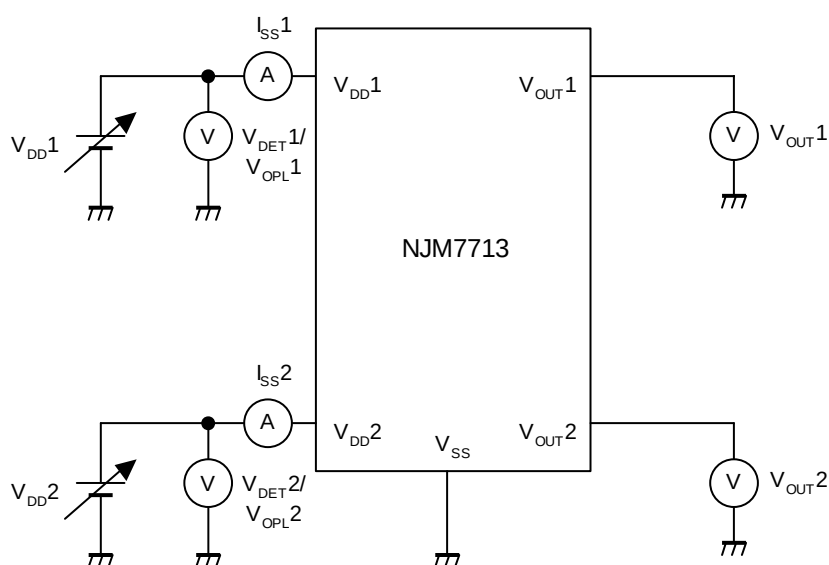


② Nch OUTPUT CURRENT TEST CIRCUIT

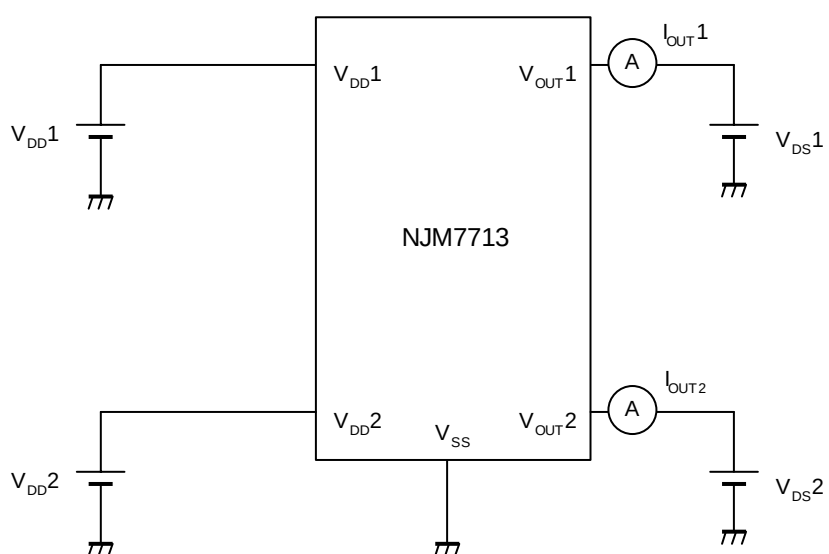

③ Pch OUTPUT CURRENT TEST CIRCUIT

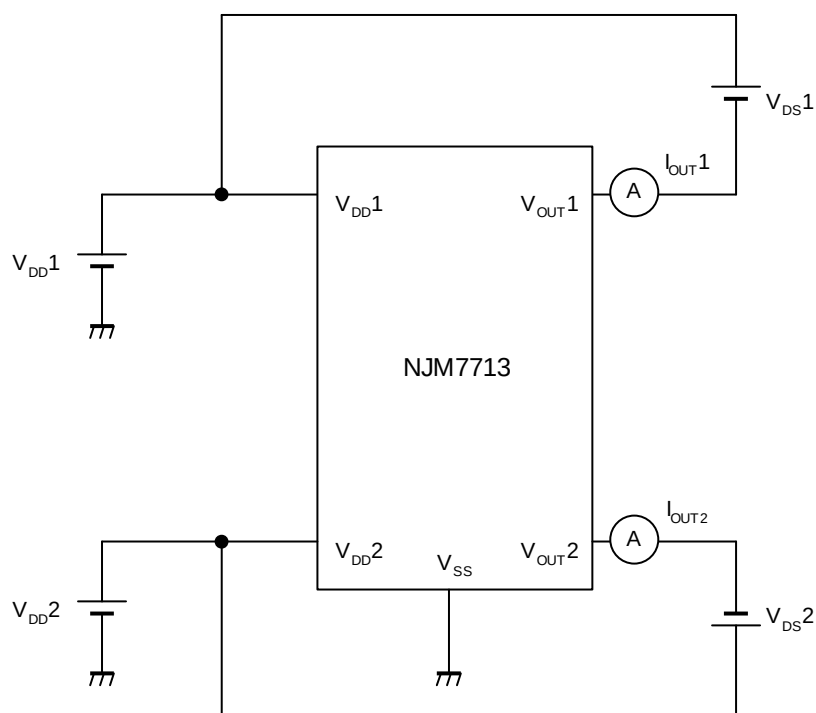


④ MINIMUM OPERATING VOLTAGE TEST CIRCUIT

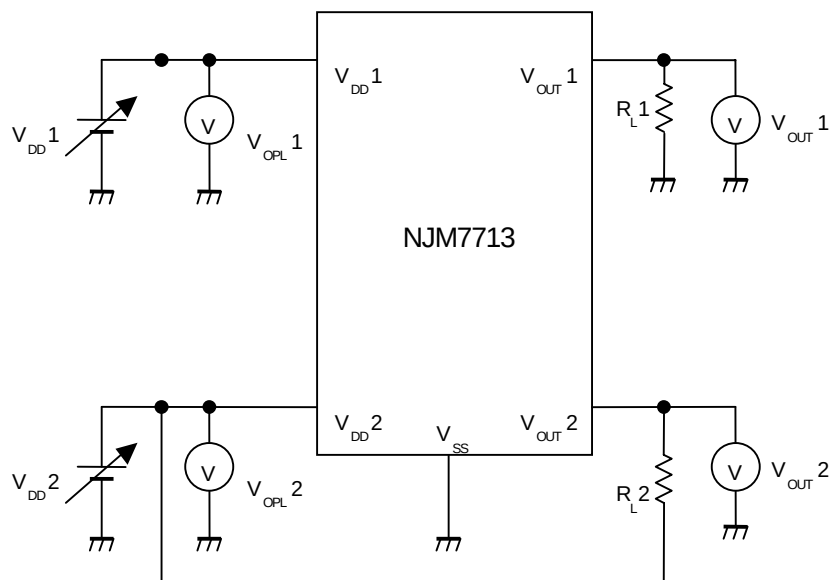

■ TYPICAL APPLICATION

① Battery voltage supervision

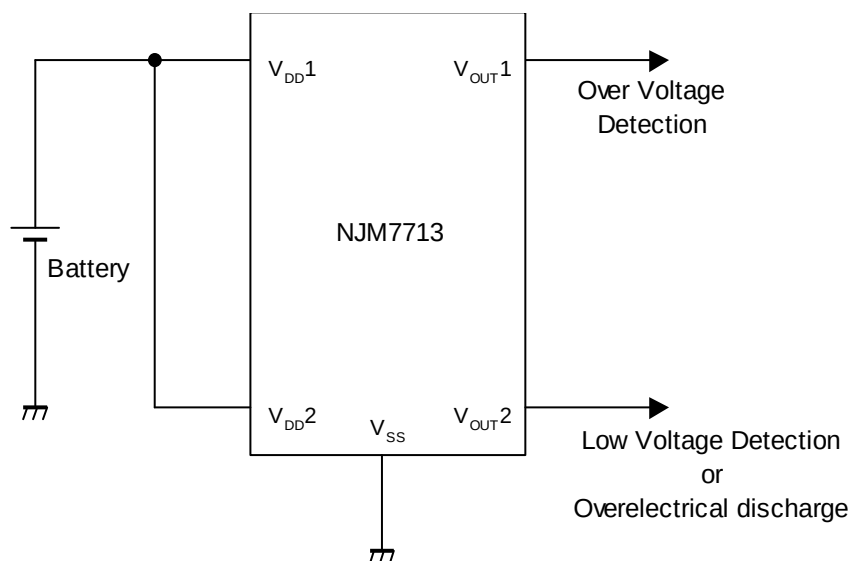

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU7712F3-4227-TE1](#) [NJU7712F0613-TE1](#) [NJU7713F4227-TE1](#) [NJU7712F4227-TE1](#) [NJU7713F3-0613-TE1](#)
[NJU7713F0613-TE1](#) [NJU7712F3-0613-TE1](#) [NJU7713F3-4227-TE1](#) [NJU7713F0433-TE1](#) [NJU7713F3-0433-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9