

# MOSFET

Metal Oxide Semiconductor Field Effect Transistor

## CoolMOS™ C6 650V

650V CoolMOS™ C6 Power Transistor  
IPx65R099C6

## Data Sheet

Rev. 2.0  
Final

Industrial & Multimarket

## 1 Description



CoolMOS™ is a revolutionary technology for high voltage power MOSFETs, designed according to the superjunction (SJ) principle and pioneered by Infineon Technologies. CoolMOS™ C6 series combines the experience of the leading SJ MOSFET supplier with high class innovation. The resulting devices provide all benefits of a fast switching SJ MOSFET while not sacrificing ease of use. Extremely low switching and conduction losses make switching applications even more efficient, more compact, lighter and cooler.

## Features

- Extremely low losses due to very low FOM  $R_{ds(on)} \cdot Q_g$  and  $E_{oss}$
- Very high commutation ruggedness
- Easy to use/drive
- Pb-free plating, Halogen free mold compound
- Qualified for industrial grade applications according to JEDEC (J-STD20 and JESD22)

## Applications

PFC stages, hard switching PWM stages and resonant switching PWM stages for e.g. PC Silverbox, Adapter, LCD & PDP TV, Lighting, Server, Telecom, UPS and Solar.

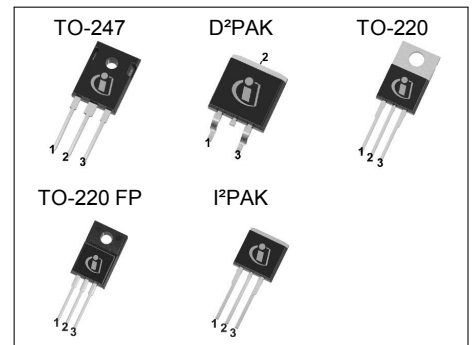

**Table 1 Key Performance Parameters**

| Parameter             | Value | Unit       |
|-----------------------|-------|------------|
| $V_{DS} @ T_{j \max}$ | 700   | V          |
| $R_{DS(on),max}$      | 0.099 | $\Omega$   |
| $Q_g, typ$            | 127   | nC         |
| $I_D, pulse$          | 115   | A          |
| $E_{oss} @ 400V$      | 10    | $\mu J$    |
| Body diode $di/dt$    | 300   | A/ $\mu s$ |

| Type / Ordering Code | Package           | Marking | Related Links  |
|----------------------|-------------------|---------|----------------|
| IPW65R099C6          | PG-TO 247         | 65C6099 | see Appendix A |
| IPB65R099C6          | PG-TO 263         |         |                |
| IPP65R099C6          | PG-TO 220         |         |                |
| IPA65R099C6          | PG-TO 220 FullPAK |         |                |
| IPI65R099C6          | PG-TO 262         |         |                |

## Table of Contents

|                                           |    |
|-------------------------------------------|----|
| Description .....                         | 2  |
| Table of Contents .....                   | 3  |
| Maximum ratings .....                     | 4  |
| Thermal characteristics .....             | 5  |
| Electrical characteristics .....          | 6  |
| Electrical characteristics diagrams ..... | 8  |
| Test Circuits .....                       | 13 |
| Package Outlines .....                    | 14 |
| Appendix A .....                          | 19 |
| Revision History .....                    | 20 |
| Disclaimer .....                          | 20 |

## 2 Maximum ratings

at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

**Table 2 Maximum ratings**

| Parameter                                                             | Symbol              | Values |      |       | Unit             | Note / Test Condition                                                            |
|-----------------------------------------------------------------------|---------------------|--------|------|-------|------------------|----------------------------------------------------------------------------------|
|                                                                       |                     | Min.   | Typ. | Max.  |                  |                                                                                  |
| Continuous drain current <sup>1)</sup>                                | $I_D$               |        |      | 38.0  | A                | $T_C = 25^\circ\text{C}$                                                         |
|                                                                       |                     |        |      | 24.0  |                  | $T_C = 100^\circ\text{C}$                                                        |
| Pulsed drain current <sup>2)</sup>                                    | $I_{D,pulse}$       |        |      | 115   | A                | $T_C = 25^\circ\text{C}$                                                         |
| Avalanche energy, single pulse                                        | $E_{AS}$            |        |      | 845   | mJ               | $I_D = 6.6\text{A}$ , $V_{DS} = 50\text{V}$                                      |
| Avalanche energy, repetitive                                          | $E_{AR}$            |        |      | 1.28  | mJ               | $I_D = 6.6\text{A}$ , $V_{DS} = 50\text{V}$                                      |
| Avalanche current, repetitive                                         | $I_{AR}$            |        |      | 6.6   | A                |                                                                                  |
| MOSFET dv/dt ruggedness                                               | dv/dt               |        |      | 50    | V/ns             | $V_{DS} = 0 \dots 480\text{V}$                                                   |
| Gate source voltage                                                   | $V_{GS}$            | -20    |      | 20    | V                | static                                                                           |
|                                                                       |                     | -30    |      | 30    |                  | AC ( $f > 1\text{ Hz}$ )                                                         |
| Power dissipation (non FullPAK)<br>TO-247, TO-220, I <sup>2</sup> PAK | $P_{tot}$           |        |      | 278.0 | W                | $T_C = 25^\circ\text{C}$                                                         |
| Power dissipation (FullPAK)<br>TO-220 FP                              | $P_{tot}$           |        |      | 35.0  | W                | $T_C = 25^\circ\text{C}$                                                         |
| Operating and storage temperature                                     | $T_j, T_{stg}$      | -55    |      | 150   | $^\circ\text{C}$ |                                                                                  |
| Mounting torque (non FullPAK)<br>TO-247, TO-220, I <sup>2</sup> PAK   |                     |        |      | 60    | Ncm              | M3 and M3.5 screws                                                               |
| Mounting torque (FullPAK)<br>TO-220 FP                                |                     |        |      | 50    | Ncm              | M2.5 screws                                                                      |
| Continuous diode forward current                                      | $I_S$               |        |      | 33.0  | A                | $T_C = 25^\circ\text{C}$                                                         |
| Diode pulse current                                                   | $I_{S,pulse}$       |        |      | 115   | A                | $T_C = 25^\circ\text{C}$                                                         |
| Reverse diode dv/dt <sup>3)</sup>                                     | dv/dt               |        |      | 15    | V/ns             | $V_{DS} = 0 \dots 480\text{V}$ , $I_{SD} \leq I_D$ ,<br>$T_j = 25^\circ\text{C}$ |
| Maximum diode commutation speed                                       | di <sub>f</sub> /dt |        |      | 300   | A/ $\mu\text{s}$ |                                                                                  |

<sup>1)</sup> Limited by  $T_{j\text{ max}}$ . Maximum duty cycle  $D=0.75$

<sup>2)</sup> Pulse width  $t_p$  limited by  $T_{j\text{ max}}$

<sup>3)</sup> Identical low side and high side switch with identical  $R_G$

### 3 Thermal characteristics

**Table 3 Thermal characteristics TO-247, TO-220, I<sup>2</sup>PAK**

| Parameter                                                  | Symbol     | Values |      |      | Unit | Note / Test Condition                |
|------------------------------------------------------------|------------|--------|------|------|------|--------------------------------------|
|                                                            |            | Min.   | Typ. | Max. |      |                                      |
| Thermal resistance, junction - case                        | $R_{thJC}$ |        |      | 0.45 | °C/W |                                      |
| Thermal resistance, junction - ambient                     | $R_{thJA}$ |        |      | 62   | °C/W | leaded                               |
| Soldering temperature, wavesoldering only allowed at leads | $T_{sold}$ |        |      | 260  | °C   | 1.6 mm (0.063 in.) from case for 10s |

**Table 4 Thermal characteristics TO-220 FP**

| Parameter                                                  | Symbol     | Values |      |      | Unit | Note / Test Condition                |
|------------------------------------------------------------|------------|--------|------|------|------|--------------------------------------|
|                                                            |            | Min.   | Typ. | Max. |      |                                      |
| Thermal resistance, junction - case                        | $R_{thJC}$ |        |      | 3.6  | °C/W |                                      |
| Thermal resistance, junction - ambient                     | $R_{thJA}$ |        |      | 80   | °C/W | leaded                               |
| Soldering temperature, wavesoldering only allowed at leads | $T_{sold}$ |        |      | 260  | °C   | 1.6 mm (0.063 in.) from case for 10s |

**Table 5 Thermal characteristics D<sup>2</sup>PAK**

| Parameter                                              | Symbol     | Values |      |      | Unit | Note / Test Condition                                     |
|--------------------------------------------------------|------------|--------|------|------|------|-----------------------------------------------------------|
|                                                        |            | Min.   | Typ. | Max. |      |                                                           |
| Thermal resistance, junction - case                    | $R_{thJC}$ |        |      | 0.45 | °C/W |                                                           |
| Thermal resistance, junction - ambient <sup>1)</sup>   | $R_{thJA}$ |        |      | 62   | °C/W | SMD version, device on PCB, minimal footprint             |
|                                                        |            |        | 35   |      |      | SMD version, device on PCB, 6cm <sup>2</sup> cooling area |
| Soldering temperature, wave- & reflowsoldering allowed | $T_{sold}$ |        |      | 260  | °C   | reflow MSL                                                |

<sup>1)</sup> Device on 40mm\*40mm\*1.5mm one layer epoxy PCB FR4 with 6cm<sup>2</sup> copper area (thickness 70µm) for drain connection. PCB is vertical without air stream cooling.

## 4 Electrical characteristics

at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

**Table 6 Static characteristics**

| Parameter                        | Symbol        | Values |       |       | Unit     | Note / Test Condition                                       |
|----------------------------------|---------------|--------|-------|-------|----------|-------------------------------------------------------------|
|                                  |               | Min.   | Typ.  | Max.  |          |                                                             |
| Drain-source breakdown voltage   | $V_{(BR)DSS}$ | 650    |       |       | V        | $V_{GS} = 0V$ , $I_D = 1mA$                                 |
| Gate threshold voltage           | $V_{GS(th)}$  | 2.5    | 3     | 3.5   | V        | $V_{DS} = V_{GS}$ , $I_D = 1.2mA$                           |
| Zero gate voltage drain current  | $I_{DSS}$     |        |       | 1     | $\mu A$  | $V_{DS} = 650V$ , $V_{GS} = 0V$ , $T_j = 25^\circ\text{C}$  |
|                                  |               |        | 10    |       |          | $V_{DS} = 650V$ , $V_{GS} = 0V$ , $T_j = 150^\circ\text{C}$ |
| Gate-source leakage current      | $I_{GSS}$     |        |       | 100   | nA       | $V_{GS} = 20V$ , $V_{DS} = 0V$                              |
| Drain-source on-state resistance | $R_{DS(on)}$  |        | 0.089 | 0.099 | $\Omega$ | $V_{GS} = 10V$ , $I_D = 12.8A$ , $T_j = 25^\circ\text{C}$   |
|                                  |               |        | 0.231 |       |          | $V_{GS} = 10V$ , $I_D = 12.8A$ , $T_j = 150^\circ\text{C}$  |
| Gate resistance                  | $R_G$         |        | 1.7   |       | $\Omega$ | $f = 1MHz$ , open drain                                     |

**Table 7 Dynamic characteristics**

| Parameter                                                  | Symbol       | Values |      |      | Unit | Note / Test Condition                                                               |
|------------------------------------------------------------|--------------|--------|------|------|------|-------------------------------------------------------------------------------------|
|                                                            |              | Min.   | Typ. | Max. |      |                                                                                     |
| Input capacitance                                          | $C_{iss}$    |        | 2780 |      | pF   | $V_{GS} = 0V$ , $V_{DS} = 100V$ , $f = 1MHz$                                        |
| Output capacitance                                         | $C_{oss}$    |        | 142  |      | pF   |                                                                                     |
| Effective output capacitance, energy related <sup>1)</sup> | $C_{o(er)}$  |        | 110  |      | pF   | $V_{GS} = 0V$ , $V_{DS} = 0 \dots 480V$                                             |
| Effective output capacitance, time related <sup>2)</sup>   | $C_{o(tr)}$  |        | 525  |      | pF   | $I_D = \text{constant}$ , $V_{GS} = 0V$ , $V_{DS} = 0 \dots 480V$                   |
| Turn-on delay time                                         | $t_{d(on)}$  |        | 10.6 |      | ns   | $V_{DD} = 480V$ , $V_{GS} = 13V$ , $I_D = 19.2A$ , $R_G = 1.7\Omega$ (see table 21) |
| Rise time                                                  | $t_r$        |        | 9    |      | ns   |                                                                                     |
| Turn-off delay time                                        | $t_{d(off)}$ |        | 77   |      | ns   |                                                                                     |
| Fall time                                                  | $t_f$        |        | 6    |      | ns   |                                                                                     |

**Table 8 Gate charge characteristics**

| Parameter             | Symbol        | Values |      |      | Unit | Note / Test Condition                                          |
|-----------------------|---------------|--------|------|------|------|----------------------------------------------------------------|
|                       |               | Min.   | Typ. | Max. |      |                                                                |
| Gate to source charge | $Q_{gs}$      |        | 15   |      | nC   | $V_{DD} = 480V$ , $I_D = 19.2A$ , $V_{GS} = 0 \text{ to } 10V$ |
| Gate to drain charge  | $Q_{gd}$      |        | 65   |      | nC   |                                                                |
| Gate charge total     | $Q_g$         |        | 127  |      | nC   |                                                                |
| Gate plateau voltage  | $V_{plateau}$ |        | 5.5  |      | V    |                                                                |

<sup>1)</sup>  $C_{o(er)}$  is a fixed capacitance that gives the same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{(BR)DSS}$

<sup>2)</sup>  $C_{o(tr)}$  is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{(BR)DSS}$

**Table 9 Reverse diode characteristics**

| Parameter                     | Symbol    | Values |      |      | Unit    | Note / Test Condition                                                  |
|-------------------------------|-----------|--------|------|------|---------|------------------------------------------------------------------------|
|                               |           | Min.   | Typ. | Max. |         |                                                                        |
| Diode forward voltage         | $V_{SD}$  |        | 0.9  |      | V       | $V_{GS} = 0V, I_F = 19.2A, T_j = 25^\circ C$                           |
| Reverse recovery time         | $t_{rr}$  |        | 615  |      | ns      | $V_R = 400V, I_F = 19.2A,$<br>$di_F/dt = 100A/\mu s$<br>(see table 20) |
| Reverse recovery charge       | $Q_{rr}$  |        | 14.8 |      | $\mu C$ |                                                                        |
| Peak reverse recovery current | $I_{rrm}$ |        | 46   |      | A       |                                                                        |

## 5 Electrical characteristics diagrams

Table 10

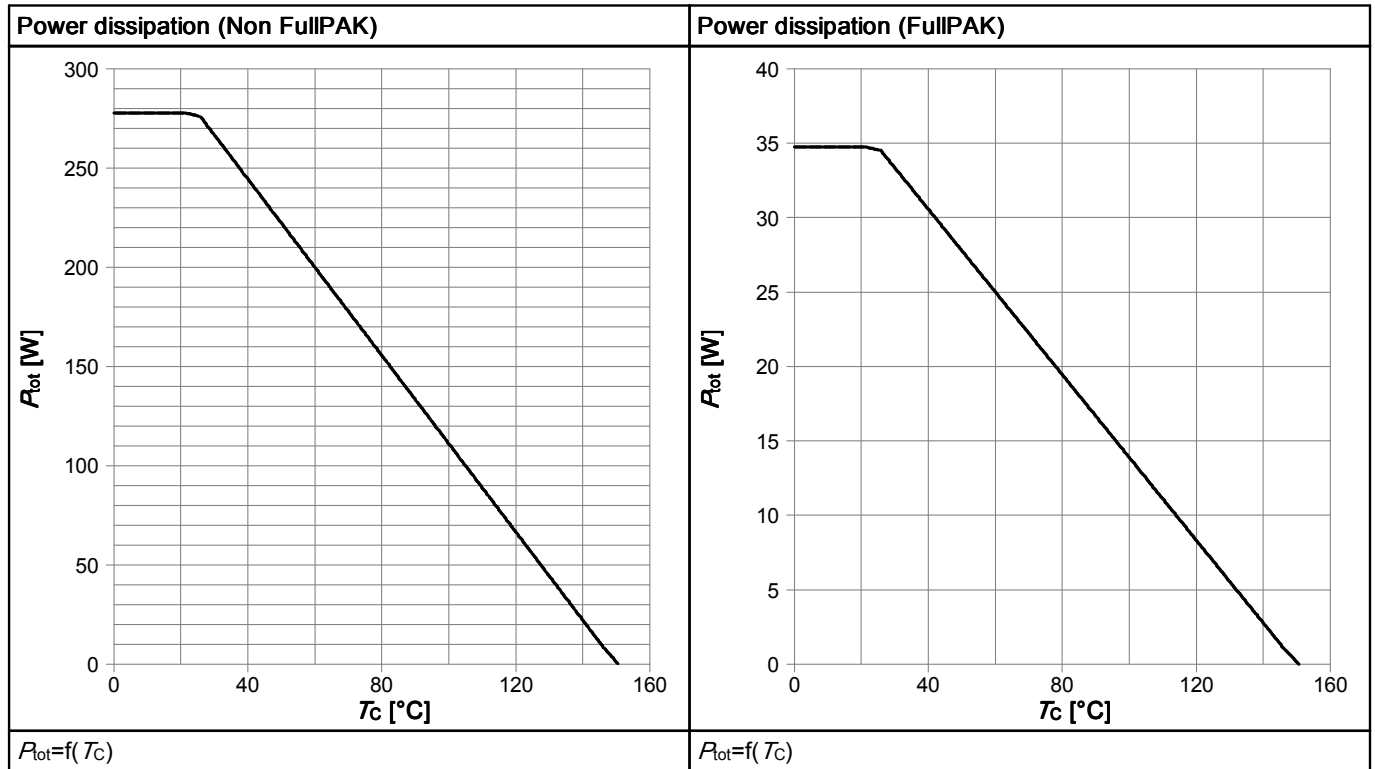


Table 11

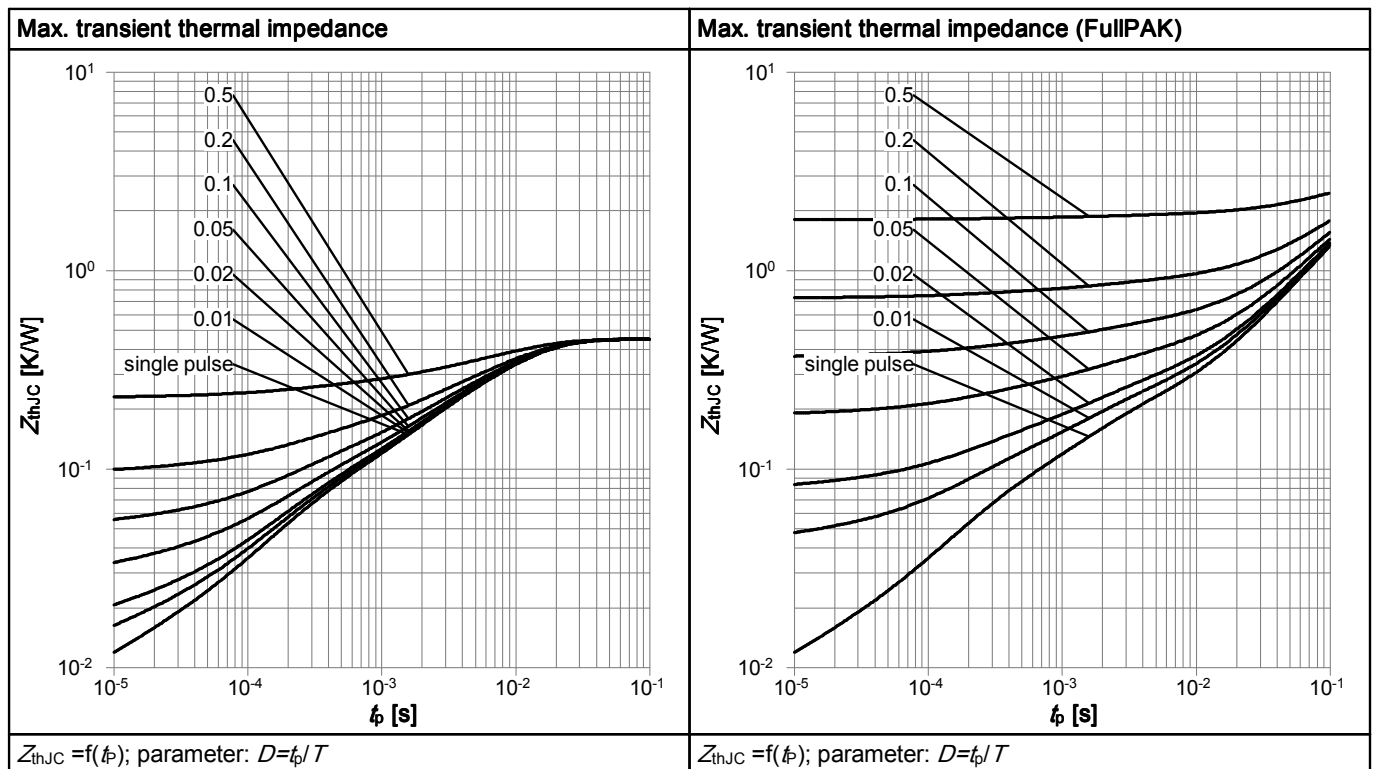




Table 12

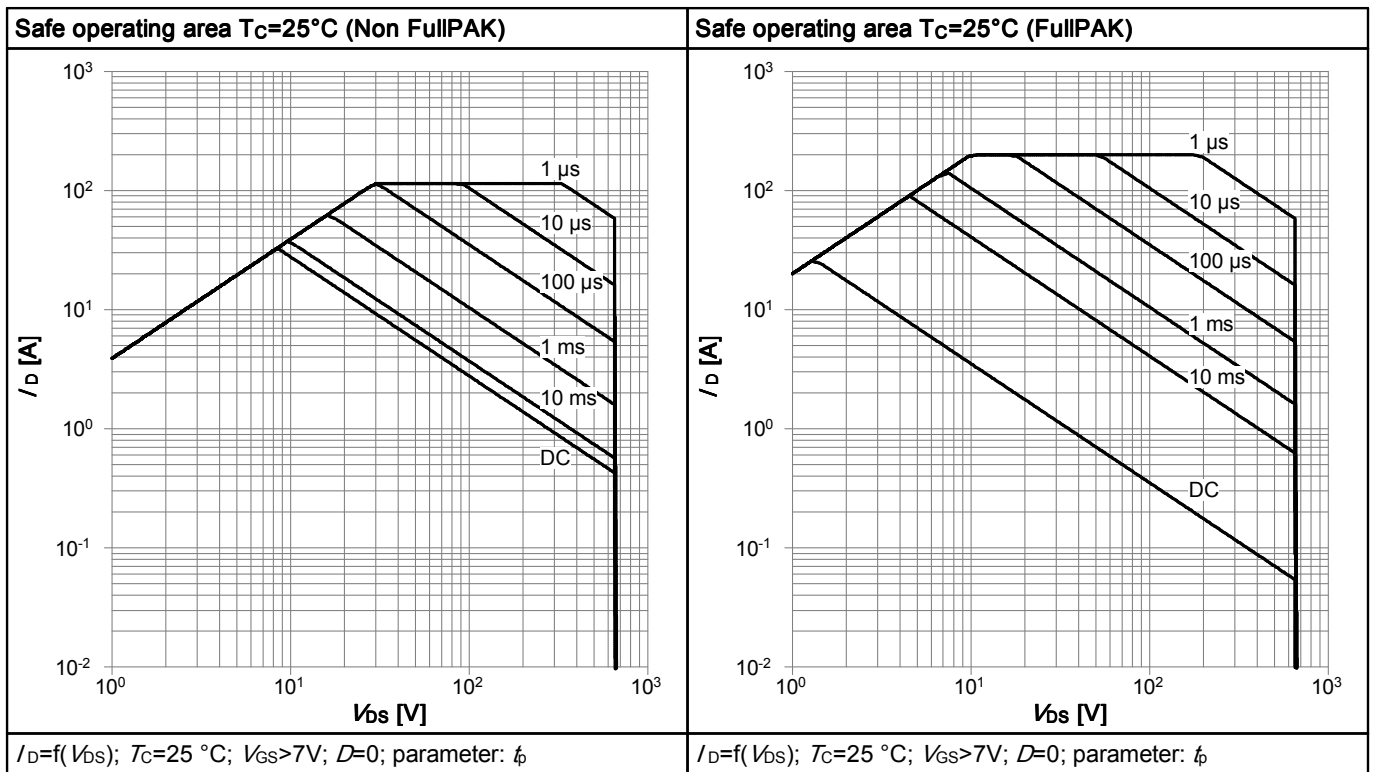


Table 13

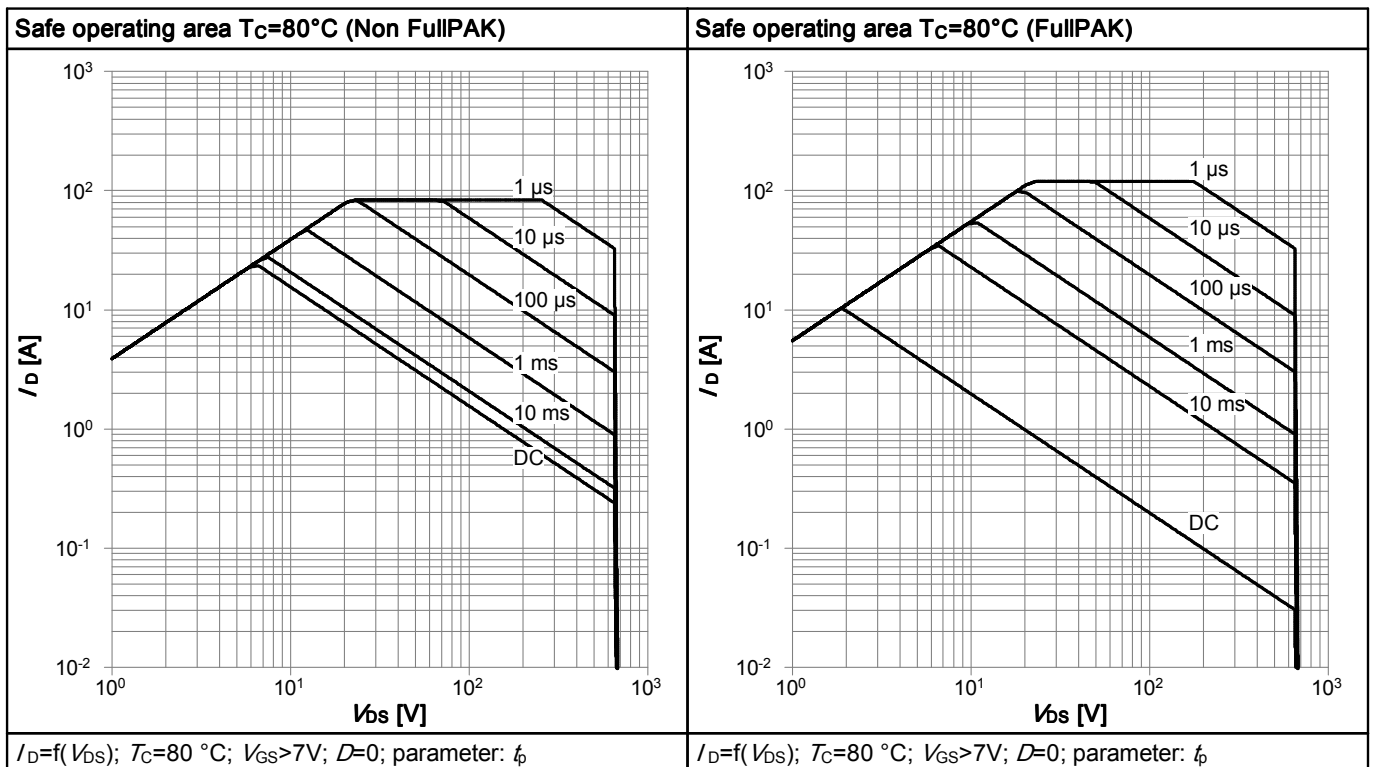


Table 14

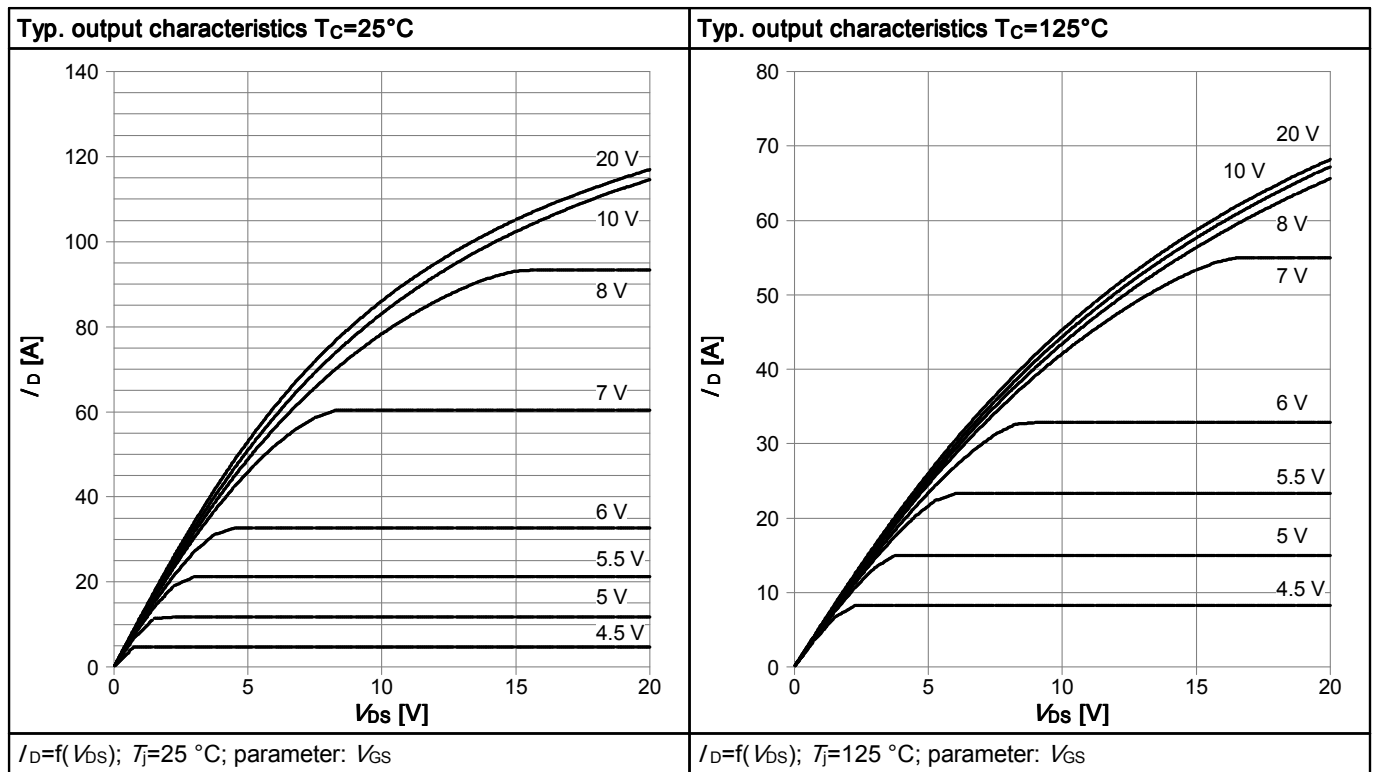


Table 15

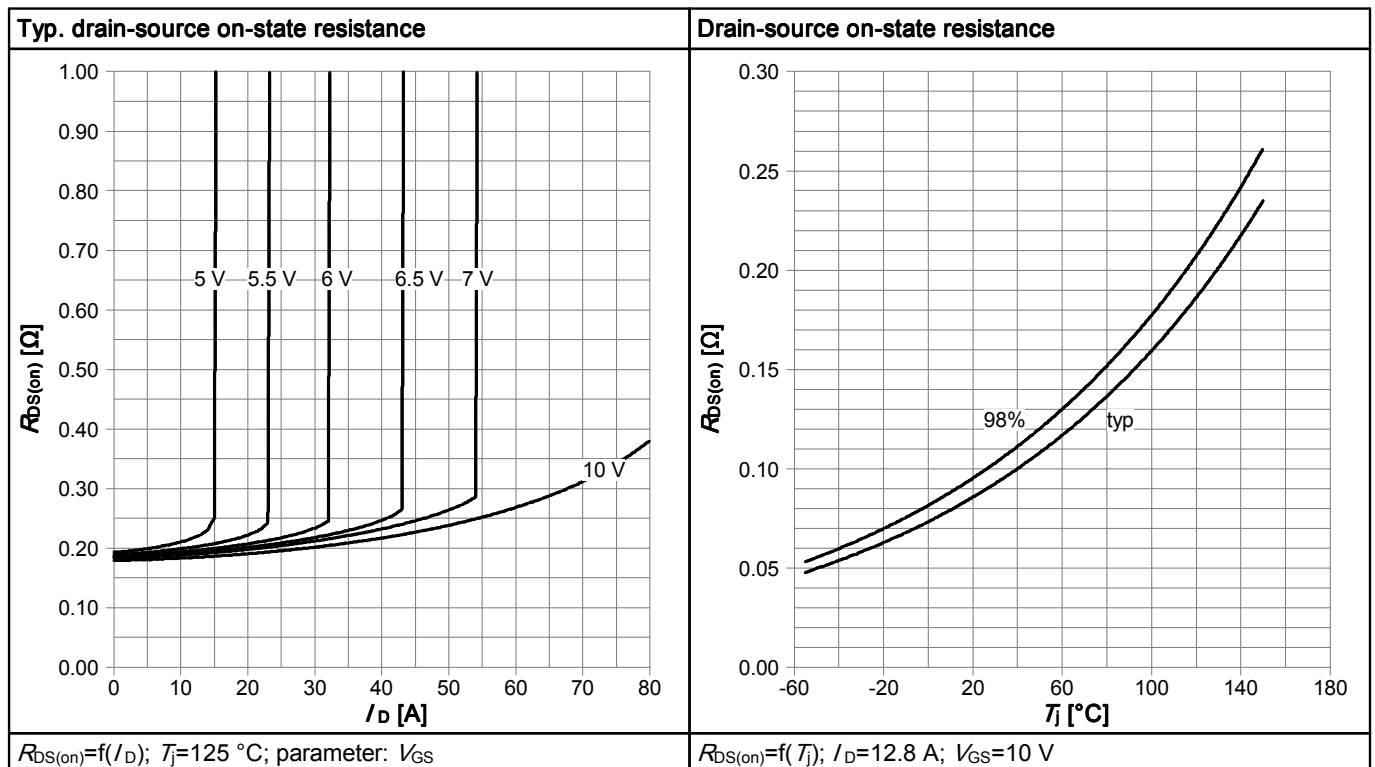


Table 16

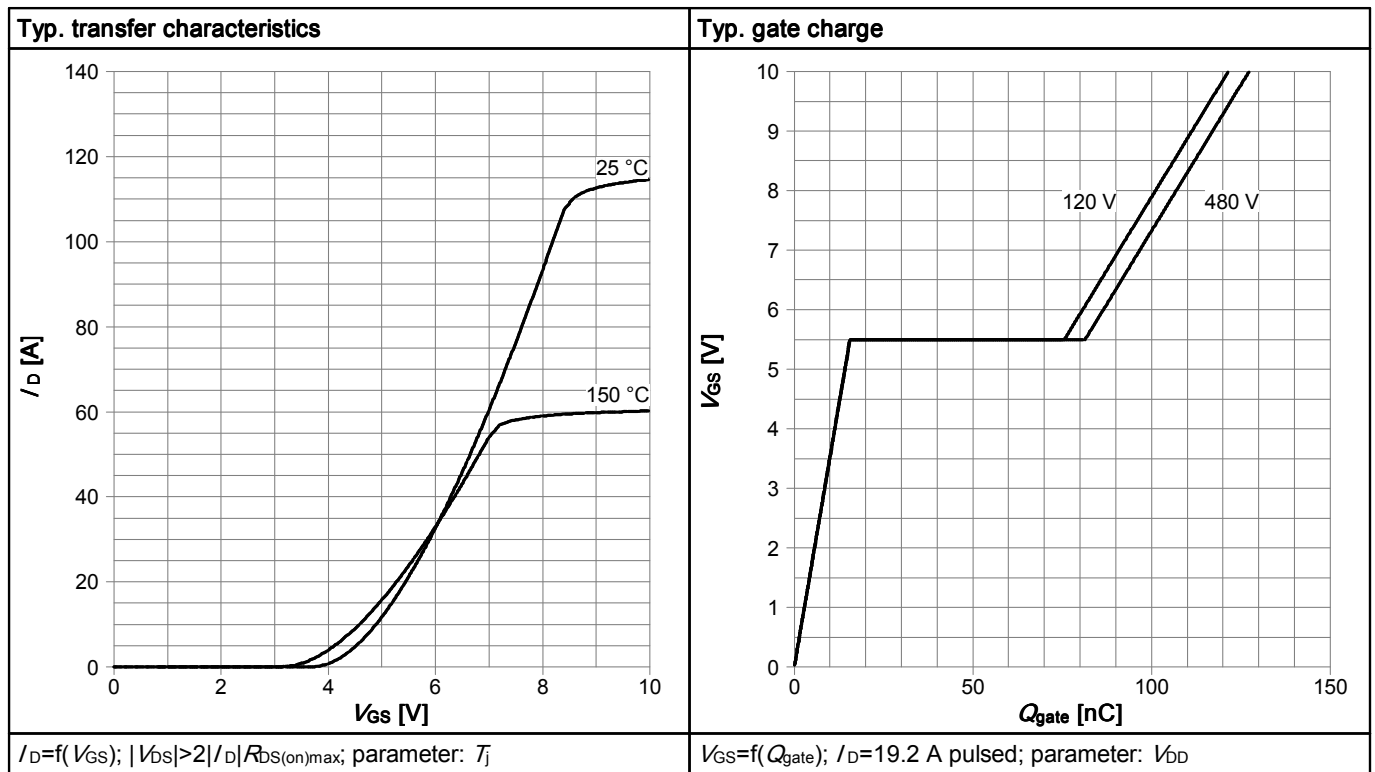


Table 17

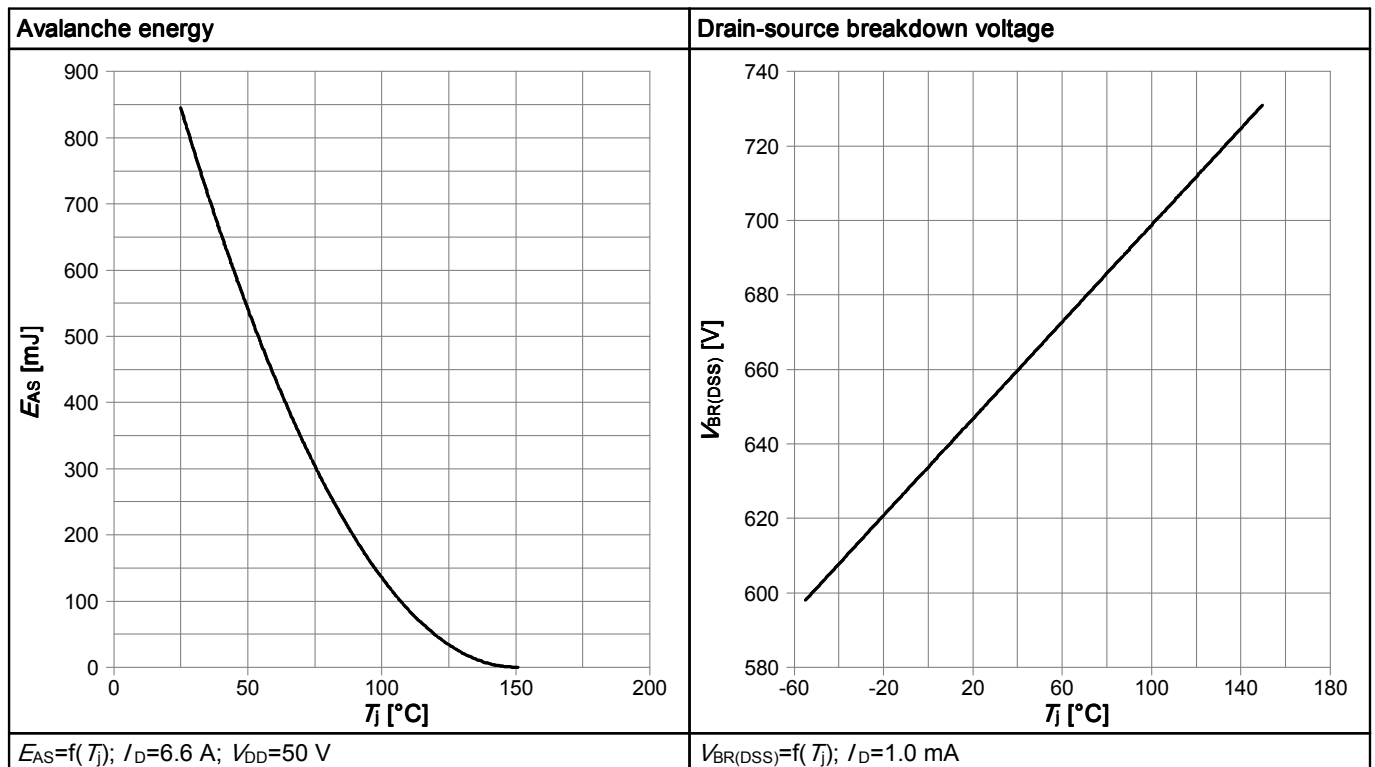


Table 18




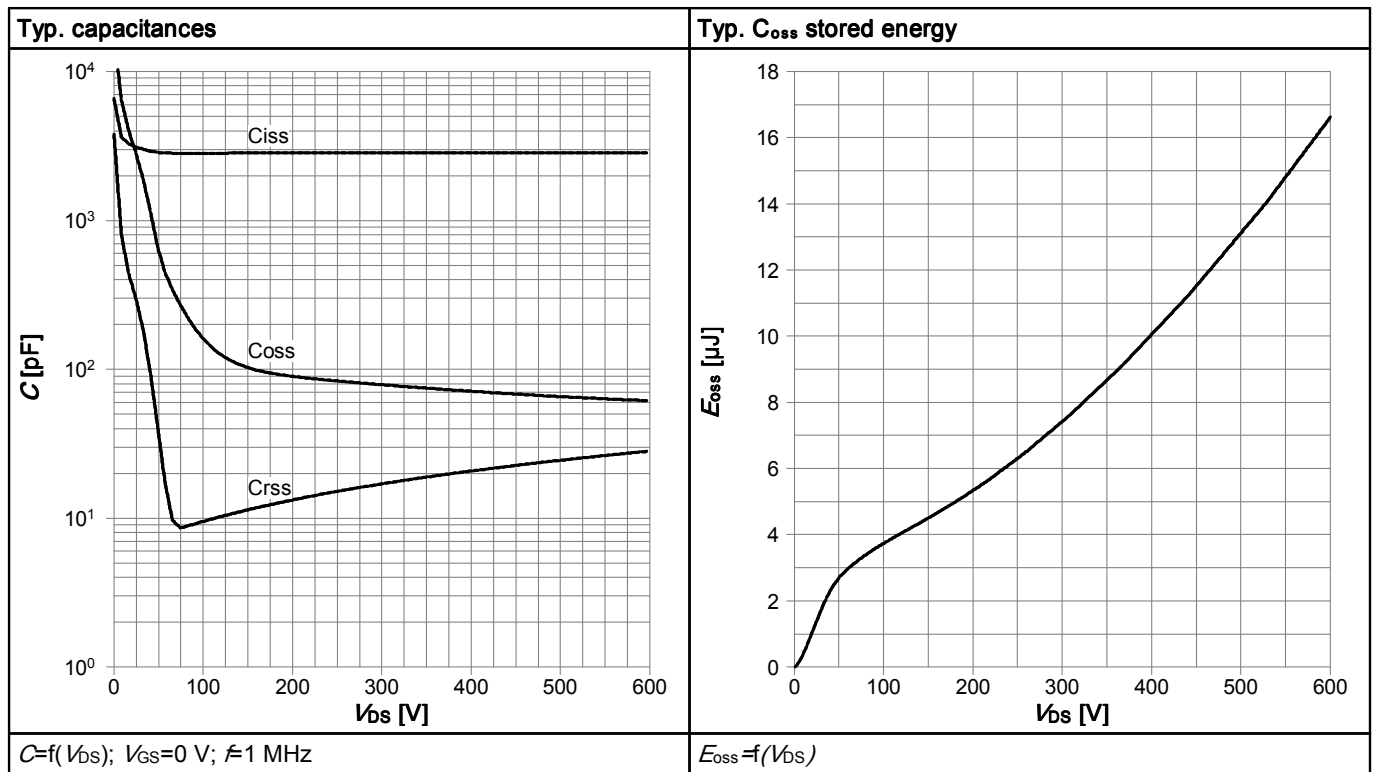


Table 19

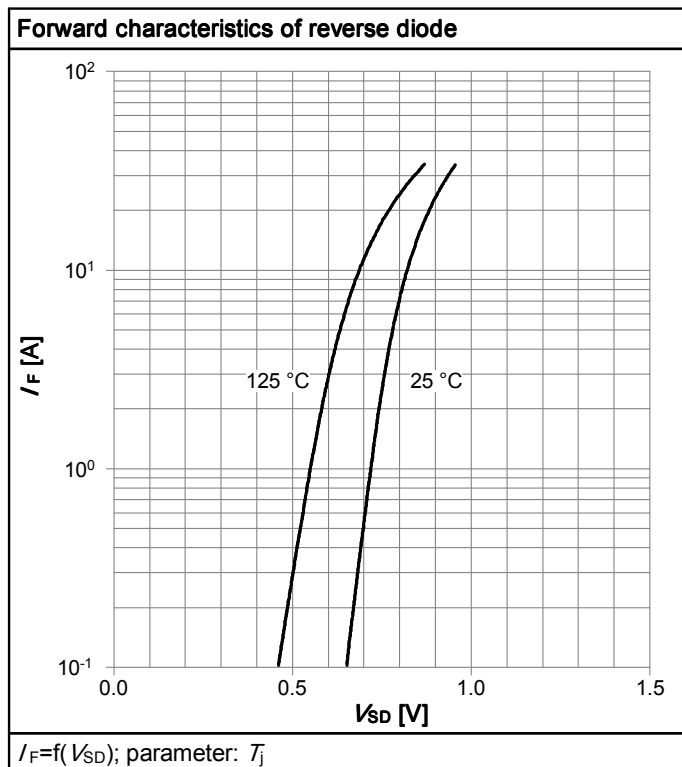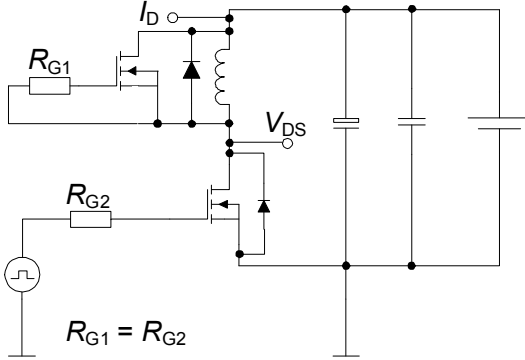
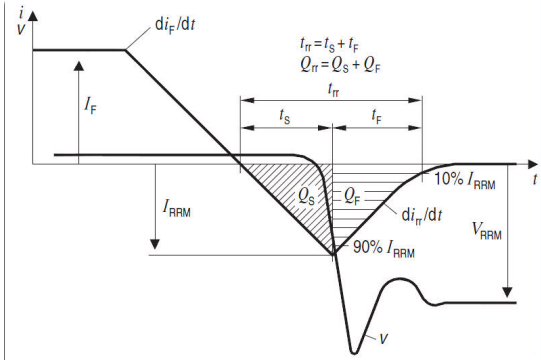


## 6 Test Circuits



**Table 20 Diode characteristics**

| Test circuit for diode characteristics                                            | Diode recovery waveform                                                            |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |

**Table 21 Switching times**
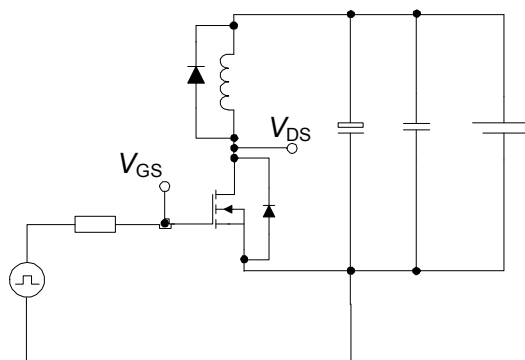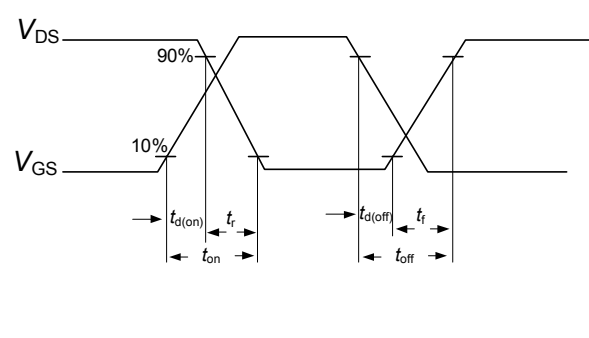
| Switching times test circuit for inductive load                                     | Switching times waveform                                                             |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

**Table 22 Unclamped inductive**
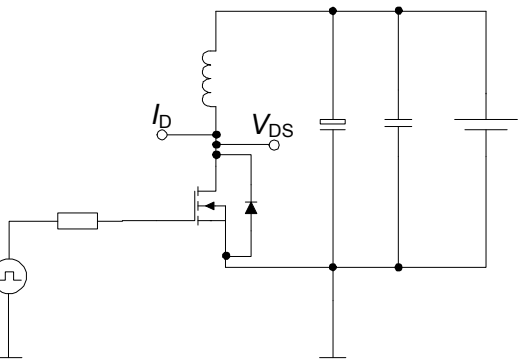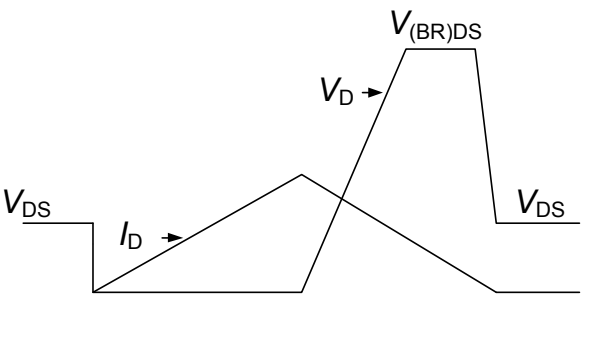
| Unclamped inductive load test circuit                                               | Unclamped inductive waveform                                                         |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

## 7 Package Outlines

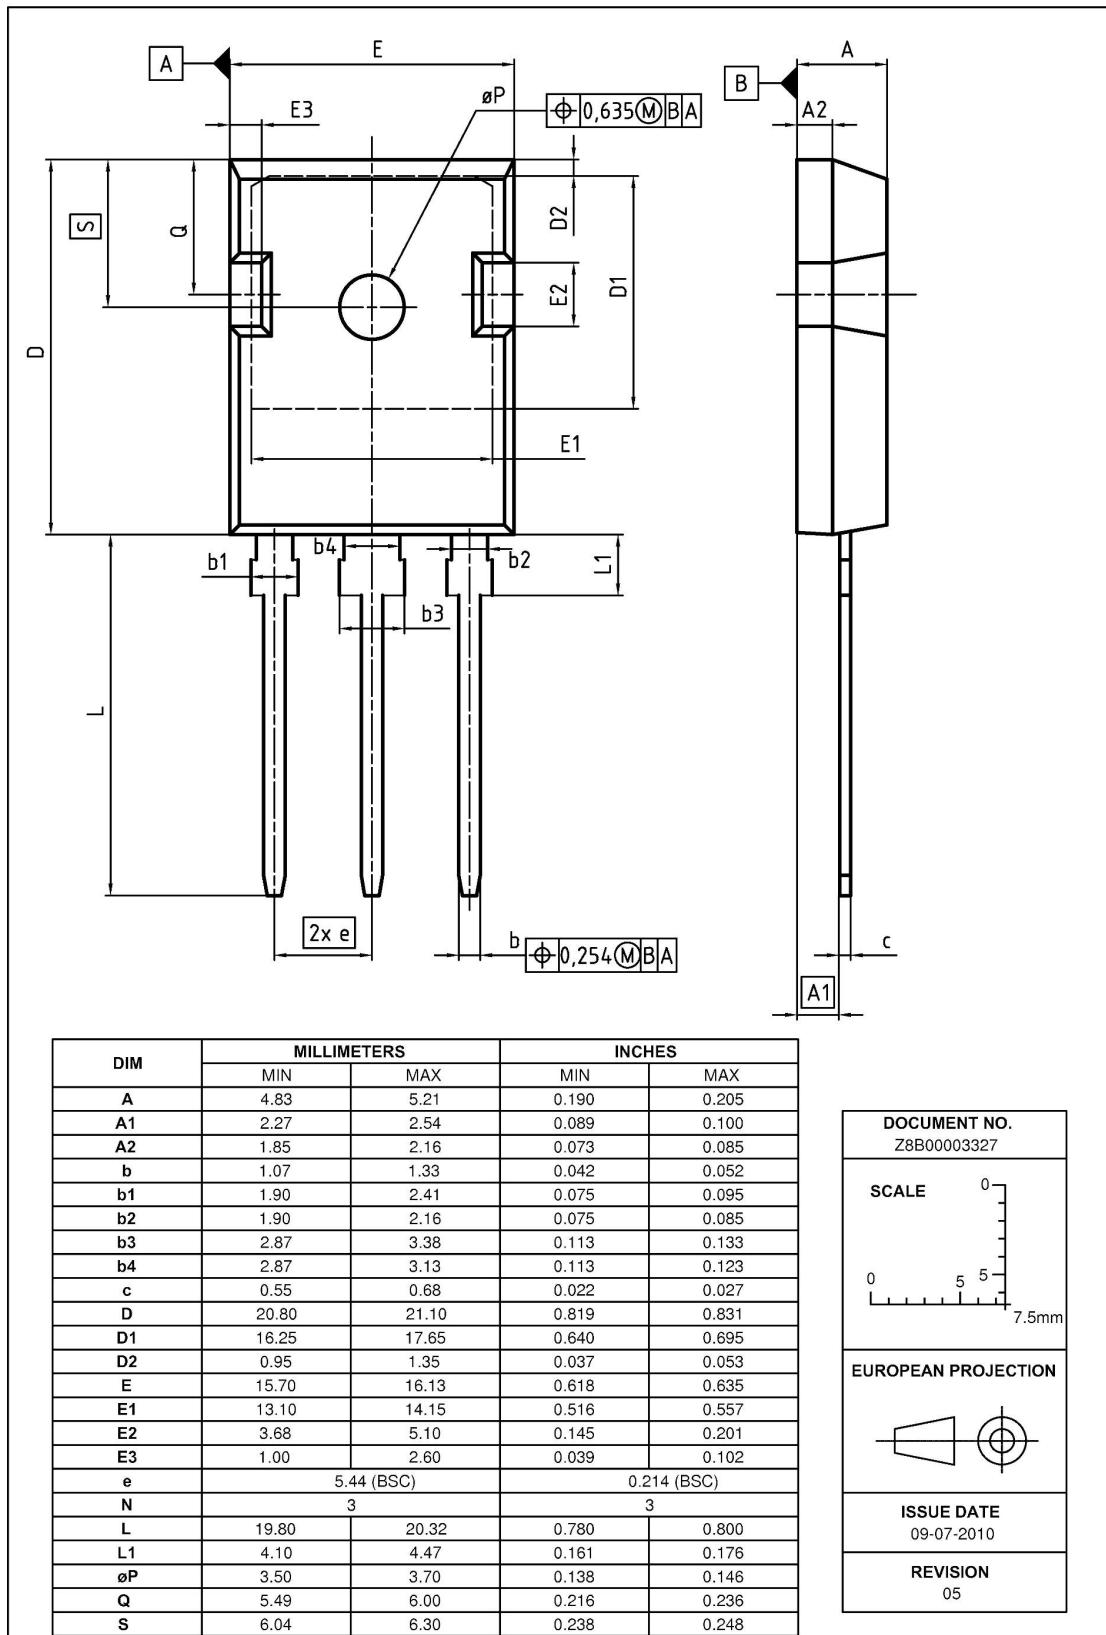


Figure 1 Outline PG-TO 247, dimensions in mm/inches

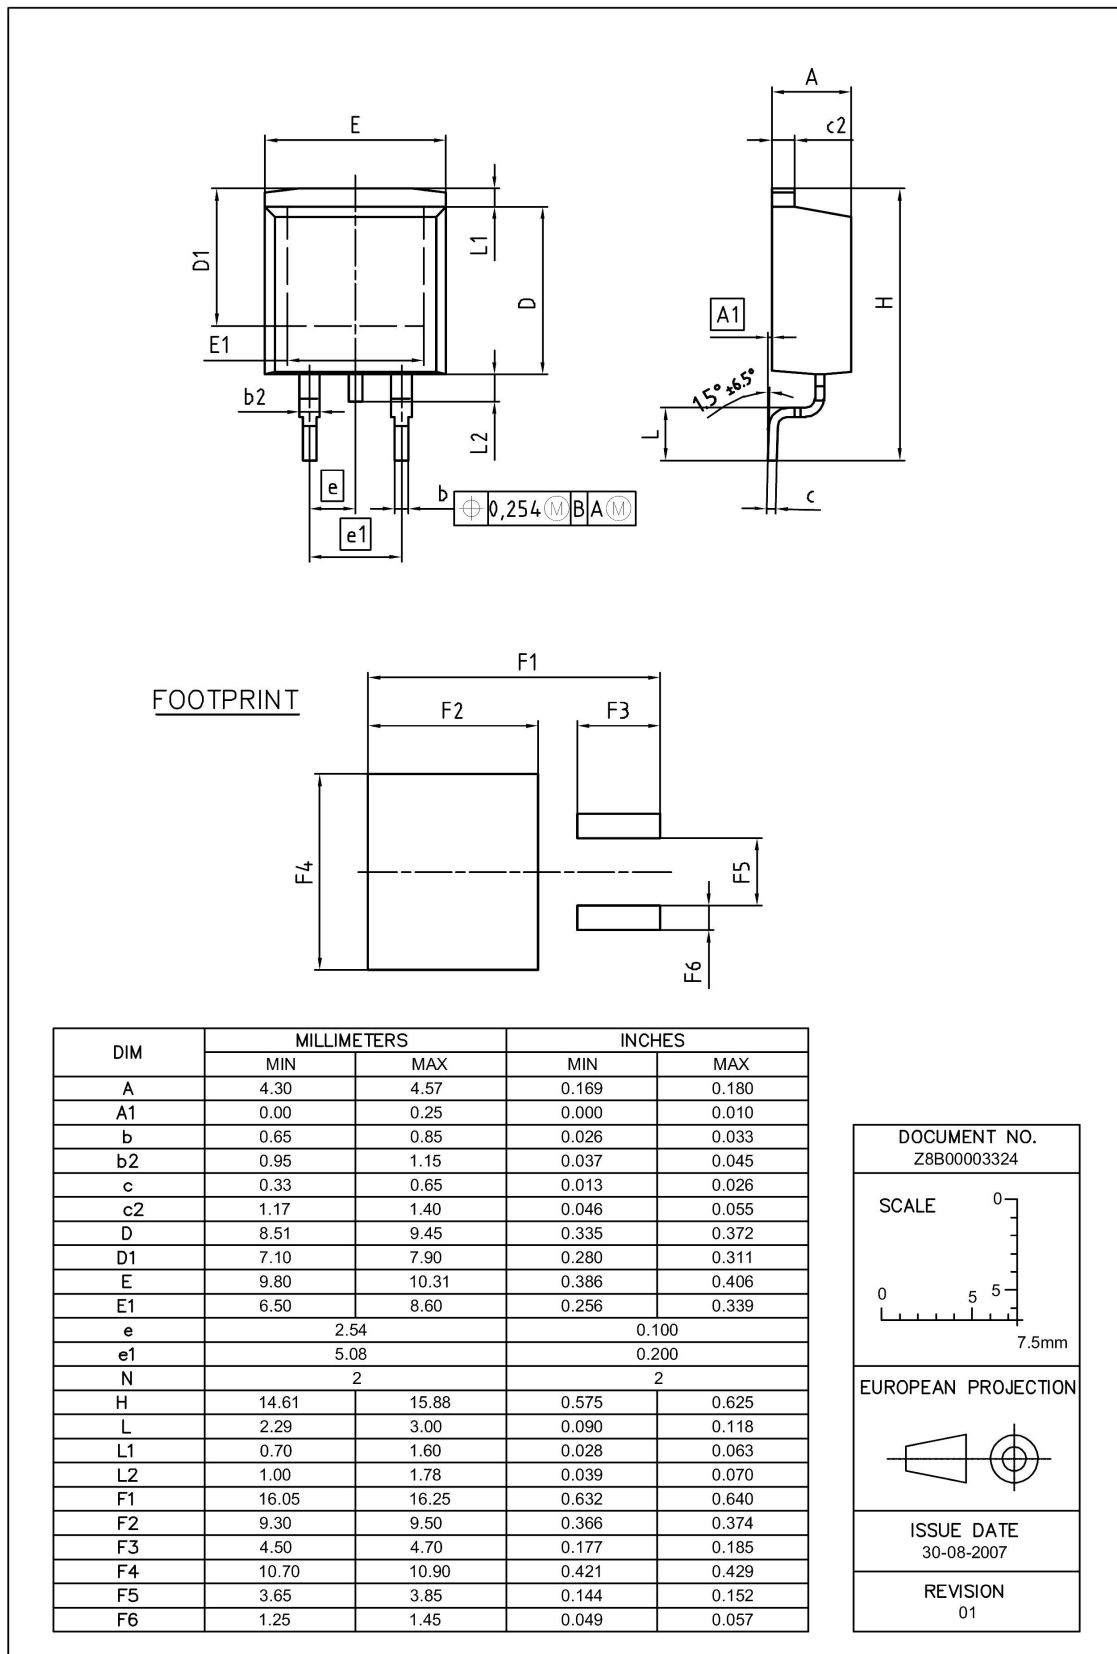


Figure 2 Outline PG-TO 263, dimensions in mm/inches


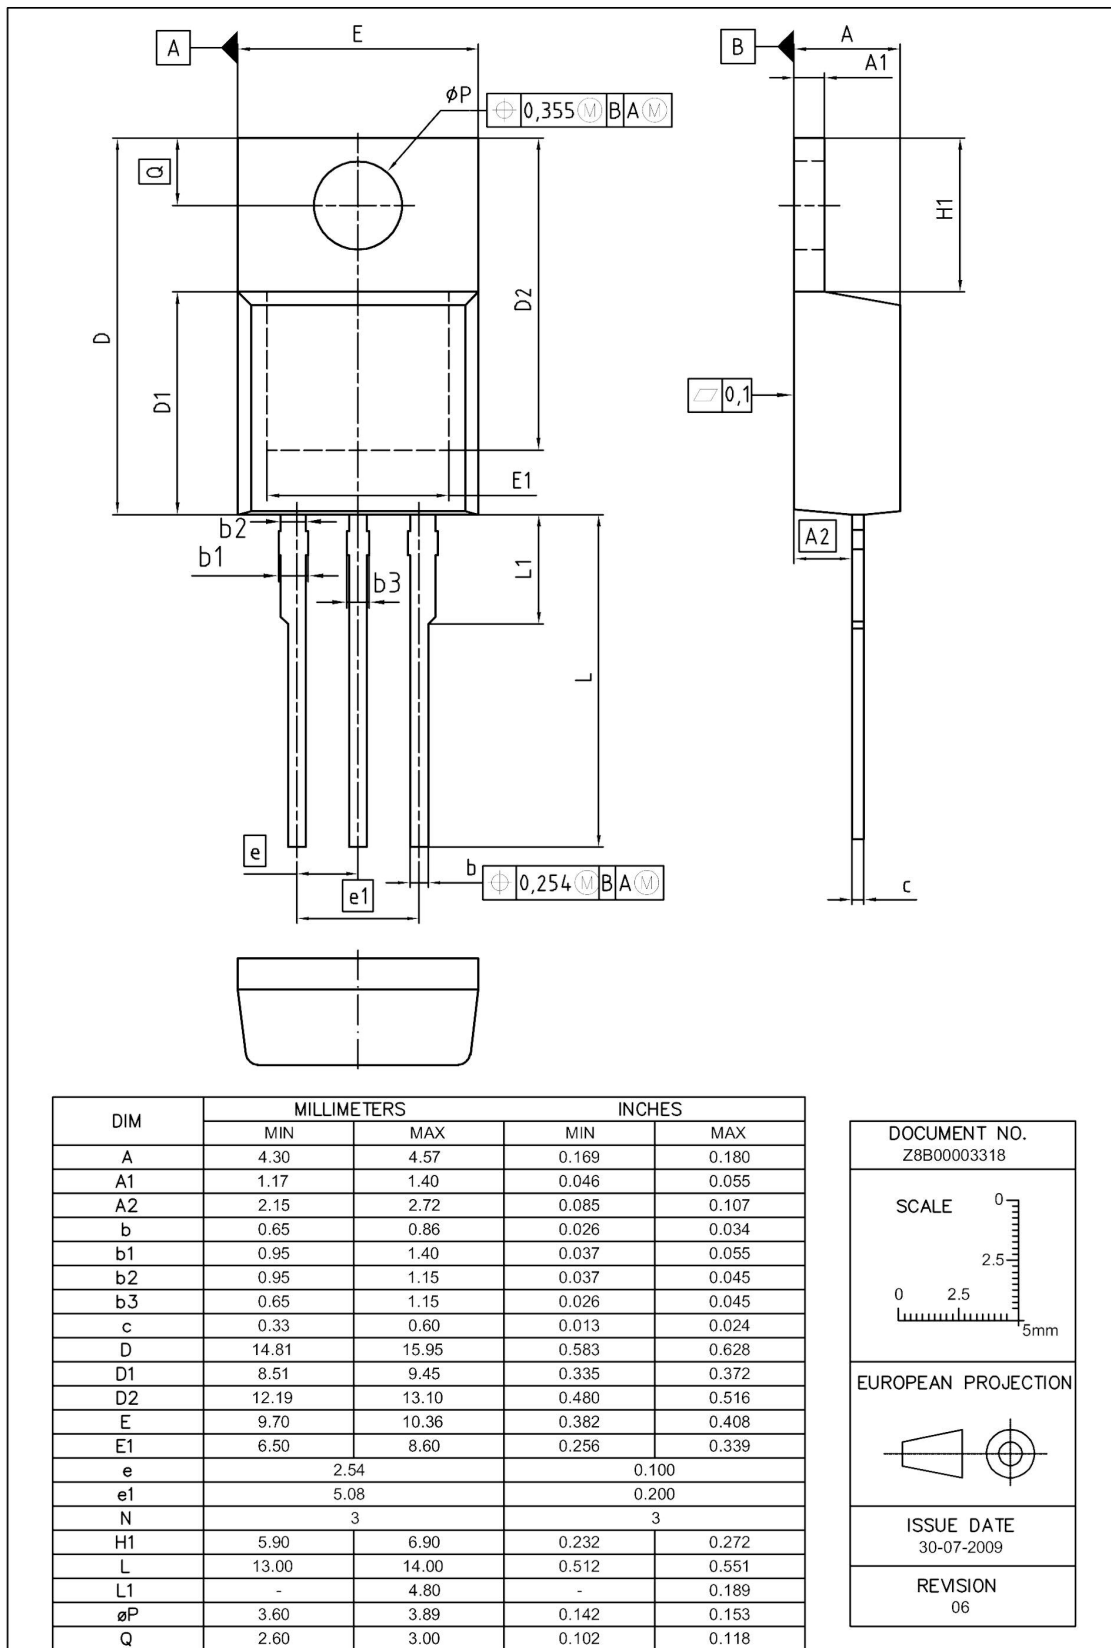


Figure 3 Outline PG-TO 220, dimensions in mm/inches



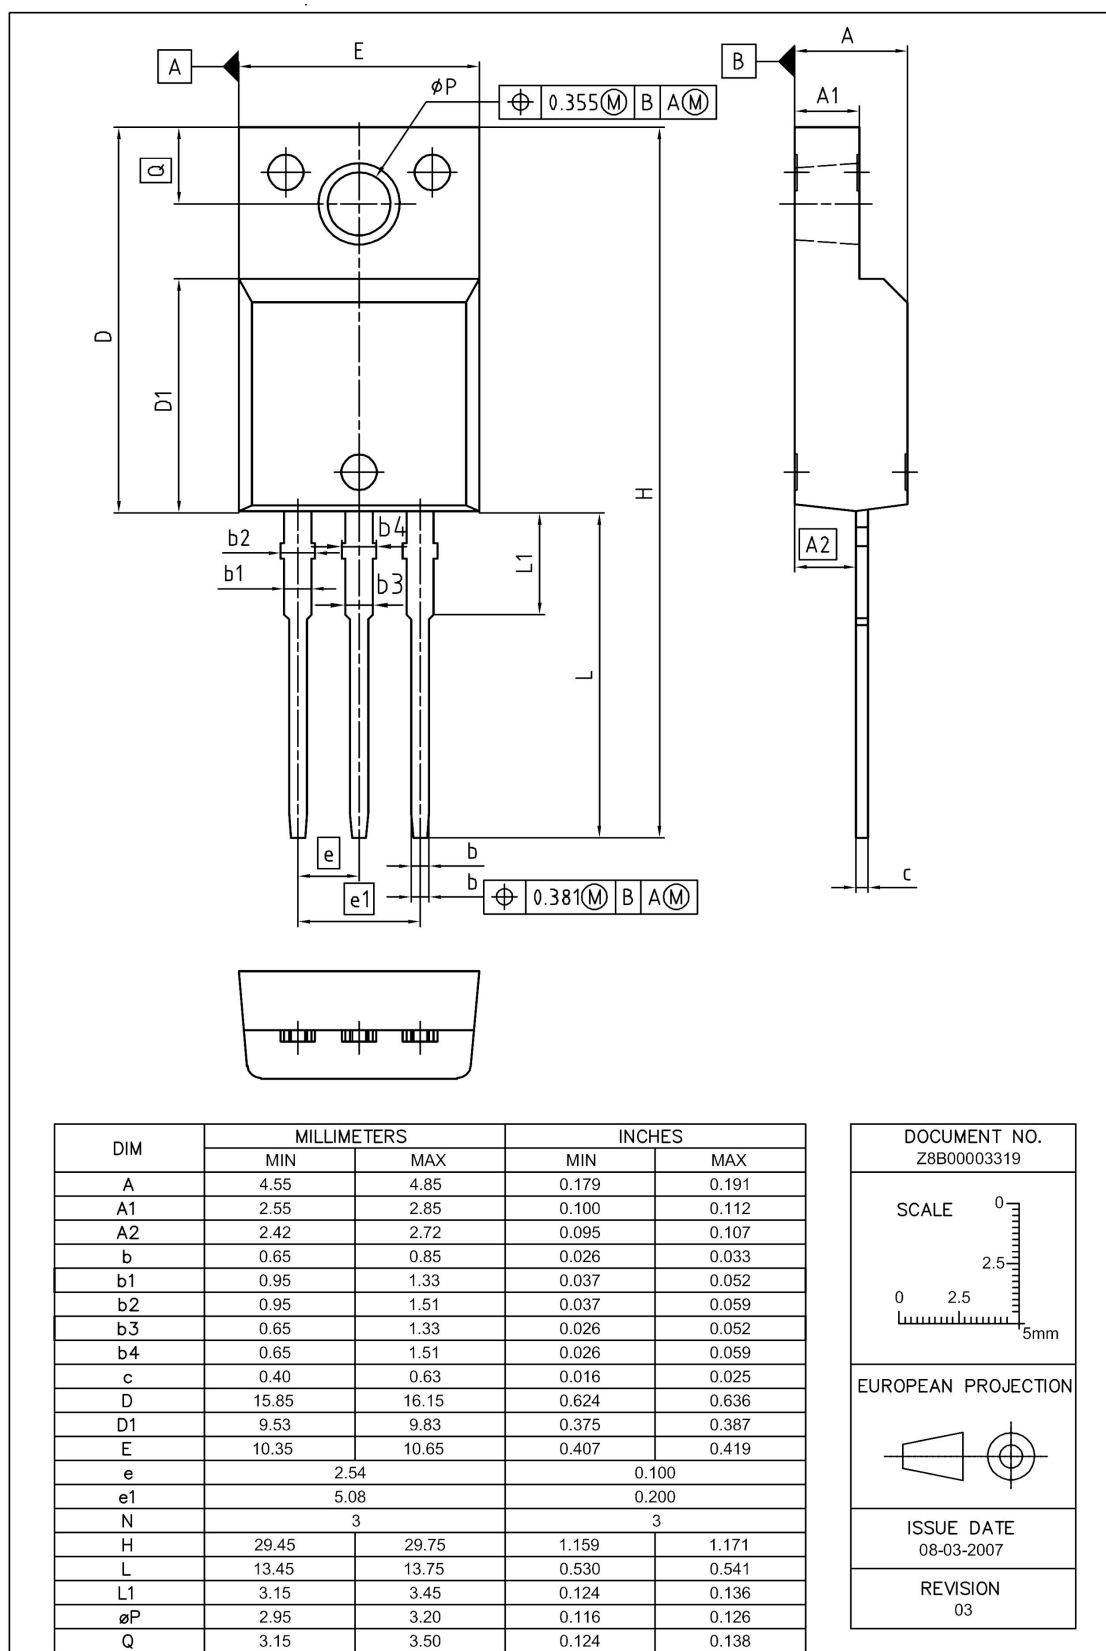

**Figure 4 Outline PG-TO 220 FullPAK, dimensions in mm/inches**

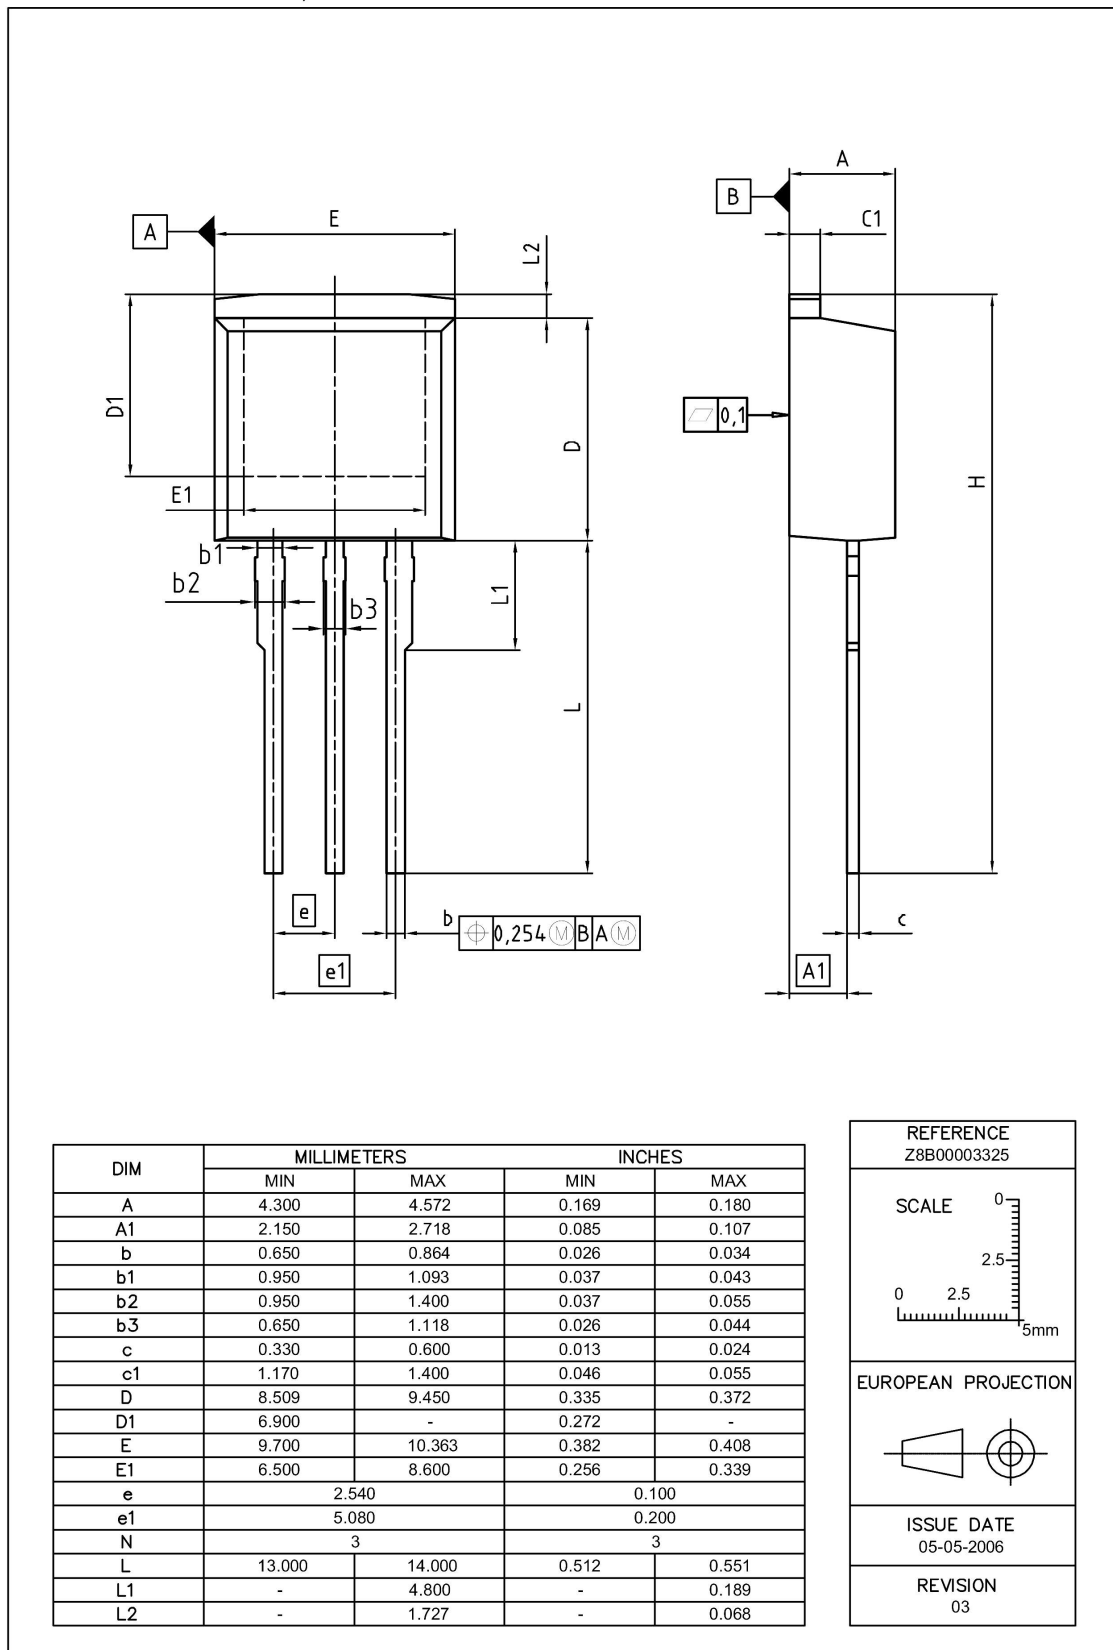


Figure 5 Outline PG-TO 262, dimensions in mm/inches

## 8 Appendix A

### Table 23 Related Links

- **IFX C6 Product Brief:**

<http://www.infineon.com/dgdl/Product+Brief+600V+CoolMOS+C6+.pdf?folderId=db3a3043156fd5730115939eb6b506db>

- **IFX C6 Portfolio:**

[http://www.infineon.com/cms/en/product/findProductTypeByName.html?q=ip\\*c6](http://www.infineon.com/cms/en/product/findProductTypeByName.html?q=ip*c6)

- **IFX CoolMOS Webpage:**

<http://www.infineon.com/cms/en/product/channel.html?channel=ff80808112ab681d0112ab6a628704d8>

- **IFX Design Tools:**

<http://www.infineon.com/cms/en/product/promopages/designtools/index.html>

## Revision History

IPW65R099C6, IPB65R099C6, IPP65R099C6, IPA65R099C6, IPI65R099C6

**Revision: 2011-12-14, Rev. 2.0**

Previous Revision

| Revision | Date       | Subjects (major changes since last revision) |
|----------|------------|----------------------------------------------|
| 1.0      | 2011-12-14 | Release of final datasheet                   |
| 2.0      | 2011-12-14 | Release of final datasheet                   |

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to: [erratum@infineon.com](mailto:erratum@infineon.com)

**Edition 2011-08-01**

**Published by**

**Infineon Technologies AG**

**81726 München, Germany**

**© 2011 Infineon Technologies AG**

**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9