


**SERIES 58**  
Single Deck, Antistatic

**LOCK FEATURES**

- Minimum Space Behind Panel
- 15,000 Vdc Static Protection
- 5 Tumbler-Plate Security
- In-Panel Key Recoding


**SWITCH FEATURES**

- Economical
- Solder Lug or PC Mount
- 36°, 45°, 60°, or 90° Throws
- 1 or 2 Poles Per Switch
- Up to 10 Positions for 1 Pole
- 200 mA for 25,000 Cycles

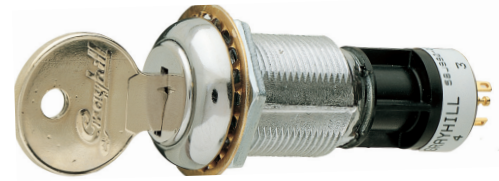

**DIMENSIONS** in inches (and millimeters)


**Standard Style**

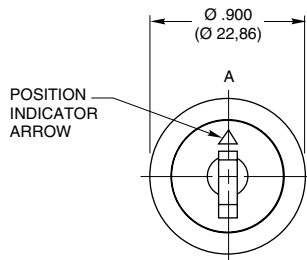

Keyslot is shown in switch position 1. Key removal position A. Key is inserted cut edge down.



**36°, 45°, 60°, or 90° Angle of Throw**

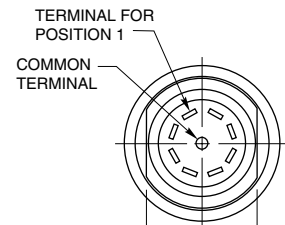


.625 ± .010 (15.88 ± 0.25)


All terminals are provided regardless of the number of active switch positions.

**PC Mount Style**

Dimensions not shown are the same as above.




**36°, 45°, 60°, or 90° Angle of Throw**



Grayhill part number and date code marked on label. Customer part number marked on request.


**TERMINAL DETAIL**

**Solder Lug**




A = .064 ± .005 (1.63 ± 0.13)  
B = .032 ± .004 (0.81 ± 0.10)

**Solder Lug Common**



C = .050 ± .010 (1.27 ± 0.25)  
D = .062 Ø ± .002 (1.57 Ø ± 0.05)


**PC Mount**




E = .125 ± .015 (3.18 ± 0.38)  
F = .020 ± .003 (0.51 ± 0.08)

G = .020 ± .003 (0.51 ± 0.08)  
H = .062 ± .004 (1.57 ± 0.10)

**RECOMMENDED PANEL CUT**



**CIRCUITRY**

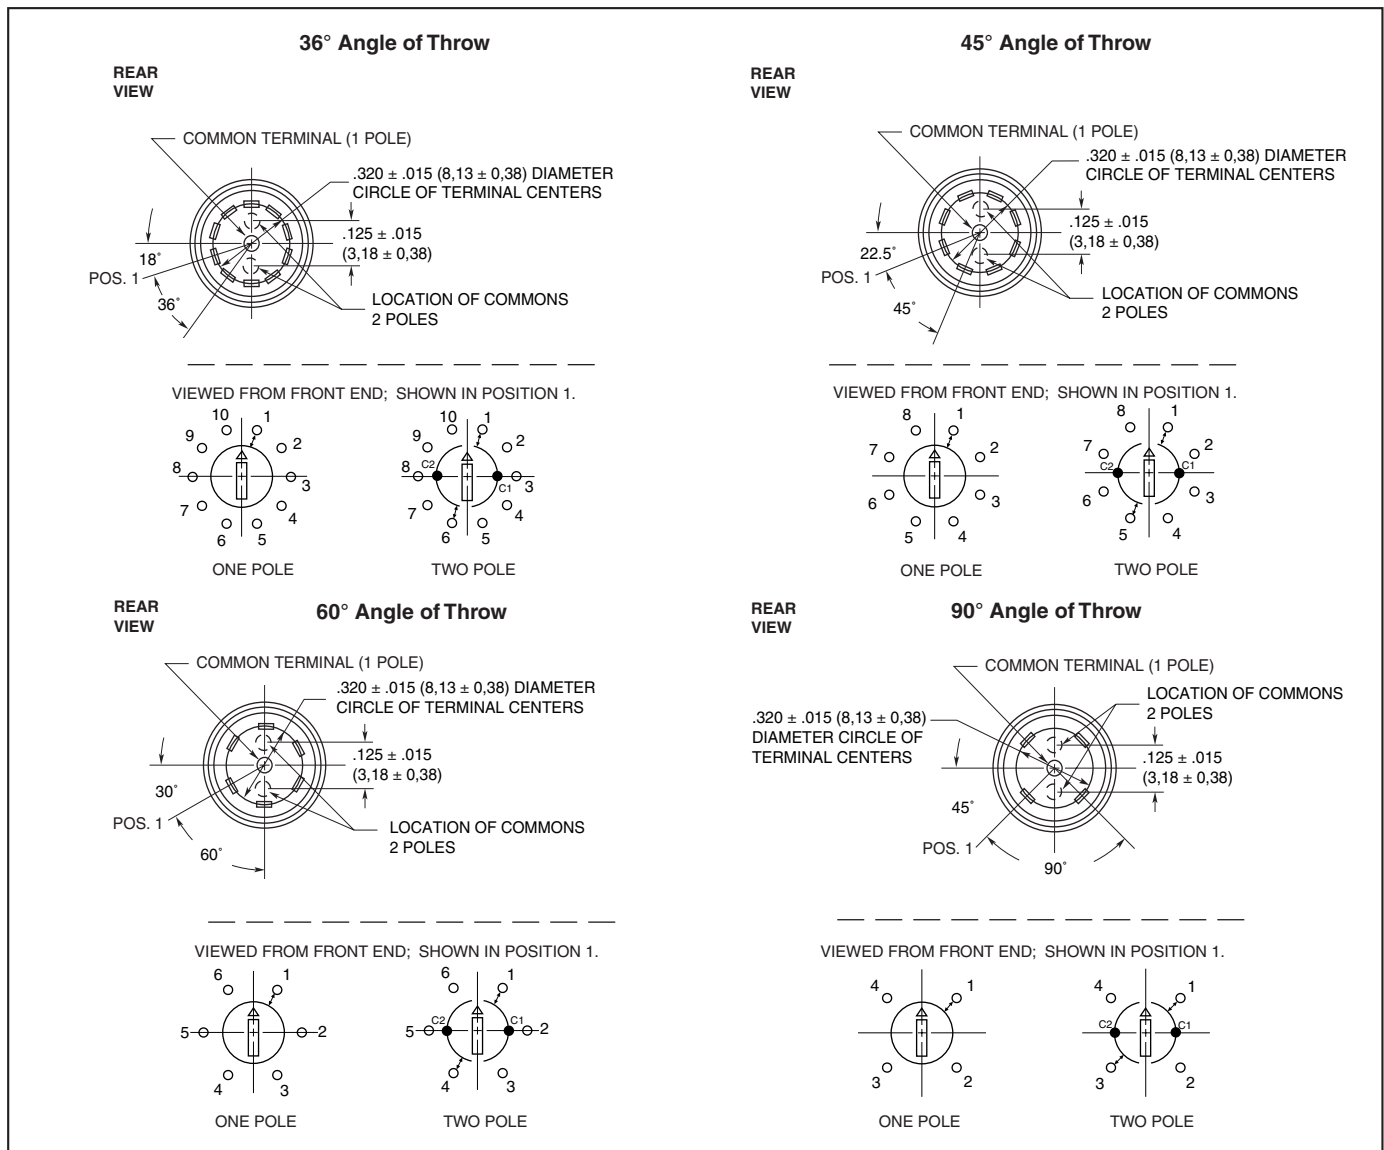

Rotary Switches

**LOCK SPECIFICATIONS**

**General Characteristics**

**Mounting:** By bushing, nut and lockwasher

**Keying:** All locks keyed alike except by special order

**Orientation of Keylock Switch:** Lock flats on both sides with key upright (cut side down) in position 1.

**Key Removals:**

- 36° Throw Switch At every position or At 0° & 180°
- 45° Throw Switch At every position or At 0°, 90°, 180°, 270°
- 60° Throw Switch At every position or At 0°, 180°
- 90° Throw Switch At every position or At 0°, 180°

*Optional pulls Contact Grayhill*

**Materials & Finishes**


- Keys:** Brass; 2 supplied
- Lock Barrel & Plug:** Zinc, clear chromate
- Lockwasher:** Steel, tin zinc plated
- Mounting Nut:** Steel, nickel-plated
- Tumbler Plates:** Brass

**SWITCH SPECIFICATIONS**

**Electrical Characteristics**

Chart is shown for non-shorting contacts and resistive load and for the life limiting criteria indicated below. The data for the curve was measured at sea level, 25°C and 68% relative humidity. Contact Grayhill for more information

if any of the following is true: life limiting criteria are more critical than those listed; more cycles of operation are required; a larger make and break current is required; the operating environment includes elevated temperatures or reduced pressures.

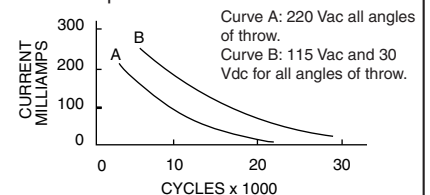

## SWITCH SPECIFICATIONS *Continued*

|  |  |  |
|--|--|--|
| <p><b>Contact Resistance:</b><br/>Initially: less than 10 mΩ<br/>End of life: less than 50 mΩ</p> <p><b>Insulation Resistance:</b> (Between mutually insulated parts)<br/>Initially: 50,000 MΩ<br/>Minimum: 10,000 MΩ</p> <p><b>Breakdown Voltage:</b> (Between mutually insulated parts) more than 600 Vac</p> <p><b>Life Expectancy:</b> Per chart; cycle is 1 rotation thru all active positions plus a full return.</p> <p><b>Carry Current:</b> 6A; maximum temperature rise 20°C</p> | <p><b>Anti-Static Voltage:</b> Anti-static types tested to withstand 15,000 Vdc</p> <p><b>Mechanical Characteristics</b><br/><b>Switching Mode:</b> Shorting (make before break) or non-shorting (break before make) as limited by the Choices chart</p> <p><b>Type of Contact:</b> Wiping</p> <p><b>Number of Terminals:</b> All switches are provided with the full circle of terminals regardless of the number of active positions</p> <p><b>Stop Strength:</b> 1.70 Nm maximum (15.0 in-lbs)</p> <p><b>Switching Torque:</b> 8 to 16 in-ozs</p> | <p><b>Materials and Finishes</b><br/><b>Switch Base:</b> Thermoset plastic<br/><b>Switch Housing:</b> Nylon<br/><b>Detent Rotor:</b> Nylon<br/><b>Detent Balls:</b> Steel, nickel-plated<br/><b>Detent Springs, and Contact Springs:</b> Stainless steel<br/><b>Common Ring:</b> Brass, gold plate over silver plate<br/><b>Terminals:</b> Brass, gold over silver and nickel plate<br/><b>Rotor Contact:</b> Precious metal, gold alloy</p> |
|--|--|--|

## CHOICES AND LIMITATIONS

| Lock Style and Description*   | Switch Style and Description                                      | Angle of Throw | No. Of Decks | Poles/Deck | Positions Per Pole** | Shorting or Non-Shrtg. |
|---|---|----------------|--------------|------------|----------------------|------------------------|
| <b>Series 58J Switches</b>  |   |                |              |            |                      |                        |
| <b>J4: Standard—Key pulls at Position 1 and at 90 Degree Increments</b> | <b>A</b> = Standard, Solder Lugs<br><b>P</b> = Standard, PC Mount | 45°            | 1            | 1<br>2     | 02 to 08<br>02 to 04 | N or S<br>N or S       |
|   |   | 36°            | 1            | 1<br>2     | 02 to 10<br>02 to 05 | N or S<br>N or S       |
| <b>J8: Standard—Key Pulls at Each Position</b>                          | <b>A</b> = Standard, Solder Lugs<br><b>P</b> = Standard, PC Mount | 45°            | 1            | 1<br>2     | 02 to 08<br>02 to 04 | N or S<br>N or S       |
|   |   | 90°            | 1            | 1<br>2     | 02 to 04<br>02       | N<br>N                 |
|   |   | 36°            | 1            | 1<br>2     | 02 to 10<br>02 to 05 | N or S<br>N or S       |
| <b>J9: Standard—Key Pulls at Position 1 and at 180 Degrees</b>          | <b>A</b> = Standard, Solder Lugs<br><b>P</b> = Standard, PC Mount | 45°            | 1            | 1<br>2     | 02 to 08<br>02 to 04 | N or S<br>N or S       |
|   |   | 60°            | 1            | 1<br>2     | 02 to 06<br>02 to 03 | N<br>N                 |
|   |   | 90°            | 1            | 1<br>2     | 02 to 04<br>02       | N<br>N                 |
|   |   | 36°            | 1            | 1<br>2     | 02 to 10<br>02 to 05 | N or S<br>N or S       |

\*Standard Keylock has anti-static protection. All keylock versions available without anti-static protection, with a reduced overall body length. Contact Grayhill for more information.

\*\*For single pole switches with maximum positions, specify continuous rotation or fixed stop when ordering.

## ORDERING INFORMATION

**Series**  
**Lock Style:** per Choices Chart J4, J8, J9  
**Switch Style:** per Choices Chart A or P  
**Angle of Throw:** 36, 45, 60 or 90 (per Choices chart)  
**Number of Decks:** 01  
**Poles per Deck:** = 1 or 2 (per Choices chart)  
**Positions per Pole:** 02 thru 10 (per Choices chart)  
**Type of Contacts:** (per Choices chart)  
 N = Non-shorting  
 S = Shorting  
**Stop Arrangement Suffix:**  
 (needed only for 1-pole switches with maximum positions)  
 F = Fixed stop between last and first positions  
 \*Leave blank for continuous rotation

**58J8A36-01-1-10N-F**

**Available from your local Grayhill Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9