



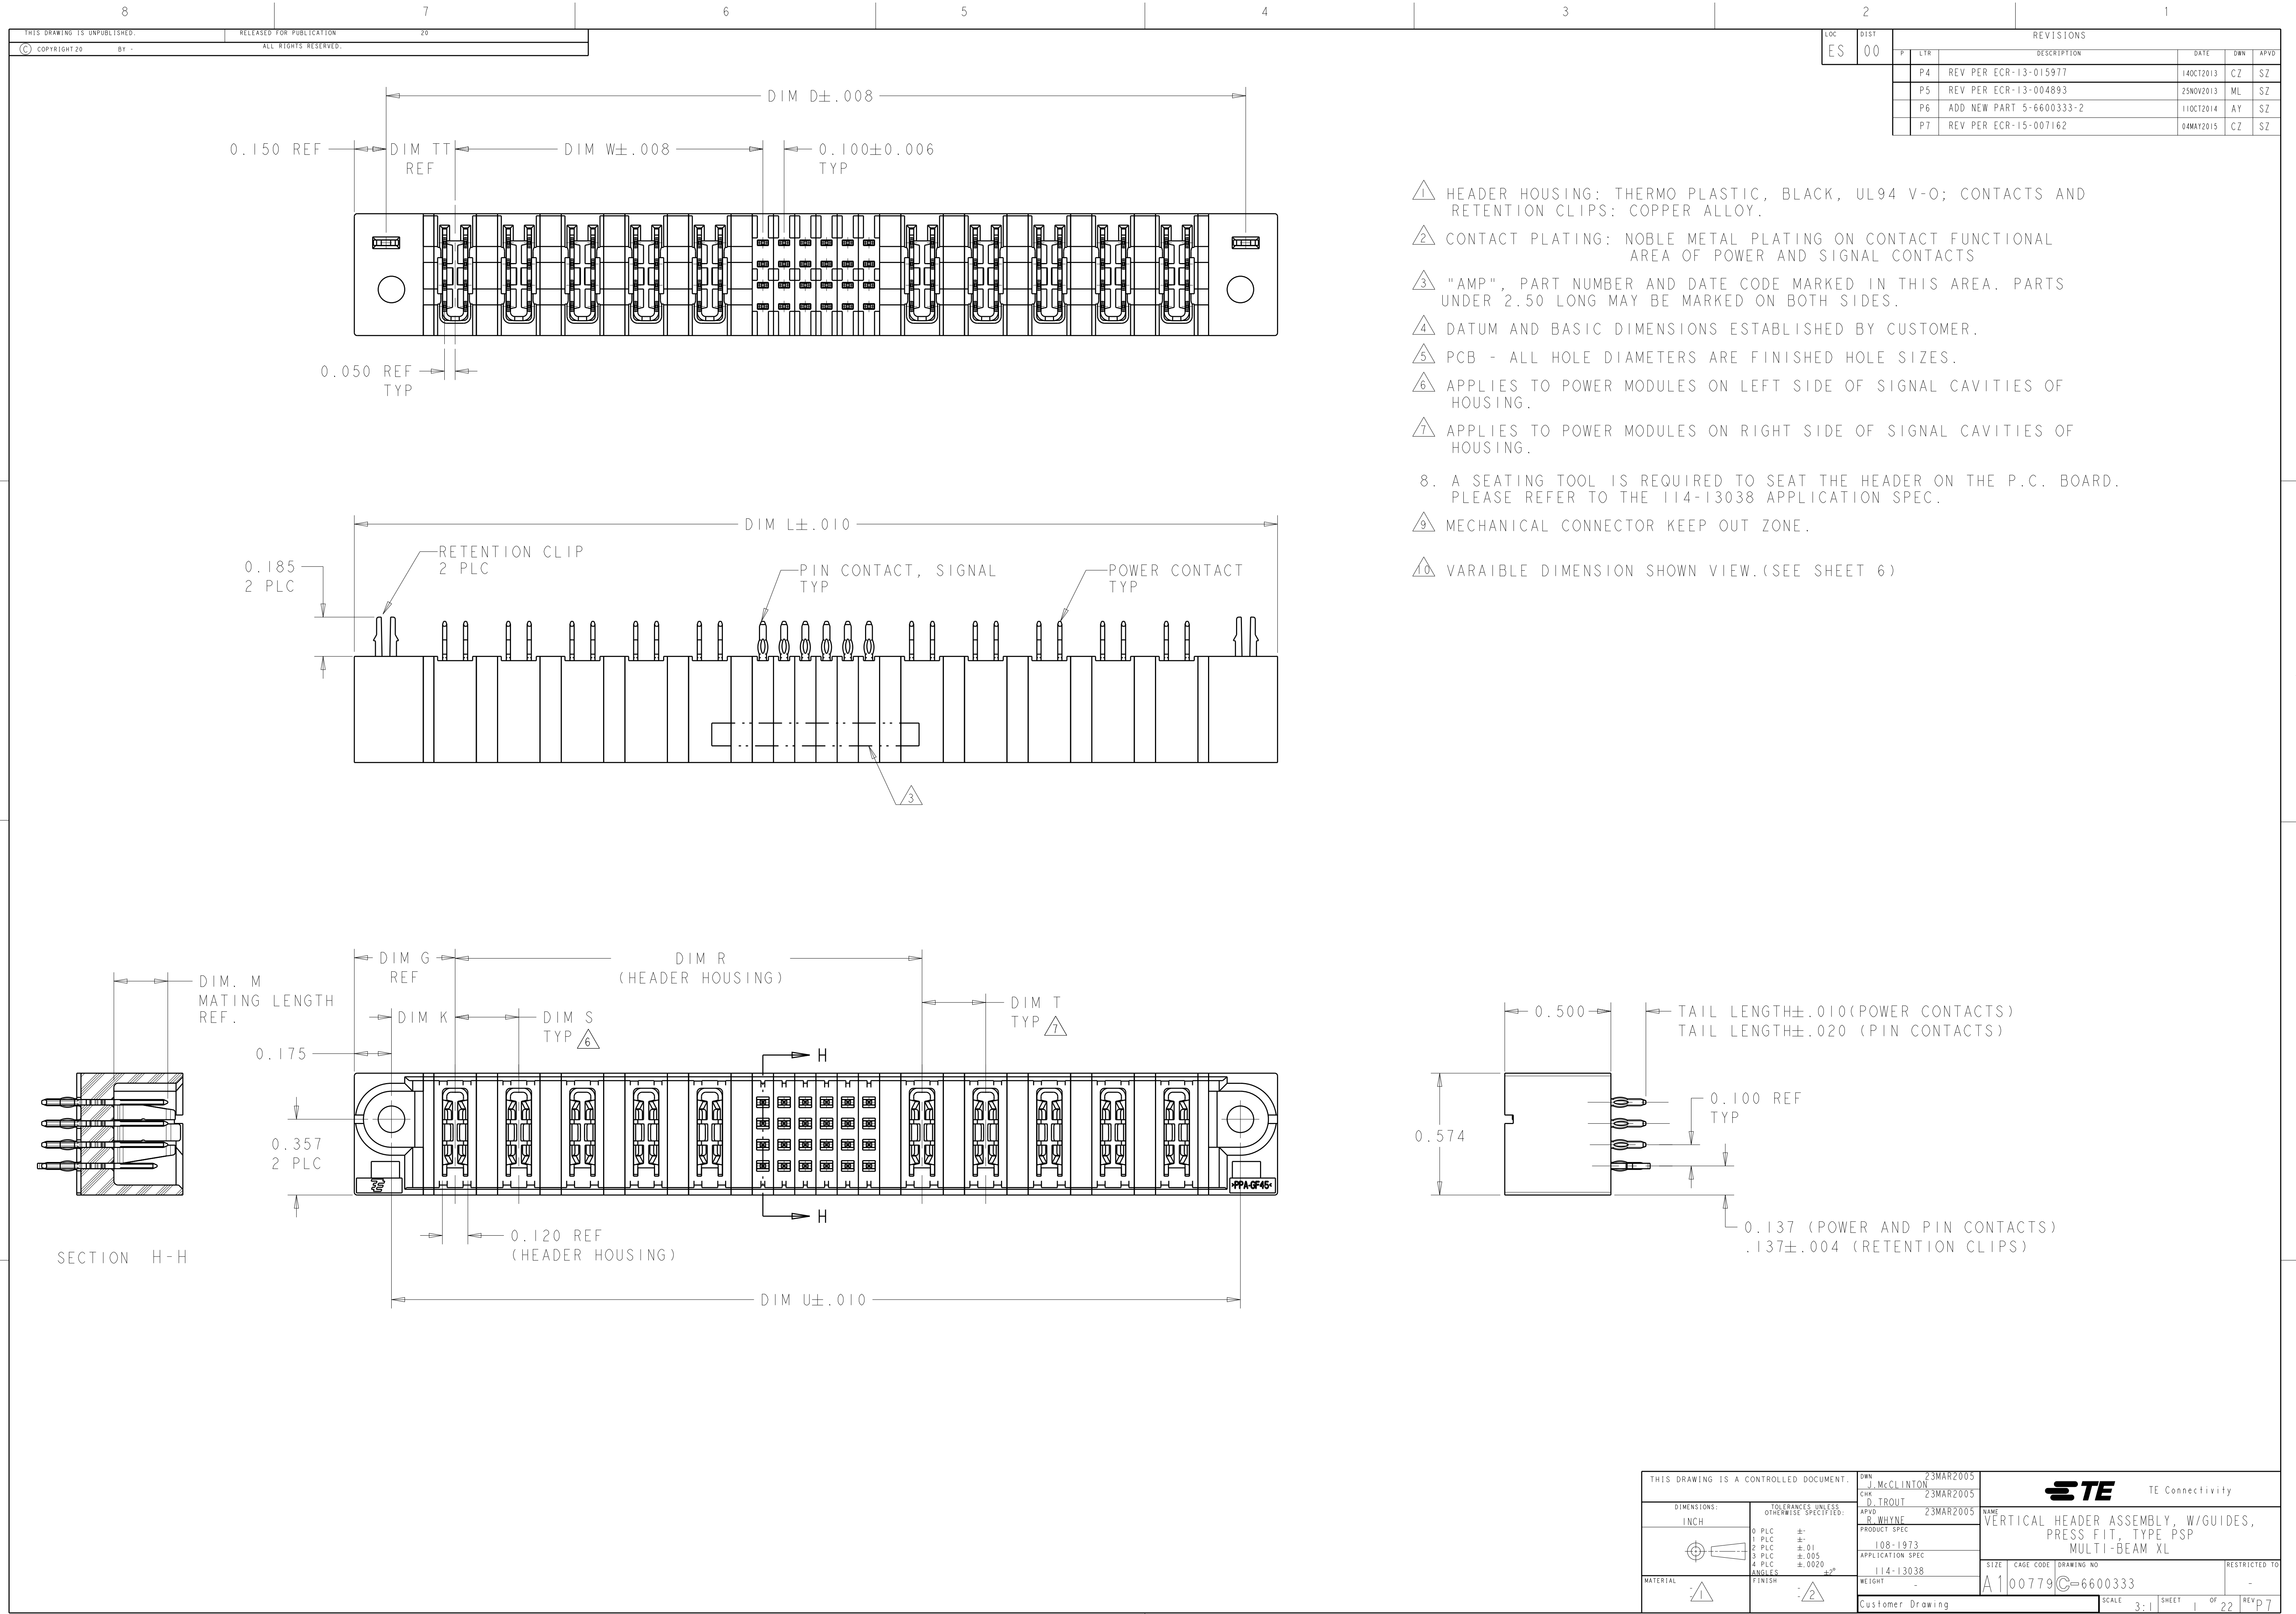

LOC		DIST		REVISIONS						
ES	00	P		LTR	DESCRIPTION	DATE	DWN	APVD		
			P4	REV PER ECR-13-015977	14OCT2013	CZ	SZ			
			P5	REV PER ECR-13-004893	25NOV2013	ML	SZ			
			P6	ADD NEW PART 5-6600333-2	11OCT2014	AY	SZ			
			P7	REV PER ECR-15-007162	04MAY2015	CZ	SZ			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. McCLINTON	23MAR2005	TE Connectivity			
		CHK	D. TROUT	23MAR2005				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R. WHYNE	23MAR2005	NAME	
INCH				PRODUCT SPEC			VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
				108-1973			SIZE	
				APPLICATION SPEC			CAGE CODE	
				114-13038			DRAWING NO	
							RESTRICTED TO	
MATERIAL		FINISH		WEIGHT			A100779	
							C=6600333	
				Customer Drawing			SCALE	
							3:1	
							SHEET	
							1	
							OF	
							22	
							REV	
							P7	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

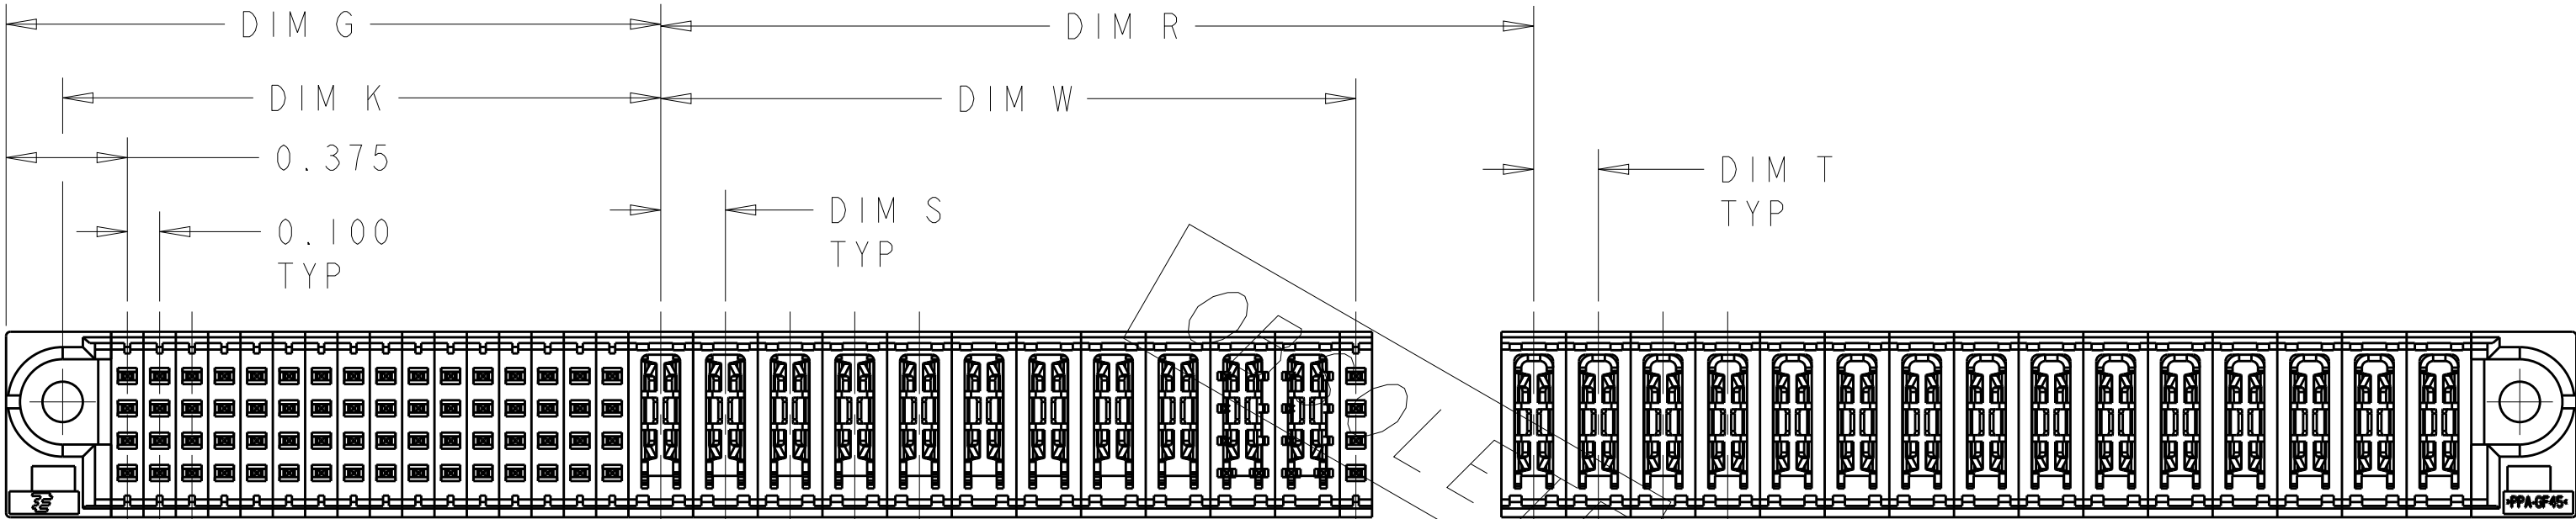

PART NUMBER 2-6600333-3
UNSPECIFIED REFER TO TEH SHEET 1

P6	.300	.425	2.500	.250	.250	1.700	2.850	.275	.450	2.550	NO	2P + 48S + 2P	5-6600333-2
	.300	1.425	4.250	.250	.250	2.700	4.600	.275	.450	4.300	NO	6P + 48S + 5P	5-6600333-1
P1	.300	.425	2.400	.250	.250	1.100	2.750	.275	.450	2.450	NO	2P + 24S + 4P	5-6600333-0
	.300	.175	1.100	-	-	.550	1.450	.275	.450	1.150	YES	1P + 12S + 1P	4-6600333-9
N7	.300	1.225	4.000	.250	.250	2.200	4.350	.275	.450	4.057	NO	5P + 24S + 6P	4-6600333-8
N3	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
N5	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S+ 2ACP	4-6600333-5
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	4-6600333-4
N4	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S + 2ACP	4-6600333-3
	.300	1.925	4.700	.250	.250	2.400	5.050	.275	.450	4.750	YES	8P + 16S + 8P	4-6600333-2
	.300	.425	1.600	.250	.250	.800	1.950	.275	.450	1.650	YES	2P + 12S + 2P	4-6600333-1
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	3-6600333-9
	.300	1.425	3.500	.250	.250	1.700	3.850	.275	.450	3.550	YES	6P + 8S + 6P	3-6600333-8
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	3-6600333-7
	.300	.925	3.700	.250	.250	2.400	4.050	.275	.450	3.750	NO	4P + 56S + 4P	3-6600333-6
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	3-6600333-5
	.300	.925	2.500	.250	.250	1.200	2.850	.275	.450	2.550	YES	4P + 8S + 4P	3-6600333-4
	.300	.925	2.700	.250	.250	1.400	3.050	.275	.450	2.750	NO	4P + 16S + 4P	3-6600333-3
	.300	.925	2.900	.250	.250	1.600	3.250	.275	.450	2.950	NO	4P + 24S + 4P	3-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	3-6600333-1
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	3-6600333-0
	.300	.425	2.100	-	.250	1.300	2.450	.275	.450	2.150	YES	2P + 32S + 2P	2-6600333-9
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-8
	.300	.975	3.250	.250	.250	1.700	3.600	.275	.450	3.300	YES	4P + 24S + 5P	2-6600333-7
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	2-6600333-6
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-5
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-4
	1.875	2.150	7.600	.200	.200	2.700	7.950	1.850	2.025	7.650	YES	64S+11P+20S+15P	2-6600333-3
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	2-6600333-1
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	1-6600333-6
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-5
	.300	.975	3.200	.250	.250	1.900	3.550	.275	.450	3.250	YES	4P + 32S + 4P	1-6600333-4
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-3
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	1-6600333-2
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	1-6600333-1
	.300	.475	1.800	.250	.250	1.000	2.150	.275	.450	1.850	YES	2P + 16S + 2P	1-6600333-0
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	6600333-9
	.300	.425	3.250	-	.250	2.700	3.600	.275	.450	3.300	YES	2P + 88S + 1P	6600333-8
	.300	.725	2.300	.250	.250	1.250	2.650	.275	.450	2.350	YES	3P + 16S + 3P	6600333-7
	.300	.975	3.000	.250	.250	1.700	3.350	.275	.450	3.050	YES	4P + 24S + 4P	6600333-6
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	6600333-5
	.300	.425	1.700	.250	.250	.900	2.050	.275	.450	1.750	YES	2P + 16S + 2P	6600333-4
	.325	1.450	4.000	.300	.300	2.200	4.350	.300	.475	4.050	YES	5ACP + 24S + 5ACP	6600333-1
DIM "TT"	DIM "W"	DIM "U"	DIM "T"	DIM "S"	DIM "R"	DIM "L"	DIM "K"	DIM "G"	DIM "D"	RETENTION CLIP		DESCRIPTION	PART NO

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
J. McCLINTON
23MAR2005

CHK
D. TROUT
23MAR2005

APVD
R. WHYNE
23MAR2005

DIMENSIONS:
INCH

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.0020
±P

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.0020
±P

MATERIAL
-

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
C=6600333

RESTRICTED TO
-


SCALE
3:1

SHEET
2


OF
22

REV
P7

TE Connectivity

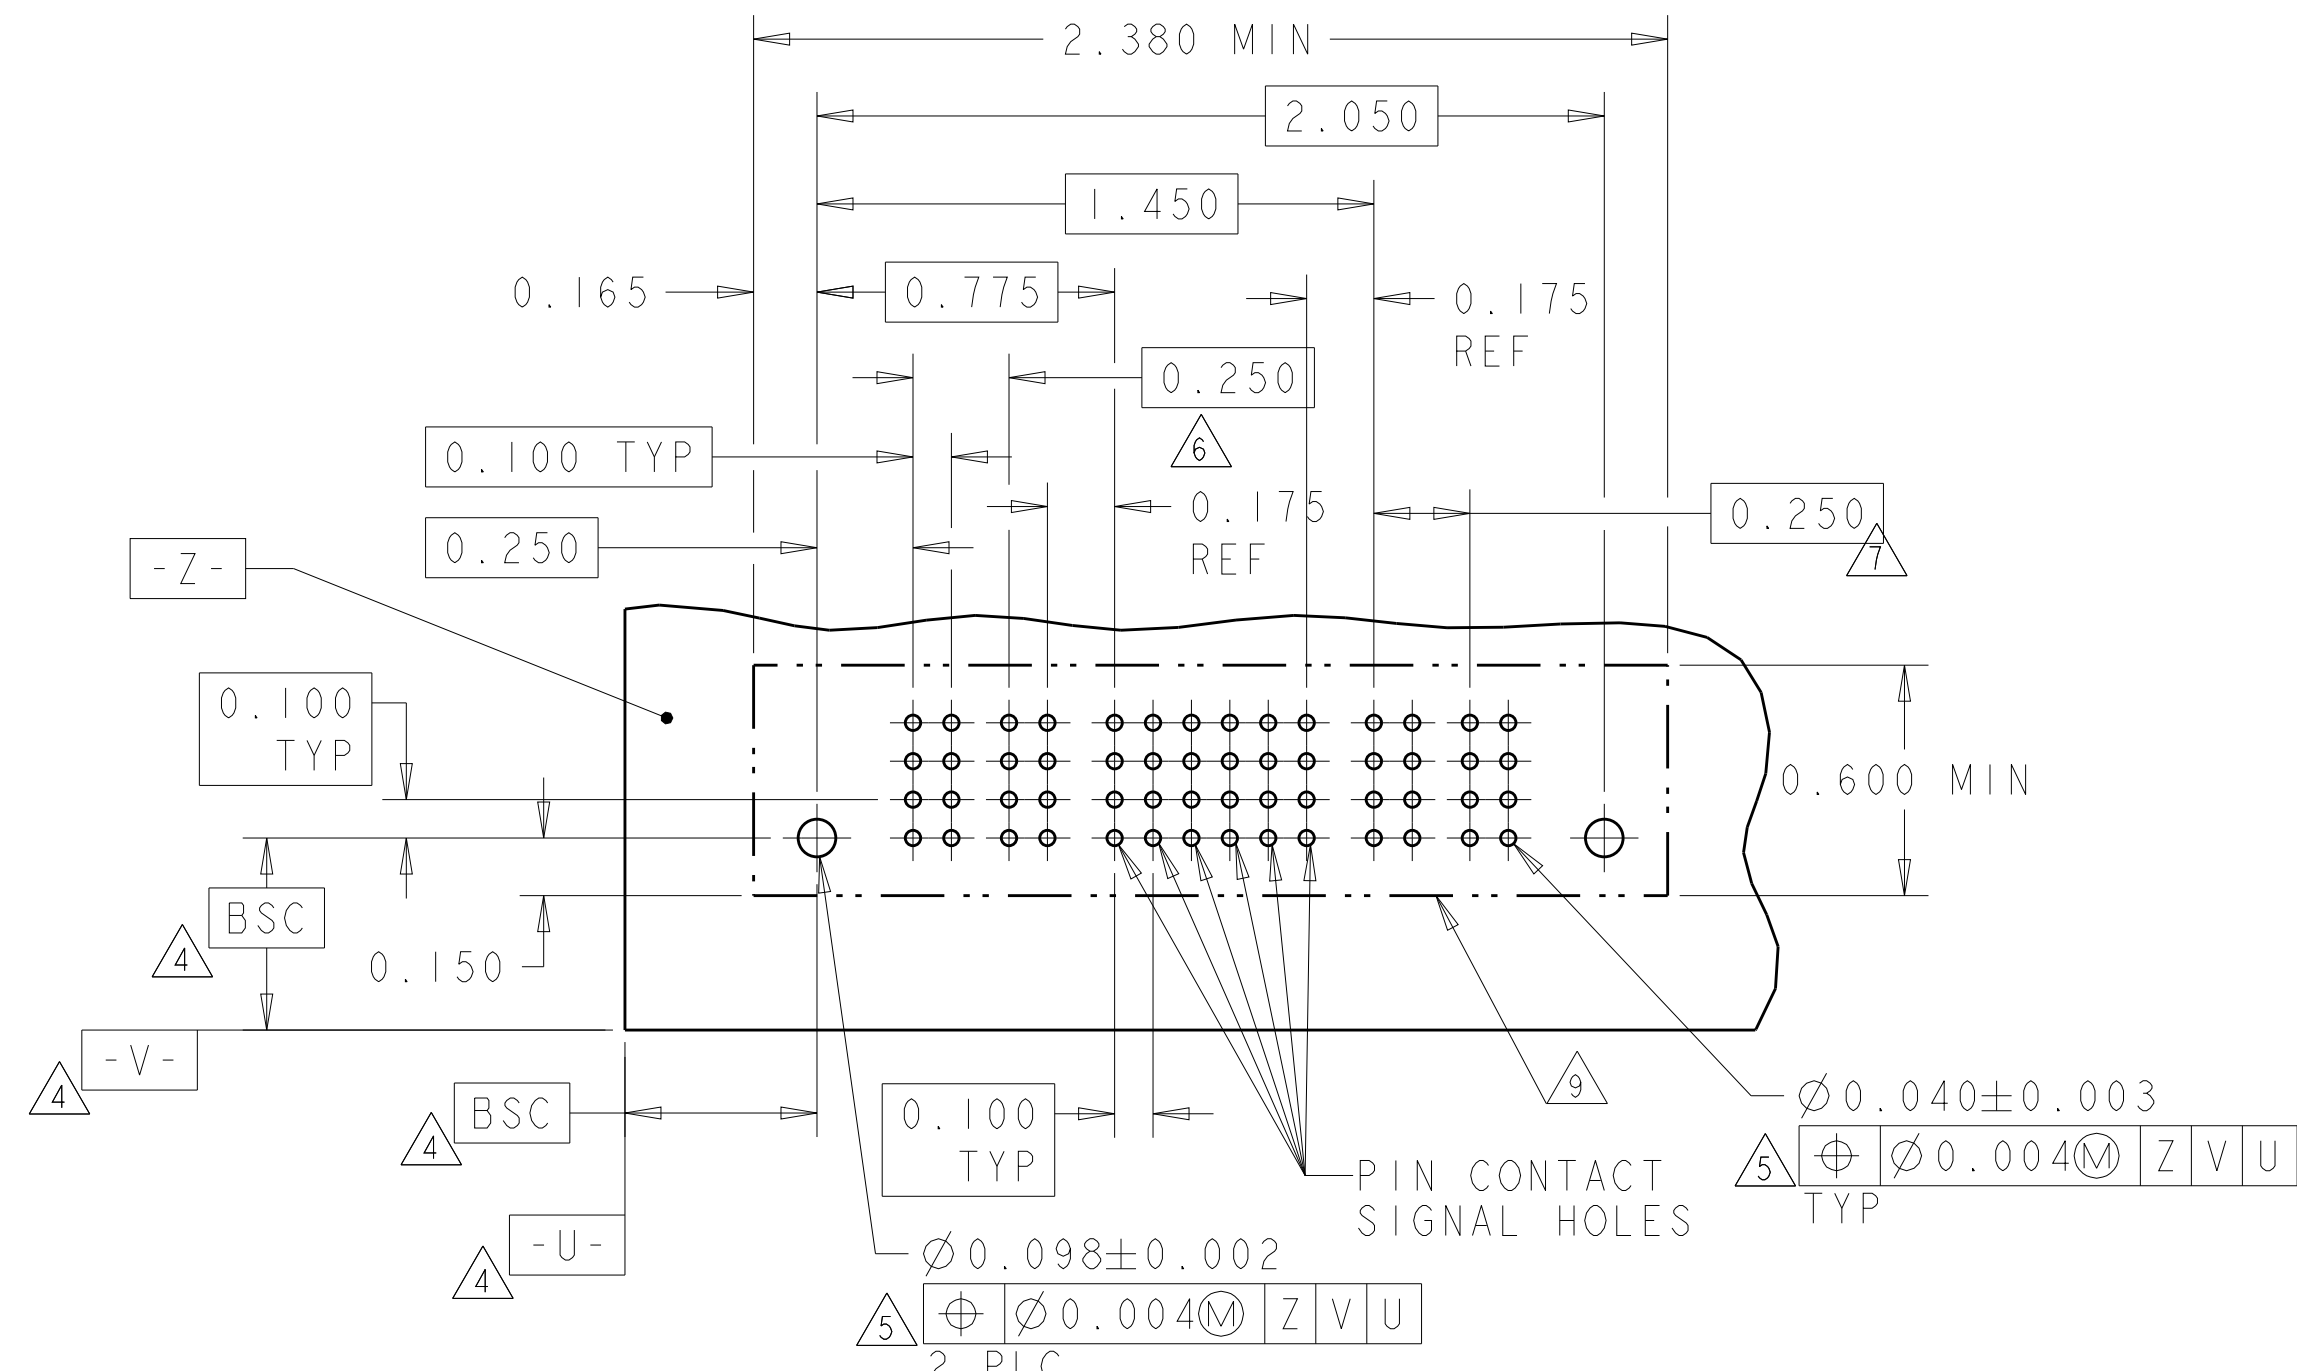[illegible]

RECOMMENDED PCB LAYOUT 6600333-5
SCALE 2:1

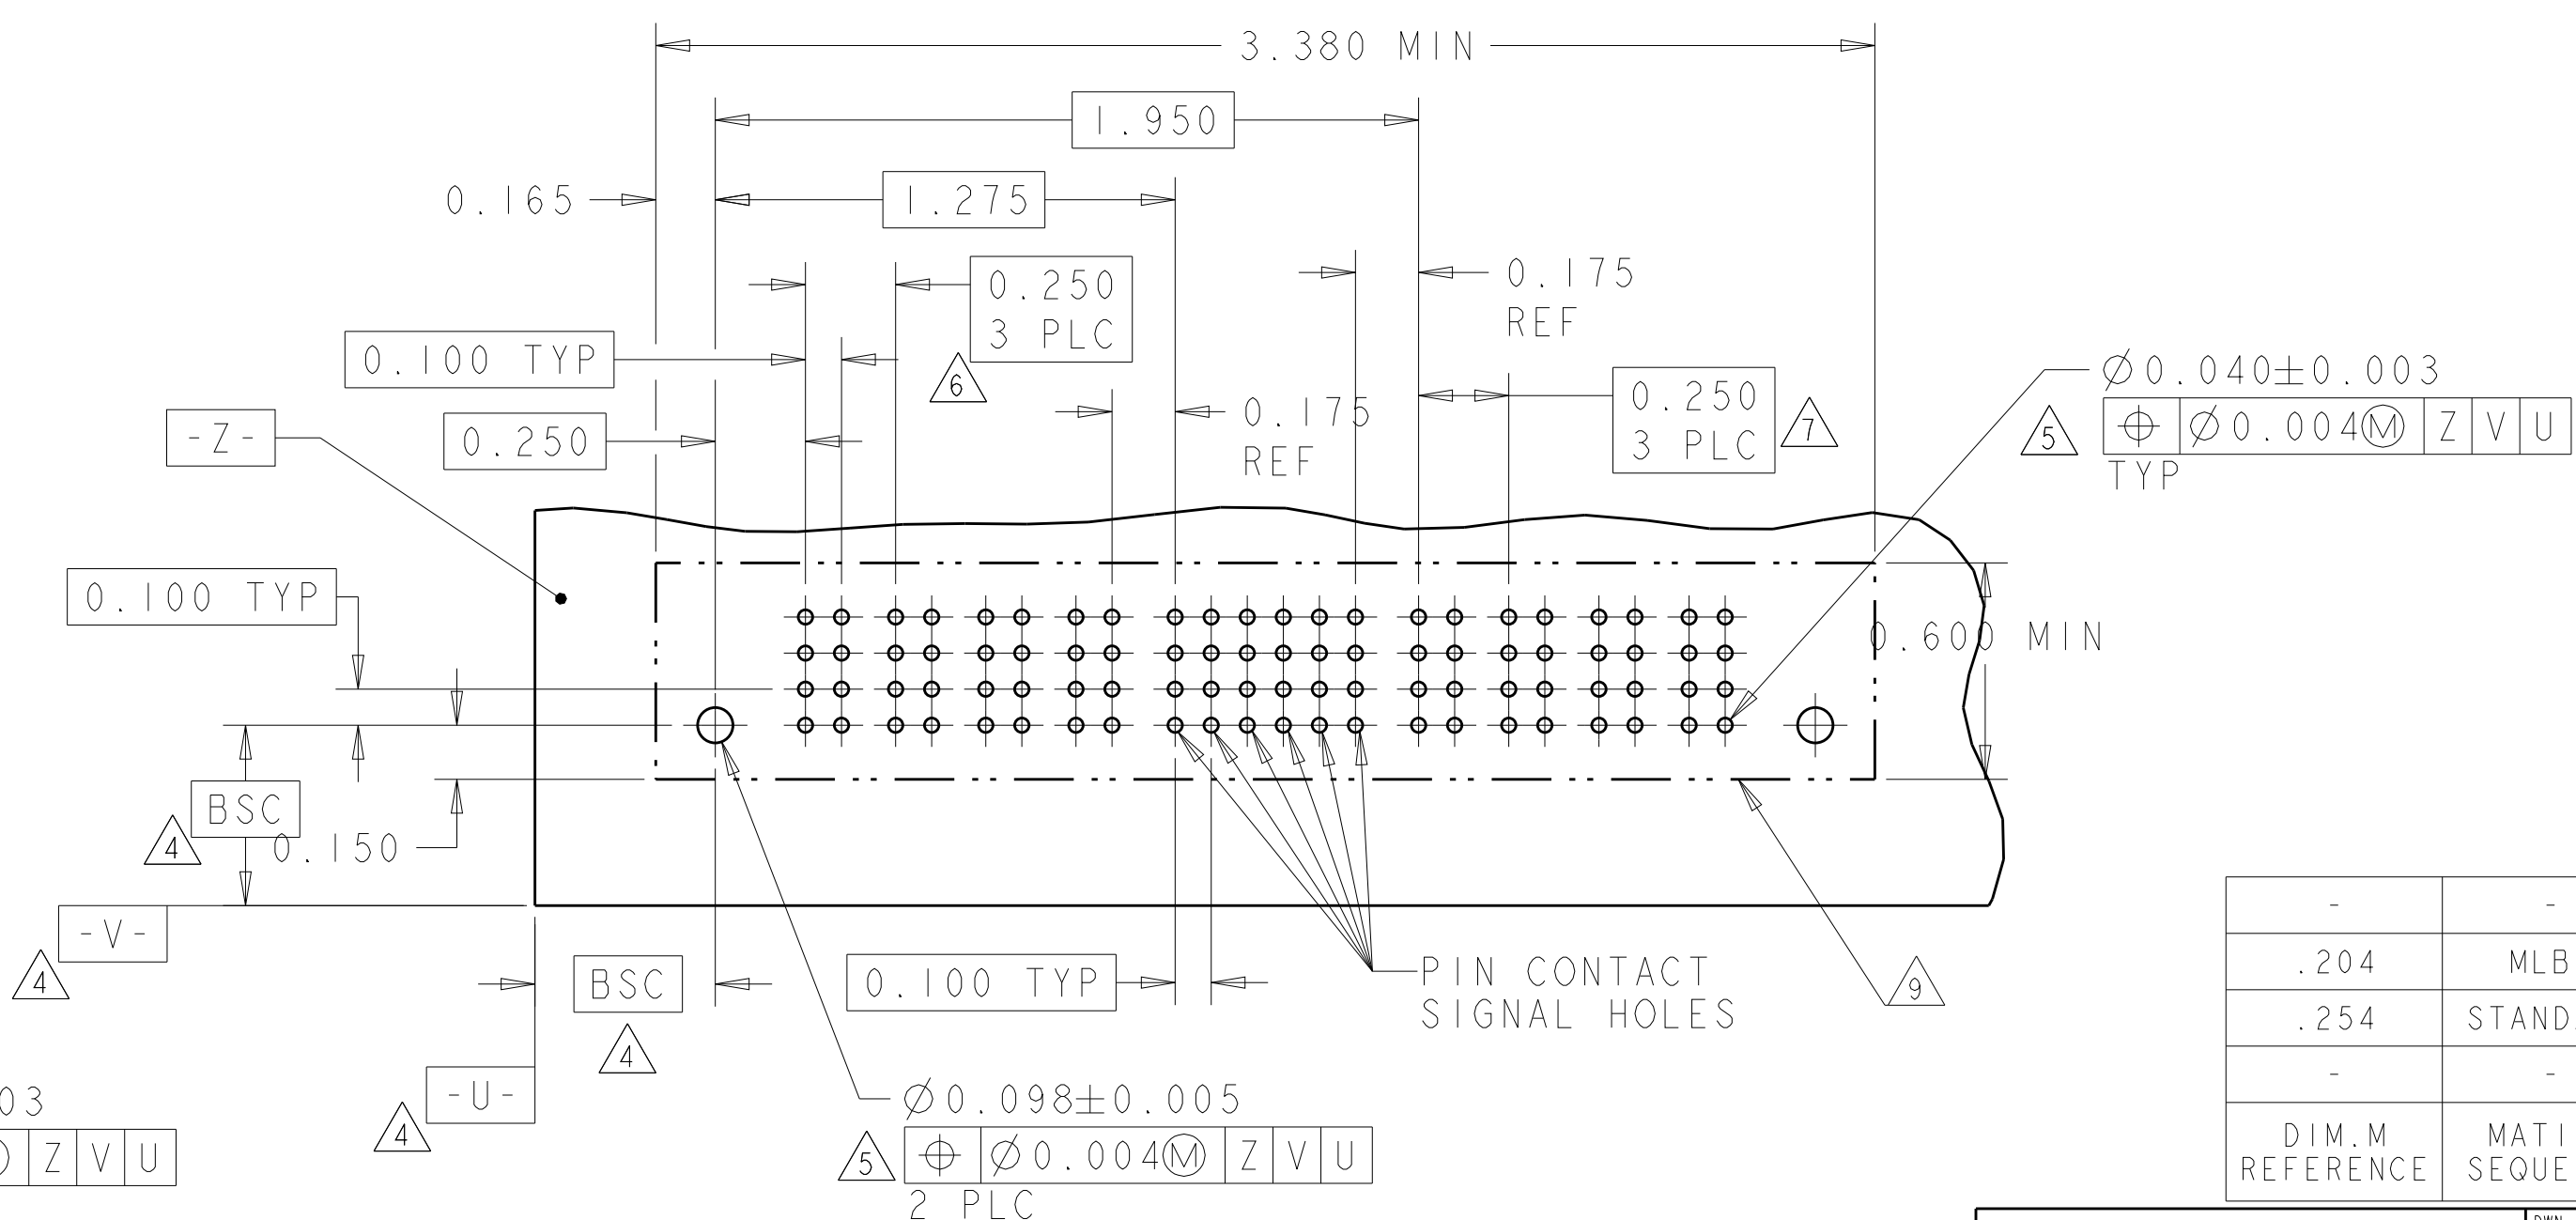
[illegible]

RECOMMENDED PCB LAYOUT 6600333-6
SCALE 2:1

-	-	RETENTION CLIP	HD
.204	MLBF	SIGNAL CONTACT .165 TAIL LENGTH	ES
.254	STANDARD	SIGNAL CONTACT .165 TAIL LENGTH	EV
-	-	POWER CONTACT .165 TAIL LENGTH	VM
DIM.M REFERENCE	MATING SEQUENCE	DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: J. MCCLINTON 23MAR2005 CHK: D. TROUT 23MAR2005 APP'D: B. WHYNE 23MAR2005		 TE Connectivity	
DIMENSIONS: INCH 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.010 ±.010 0.005 ±.005 0.002 ±.002 ANGLES 42°		NAME: VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
MATERIAL: - FINISH: -		PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: -		SIZE: - CASE CODE: - DRAWING NO: A100779 C: 6600333	
Customer Drawing		SCALE: 3:1		SHEET: 3 of 22 REV: P	


PART NUMBER	ROWS		POWER	SIGNAL					POWER	
			P1	1	2	3	4	P2		
6600333-9	D		VM	ES	EV	ES	EV	VM		
	C			EV	EV	EV	EV			
	B			ES	EV	ES	EV			
	A			ES	EV	ES	EV			
IP+16S+IP		HD								HD

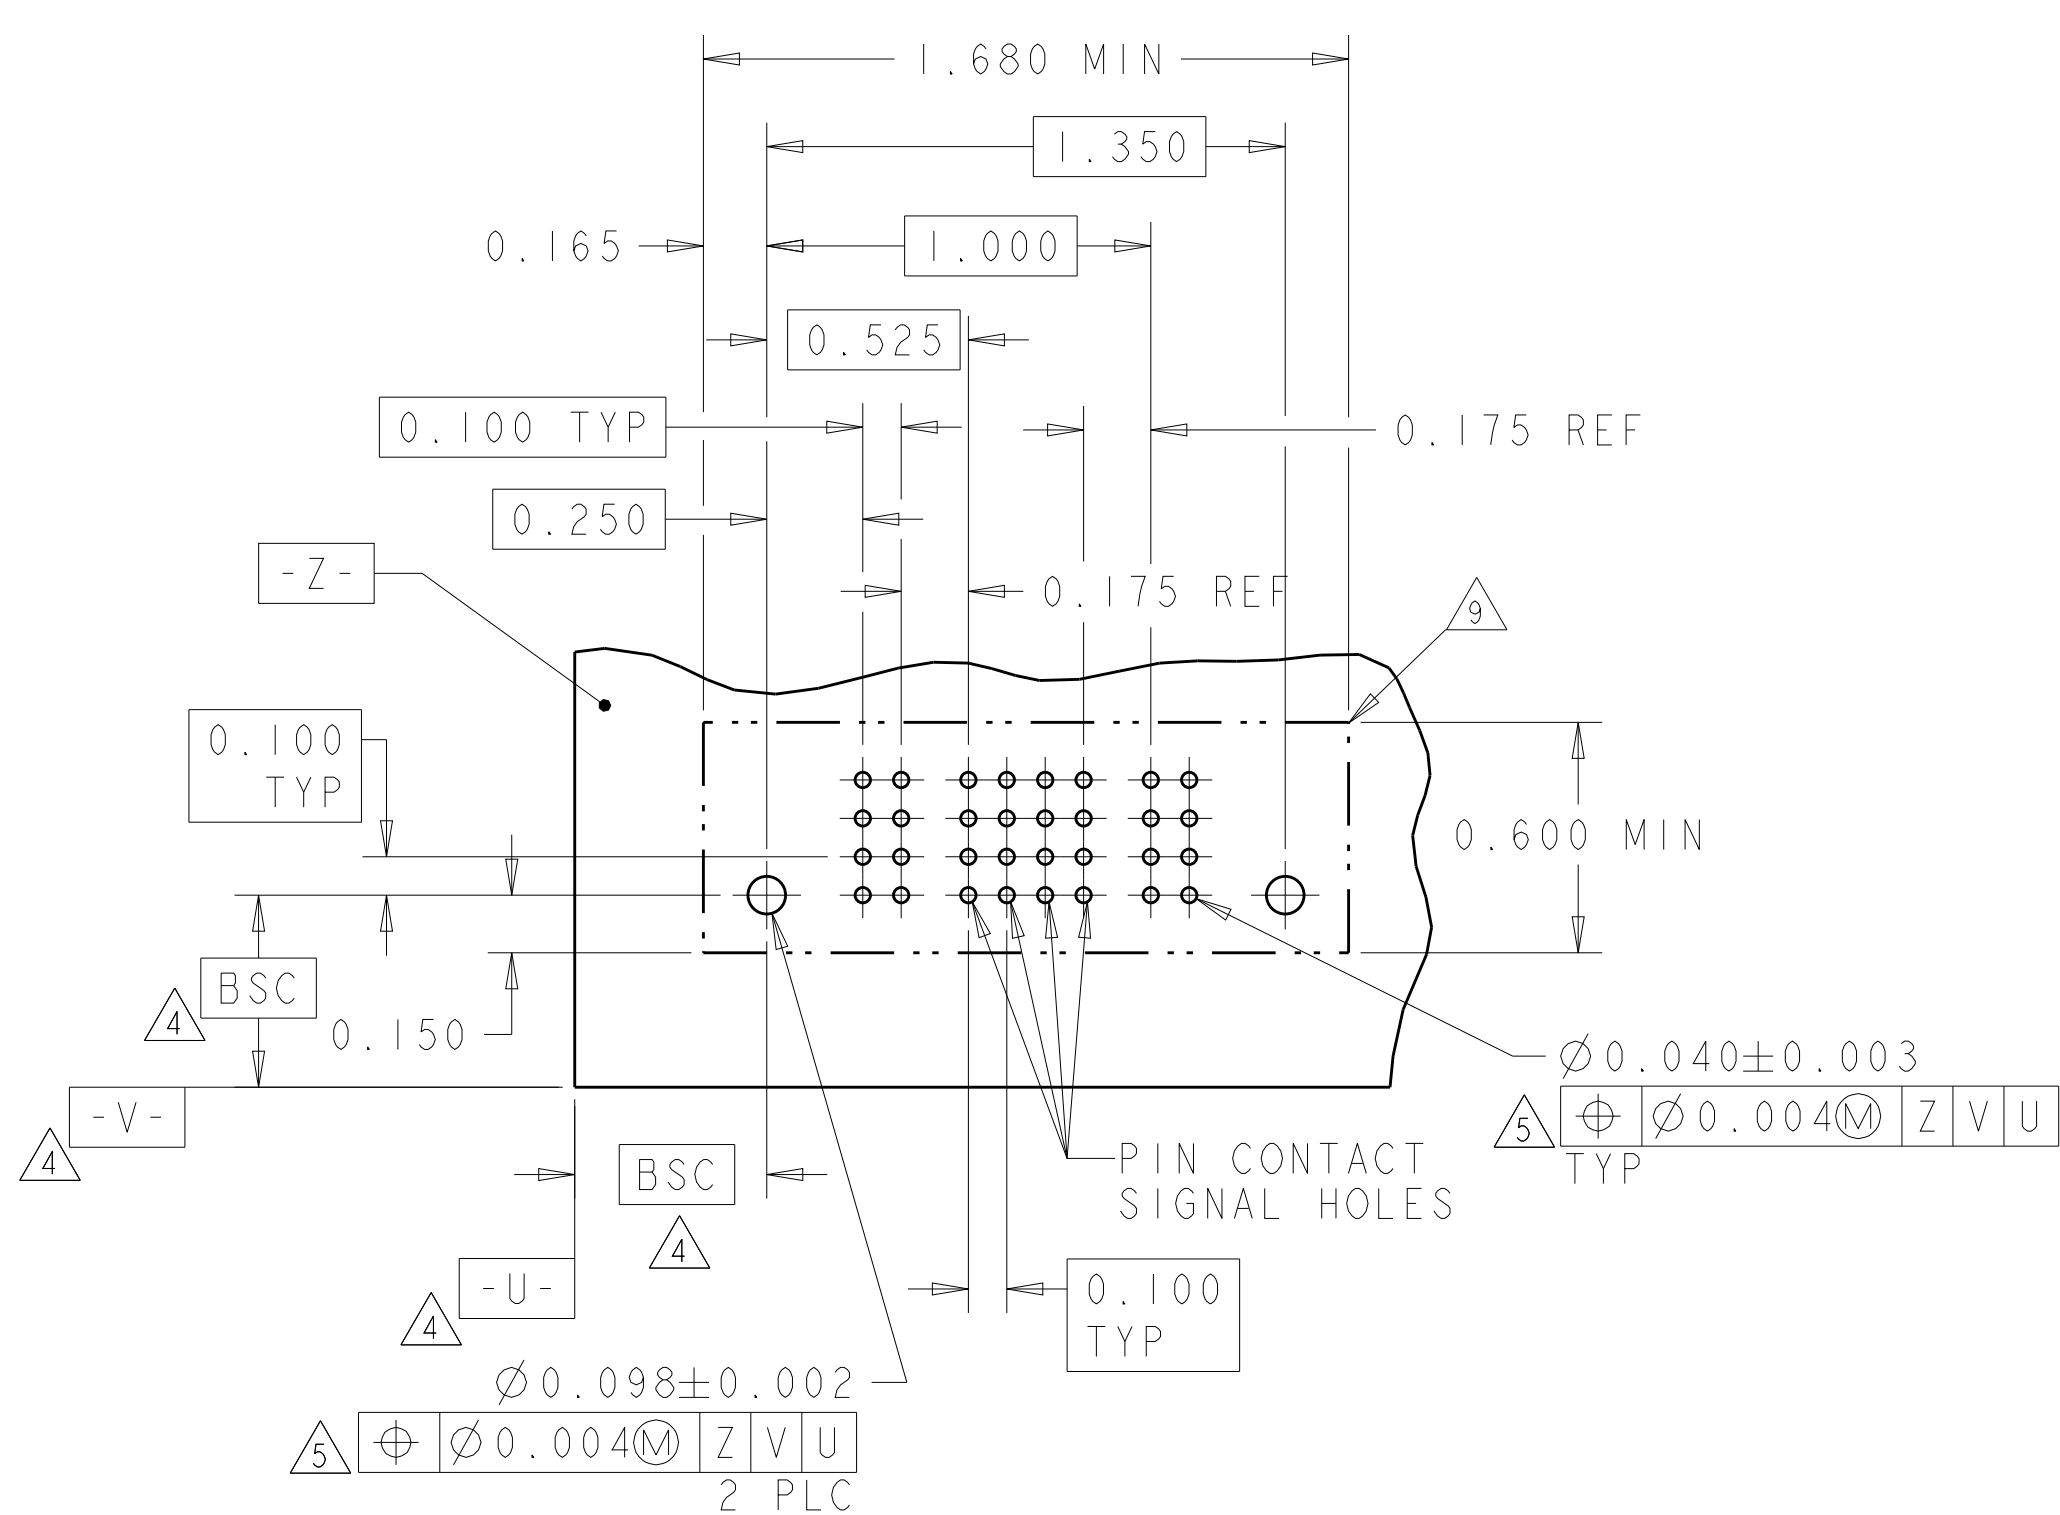


RECOMMENDED PCB LAYOUT 6600333-9
SCALE 2:1

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
3-6600333-0	D		VM	ES	EV	EV	ES	VM	
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
IP+16S+IP		HD							HD




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLINTON CHK 23MAR2005 D. TROUT KAYR 23MAR2005		 TE Connectivity	
DIMENSIONS: INCH 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.010 ±.010 0.005 ±.005 0.002 ±.002 ANGLES ±.0°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
MATERIAL - FINISH -		WEIGHT - Customer Drawing		SIZE CAGE CODE DRAWING NO A100779 C6600333 RESTRICTED TO -	
		SCALE 3:1 SHEET 4 of 22 REV P			

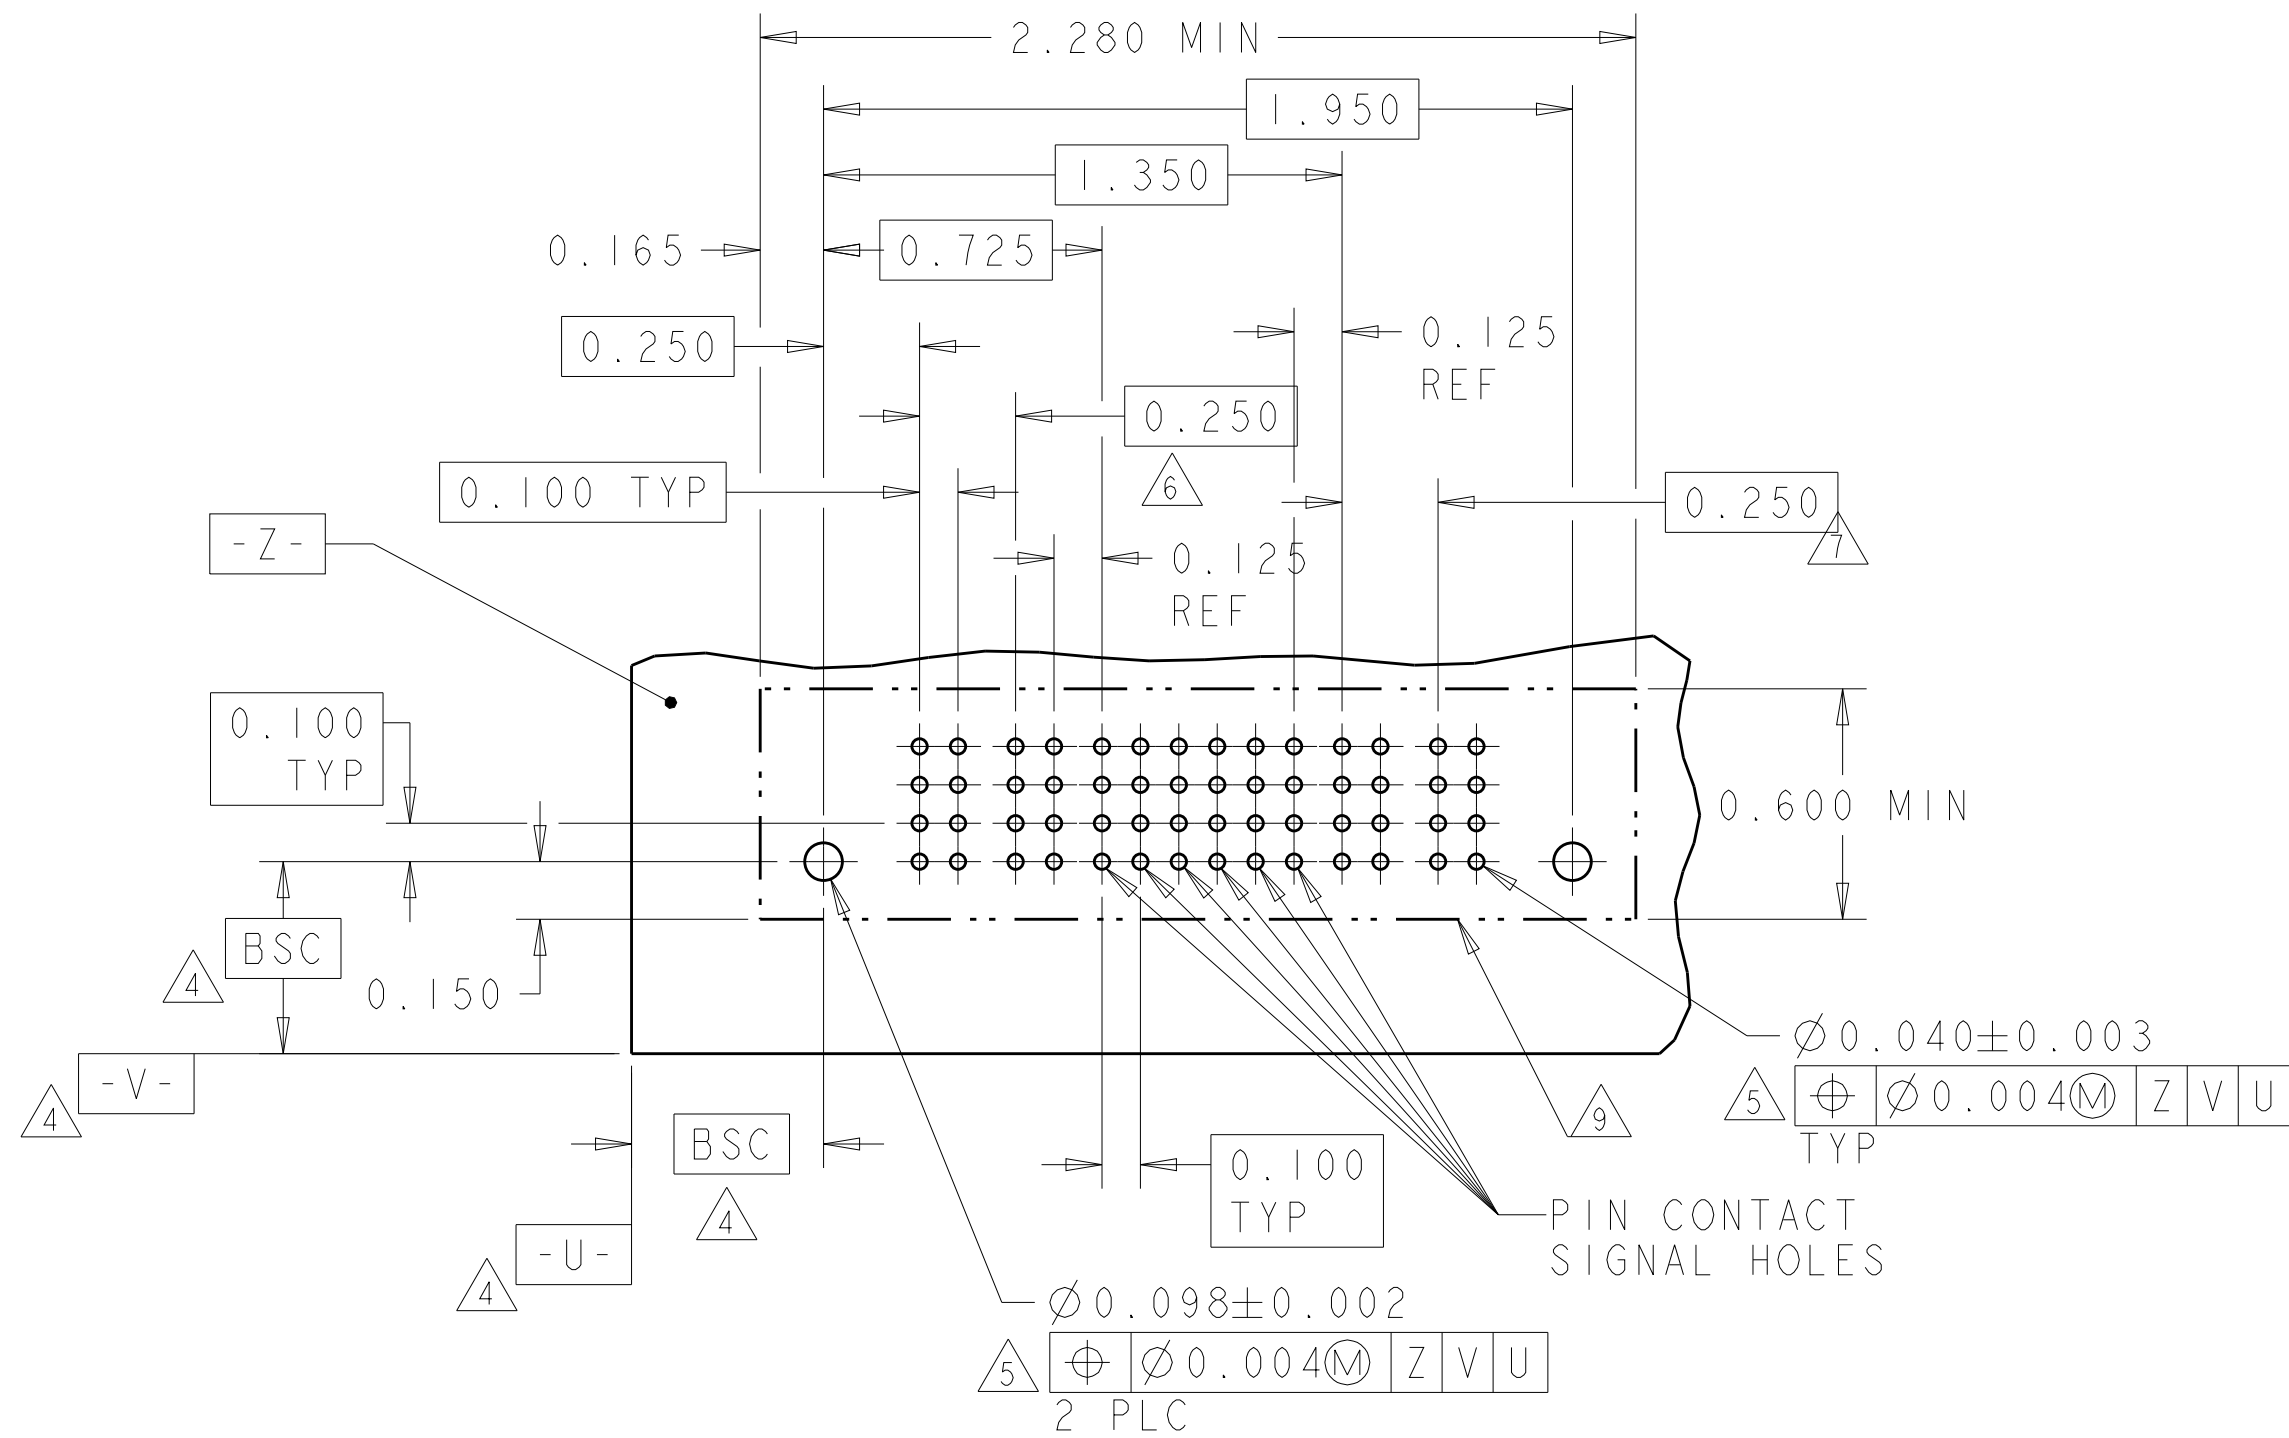[illegible]

RECOMMENDED PCB LAYOUT 1-6600333-2
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	
I-6600333-3	D		VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
	C								EV	EV	EV	EV	EV	EV							
	B								EV	EV	EV	EV	EV	EV							
	A								EV	EV	EV	EV	EV	EV							
6P+24S+6P		HD																			HD

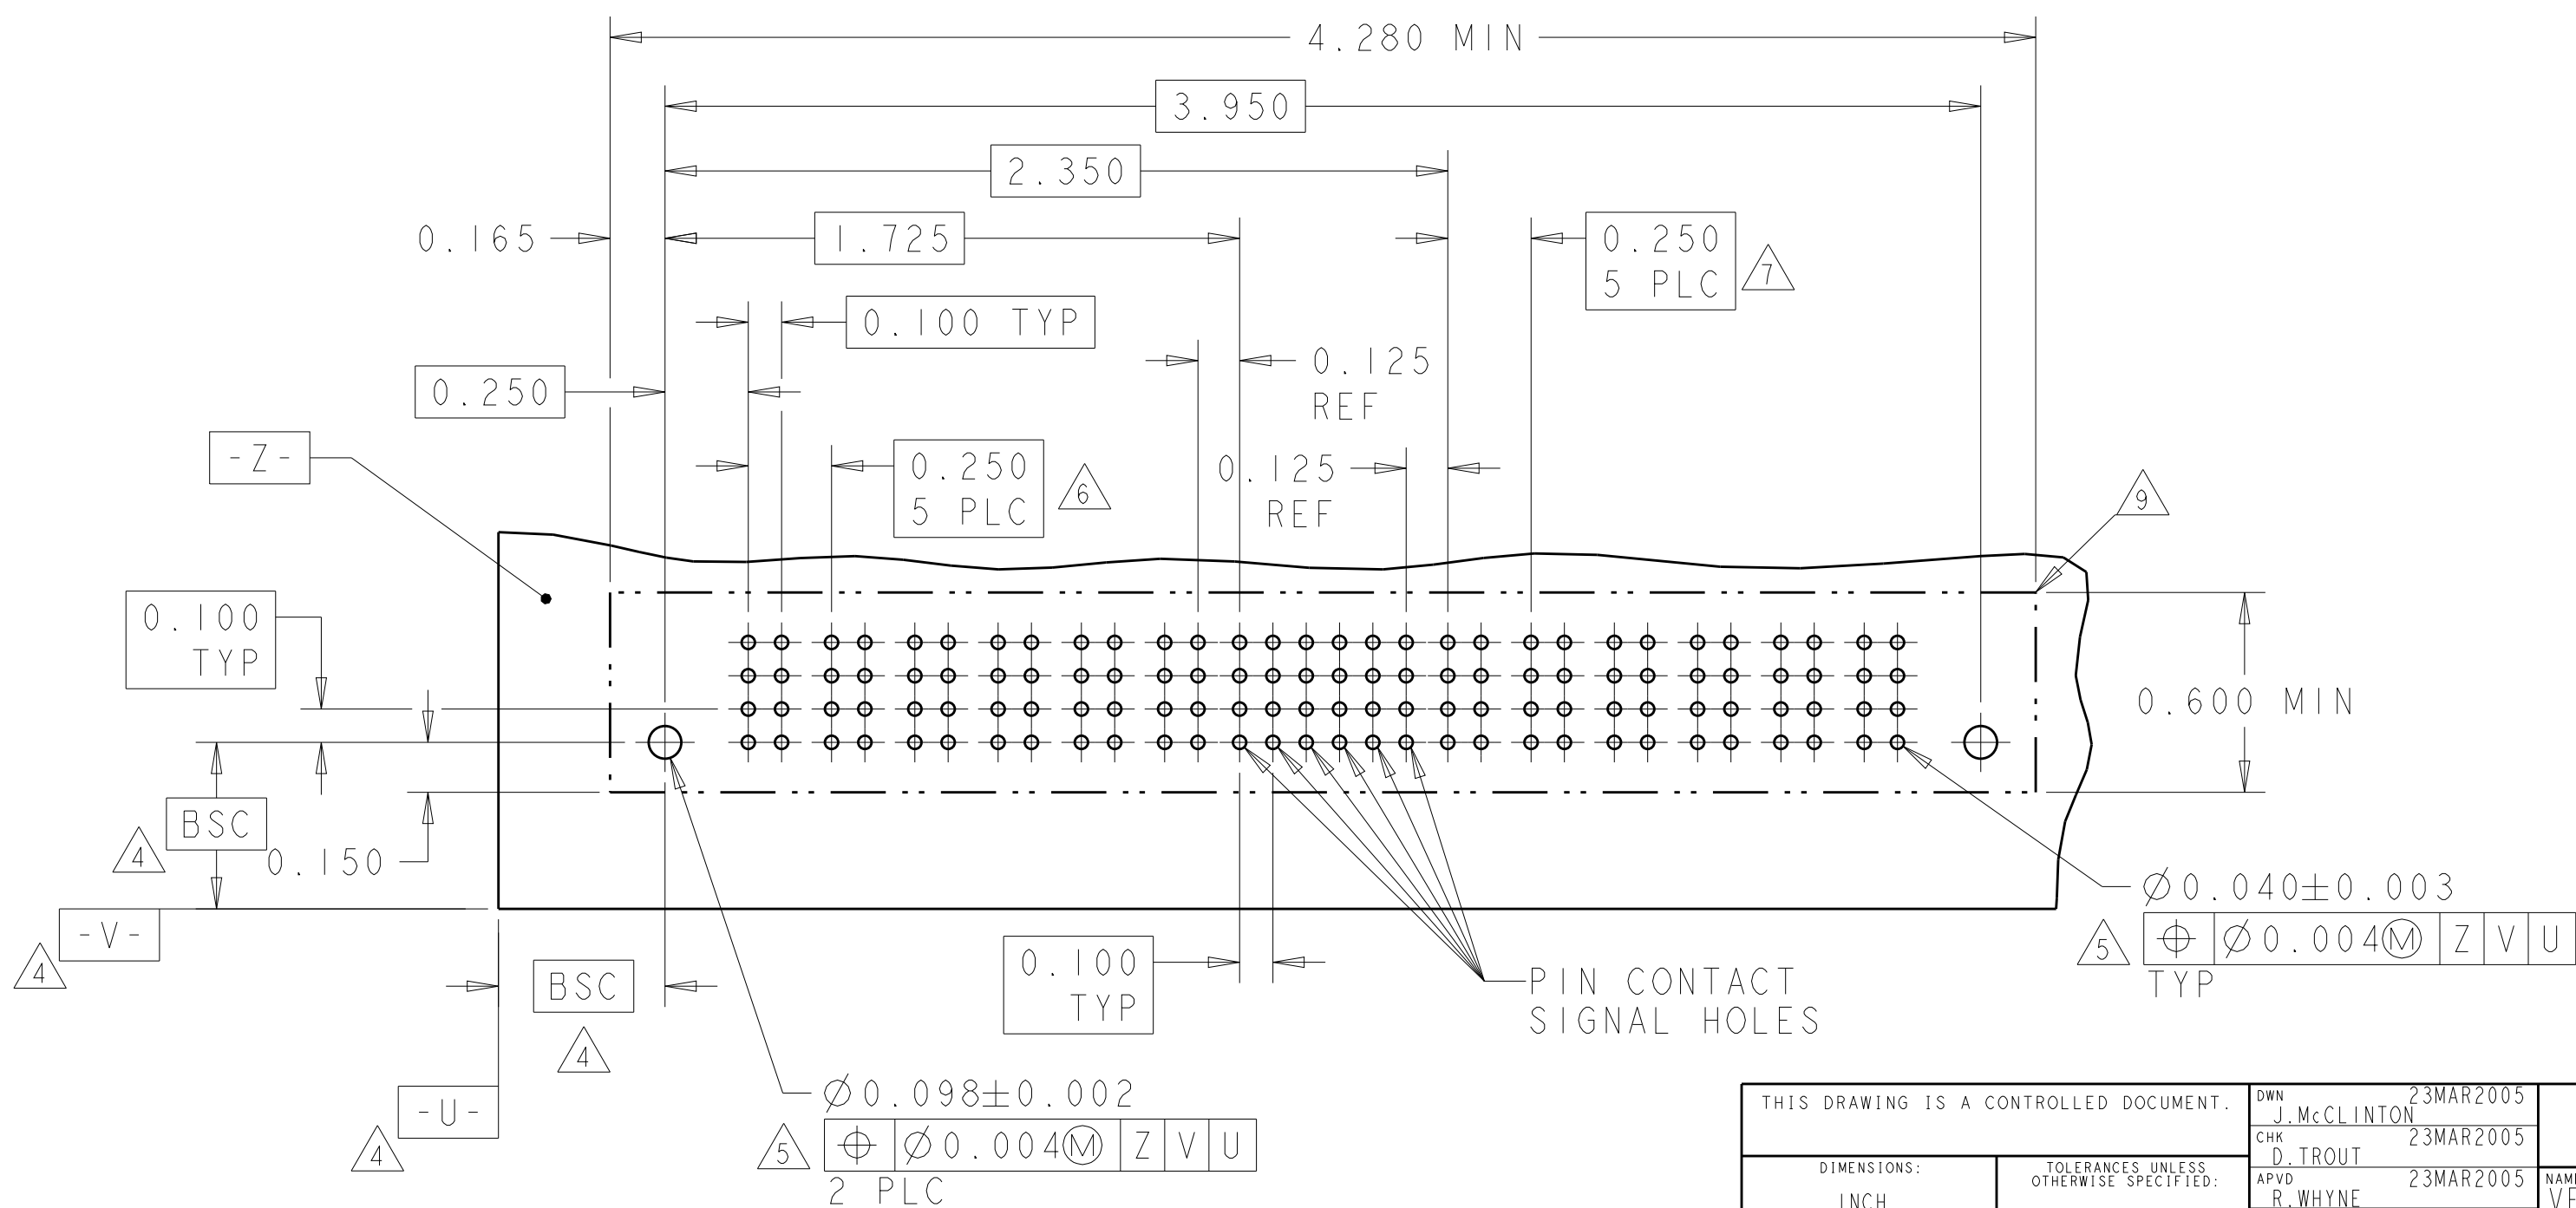

RECOMMENDED PCB LAYOUT 1-6600333-3
SCALE 2:1

4805 (3/11)

[illegible]

2.380 MIN

2.050

1.450

0.165

0.775

0.250

0.175 REF

0.100 TYP

0.250

0.100 TYP

0.150

0.600 MIN

0.040

0.004 M

PIN CONTACT SIGNAL HOLES


2 PLC


RECOMMENDED PCB LAYOUT I-6600333-6

SCALE 2:1




RECOMMENDED PCB LAYOUT 1-6600333-6
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER								
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14	
2-6600333-1	D C B A	 HD	 VM	 VM	 VM	 VM	 VM	 EV															

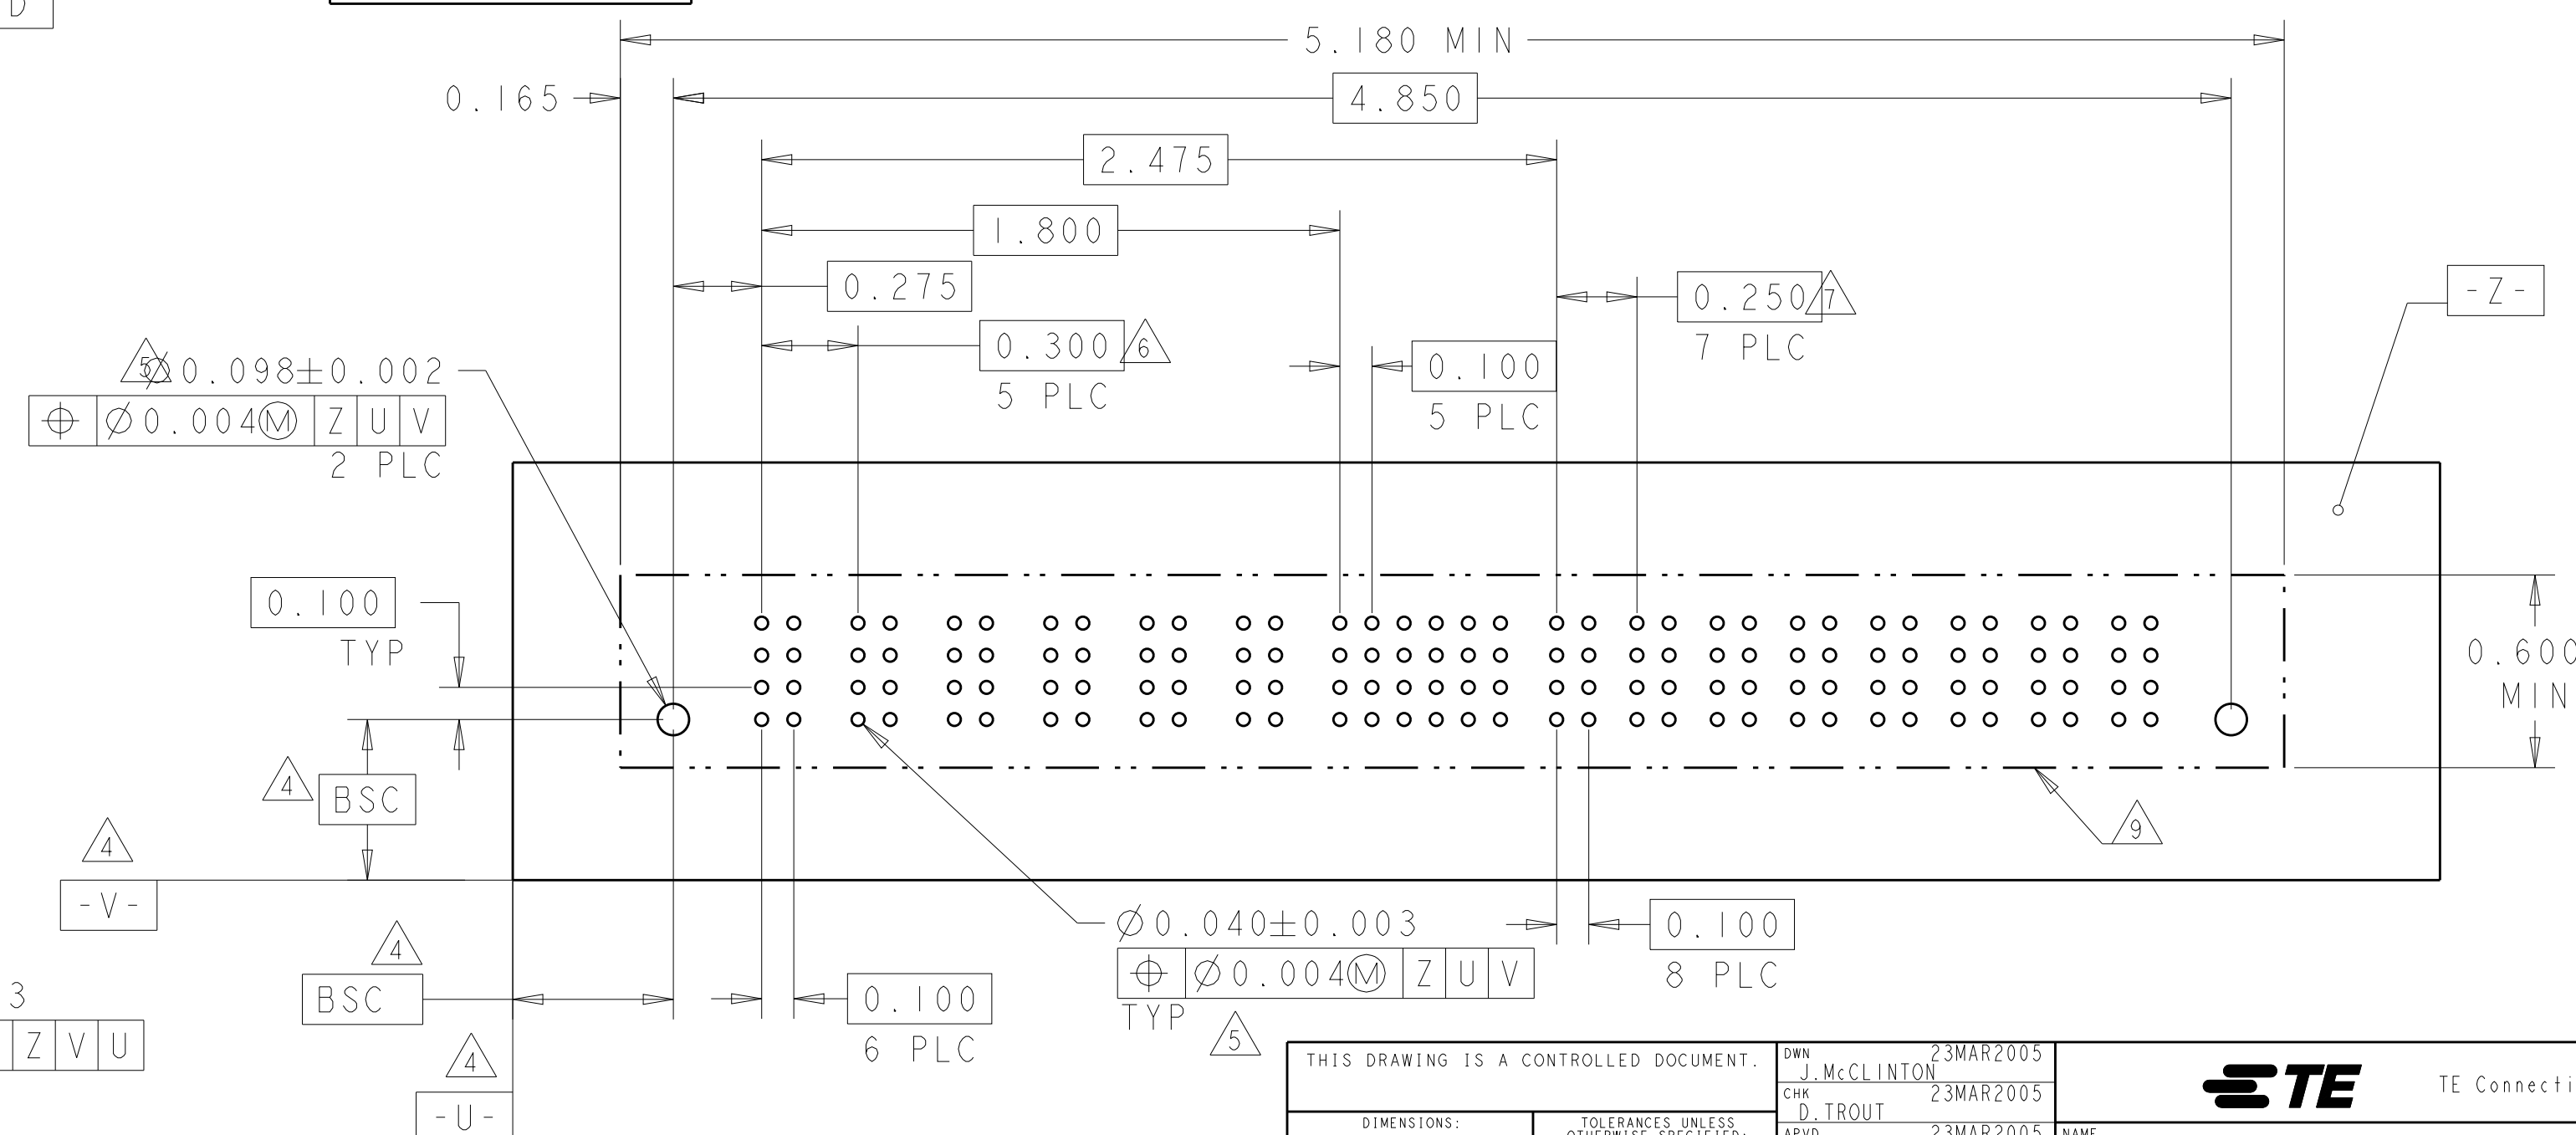

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. MCCLINTON CHK 23MAR2005 D. TROUT		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES °		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C-6600333	
		Customer Drawing		SCALE 3:1 SHEET 6 of 22 REV P	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
ES	00	-	-	SEE SHEET 1	-	-

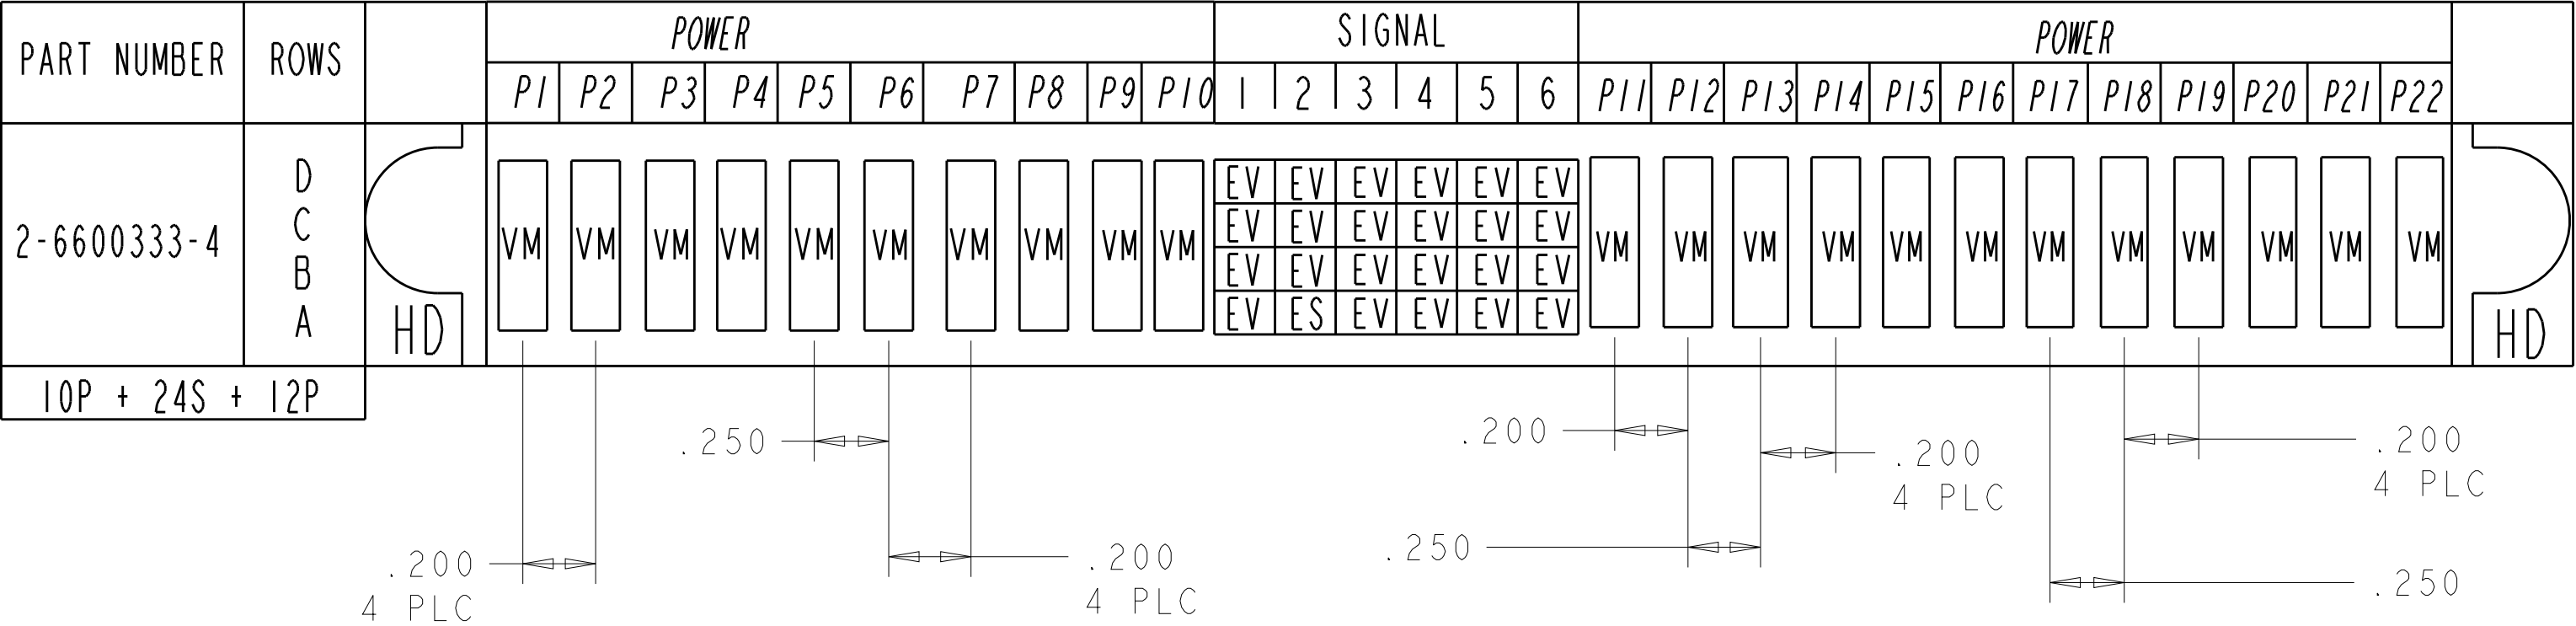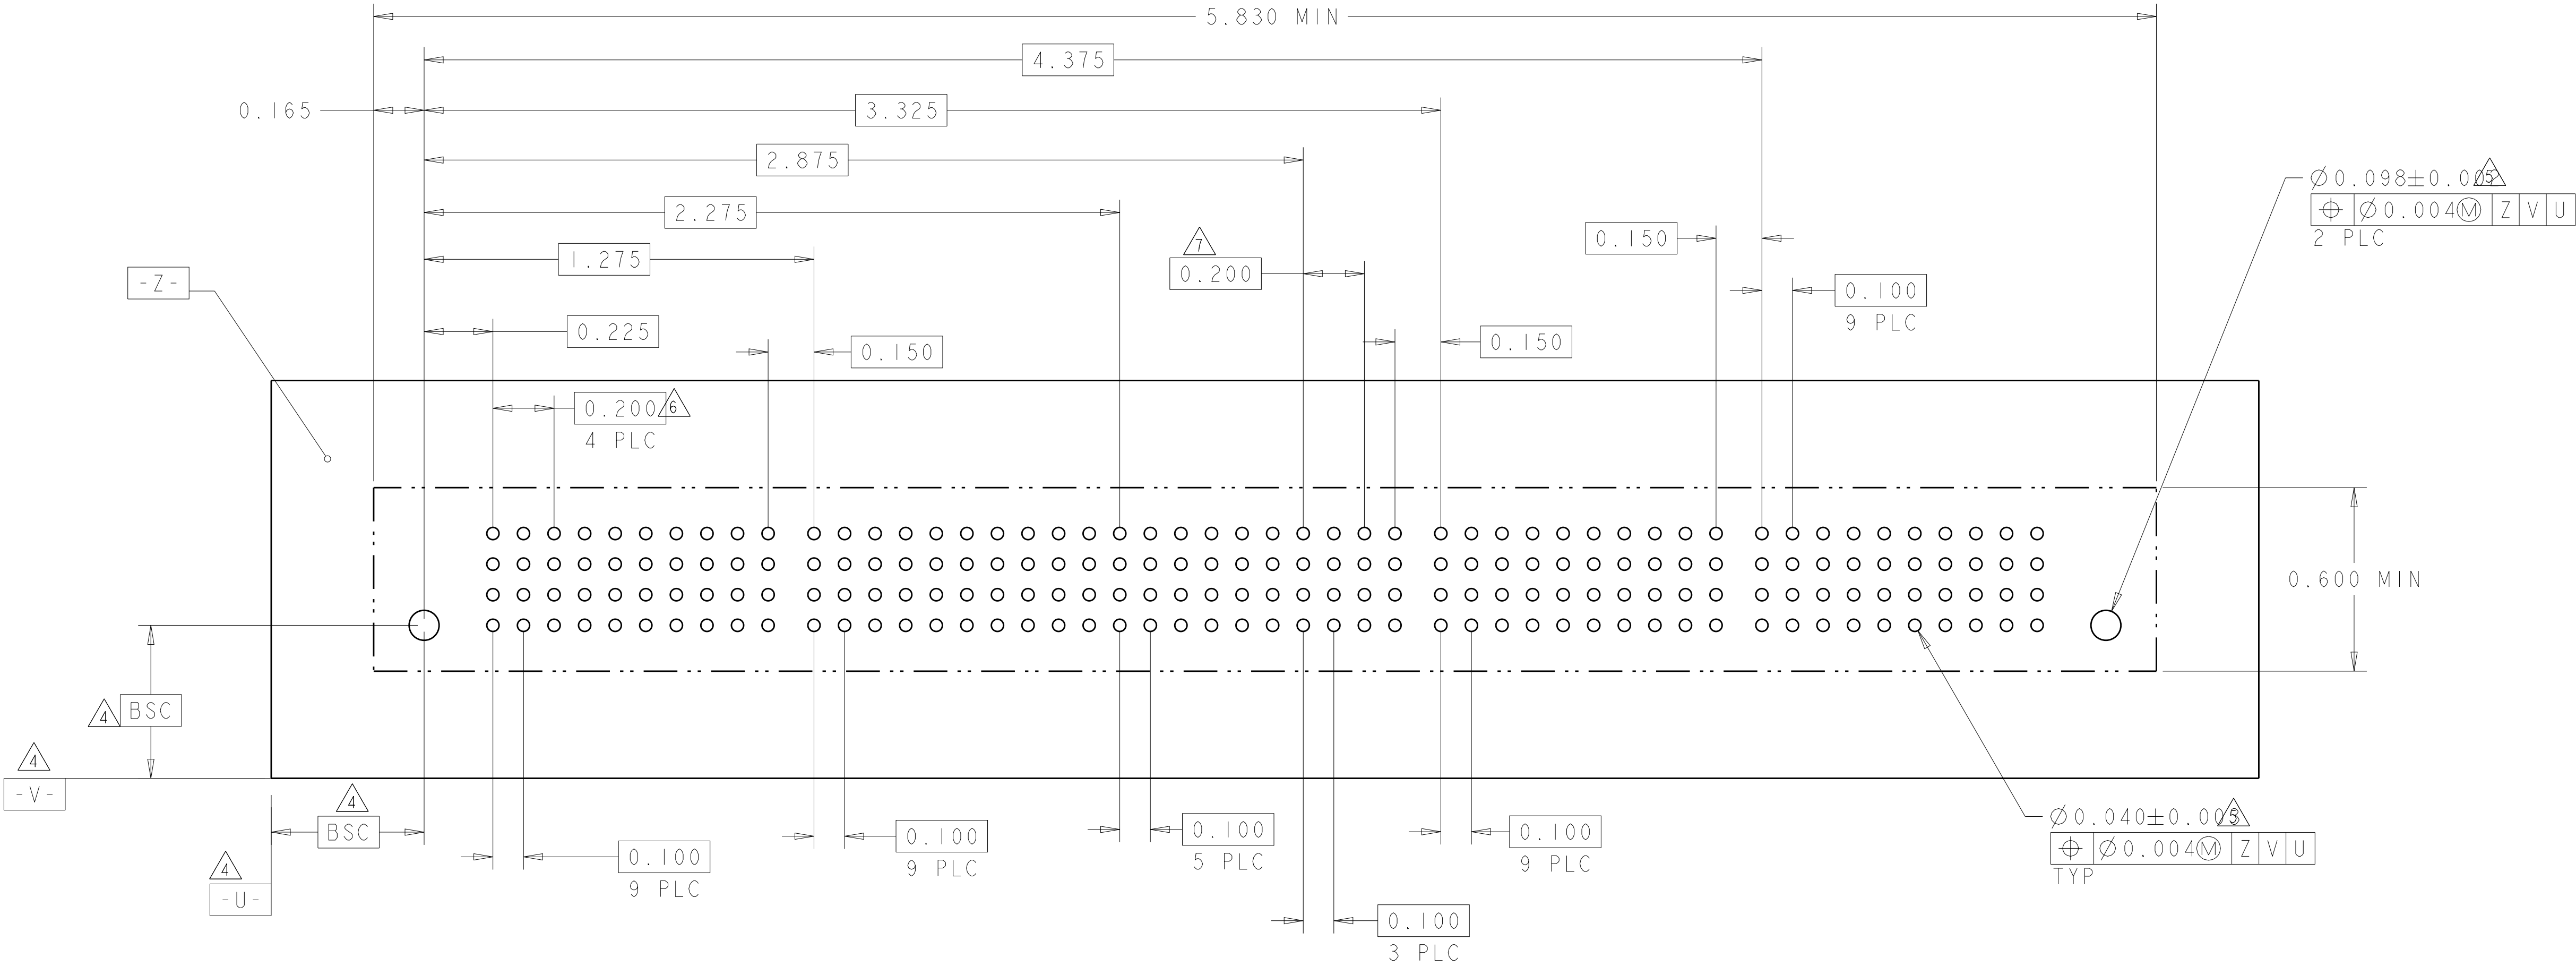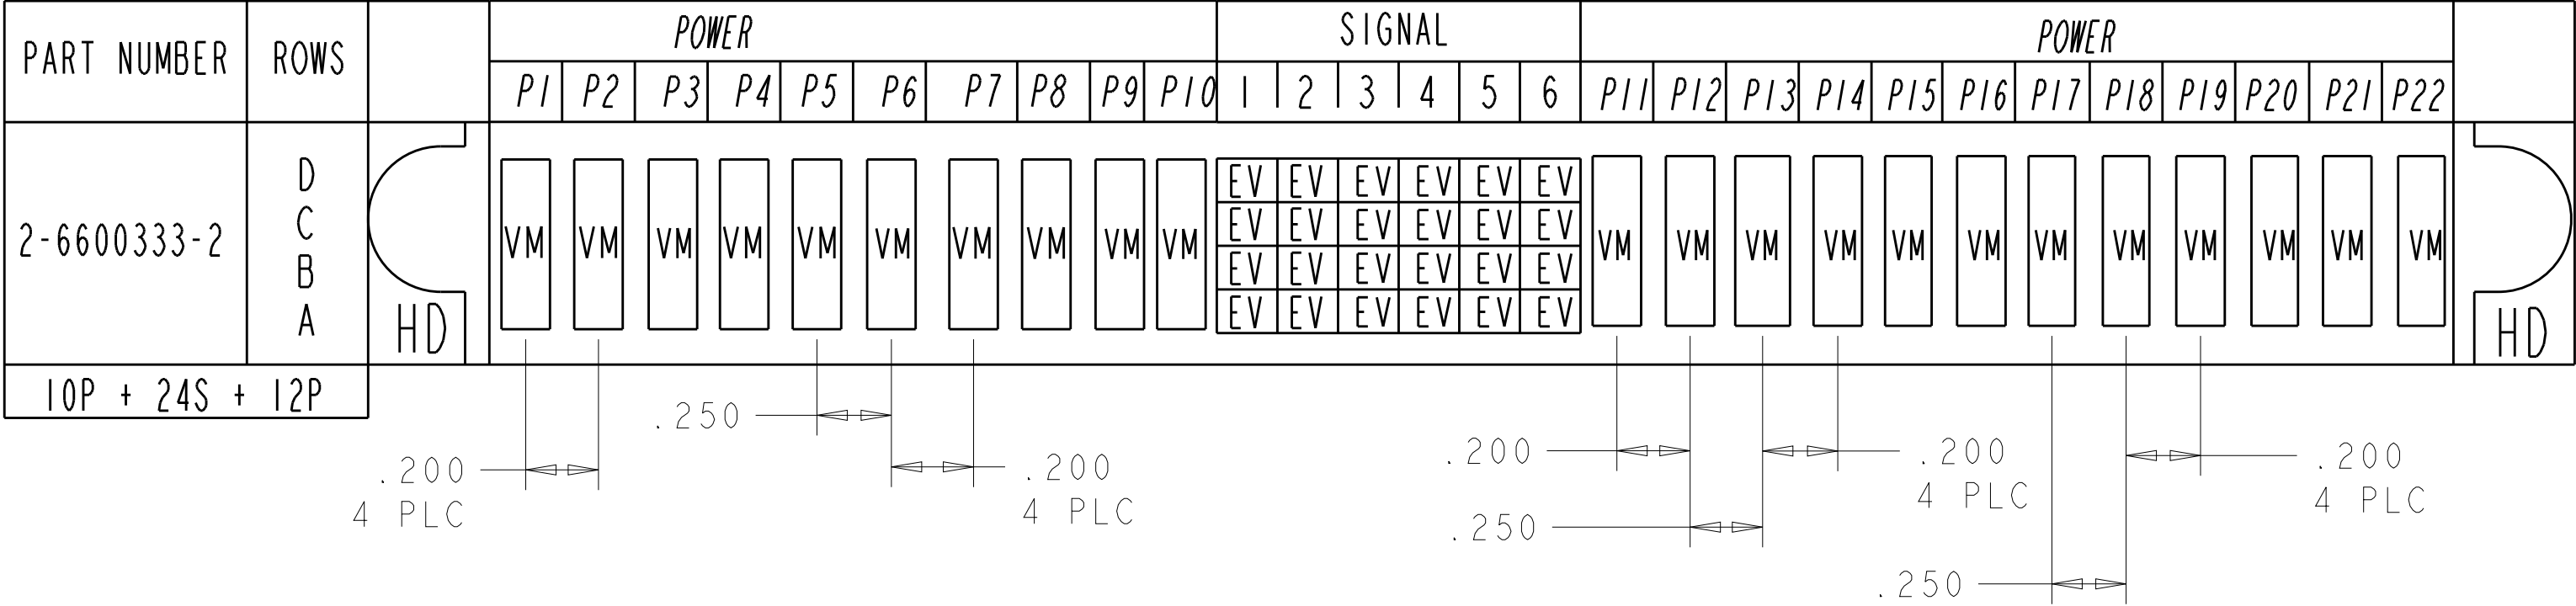

THE PART NUMBER 2-6600333-4 PCB LAYOUT IS SAME AS 2-6600333-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCH

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±7°

FINISH

FINISH

-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

J. McCLINTON

23MAR2005

CHK

D. TROUT

23MAR2005

APVD

R. WHYNE

23MAR2005

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

NAME

VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6600333

RESTRICTED TO

-

SCALE

3:1

SHEET

7

OF

22

REV

P7


TE

TE Connectivity


4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	
2-6600333-5	D		VM	VM	VM	VM	EV	EV	EV	EV	VM	VM	VM	
	C						EV	EV	EV	EV				
	B						EV	EV	EV	EV				
	A						ES	EV	EV	EV				
4P+16S+3P		HD												HD

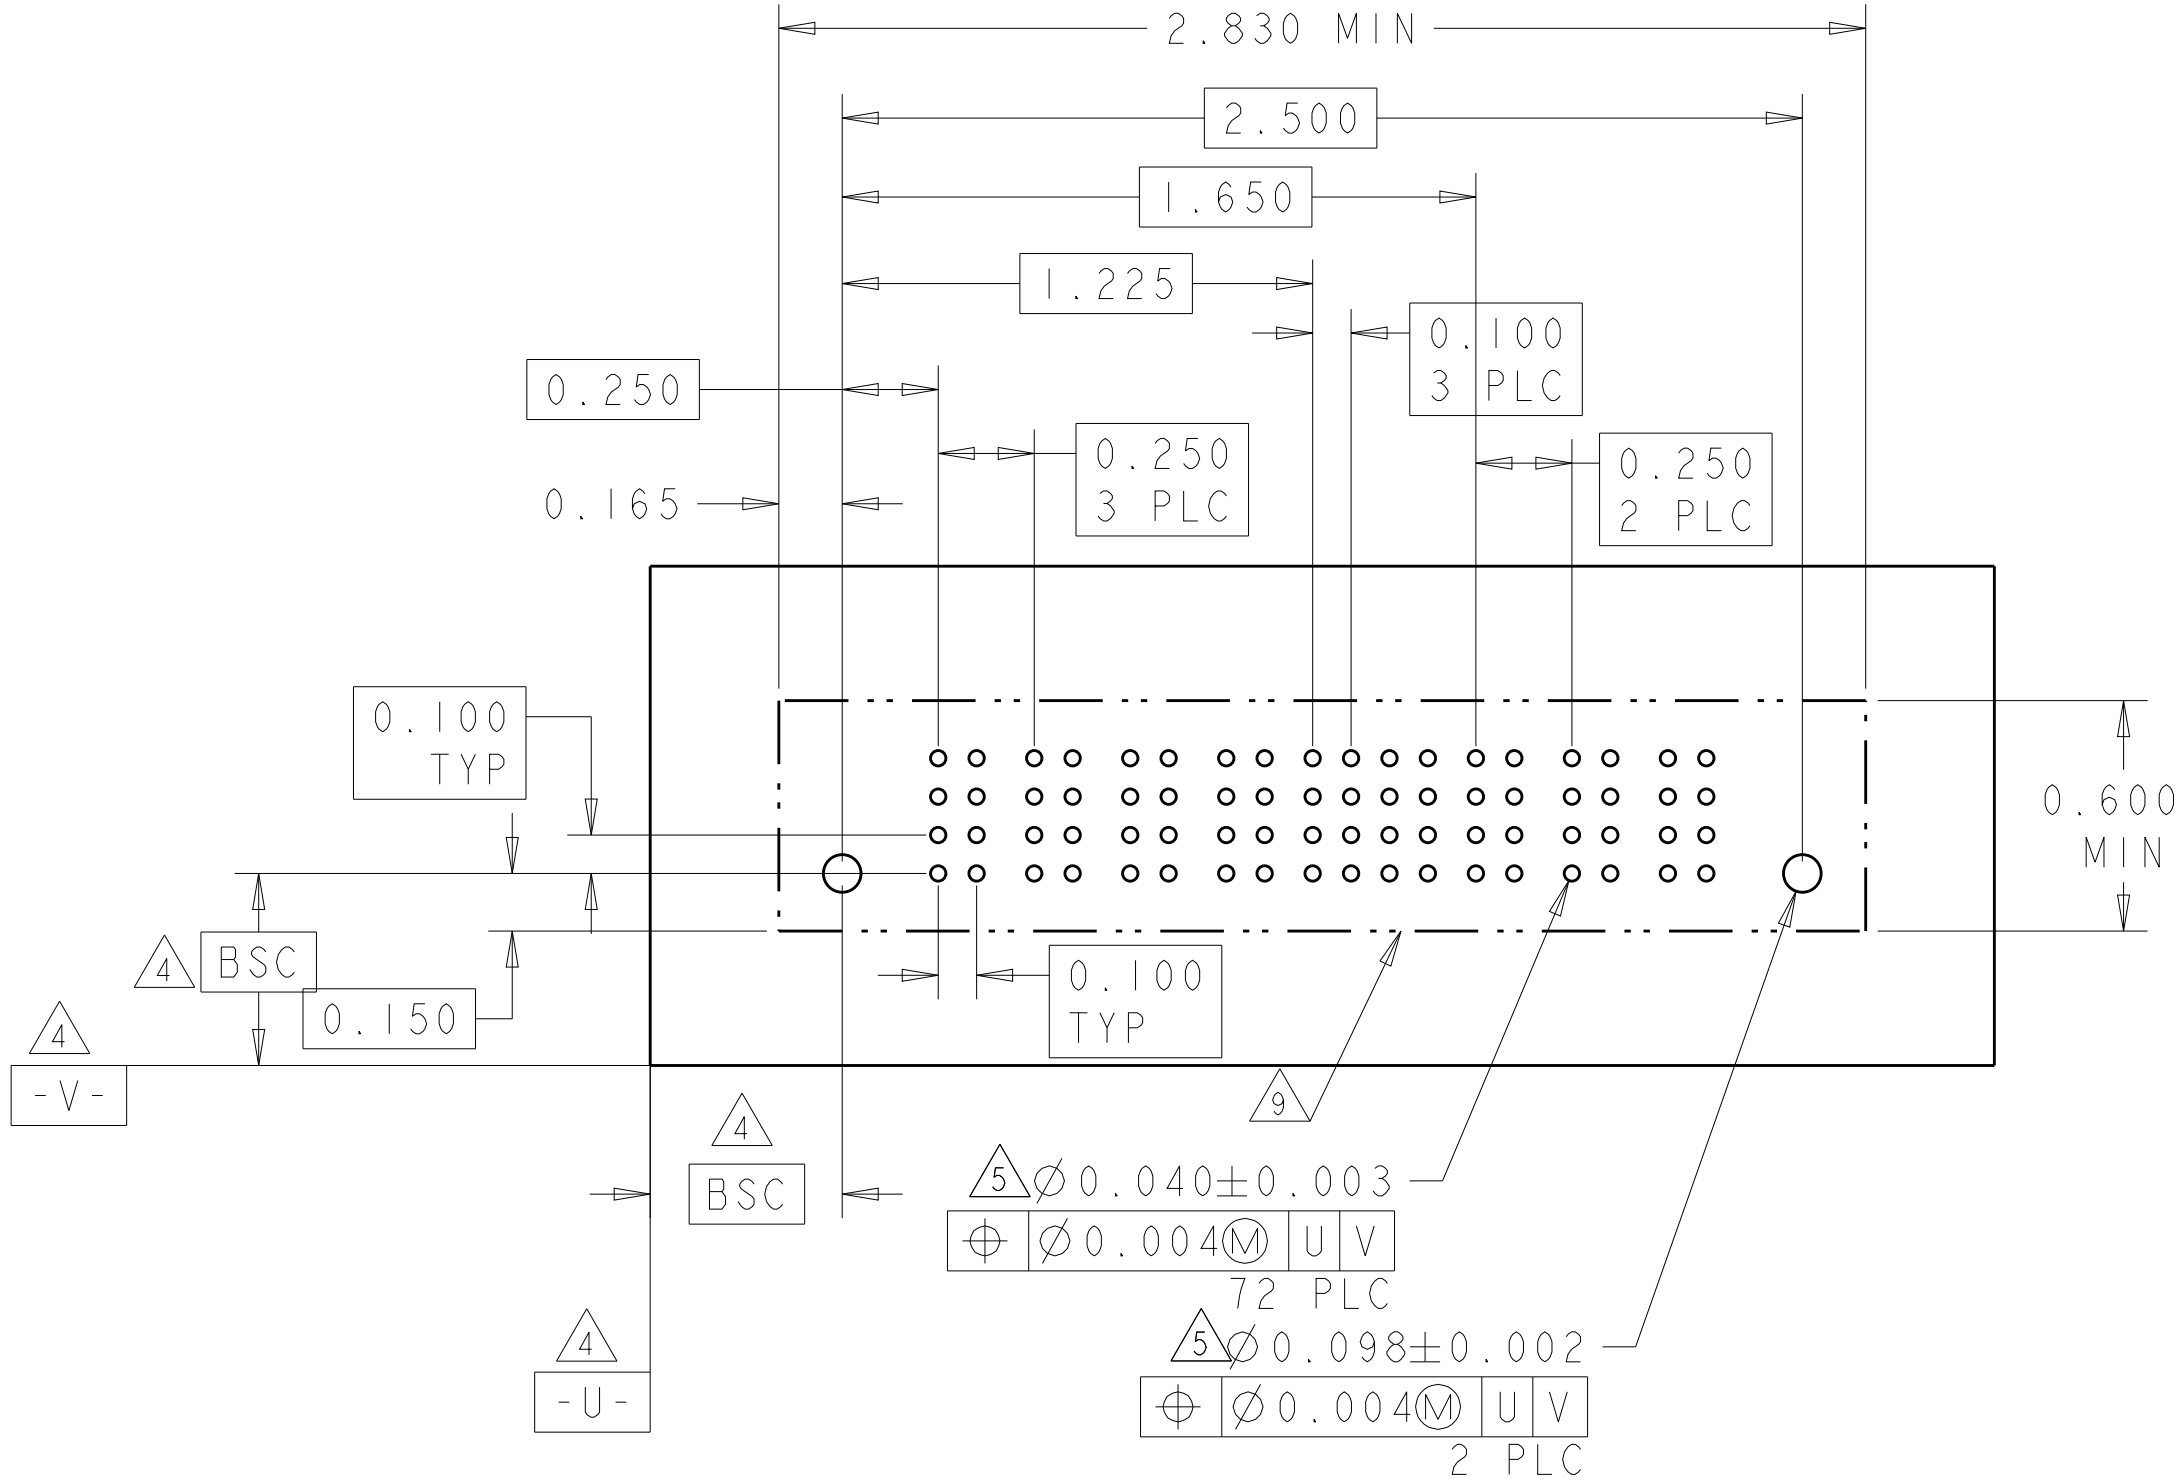

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
2-6600333-6	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

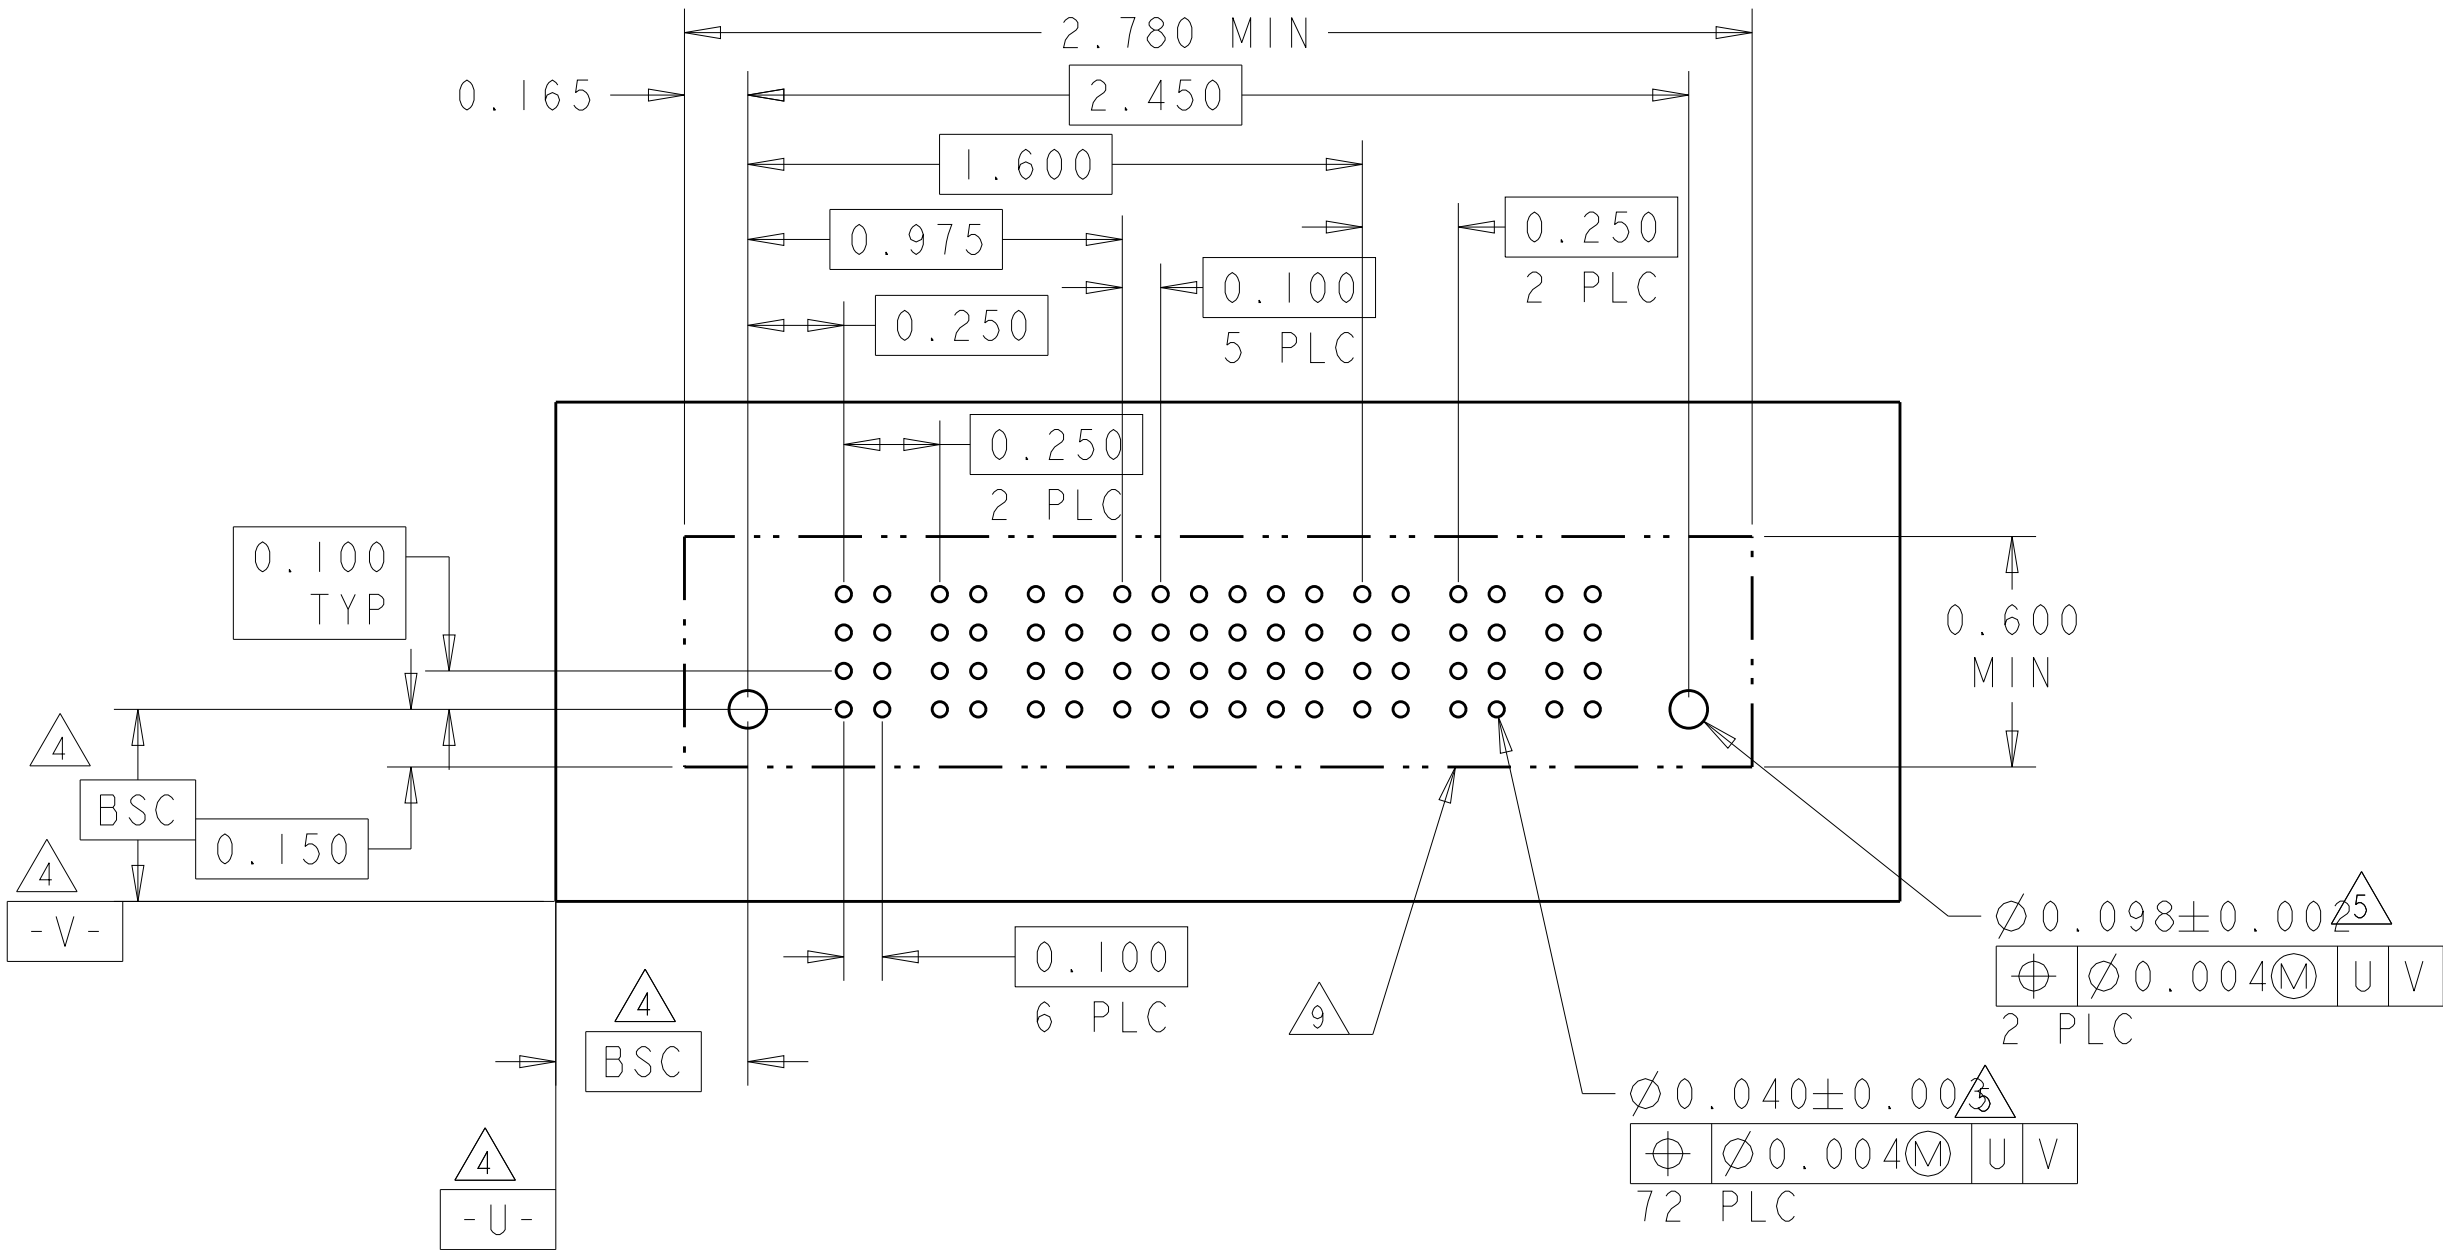

PART NUMBER	ROWS		POWER				SIGNAL						POWER					
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	
2-6600333-7	D		VM	VM	VM	VM	ES	EV	ES	EV	EV		VM	VM	VM	VM	VM	
	C						EV	EV	EV	ES	EV							
	B						EV	ES	EV	EV	EV							
	A						ES	ES	EV	EV	ES							
4P+24S+5P		HD																HD

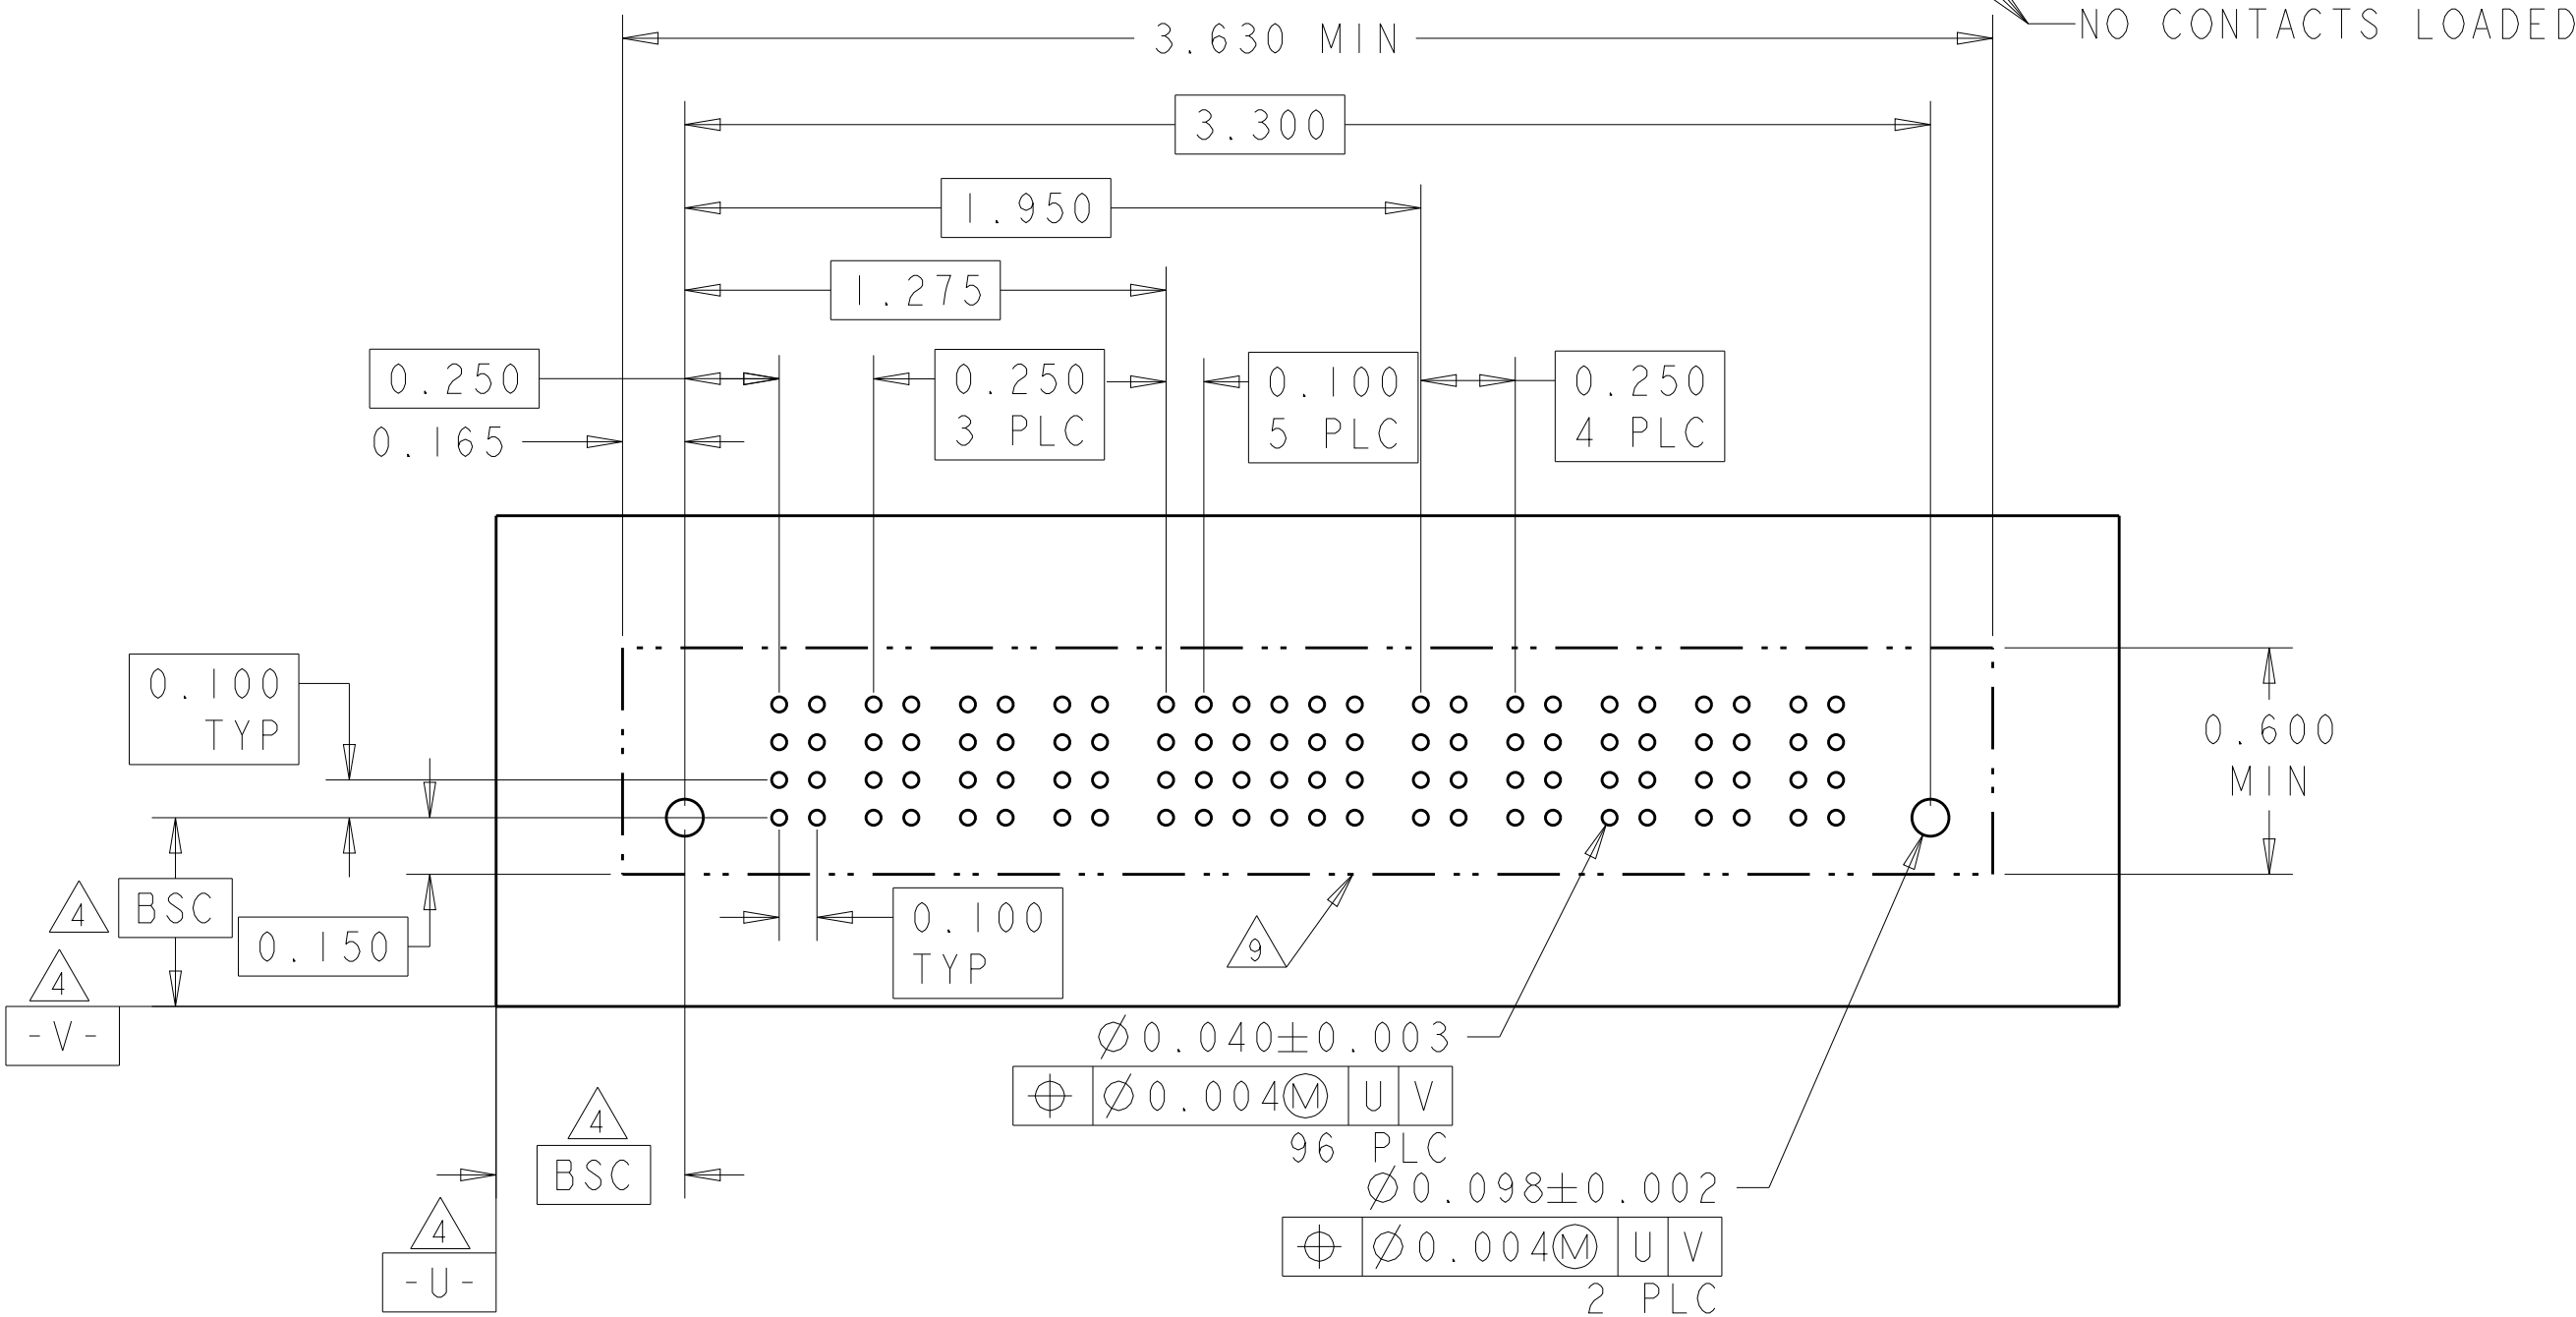

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

SCALE 3:1

NAME

VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO


6600333

RESTRICTED TO


-

SHEET 9 OF 22


REV P7

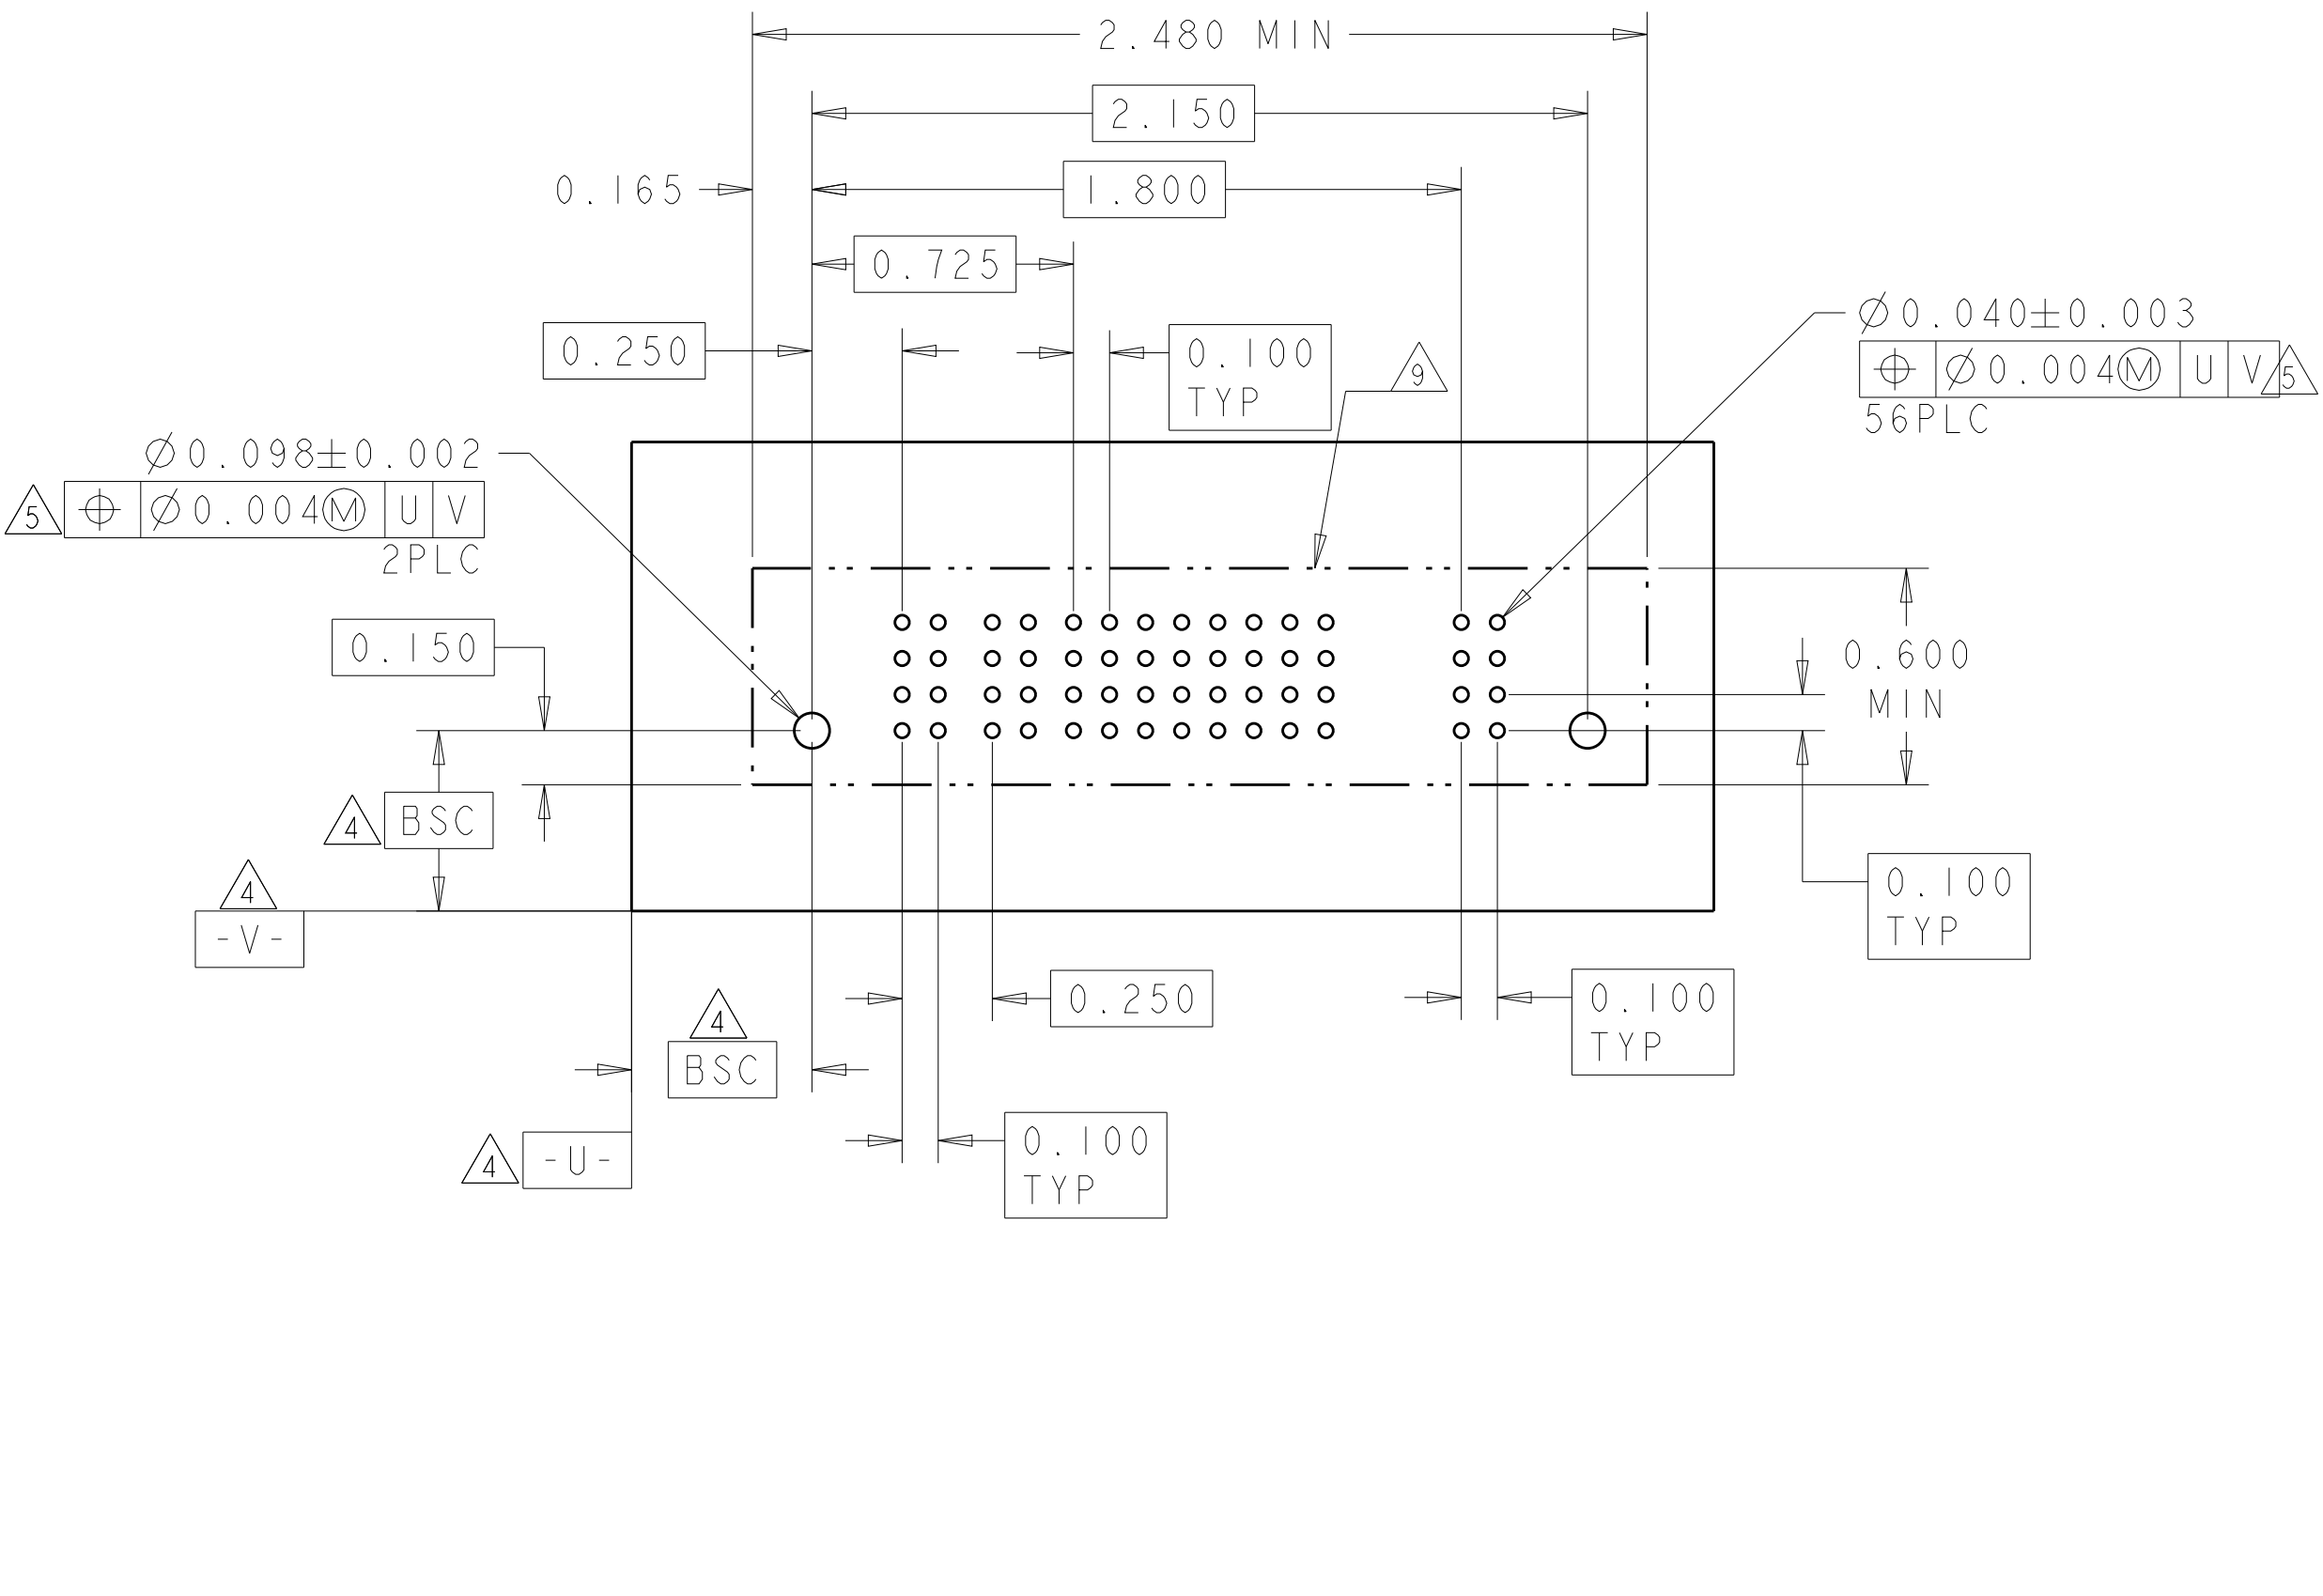
[illegible]4805 (3/11)



PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
3-6600333-2	D		VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV	EV	EV	EV					
	B						EV	EV	EV	EV	EV	EV					
	A						EV	EV	EV	EV	EV	EV					
4P+24S+4P																	

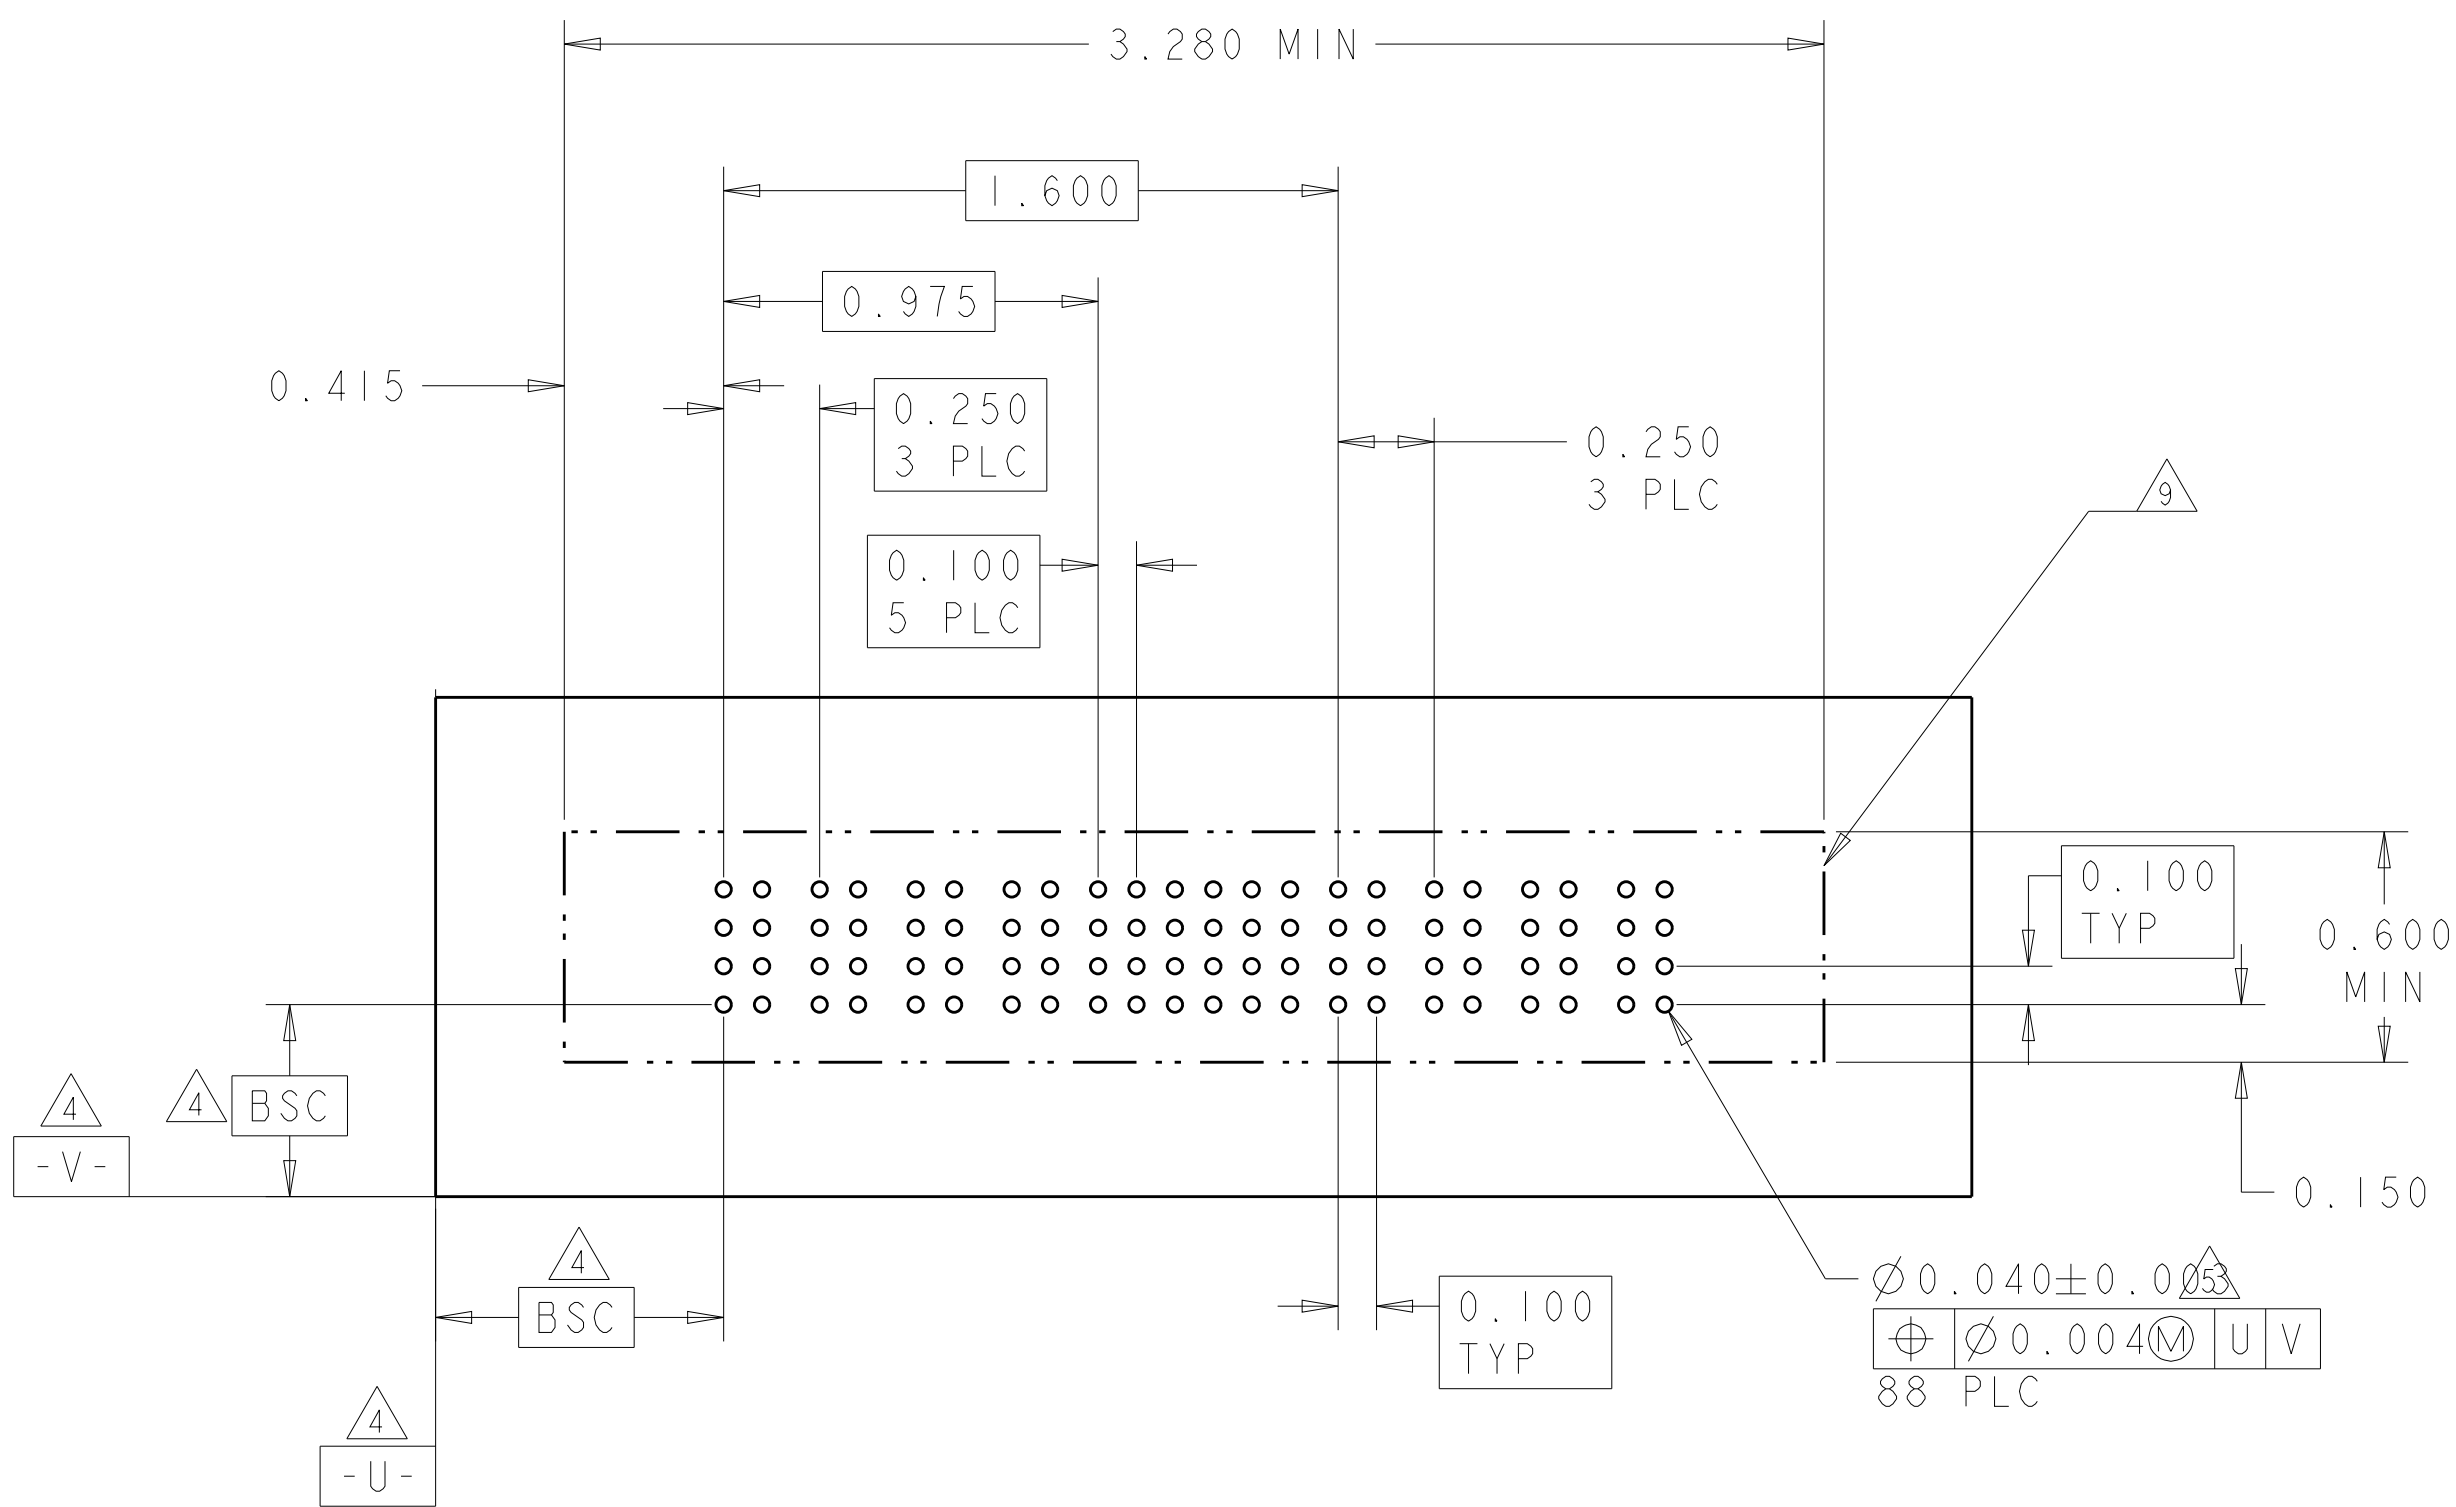4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL		POWER				
			P1	P2	P3	P4	1	2	P5	P6	P7	P8	
3-6600333-4	D C B A	 HD	 VM	 VM	 VM	 VM	EV	EV	 VM	 VM	 VM	 VM	 HD
							EV	EV					
							EV	EV					
							EV	EV					
4P + 8S + 4P													

PART NUMBER	ROWS		POWER				SIGNAL				POWER				
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	P8	
3-6600333-3	D C B A						EV	EV	EV	EV					
							EV	EV	EV	EV					
							EV	EV	EV	EV					
							EV	EV	EV	EV					
4P + 16S + 4P															

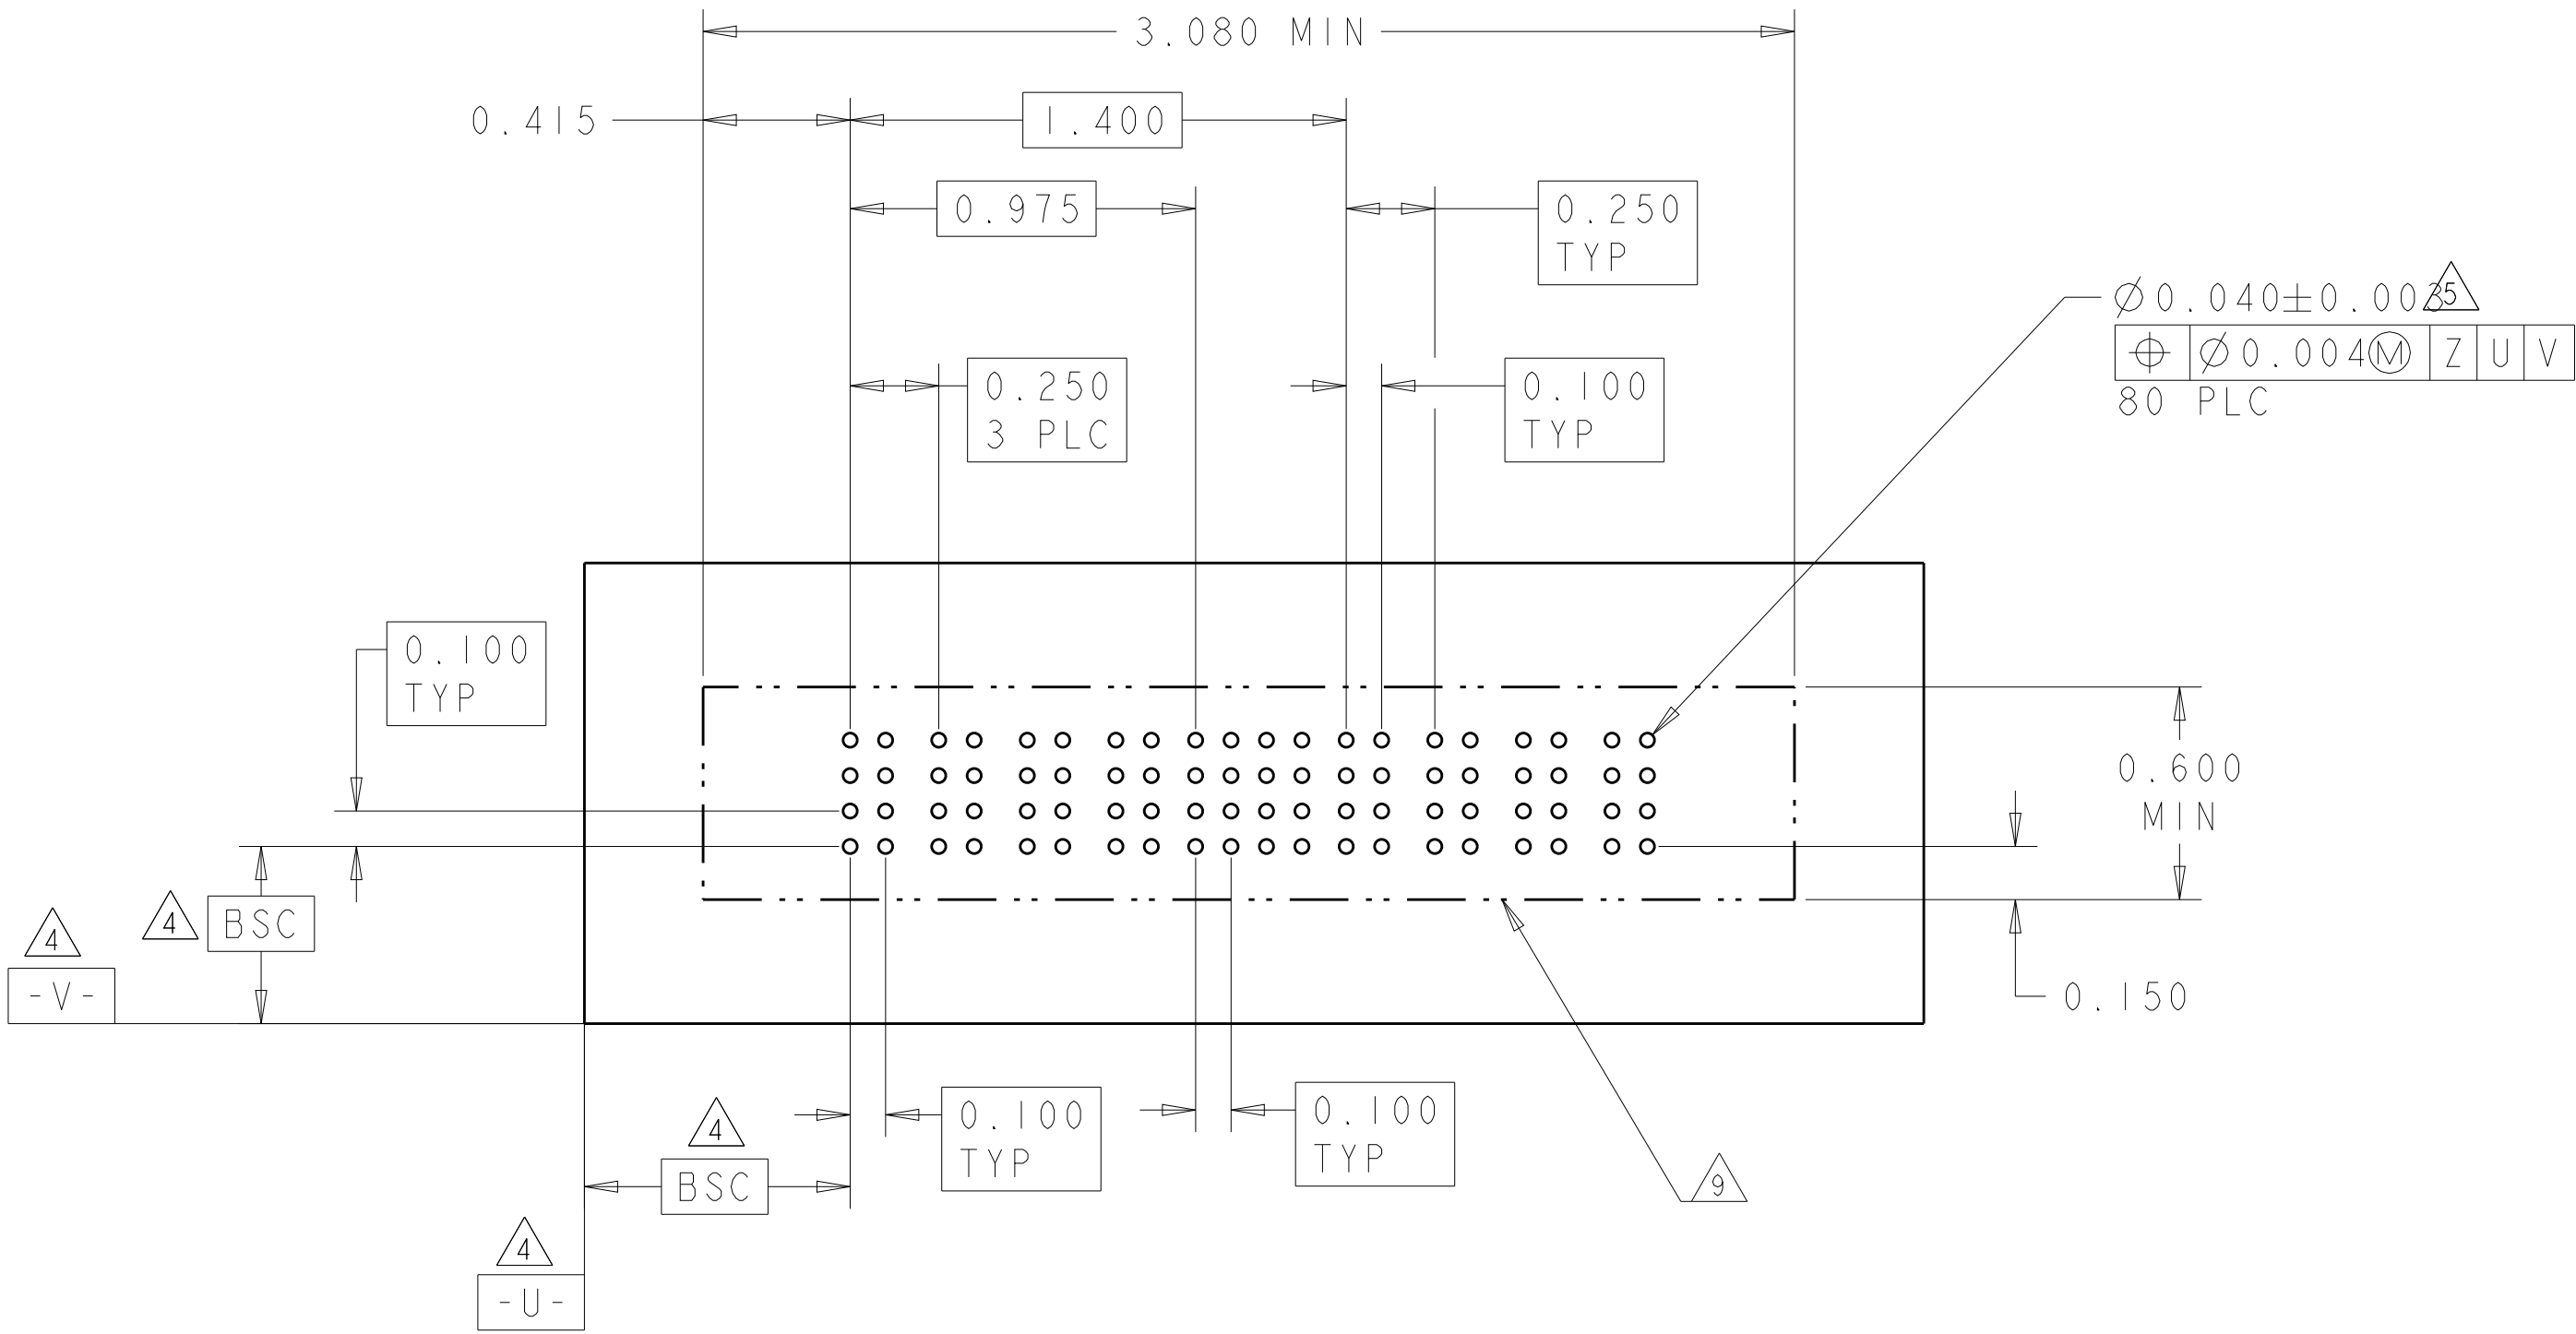
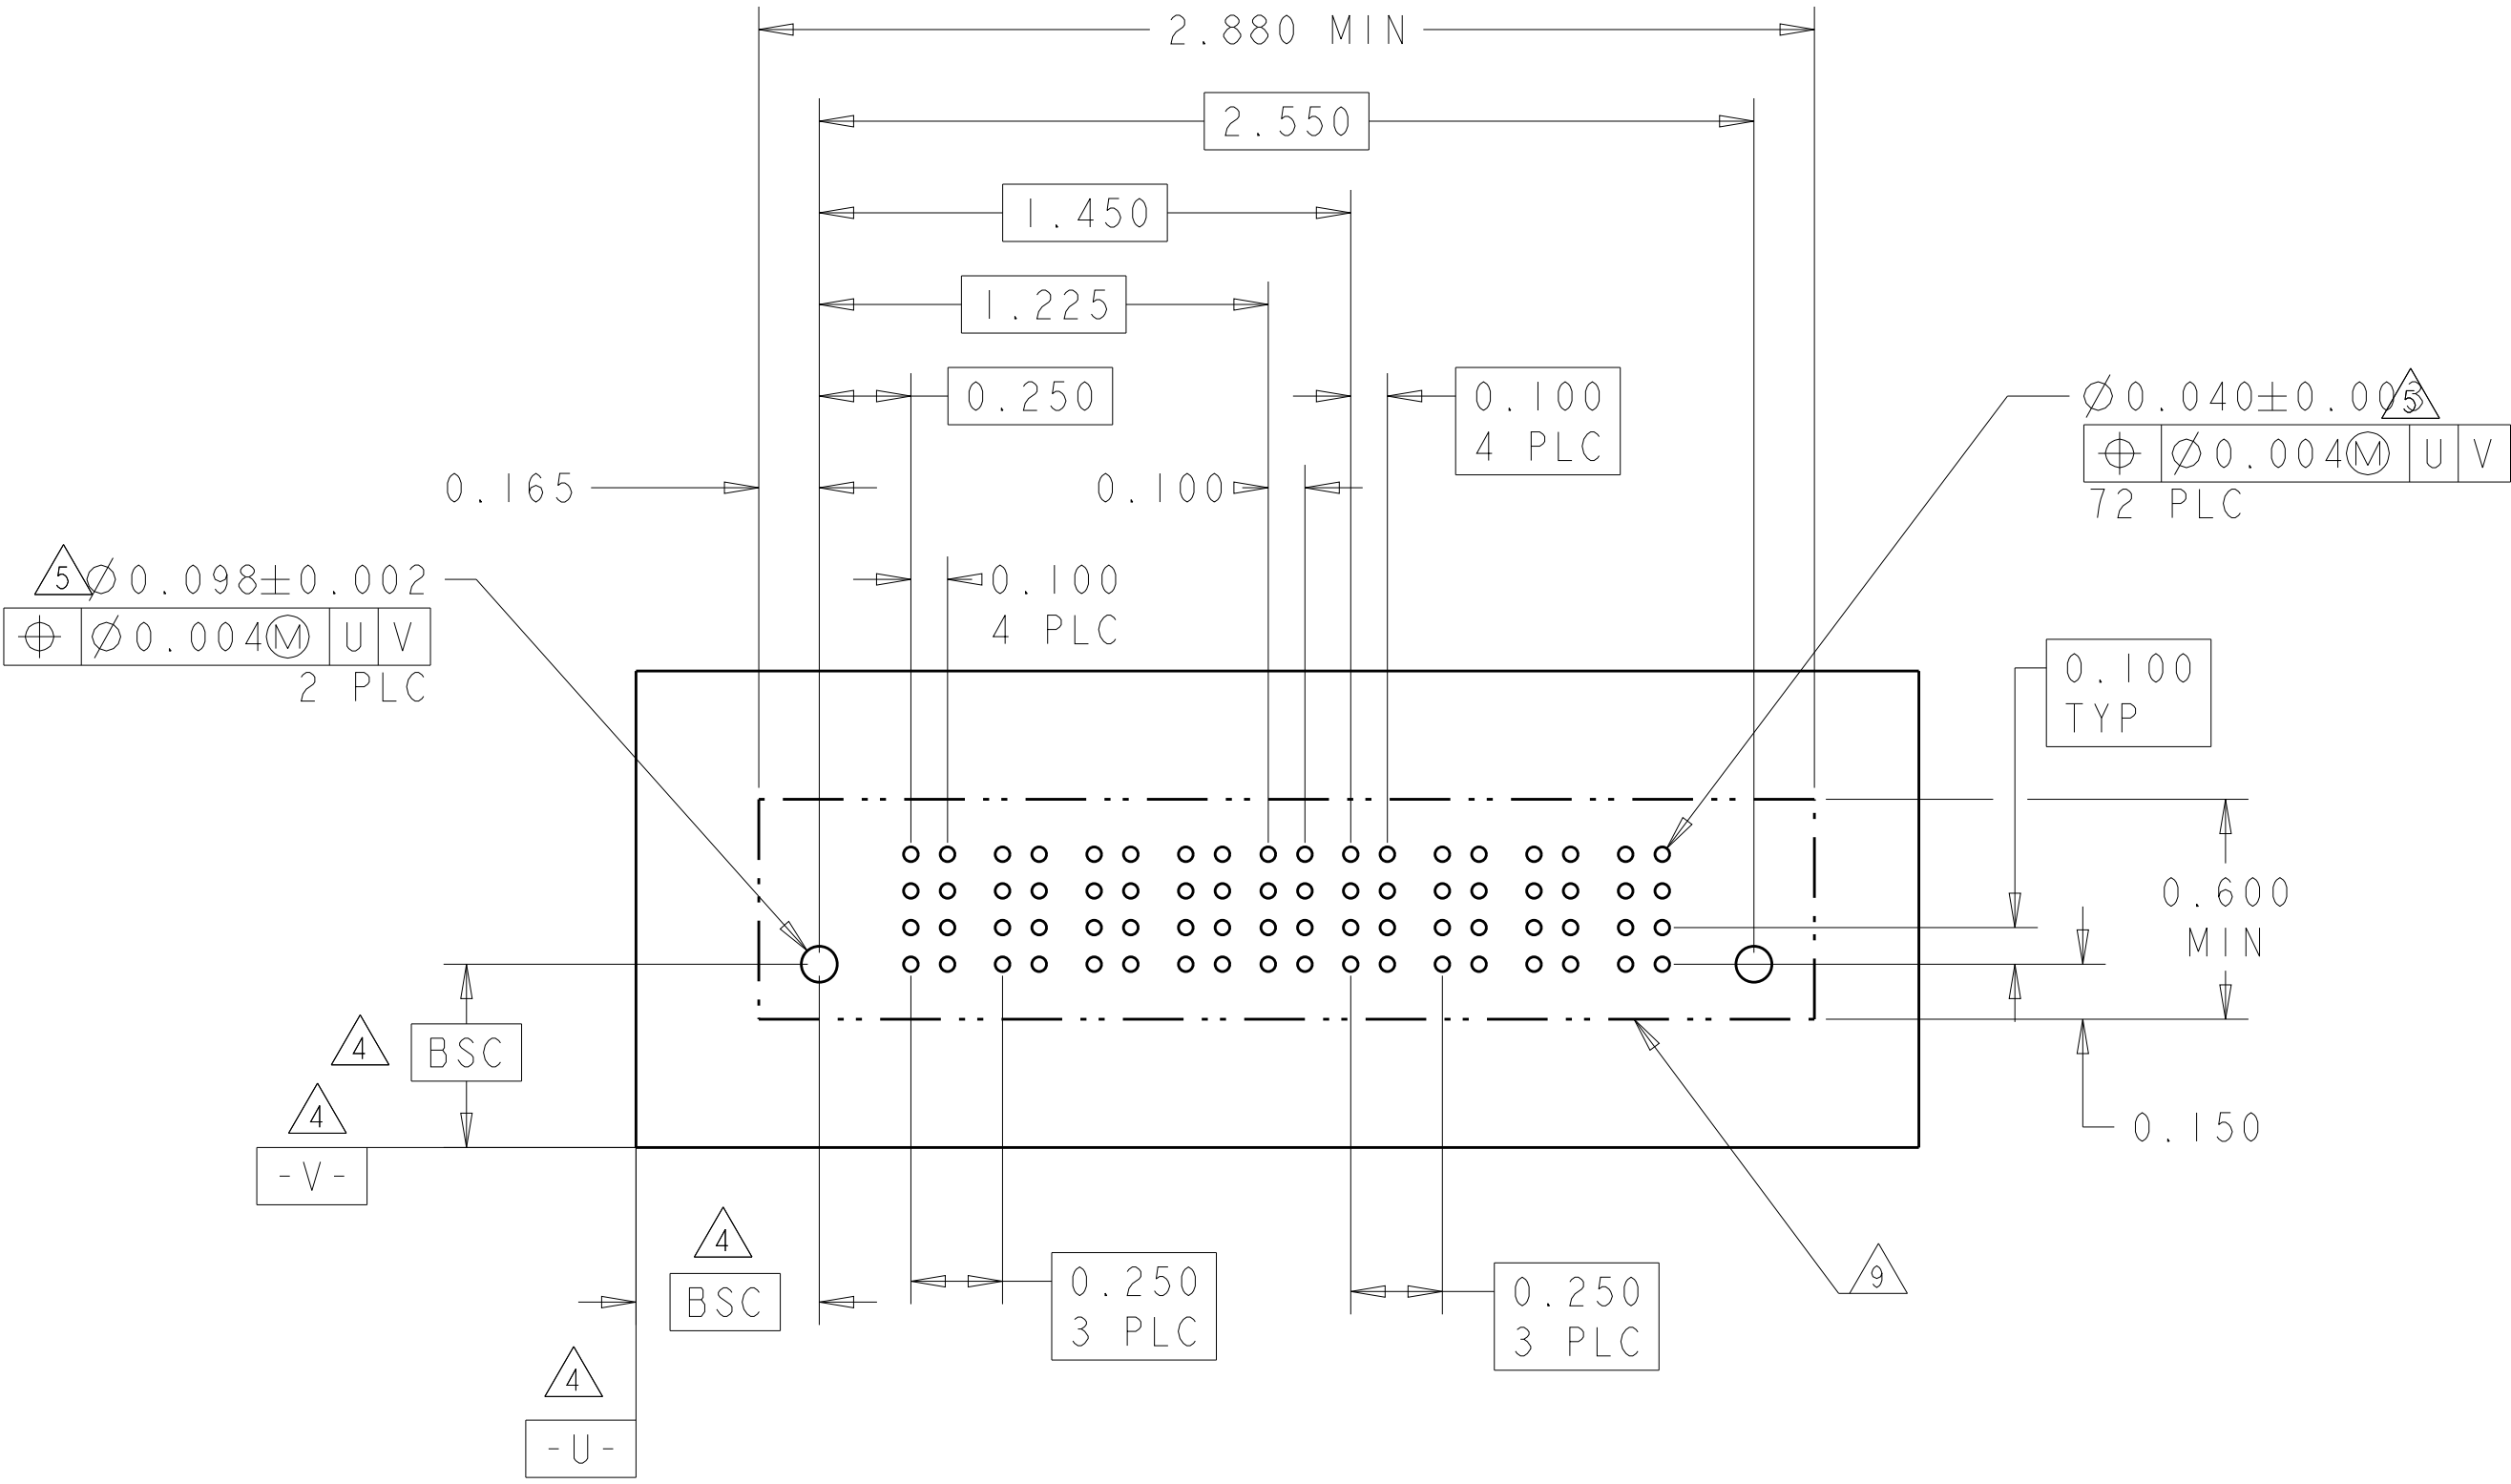


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. WHYNE 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038 WEIGHT	SIZE A100779C=6600333	
Customer Drawing		SCALE 3:1	SHEET 12	REV P7


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-5	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
3-6600333-7	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM	
	C				ES	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV			
2P+24S+2P		HD											HD

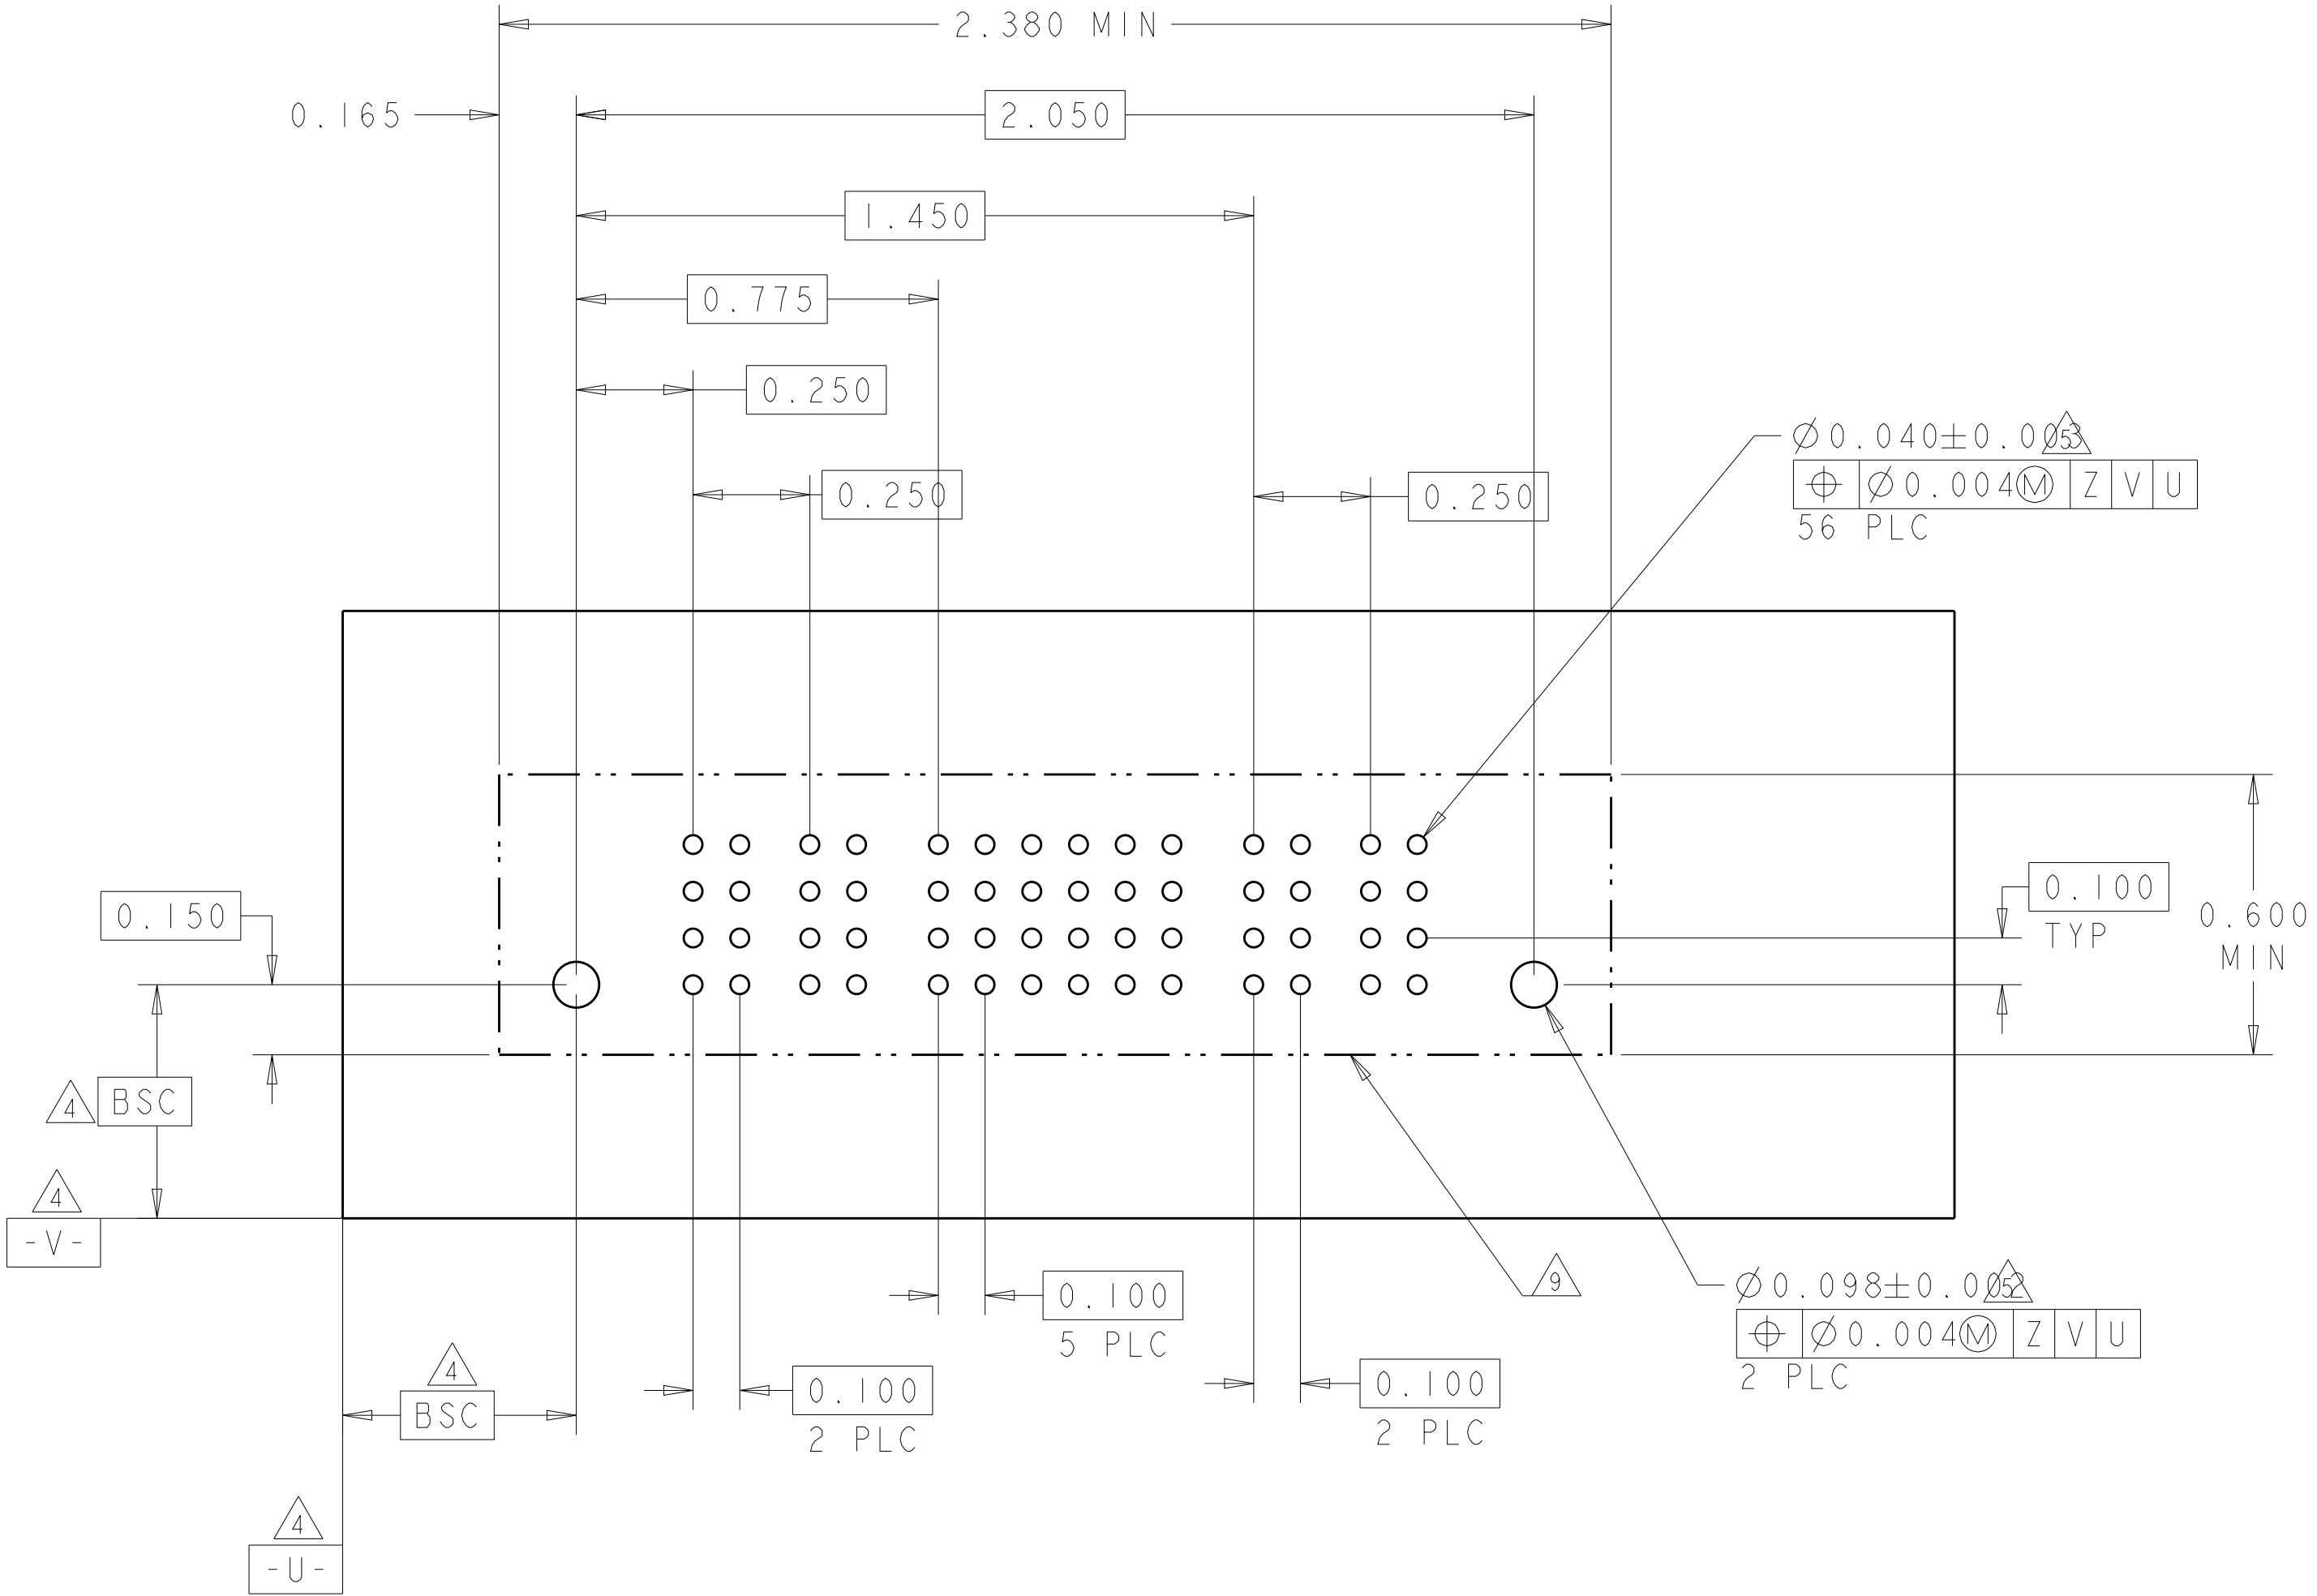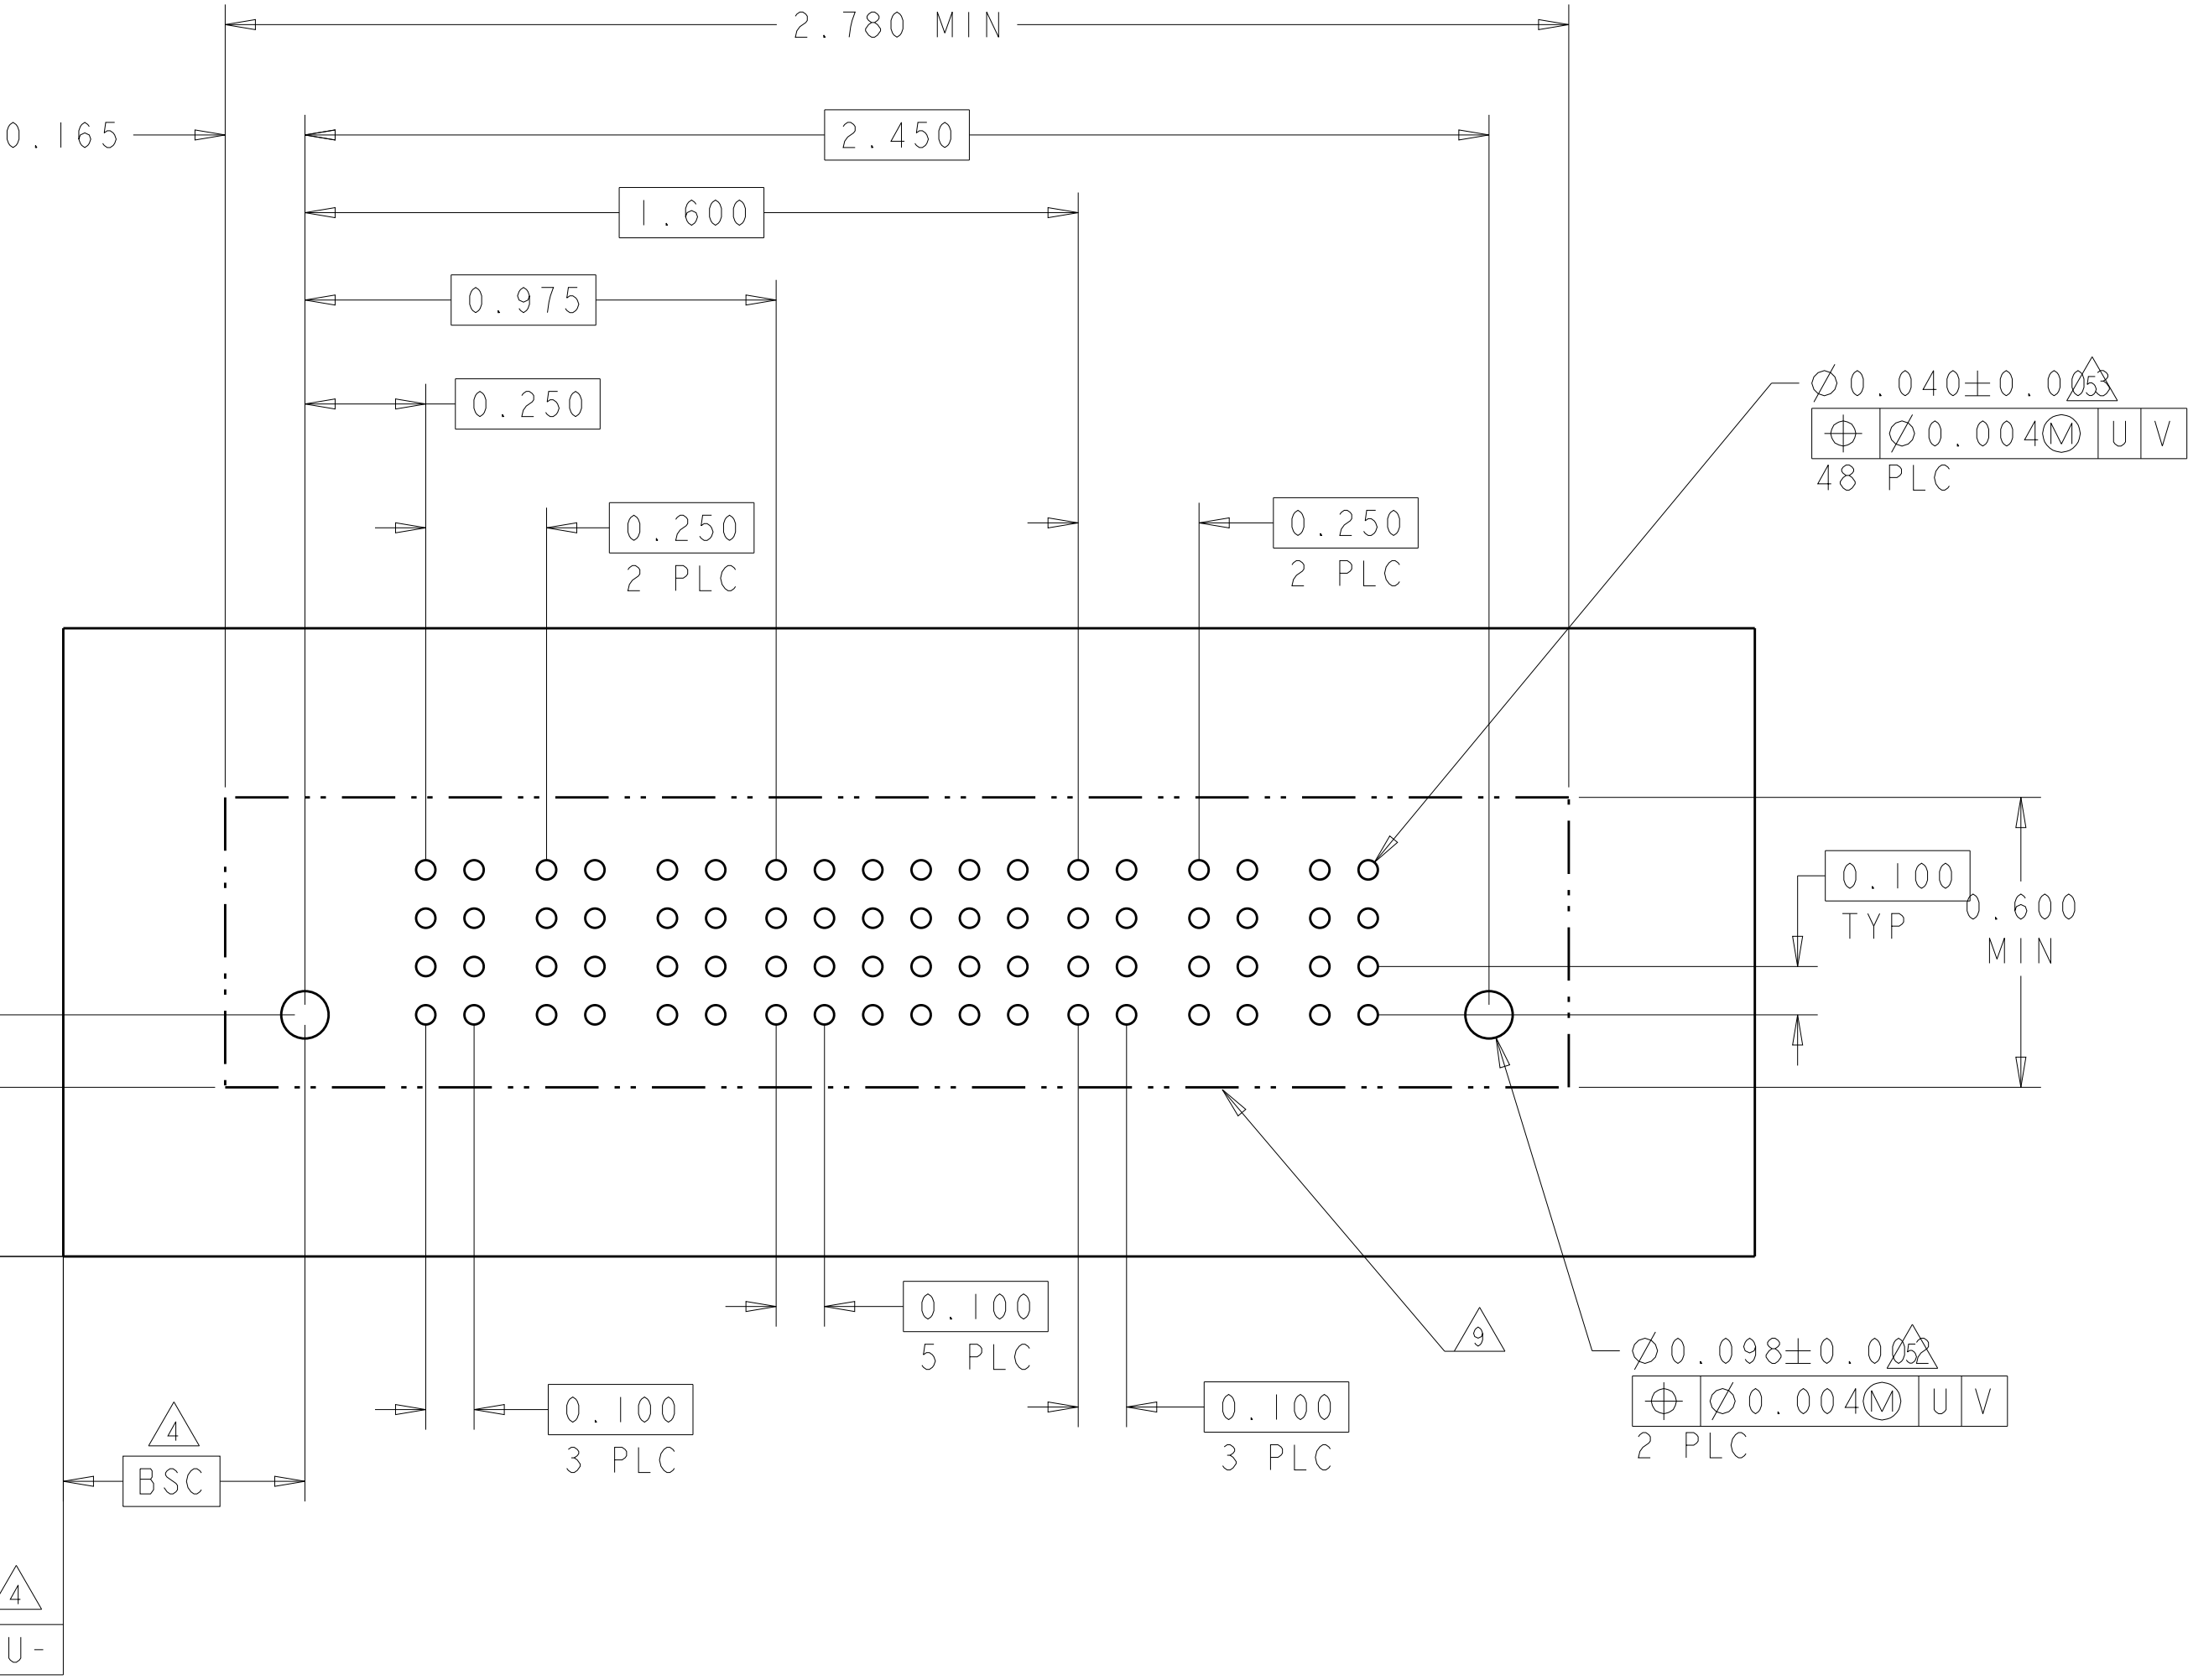


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
		CHK D. TROUT 23MAR2005		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. WHYNE 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
INCH	0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038 WEIGHT	SIZE A100779	CAGE CODE 6600333
MATERIAL		Customer Drawing	SCALE 3:1	SHEET 13 OF 22
				REV P7

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 23MAR2005 J. McCLENTON		 TE Connectivity	
DIMENSIONS:		CHK 23MAR2005 D. TROUT			
1 INCH		TOLERANCES, UNLESS SPECIFIED:		NAME	
		APPROV D. R. WHYNE 23MAR2005		VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC		SIZE CASE CODE DRAWING NO	
		108-1973		A1 00779 C-6600333	
		APPLICATION SPEC		RESTRICTED TO	
4 P LNC ±.1		114-13038		-	
4 P LNC ±.01		WEIGHT		-	
4 P LNC ±.005		Customer Drawing		SCALE 3:1 SHEET 14 OF 22 REV P	
4 P LNC ±.0020					
ANGLES					
FINISH					
MATERIAL					
-					
-					
-					

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	I	2	3	4	5	6	P4	P5	P6	
3-6600333-9	D		VM	VM	VM	E _V	E _V	E _V	E _V	E _V	E _V	VM	VM	VM	
	C					E _V	E _V	E _V	E _V	E _V	E _V				
	B					E _V	E _V	E _V	E _V	E _V	E _V				
	A					E _S	E _V	E _V	E _V	E _V	E _V				
3ACP+24S+3ACP		HD													HD

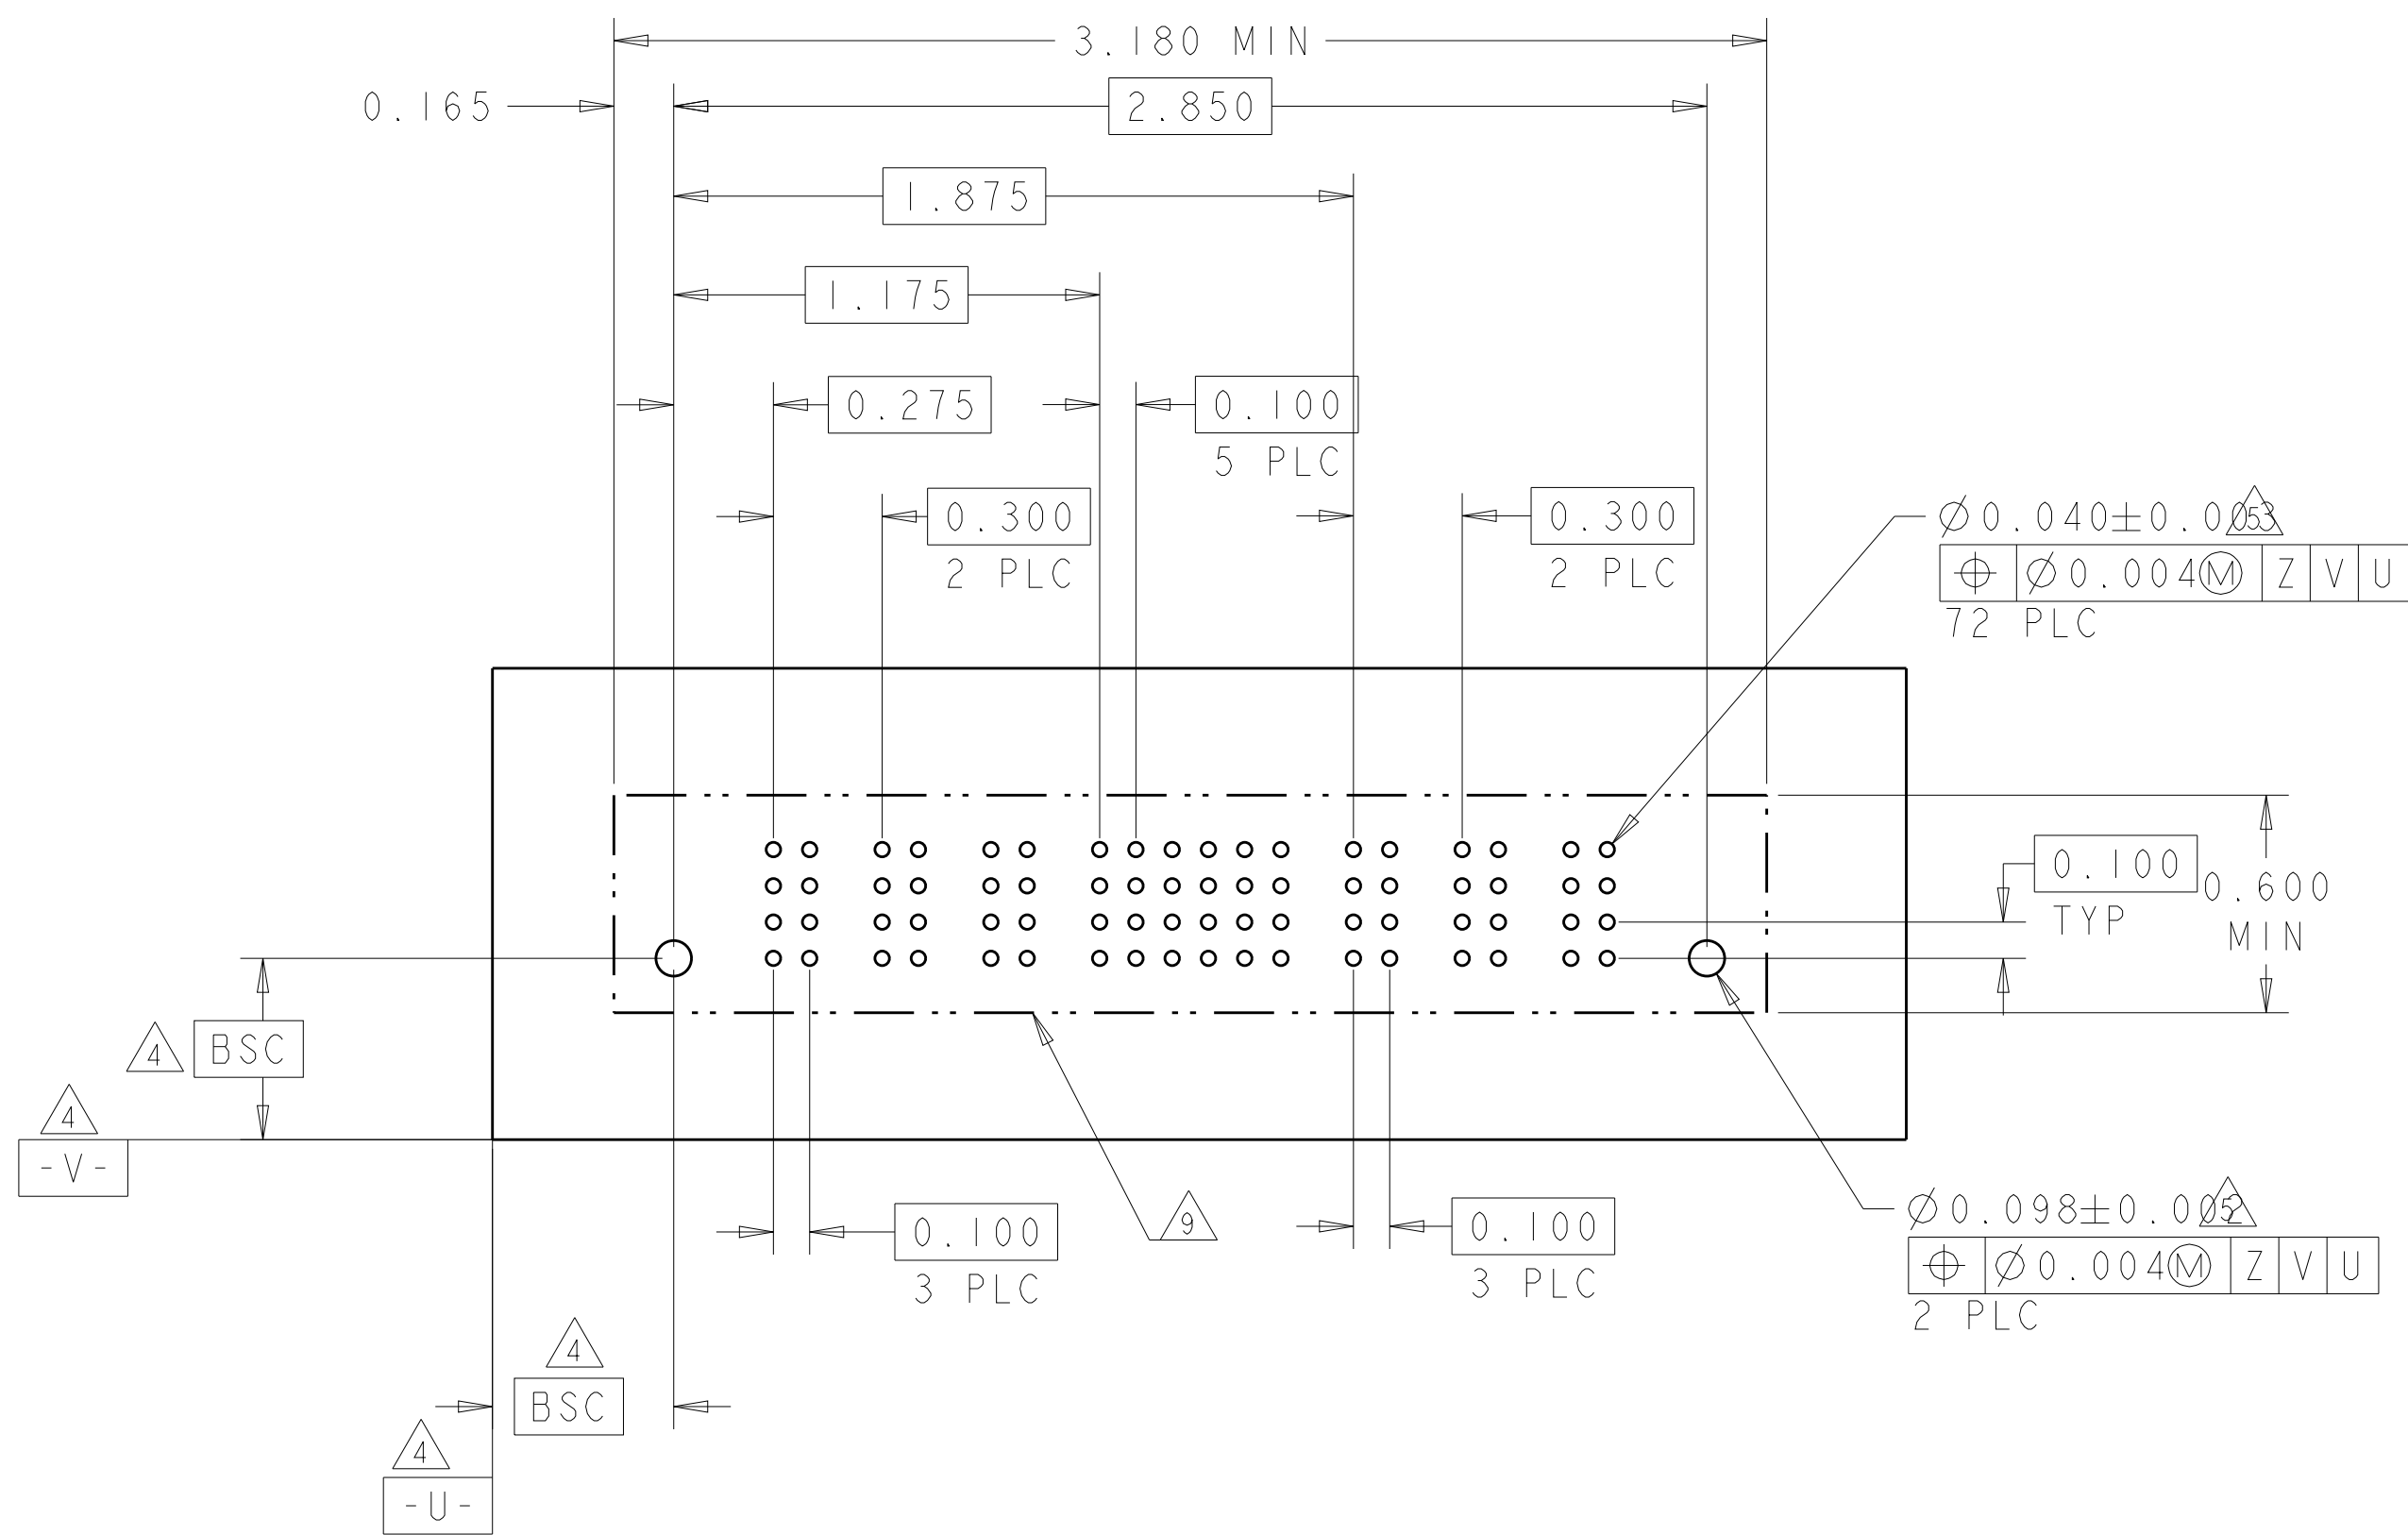4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL			POWER	
			P1	1	2	3	P2		
4-6600333-9	D		VM	ES	EV	EV	VM		
	C			EV	EV	EV			
	B			EV	EV	EV			
	A			EV	EV	EV			
1P+12S+1P		HD							HD

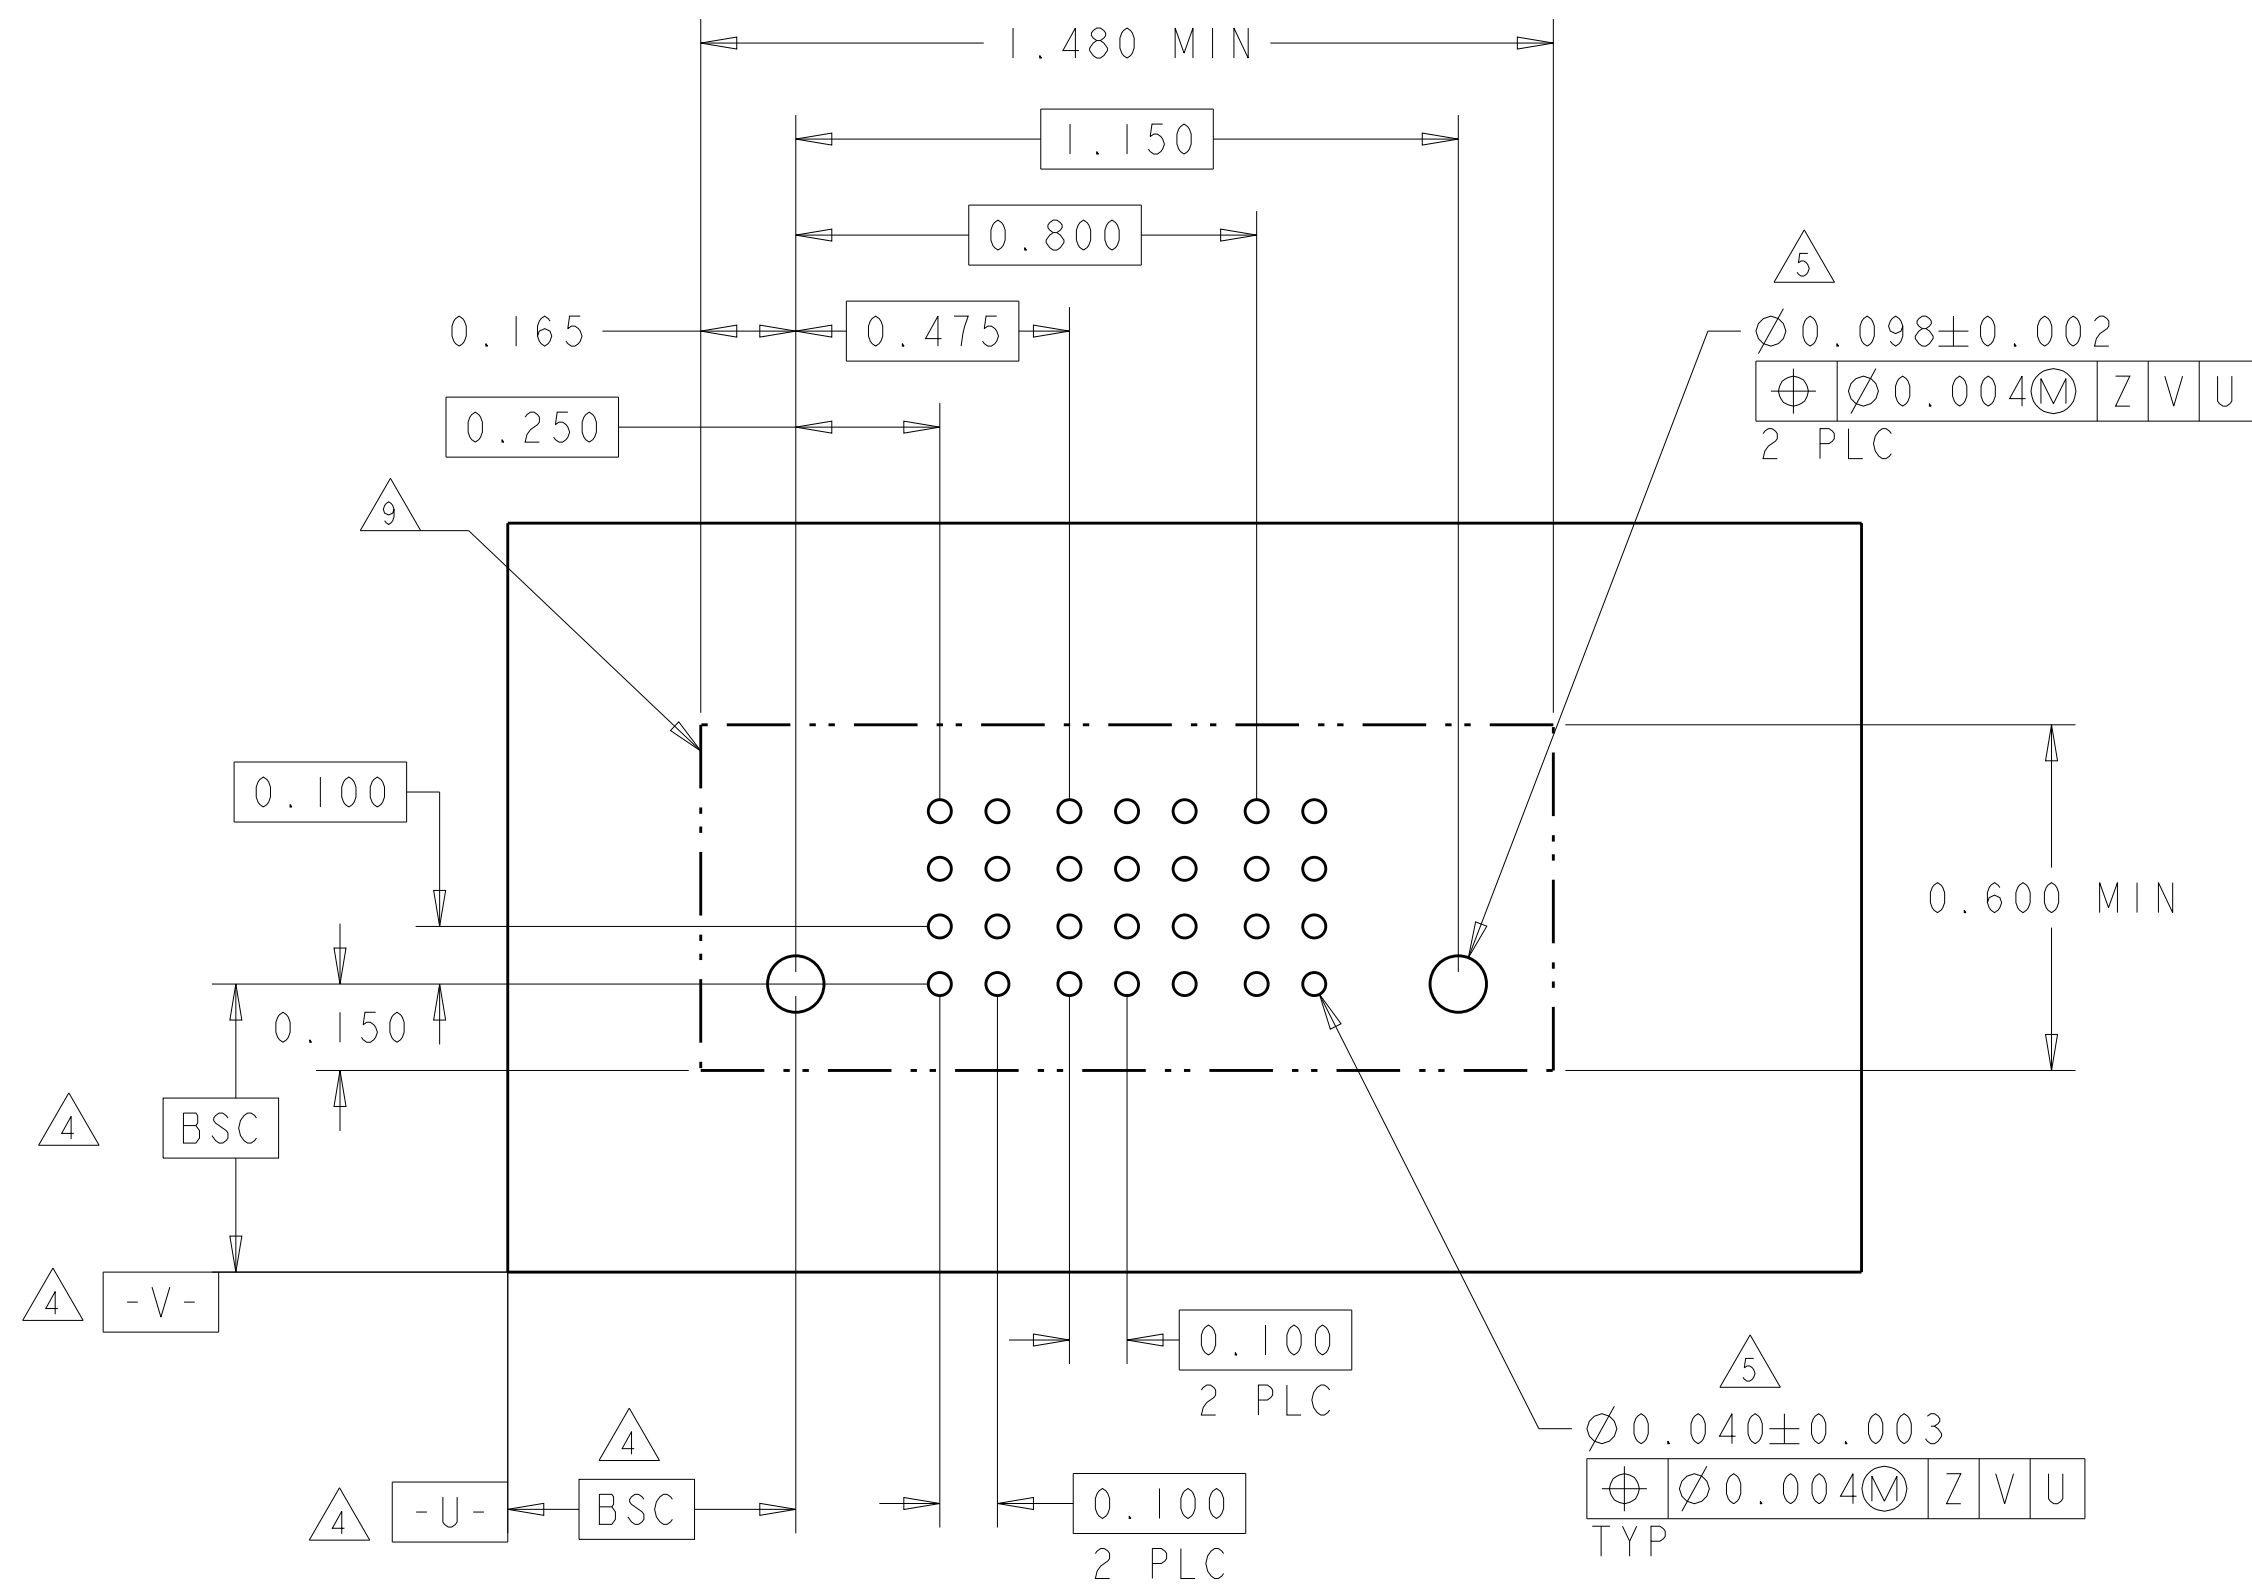
4805 (3/11)

N

4805 (3/11)


PART NUMBER	ROWS		POWER				SIGNAL			POWER				
			P1	P2	P3	P4	I	2	3	P5	P6	P7	P8	
4-6600333-6	D		VM	VM	VM	VM	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV					
	B						EV	EV	EV					
	A						EV	EV	EV					
4P + 12S + 4P		HD												HD

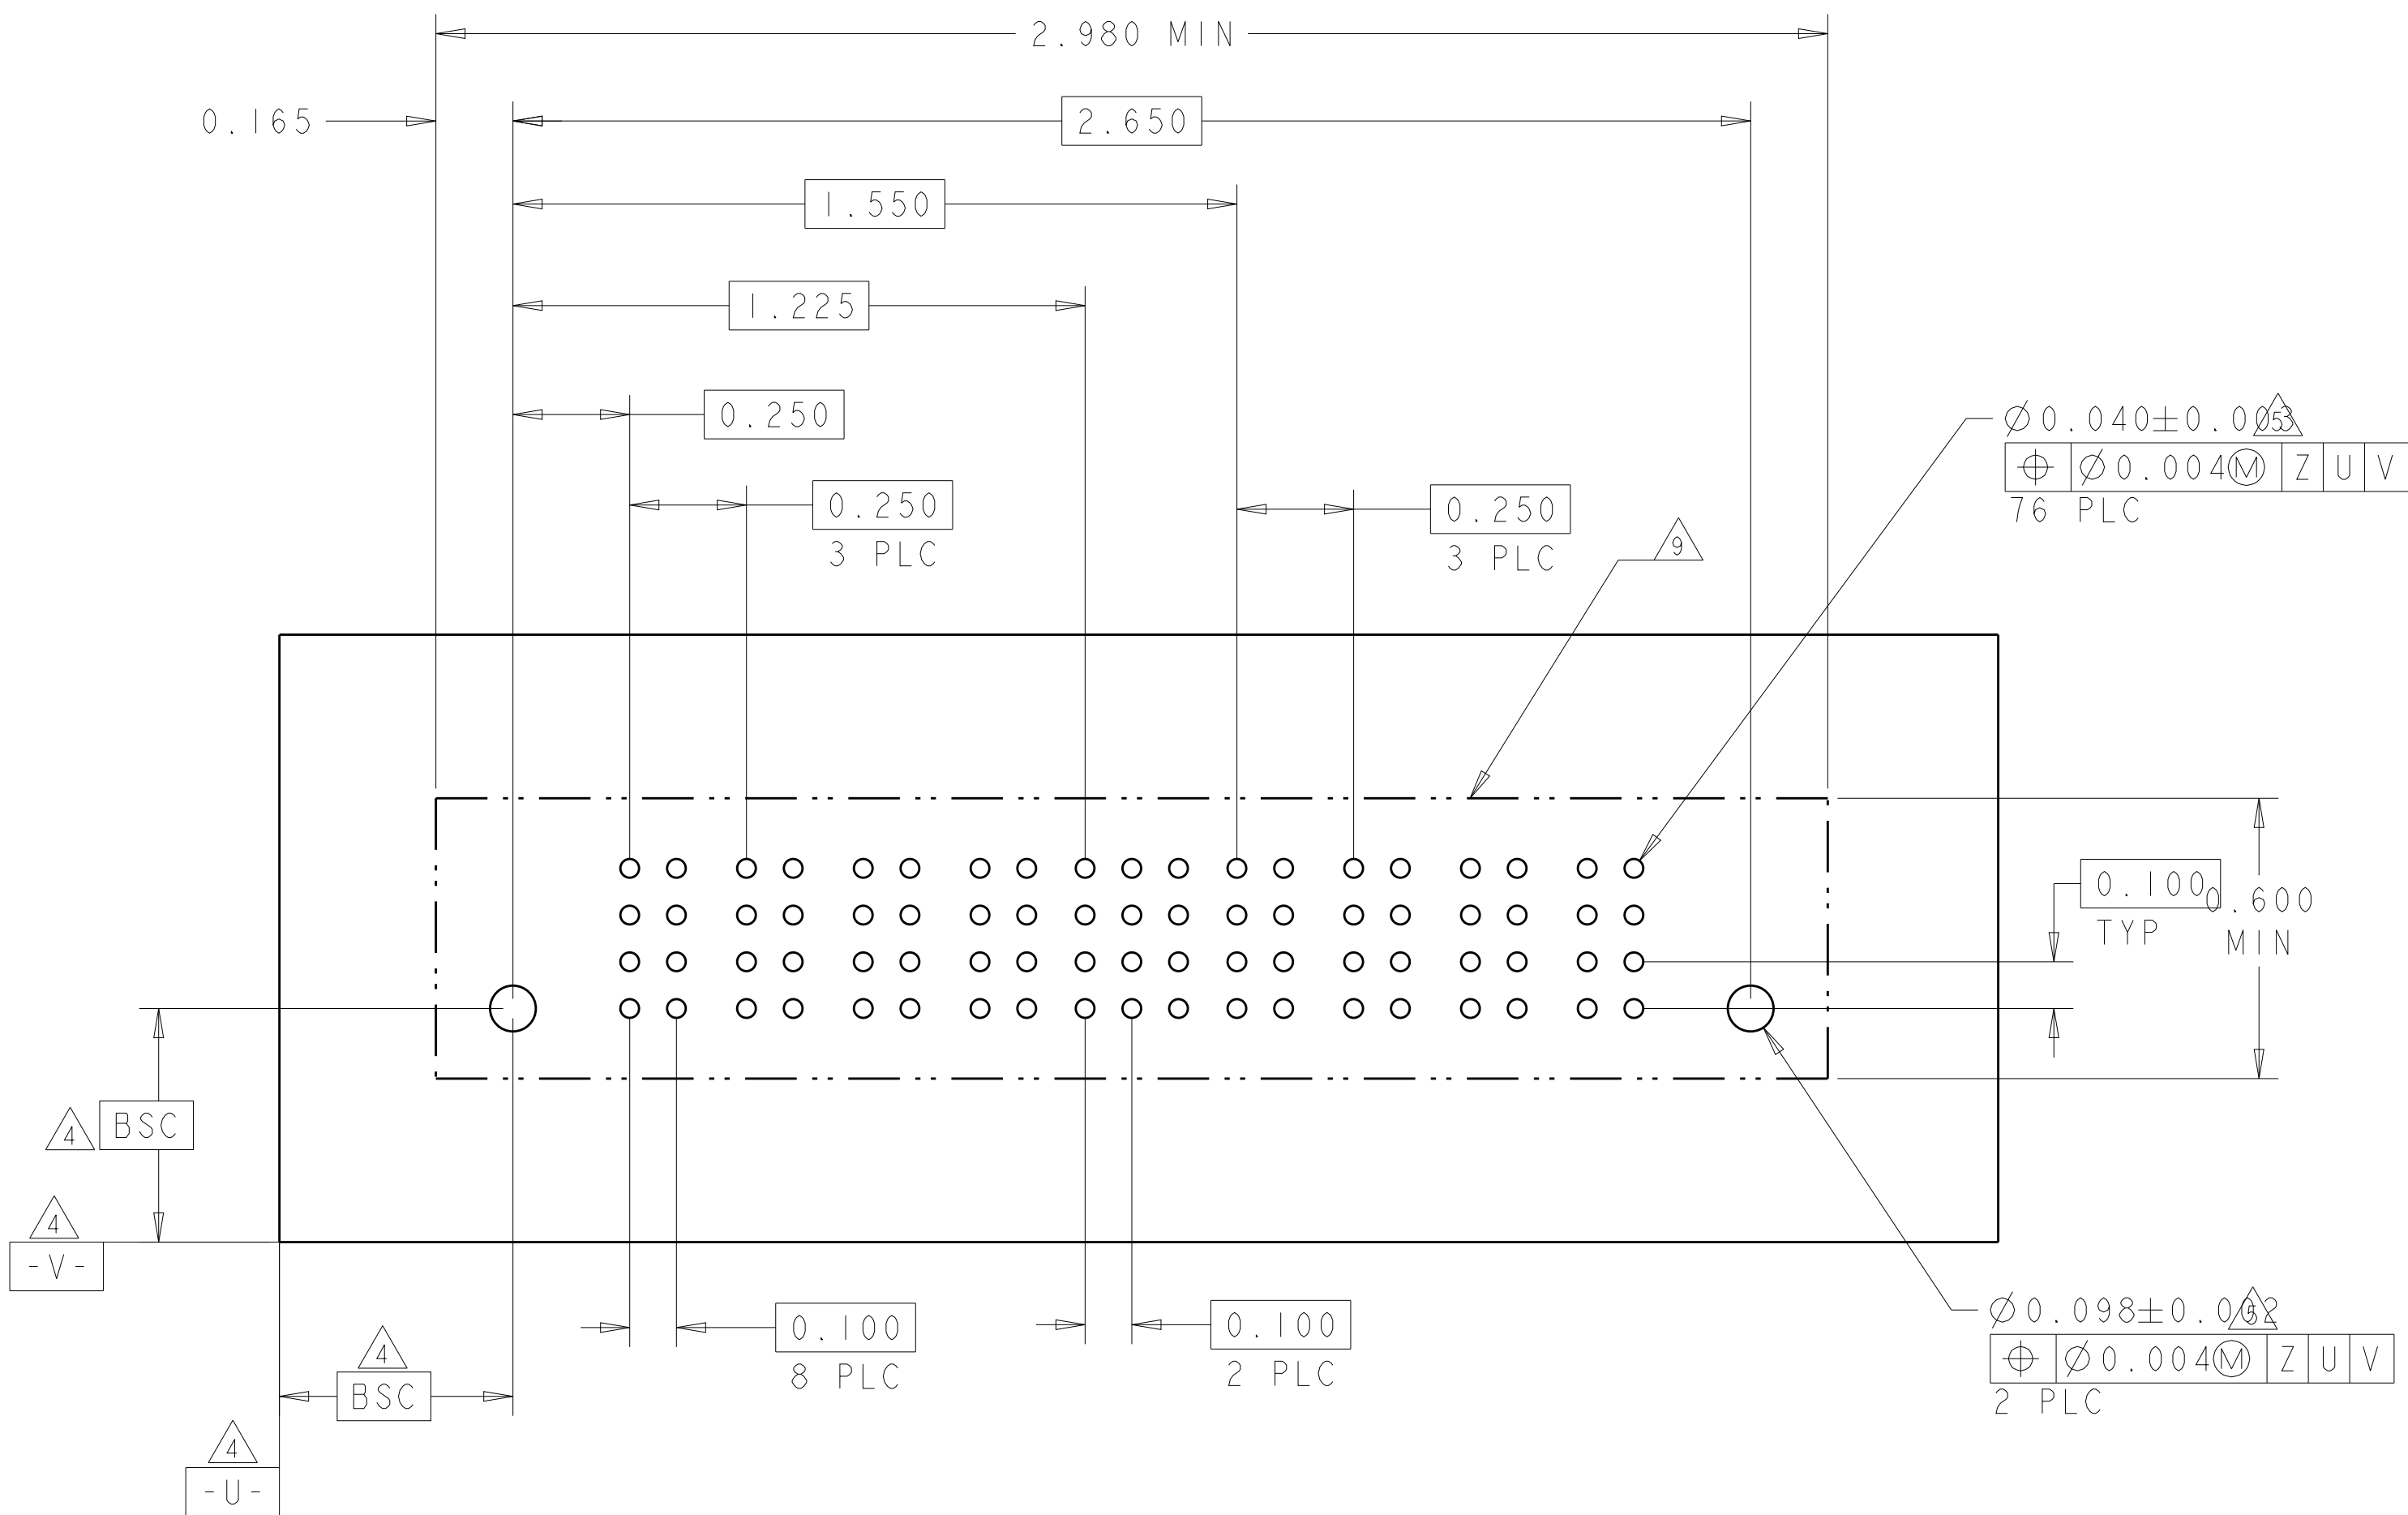4805 (3/11)

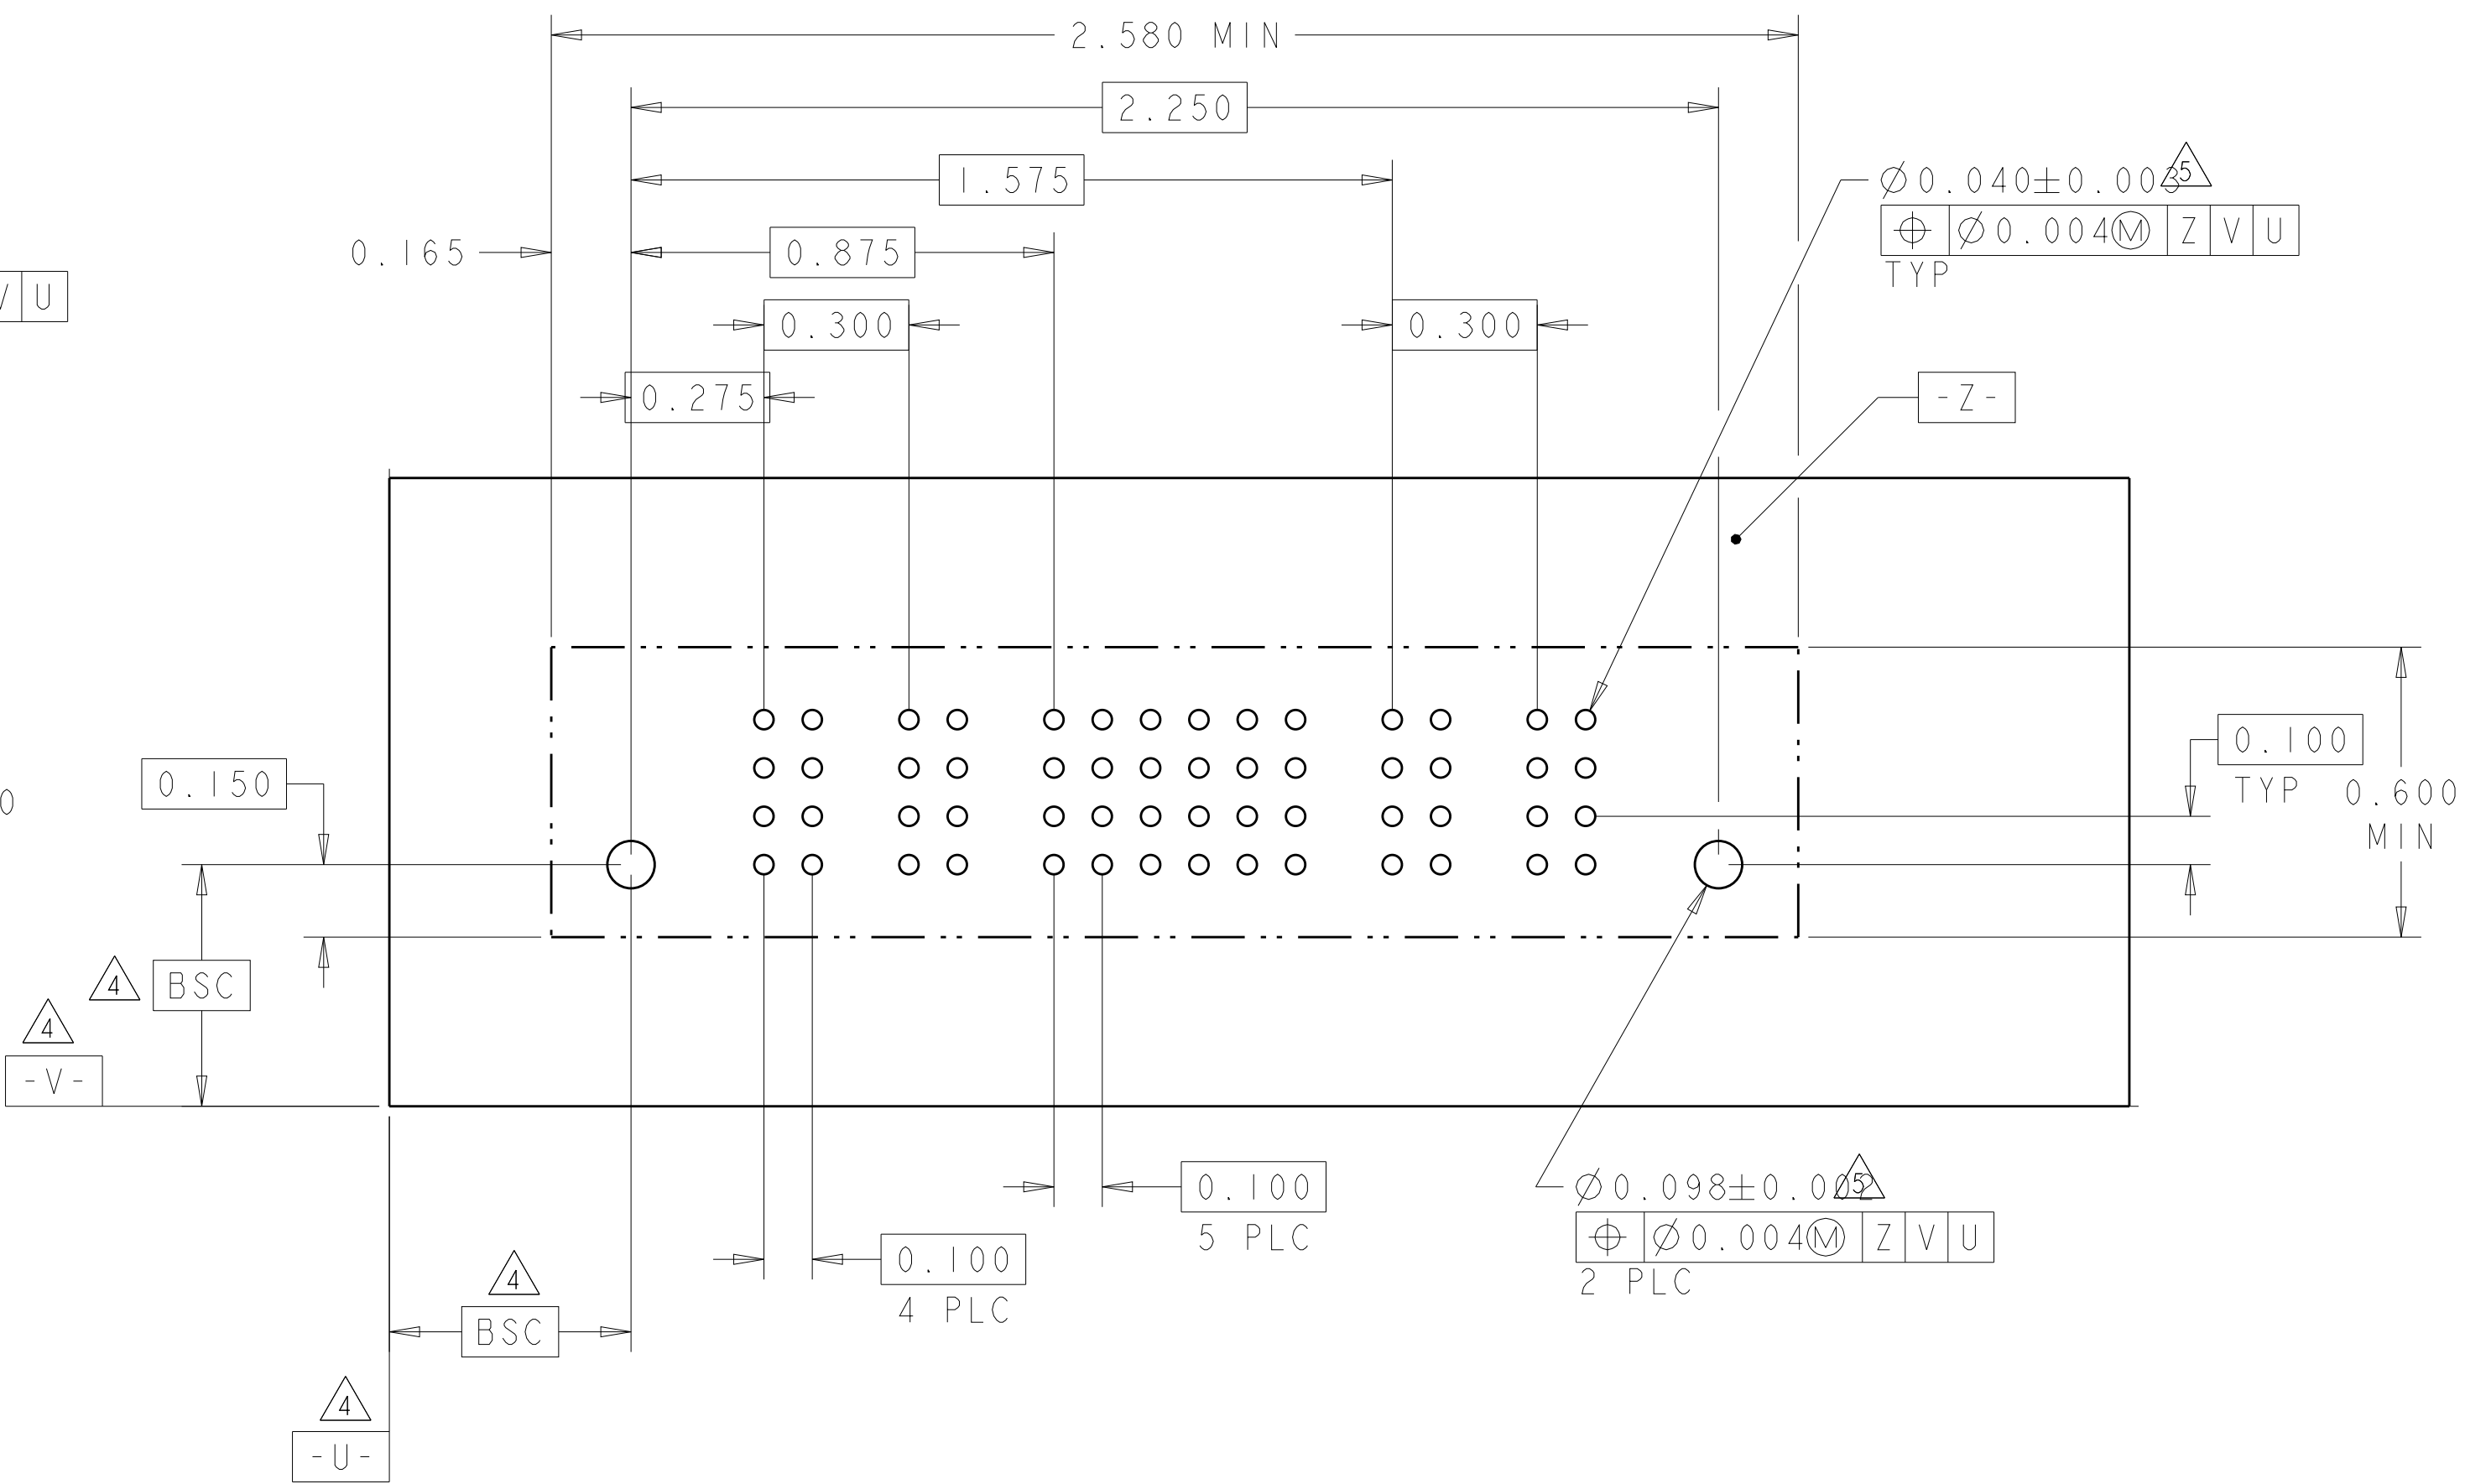[illegible]

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER						
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	P11	
4-6600333-8	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
								EV	EV	EV	EV	EV	EV							
								EV	EV	EV	EV	EV	EV							
								EV	EV	EV	EV	EV	ES							
5P + 24S + 6P																				

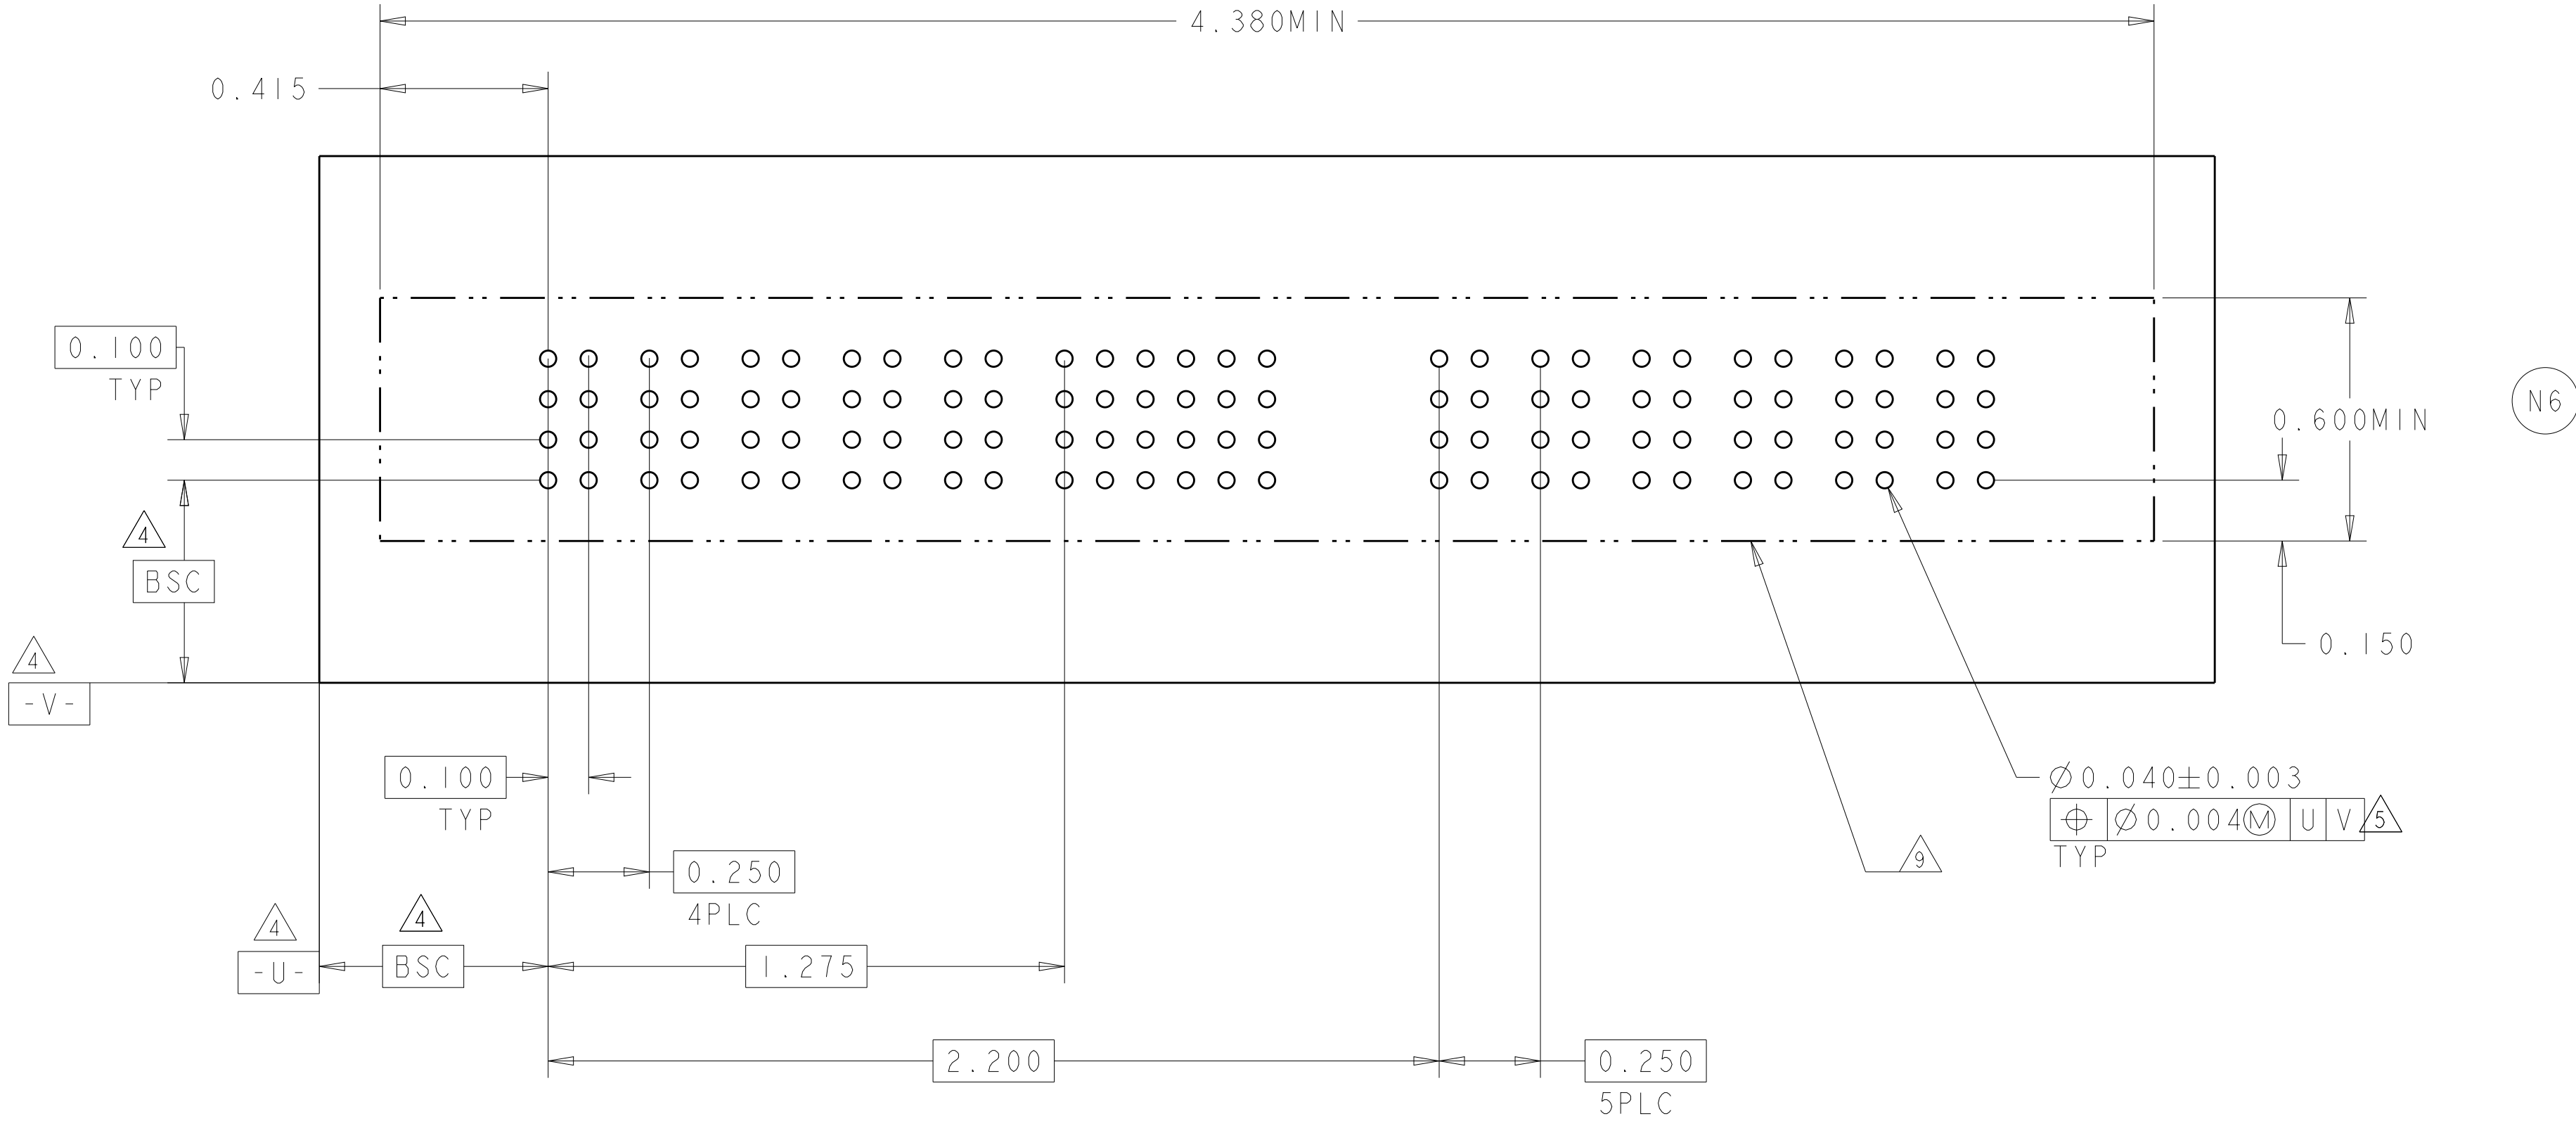

RECOMMENDED PCB LAYOUT 4-6600333-8

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

MATERIAL -

Customer Drawing

TE Connectivity

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES,
PRESS FIT, TYPE PSP
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6600333

RESTRICTED TO
-

SCALE
3:1

SHEET
20



OF
22

REV
P7

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P1	P2	1	2	3	4	5	6	P3	P4	P5	P6	
5-6600333-0	D				EV	EV	EV	EV	EV	EV					
	EV				EV	EV	EV	EV	EV						
	EV				EV	EV	EV	EV	EV						
	EV				EV	EV	EV	EV	EV						
	EV				EV	EV	EV	EV	EV						
2P + 24S + 4P															

PART NUMBER	ROWS		POWER						SIGNAL												POWER						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	7	8	9	10	11	12	P7	P8	P9	P10	P11		
5-6600333-1	D		VM	VM	VM	VM	VM	VM	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	EV	VM	VM	VM	VM	VM	
	C								ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	EV						
	B								ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	EV						
	A								ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	EV						
6P + 48S + 5P																											

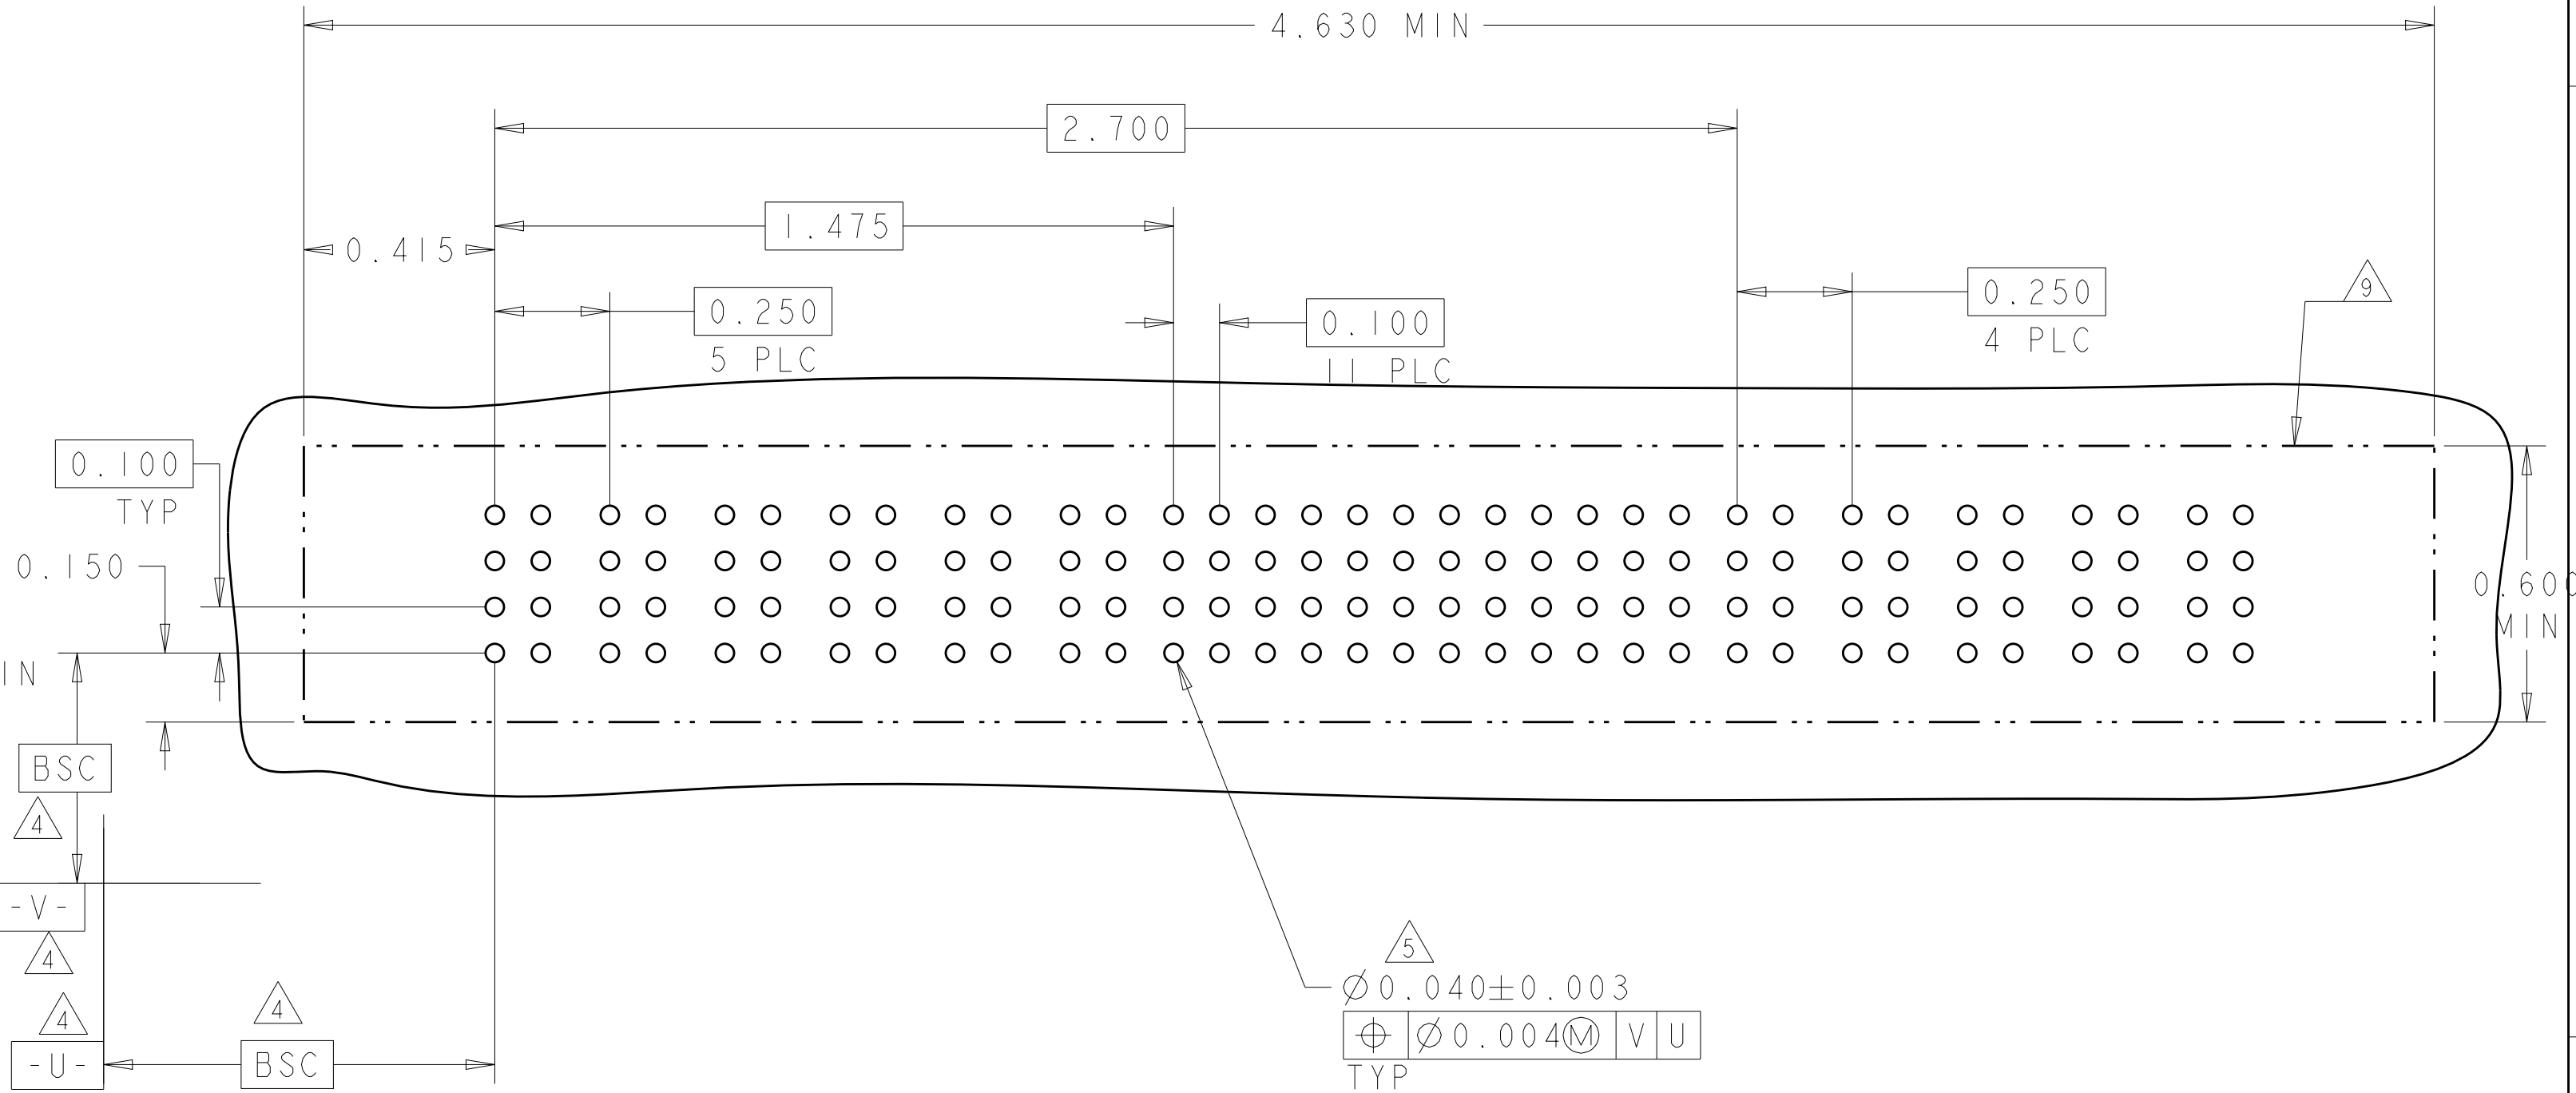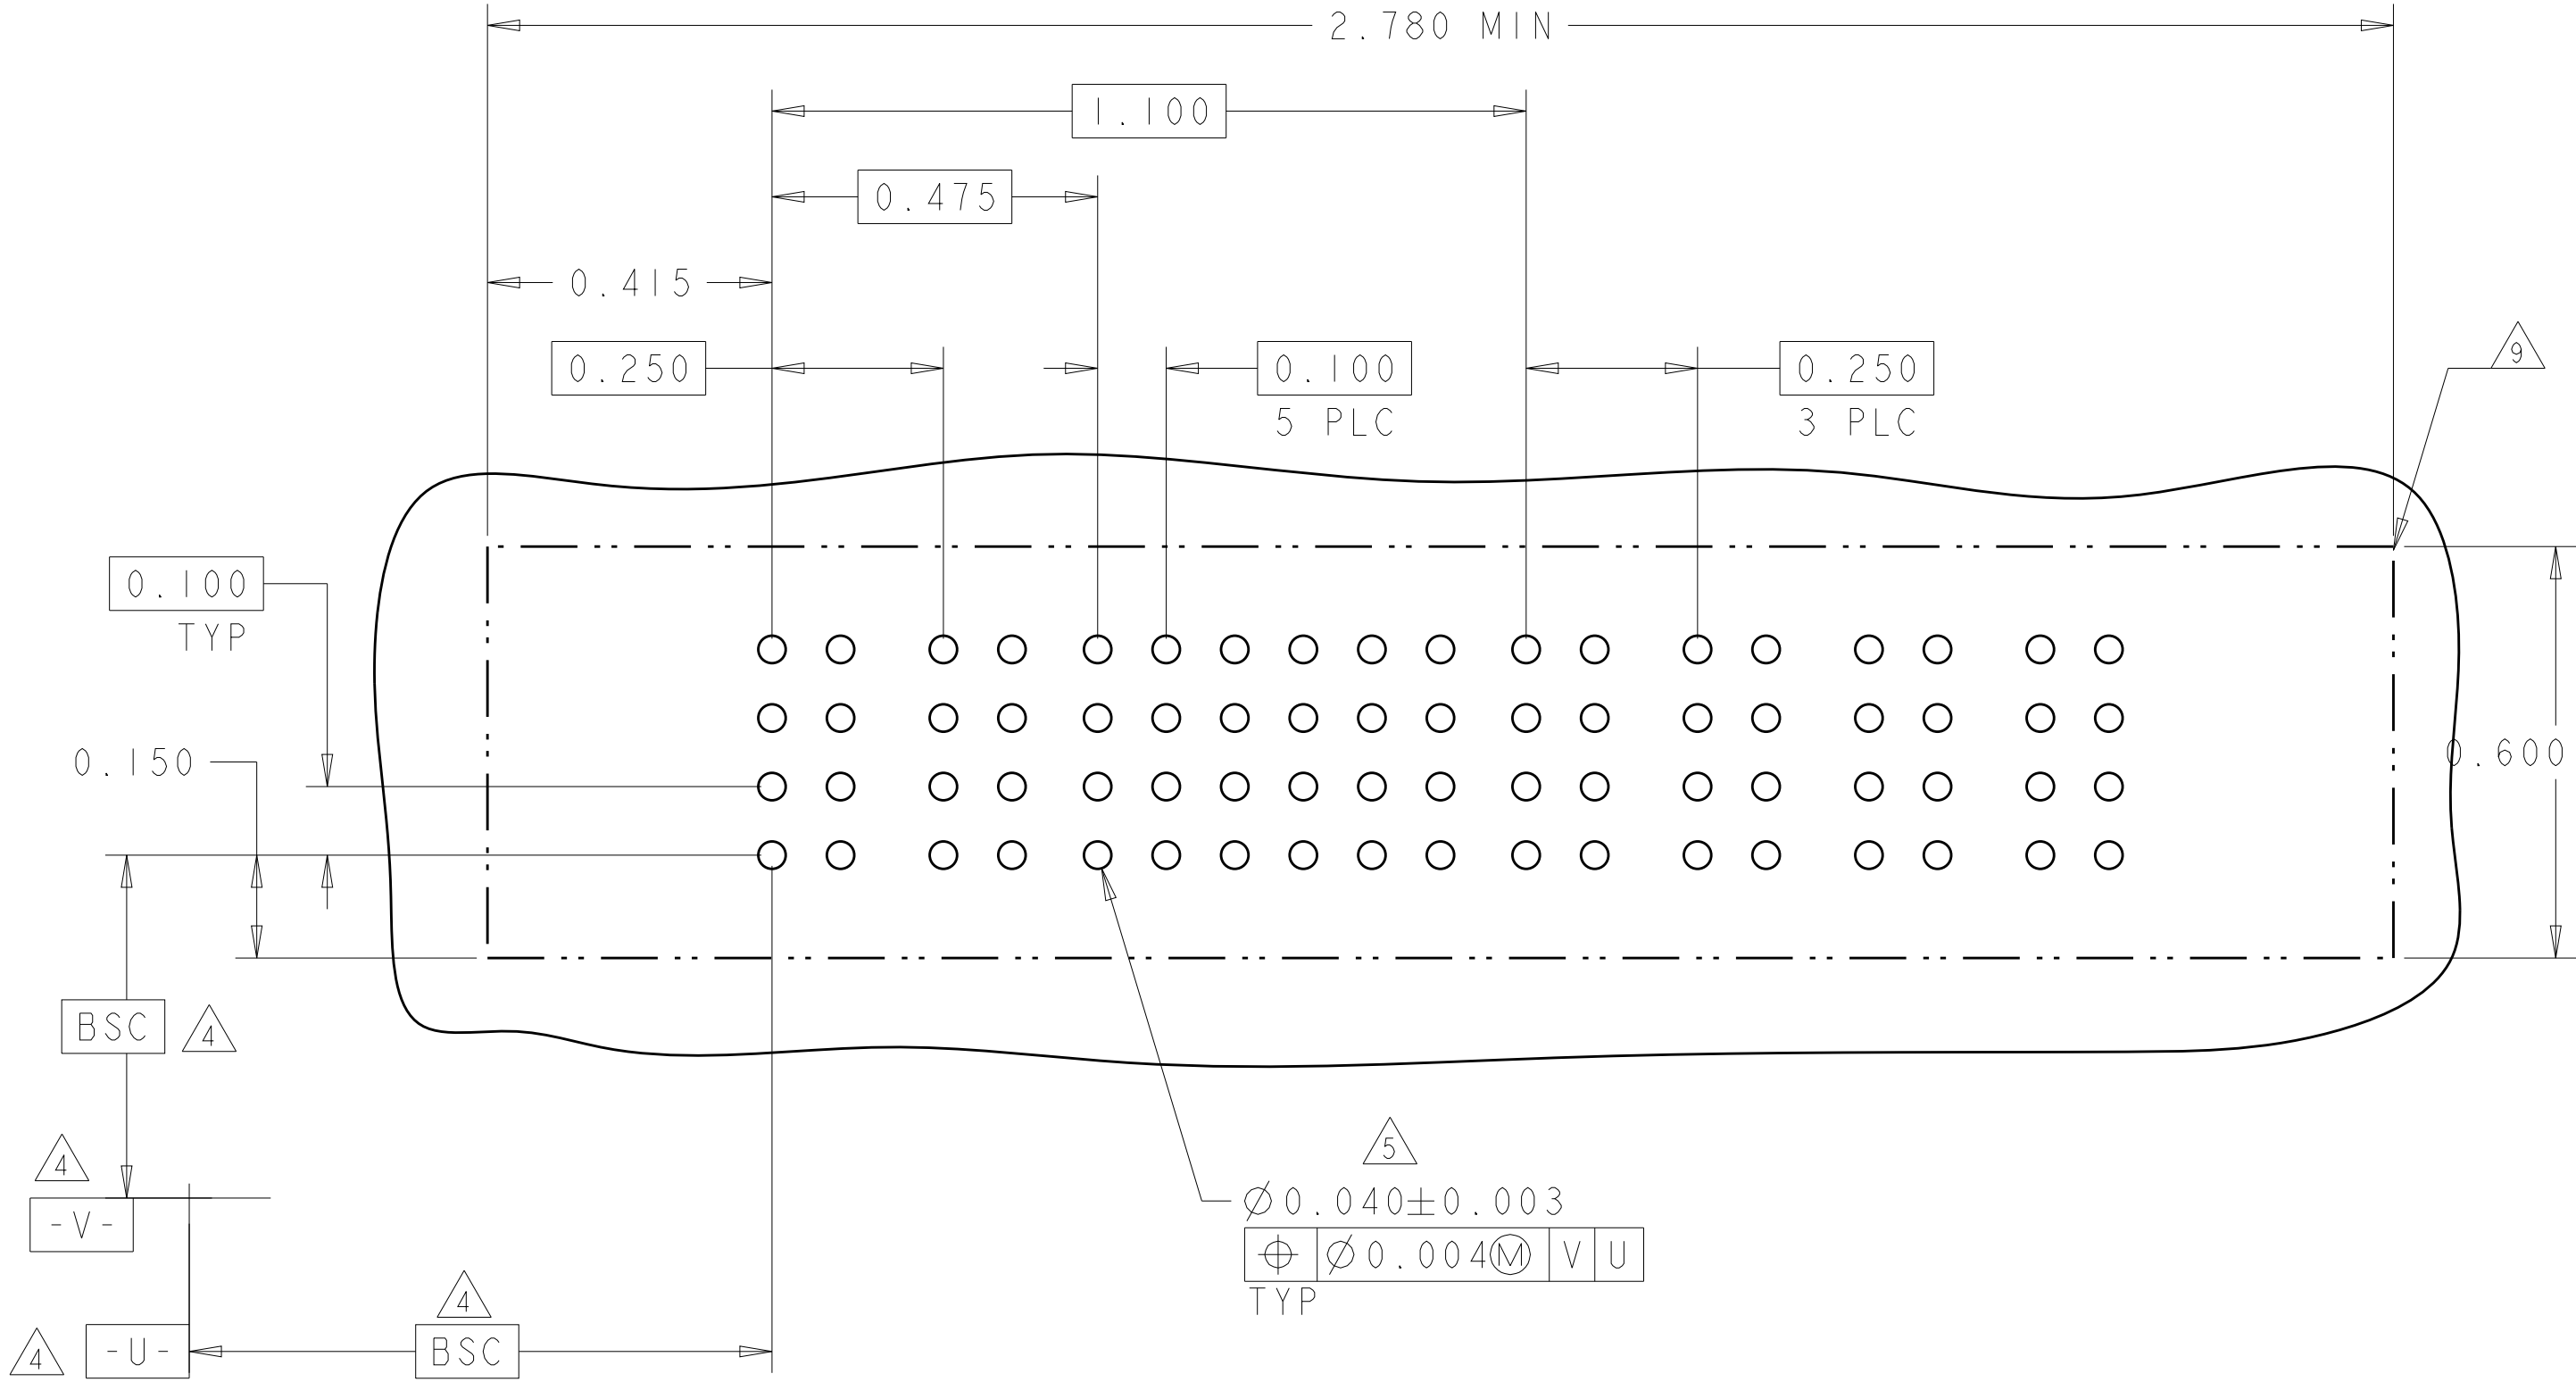

Technical drawing of a rectangular plate with a grid of holes. The drawing includes dimensions: overall width 2.880 MIN, overall height 0.600 MIN, and various hole spacing dimensions (0.415, 0.475, 0.250, 1.700, 0.100). A feature control frame for a hole specifies a diameter of 0.040 ± 0.003, a circular runout tolerance of 0.004 M, and material removal (V) and secondary operation (U). A surface texture symbol is also present.

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9