





Super Junction MOSFET

- Ultra Low $R_{DS(ON)}$
- Low Miller Capacitance
- Ultra Low Gate Charge, Q_g
- Avalanche Energy Rated
- Extreme dv/dt Rated
- Popular TO-247 or Surface Mount D³ package.



MAXIMUM RATINGS

All Ratings per die: $T_C = 25^\circ\text{C}$ unless otherwise specified.

| Symbol | Parameter | APT77N60B_SC6 | UNIT |
|----------------|--|---------------|------------------|
| V_{DSS} | Drain-Source Voltage | 600 | Volts |
| I_D | Continuous Drain Current @ $T_C = 25^\circ\text{C}$ | 77 | Amps |
| | Continuous Drain Current @ $T_C = 100^\circ\text{C}$ | 49 | |
| I_{DM} | Pulsed Drain Current ¹ | 272 | |
| V_{GS} | Gate-Source Voltage Continuous | ± 20 | Volts |
| P_D | Total Power Dissipation @ $T_C = 25^\circ\text{C}$ | 481 | Watts |
| T_J, T_{STG} | Operating and Storage Junction Temperature Range | - 55 to 150 | $^\circ\text{C}$ |
| T_L | Lead Temperature: 0.063" from Case for 10 Sec. | 300 | |
| I_{AR} | Avalanche Current ² | 13.4 | Amps |
| E_{AR} | Repetitive Avalanche Energy ² ($I_D = 13.4\text{A}, V_{DD} = 50\text{V}$) | 2.96 | mJ |
| E_{AS} | Single Pulse Avalanche Energy ($I_D = 13.4\text{A}, V_{DD} = 50\text{V}$) | 1954 | |

STATIC ELECTRICAL CHARACTERISTICS

| Symbol | Characteristic / Test Conditions | MIN | TYP | MAX | UNIT |
|--------------|---|-----|------|-----------|---------------|
| $BV_{(DSS)}$ | Drain-Source Breakdown Voltage ($V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$) | 600 | | | Volts |
| $R_{DS(on)}$ | Drain-Source On-State Resistance ³ ($V_{GS} = 10\text{V}, I_D = 44.4\text{A}$) | | .037 | .041 | Ohms |
| I_{DSS} | Zero Gate Voltage Drain Current ($V_{DS} = V_{DSS}, V_{GS} = 0\text{V}, T_C = 25^\circ\text{C}$) | | | 25 | μA |
| | Zero Gate Voltage Drain Current ($V_{DS} = V_{DSS}, V_{GS} = 0\text{V}, T_C = 150^\circ\text{C}$) | | | 250 | |
| I_{GSS} | Gate-Source Leakage Current ($V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$) | | | ± 100 | nA |
| $V_{GS(th)}$ | Gate Threshold Voltage ($V_{DS} = V_{GS}, I_D = 2.96\text{mA}$) | 2.5 | 3 | 3.6 | Volts |



CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

"COOLMOS™ comprise a new family of transistors developed by Infineon Technologies AG. "COOLMOS" is a trademark of Infineon Technologies AG."

Microsemi Website - <http://www.microsemi.com>

| Symbol | Characteristic | Test Conditions | MIN | TYP | MAX | UNIT |
|---------------------|---------------------------------------|---|-----|-------|-----|------|
| C _{iss} | Input Capacitance | V _{GS} = 0V V _{DS} = 25V f = 1 MHz | | 13600 | | pF |
| C _{oss} | Output Capacitance | | | 4400 | | |
| C _{rss} | Reverse Transfer Capacitance | | | 290 | | |
| Q _g | Total Gate Charge ⁴ | V _{GS} = 10V V _{DD} = 400V I _D = 77A @ 25°C | | 260 | | nC |
| Q _{gs} | Gate-Source Charge | | | 38 | | |
| Q _{gd} | Gate-Drain ("Miller") Charge | | | 144 | | |
| t _{d(on)} | Turn-on Delay Time | INDUCTIVE SWITCHING V _{GS} = 10V V _{DD} = 380V I _D = 77A @ 25°C R _G = 5.0Ω | | 18 | | ns |
| t _r | Rise Time | | | 27 | | |
| t _{d(off)} | Turn-off Delay Time | | | 110 | 165 | |
| t _f | Fall Time | | | 8 | 12 | |
| E _{on} | Turn-on Switching Energy ⁵ | INDUCTIVE SWITCHING @ 25°C V _{DD} = 400V, V _{GS} = 15V I _D = 77A, R _G = 5Ω | | 1670 | | μJ |
| E _{off} | Turn-off Switching Energy | | | 2880 | | |
| E _{on} | Turn-on Switching Energy ⁵ | INDUCTIVE SWITCHING @ 125°C V _{DD} = 400V, V _{GS} = 15V I _D = 77A, R _G = 5Ω | | 2300 | | |
| E _{off} | Turn-off Switching Energy | | | 3100 | | |

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

| Symbol | Characteristic / Test Conditions | MIN | TYP | MAX | UNIT |
|------------------|--|-----------------------|-----|-----|-------|
| I _S | Continuous Source Current (Body Diode) | | | 77 | Amps |
| I _{SM} | Pulsed Source Current ¹ (Body Diode) | | | 231 | |
| V _{SD} | Diode Forward Voltage ³ (V _{GS} = 0V, I _S = -77A) | | 1 | 1.2 | Volts |
| dv/dt | Peak Diode Recovery ⁶ dv/dt | | | 15 | V/ns |
| t _{rr} | Reverse Recovery Time (I _S = -77A, di/dt = 100A/μs) | T _J = 25°C | 950 | | ns |
| Q _{rr} | Reverse Recovery Charge (I _S = -77A, di/dt = 100A/μs) | T _J = 25°C | 32 | | μC |
| I _{RRM} | Peak Recovery Current (I _S = -77A, di/dt = 100A/μs) | T _J = 25°C | 60 | | Amps |

THERMAL CHARACTERISTICS

| Symbol | Characteristic | MIN | TYP | MAX | UNIT |
|------------------|---------------------|-----|-----|------|------|
| R _{θJC} | Junction to Case | | | 0.26 | °C/W |
| R _{θJA} | Junction to Ambient | | | 40 | |

1 Repetitive Rating: Pulse width limited by maximum junction temperature

2 Repetitive avalanche causes additional power losses that can be calculated as

$P_{AV} = E_{AR} \cdot f$. Pulse width tp limited by Tj max.

3 Pulse Test: Pulse width < 380 μs, Duty Cycle < 2%

4 See MIL-STD-750 Method 3471

5 Eon includes diode reverse recovery.

6 Maximum 125°C diode commutation speed = di/dt 600A/μs

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

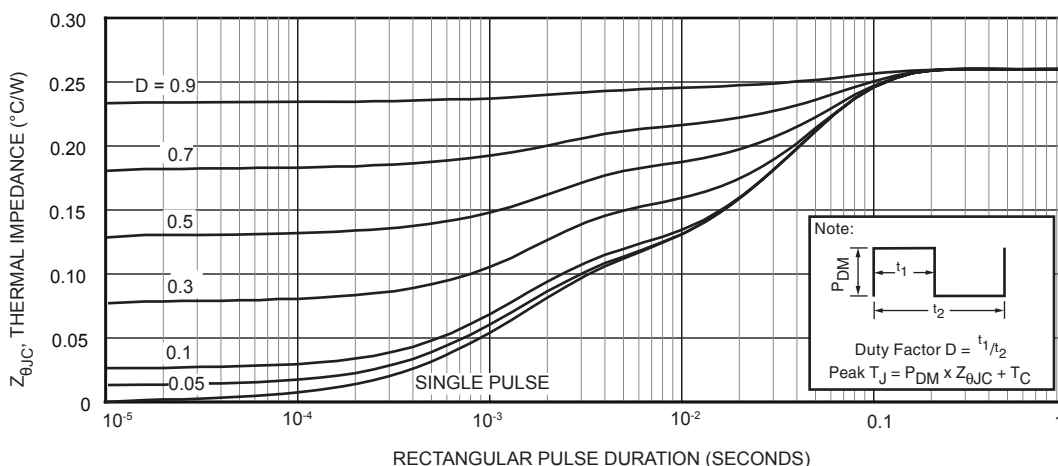


Figure 1, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

Typical Performance Curves

APT77N60B_SC6

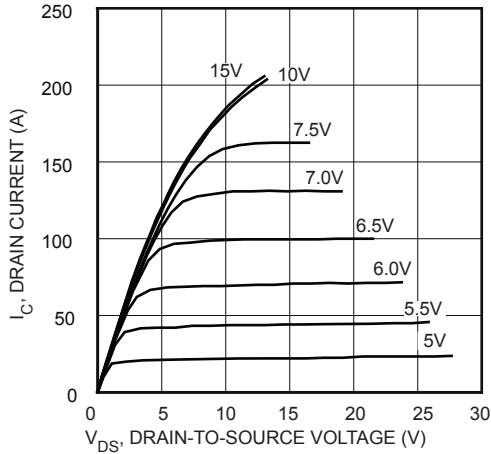


FIGURE 2, Low Voltage Output Characteristics

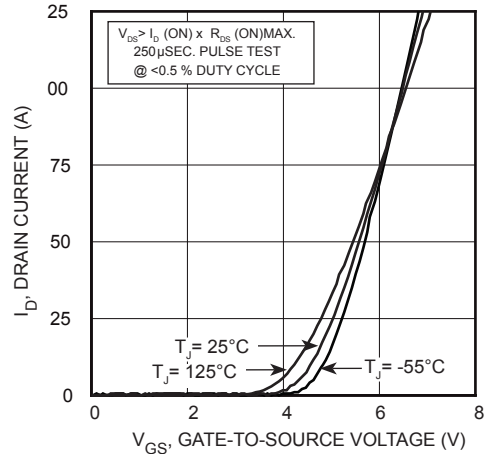


FIGURE 3, Transfer Characteristics

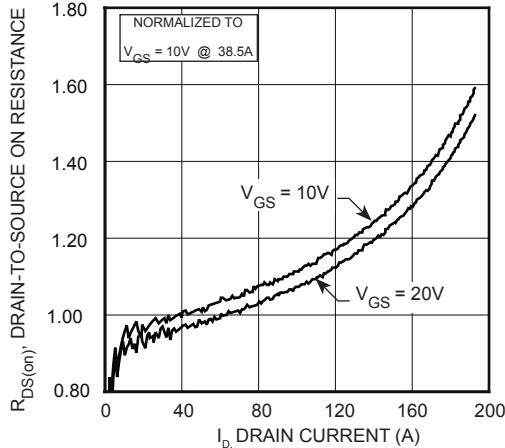


FIGURE 4, $R_{DS(ON)}$ vs Drain Current

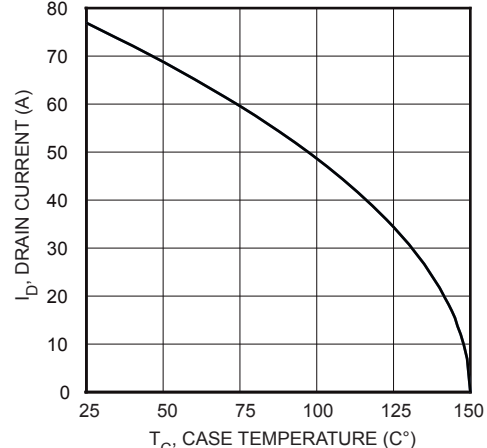


FIGURE 5, Maximum Drain Current vs Case Temperature

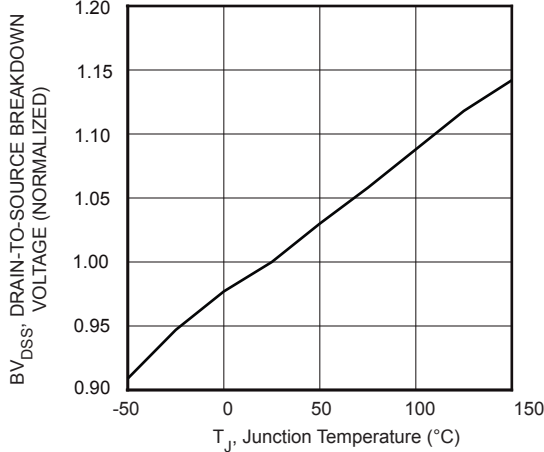


FIGURE 6, Breakdown Voltage vs Temperature

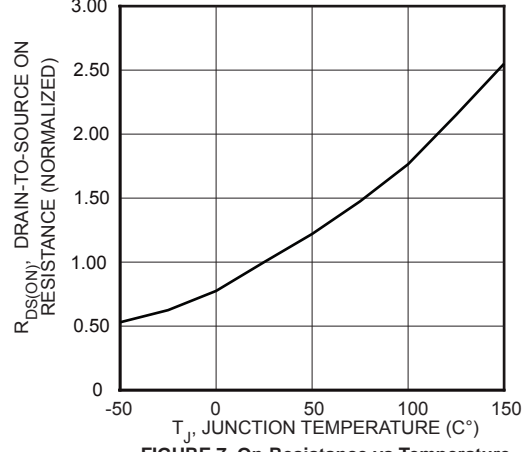


FIGURE 7, On-Resistance vs Temperature

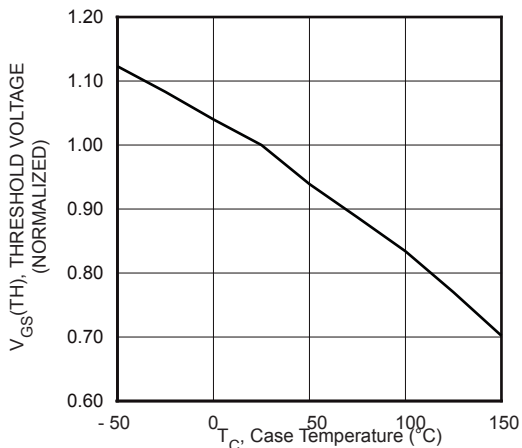


FIGURE 8, Threshold Voltage vs Temperature

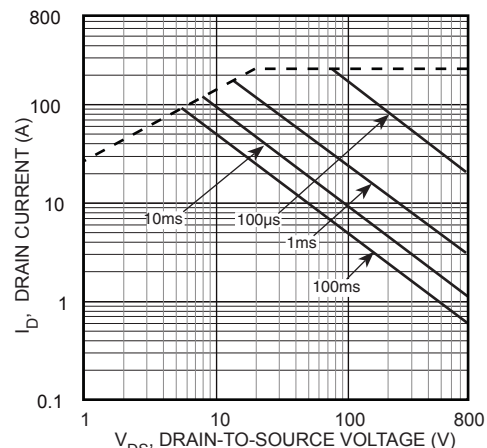


FIGURE 9, Maximum Safe Operating Area

Typical Performance Curves

APT77N60B_SC6

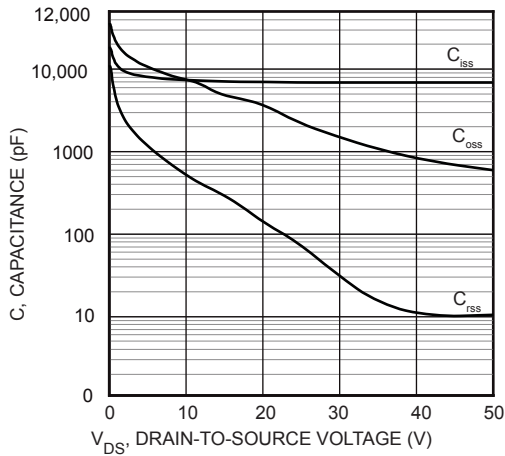


FIGURE 10, Capacitance vs Drain-To-Source Voltage

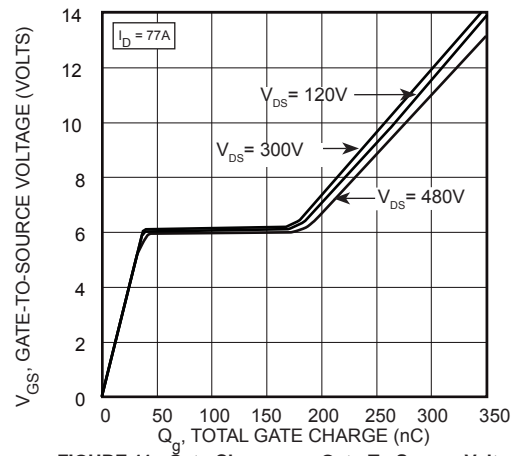


FIGURE 11, Gate Charges vs Gate-To-Source Voltage

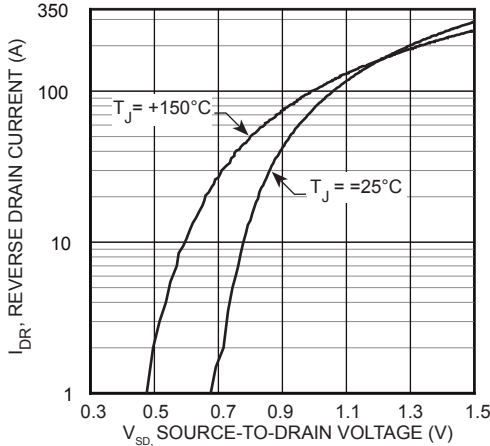


FIGURE 12, Source-Drain Diode Forward Voltage

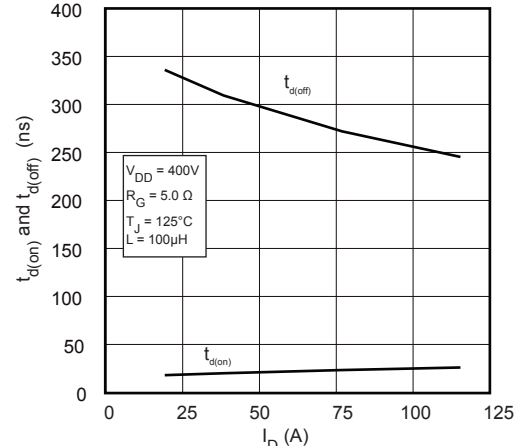


FIGURE 13, Delay Times vs Current

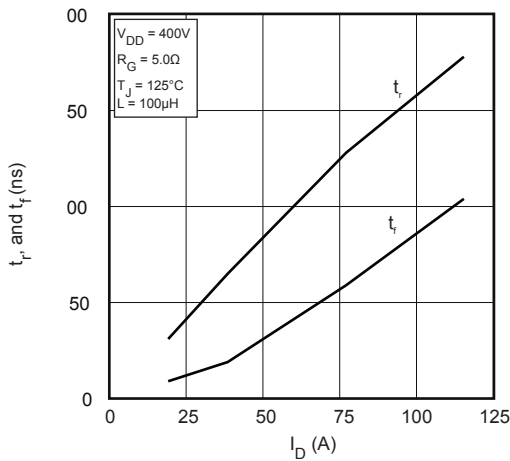


FIGURE 14, Rise and Fall Times vs Current

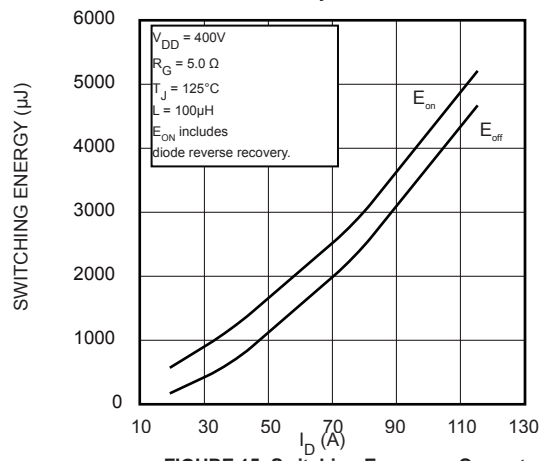


FIGURE 15, Switching Energy vs Current

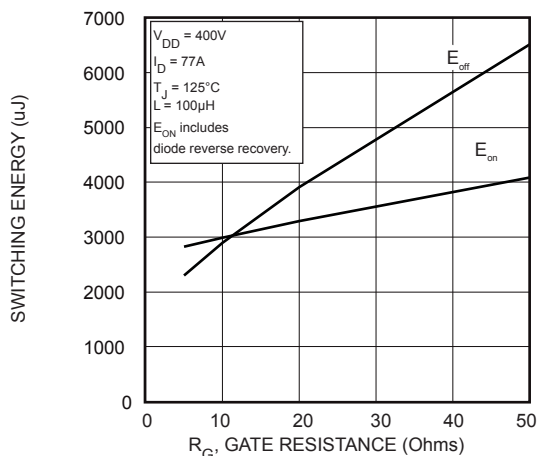


FIGURE 16, Switching Energy vs Gate Resistance

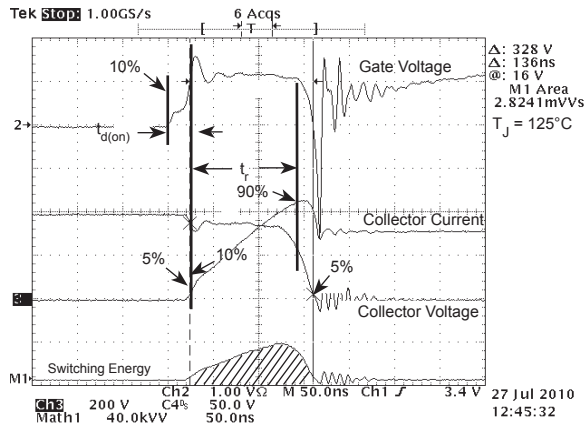


Figure 17, Turn-on Switching Waveforms and Definitions

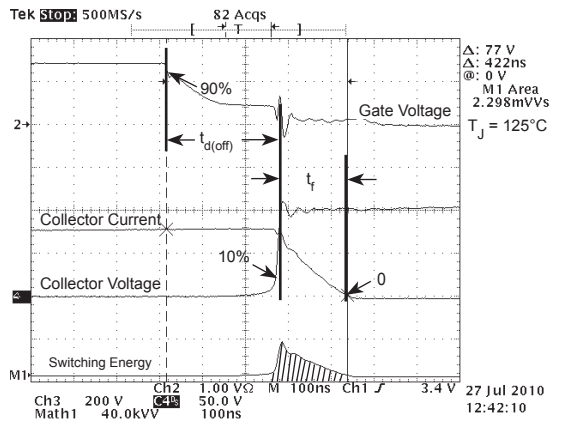


Figure 18, Turn-off Switching Waveforms and Definitions


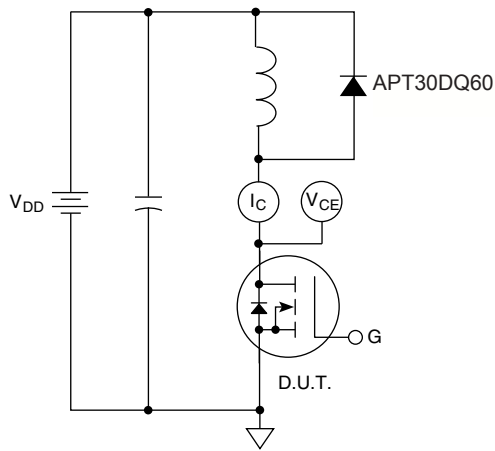



Figure 19, Inductive Switching Test Circuit

TO-247 Package Outline

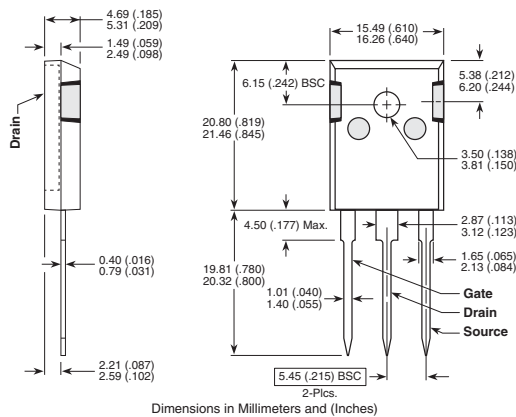

D³PAK Package Outline

Ⓢ 100% Sn

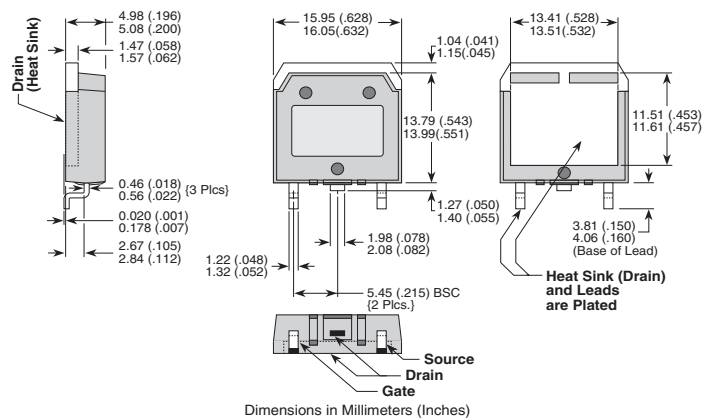

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9