




### FEATURES

- Full-size, 0.56" (14.2mm), red or green LED's
- Low-power or high-intensity LED's optional
- Single +5V or optional +7.5-32V supply
- +24V Isolated-power models
- Low power consumption, 15mA from +5V
- 100Ω impedance, 2V loop drop
- DIP-switch selectable range and decimal points
- Hundreds of different input/readout combinations
- Vibration-resistant package; Reliable screw-terminal input connections
- High-quality, 20-turn, gain/span and zero/offset adjust potentiometers
- Miniature size: 2.17" x 0.92" x 1.02"  
55mm x 23mm x 27mm

The DMS-30PC-4/20S Series of 4-20mA current-loop-input, 3½ digit, LED display panel meters offer an outstanding combination of electrical performance, display readability, ease-of-use, and long-term reliability. Each of the 5 models features a large (0.56"/14.2mm), red or green, LED display. Low-power or high-intensity red models are optional. Power supplies can be a single +5V or an optional, wide-range +7.5-32V (24V nominal). All DMS-30PC-4/20S meters are constructed using DATEL's super-reliable, field-proven, epoxy-encapsulated DMS-30PC digital voltmeters. The entire assembly utilizes 100% soldered connections. These are the most rugged, 4-20mA input, panel meters in the world.

Gain (span) and offset (zero) adjustments are both performed with high-precision, 20-turn potentiometers. All decimal point and range-change settings are made on a gold-plated, vibration-resistant, DIP switch; there are no cumbersome solder gaps or jumpers to contend with. Connections to the current loop and the power source are both made on a rugged, four-position, screw-type terminal block.

The DMS-30PC-4/20S's user-friendly design accommodates virtually hundreds of different input-current/output-reading combinations. This eliminates the majority of requirements for more costly, long-lead-time, factory "specials"—especially in applications requiring several different-range meters. A bezel assembly, featuring secure screw fasteners and an EPDM rubber gasket, is available for applications requiring moisture and/or dust resistance.

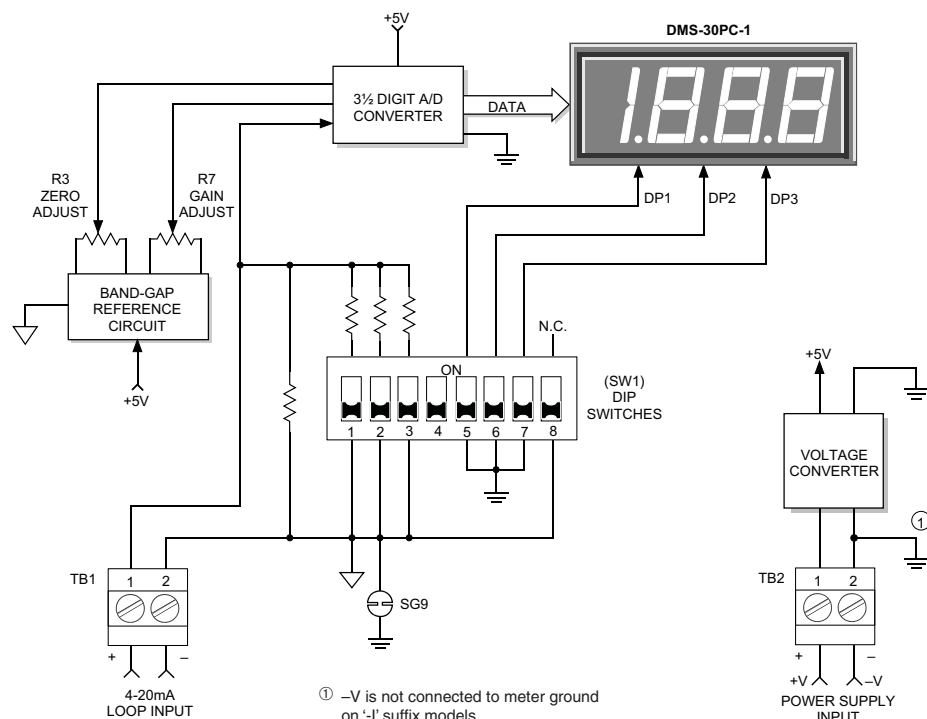

### Performance/Functional Specifications

Typical at T<sub>A</sub> = +25°C, unless otherwise noted.

| Current Loop Input             | Min.                                                      | Typ.  | Max. | Units   |
|--------------------------------|-----------------------------------------------------------|-------|------|---------|
| Full Scale Input Range         | +3.5                                                      | —     | +22  | mA      |
| Input Impedence                | —                                                         | 100   | —    | Ohms    |
| Voltage Drop                   | —                                                         | —     | 2.0  | Volts   |
| Overcurrent Protection         | —                                                         | ±0.15 | ±0.3 | mA      |
| Performance                    |                                                           |       |      |         |
| Sampling Rate                  | 2.5 reading per second                                    |       |      |         |
| Accuracy (1 minute warm-up)    | ±0.05%FS ±1 Count                                         |       |      |         |
| Temperature Drift              | —                                                         | ±0.15 | ±0.3 | Cnts/°C |
| Power Supply Requirements      |                                                           |       |      |         |
| DMS-30PC-4/20S-5RS             | +4.75 to +5.25Vdc at 225mA max.                           |       |      |         |
| DMS-30PC-4/20S-5GS             | +4.75 to +5.25Vdc at 225mA max.                           |       |      |         |
| DMS-30PC-4/20S-5RH             | +4.75 to +5.25Vdc at 225mA max.                           |       |      |         |
| DMS-30PC-4/20S-5RL             | +4.75 to +5.25Vdc at 20mA max.                            |       |      |         |
| DMS-30PC-4/20S-24RL            | +7.5 to +32Vdc at 30mA max.                               |       |      |         |
| DMS-30PC-4/20S-24XX-I (models) | +21.6 to +26.4Vdc at 60mA max.                            |       |      |         |
| Display                        |                                                           |       |      |         |
| Display Type and Size          | 3½ digit, 0.56"/14.2mm high LED                           |       |      |         |
| Polarity Indication            | "—" for negative readings                                 |       |      |         |
| Overrange Indication           | "-1___" for negative inputs<br>"1___" for positive inputs |       |      |         |
| Physical/Environmental         |                                                           |       |      |         |
| Operating Temperature          | 0                                                         | —     | +60  | °C      |
| Storage Temperature            | −40                                                       | —     | +75  | °C      |
| Humidity (non-condensing)      | 0                                                         | —     | 95   | %       |
| Case Material                  | Polycarbonate                                             |       |      |         |
| Weight                         | 1 ounces (28 grams)                                       |       |      |         |

① **Input Grounding:** Except for the "-I" suffix models which feature isolated current loop inputs, all other DMS-30PC-4/20S meters are supplied with their 4-20mA negative-input terminals (TB1-2, "-") internally connected to their power supply ground terminal (TB2-2, "-V"). This single-ended input configuration is compatible with most grounded-referenced 4-20mA transmitters.

Applications in which the DMS-30PC-4/20S and its associated 4-20mA transmitter are connected to a common ground and the transmitter drives two or more loads (for example, the meter in series with a PLC) must have the meter connected as the **first** device in the current loop, that is, closest to the system ground (see Figure 2). If this is not possible and/or the meter must be connected in the middle of the current loop, then "-I" suffix models **must be used** to provide the required isolation between the meter's current loop input and the power supply ground ("-V"). See Figures 2, 3, 4, and 5 for typical loop connections.

### Ordering Information

|                         |                                                      |
|-------------------------|------------------------------------------------------|
| DMS-30PC-4/20S-5RS-C    | +5V supply, standard-intensity red LED's             |
| DMS-30PC-4/20S-5GS-C    | +5V supply, standard-intensity green LED's           |
| DMS-30PC-4/20S-5RL-C    | +5V supply, low-power red LED's                      |
| DMS-30PC-4/20S-5RH-C    | +5V supply, high-intensity red LED's                 |
| DMS-30PC-4/20S-24RL-C   | +7.5V to +32V supply, low-power red LED's            |
| DMS-30PC-4/20S-24RS-I-C | +24V isolated supply, standard-intensity red LED's   |
| DMS-30PC-4/20S-24RH-I-C | +24V isolated supply, high-intensity red LED's       |
| DMS-30PC-4/20S-24BS-I-C | +24V isolated supply, high-intensity blue LED's      |
| DMS-30PC-4/20S-24GS-I-C | +24V isolated supply, standard-intensity green LED's |

### ACCESSORIES

|            |                                       |
|------------|---------------------------------------|
| DMS-BZL1-C | Panel-mount bezel assembly            |
| DMS-BZL2-C | Panel-mount bezel with sealing gasket |
| DMS-30-CP  | Panel cutout punch                    |

A panel-mount retaining clip is supplied with each model.



### DIP-Switch Settings Table ②

| Display Reading    | SW1 | SW2 | SW3 | SW4 |
|--------------------|-----|-----|-----|-----|
| 1. 000 to 100-300  | On  | On  | On  | Off |
| 2. 000 to 400-600  | Off | On  | Off | Off |
| 3. 000 to 700-1999 | On  | Off | Off | Off |
| 4. ±100            | On  | On  | On  | Off |
| 5. ±200 to ±300    | On  | On  | Off | Off |
| 6. ±400 to ±600    | On  | Off | Off | Off |
| 7. ±700 to ±1999   | Off | Off | Off | On  |

② When looking up DIP-switch settings in the Table and the desired display readings happen to fall between two switch settings, try performing the adjustments with both settings to determine which one offers the better settability. Please keep in mind that the DMS-30PC meter (from which the DMS-30PC-4/20S is derived) has an accuracy specification of ±2 counts (max.). Thus, it may not always be possible to obtain the exact desired display reading.

### OPERATING AND SETUP INSTRUCTIONS

As shipped, the DMS-30PC-4/20S is factory calibrated to read "000" for a 4mA input and "1999" for a 20mA input. The following worst-case procedure assumes the DMS-30PC-4/20S is completely mis-adjusted, i.e., both potentiometers and the DIP switches are randomly set.

1. Set R7 (gain/span adjust) and R3 (zero/offset adjust) fully clockwise, roughly 20 turns, and place SW1-SW8 to OFF (down position).
2. Set SW1 to ON (up position). See DIP switch setting #3.
3. Apply a precision 4mA input, with proper polarity, and adjust R3 until the meter's display reads "000".
4. Apply a precision 20mA and adjust R7 until the display reads "1999". Repeat 3 and 4 to make sure adjustments do not affect one another.
5. If desired, select the appropriate decimal point by setting either SW5, SW6 or SW7 to ON (DP1, DP2 or DP3 respectively).

**NOTE:** If a display reading other than "000" to "1999" is desired, refer to the DIP-Switch Settings Table for SW1-SW4 settings.

### Examples

1. Desired display readings are:

4mA = "0.00"

20mA = "2.00"




Use DIP-switch setting #1 and enable decimal point DP2 via SW6. Apply 4mA and adjust R3 so the display reads "0.00". Apply 20mA and adjust R7 so the display reads "2.00".

2. Desired display readings are:

4mA = "-100"

12mA = "000"

20mA = "100"




Use DIP-switch setting #4. Apply 12mA and adjust R3 so the display reads "000". Apply 20mA and adjust R7 so the display reads "100". Apply 4mA and the display should read "-100". For these display readings, no decimal points are used. Set SW5, SW6 and SW7 to OFF.

3. Desired display readings are:

4mA = ".000"

12mA = ".250"



This example is not as straightforward as the previous two. Notice that 12mA is exactly halfway between 4mA and 20mA. If we assume the input could go up to 20mA, the display reading would be: 2 x .250 or ".500". From the table, we can select DIP-switch setting #2 and enable DP1 via SW5. Apply 4mA and adjust R3 so the display reads ".000". Apply 12mA and adjust R7 so the display reads ".250".

### CONNECTION DIAGRAMS

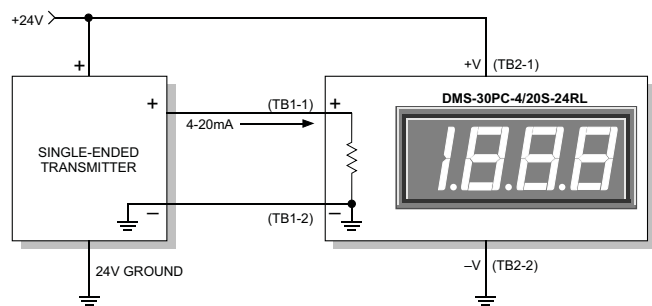


Figure 2. Typical Connections for Single-Ended Transmitters Driving Single-Ended +24V Powered Meters.

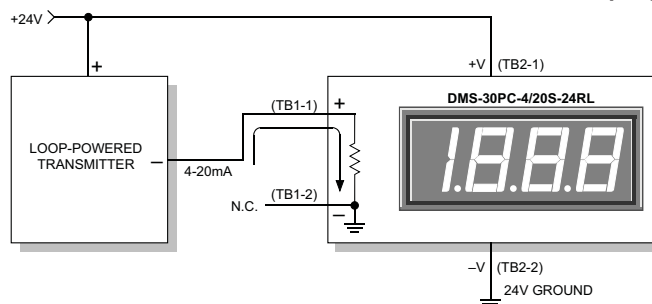


Figure 3. Typical Connections for Loop-Powered Transmitters Driving Single-Ended Meters.

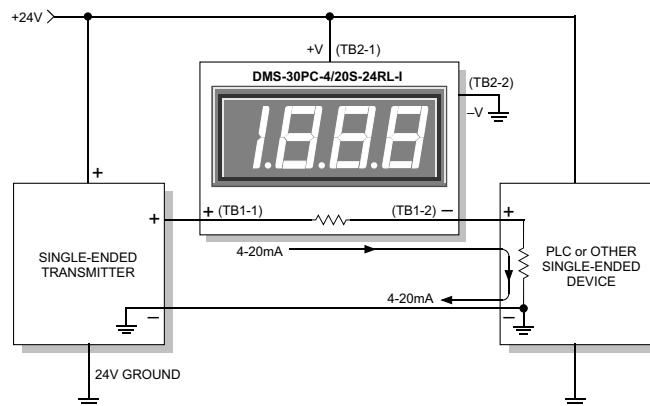


Figure 4. Typical Connections for Isolated-Supply Meters in Series with an Auxiliary Device

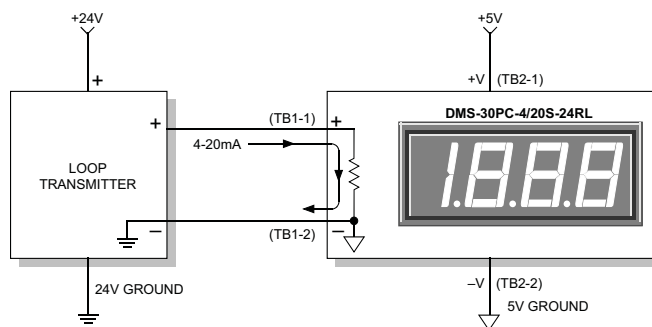


Figure 5. Typical Connections for +5V Powered Meters. Note that 5V Ground and 24V Ground are Tied Together Inside the Meter.

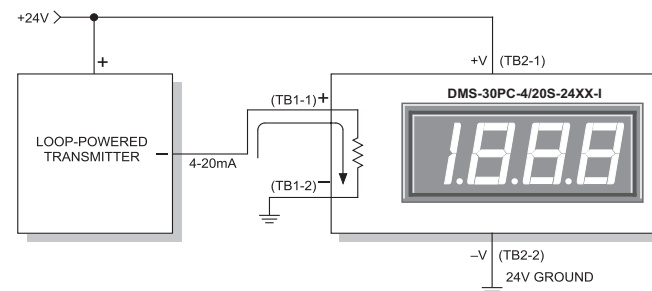



Figure 6. Typical Connections for Loop-Powered Transmitters Driving Isolated-Supply Meters (-I part number suffix).

MECHANICAL DIMENSIONS: Inches (mm)


TOLERANCES: 2 PL DEC  $\pm 0.02$  ( $\pm 0.51$ )  
3 PL DEC  $\pm 0.010$  ( $\pm 0.254$ )

WIRE SIZE: 18 to 26 AWG  
(Solid or stranded)

STRIPPING LENGTH: 0.20" (5.08mm)

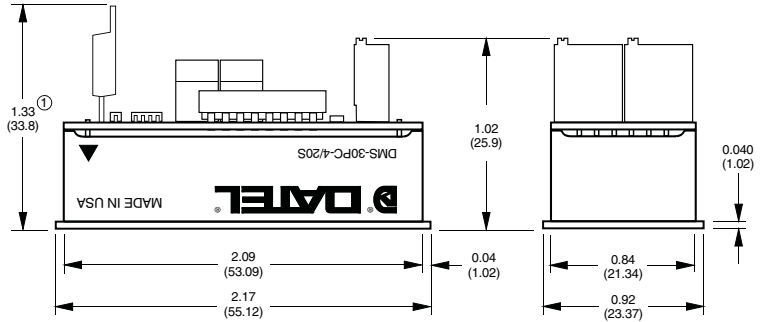


① Depth dimension for the DMS-30PC-4/20S-24RL model only.

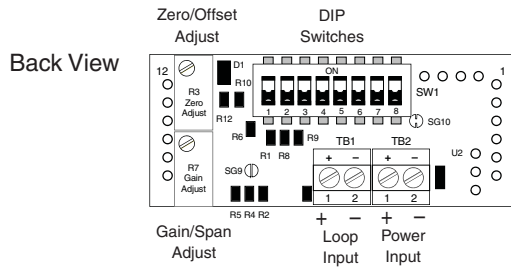



Front View

DP1 (SW5) DP2 (SW6) DP3 (SW7)


### OPTIONAL BEZEL (DMS-BZL1 and DMS-BZL2)

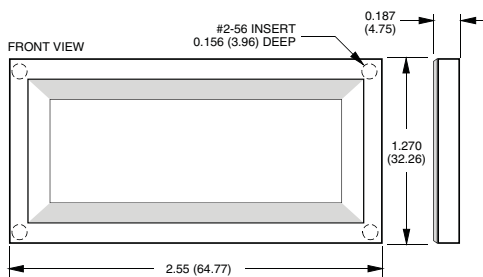

### RECOMMENDED DRILL AND PANEL CUTOUT DIMENSIONS

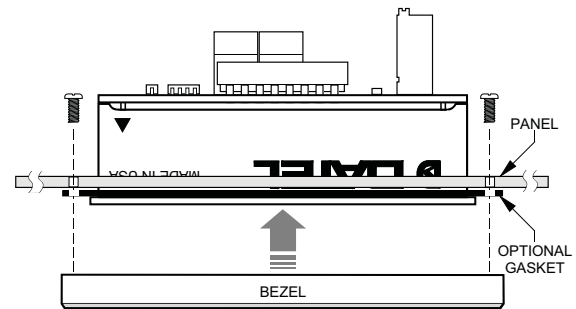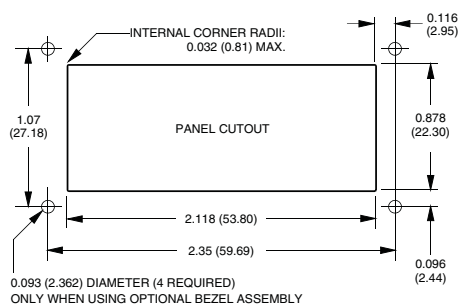

### RETAINING CLIP INSTALLATION

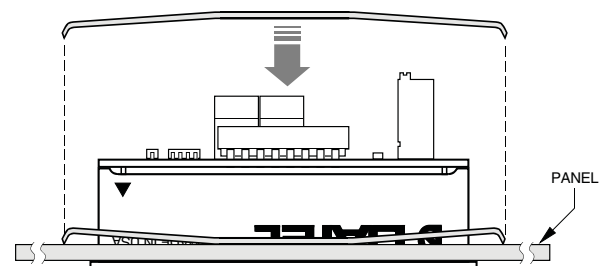

A panel-mount retaining clip is supplied with all models

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9